




**THE DATASHEET OF  
PS2571**



DESCRIPTION: 15 POS HIGH DENSITY OVER (2) PS/2

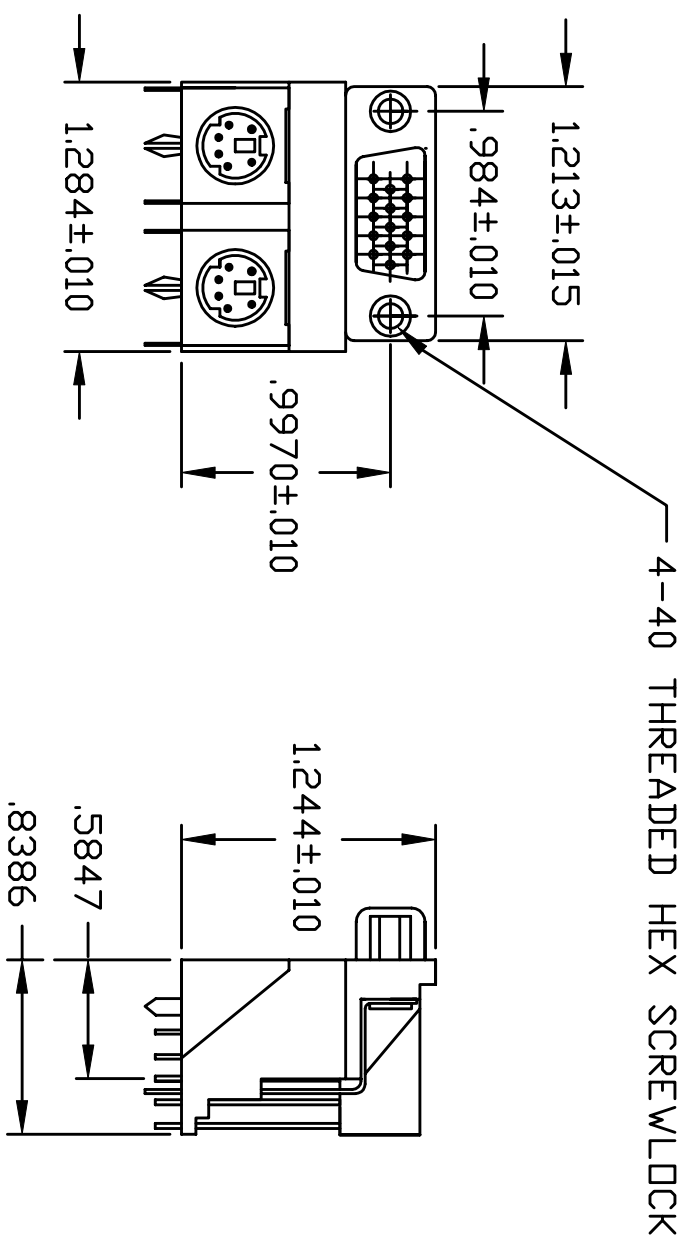

4-40 THREADED HEX SCREWLOCK

**SPECIFICATIONS:**

**ELECTRICAL CHARACTERISTICS:**

- Contact Current Rating: 3 Amperes
- Dielectric Withstanding Voltage: AC 1000V/60 sec. r.m.s.
- Insulation Resistance: 5000 Megohms Minimum DC 500
- Contact Resistance: 25 Milliohms Maximum
- Operating Temperature: -55° to +105°


**MATERIALS:**

- Contacts: Brass
- Insulator: PBT UL 94V-0
- High Density D-sub = Blue
- Mini-Din = Left Port = Purple
- Right Port = Green

Shell: Cold Roll Steel


**PLATINGS:**

- Contacts: Gold Flash
- Shells: Nickel Plated

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF APPARATUS WITHOUT WRITTEN PERMISSION.		
	DRAWN: PAM JENKINS	DATE: 4-30-01	
CHECKED:	DATE:		
SCALE:	SHEET 1 OF 2	REV 1	

NorComp

DWG NO. 999-H15-PS2-571

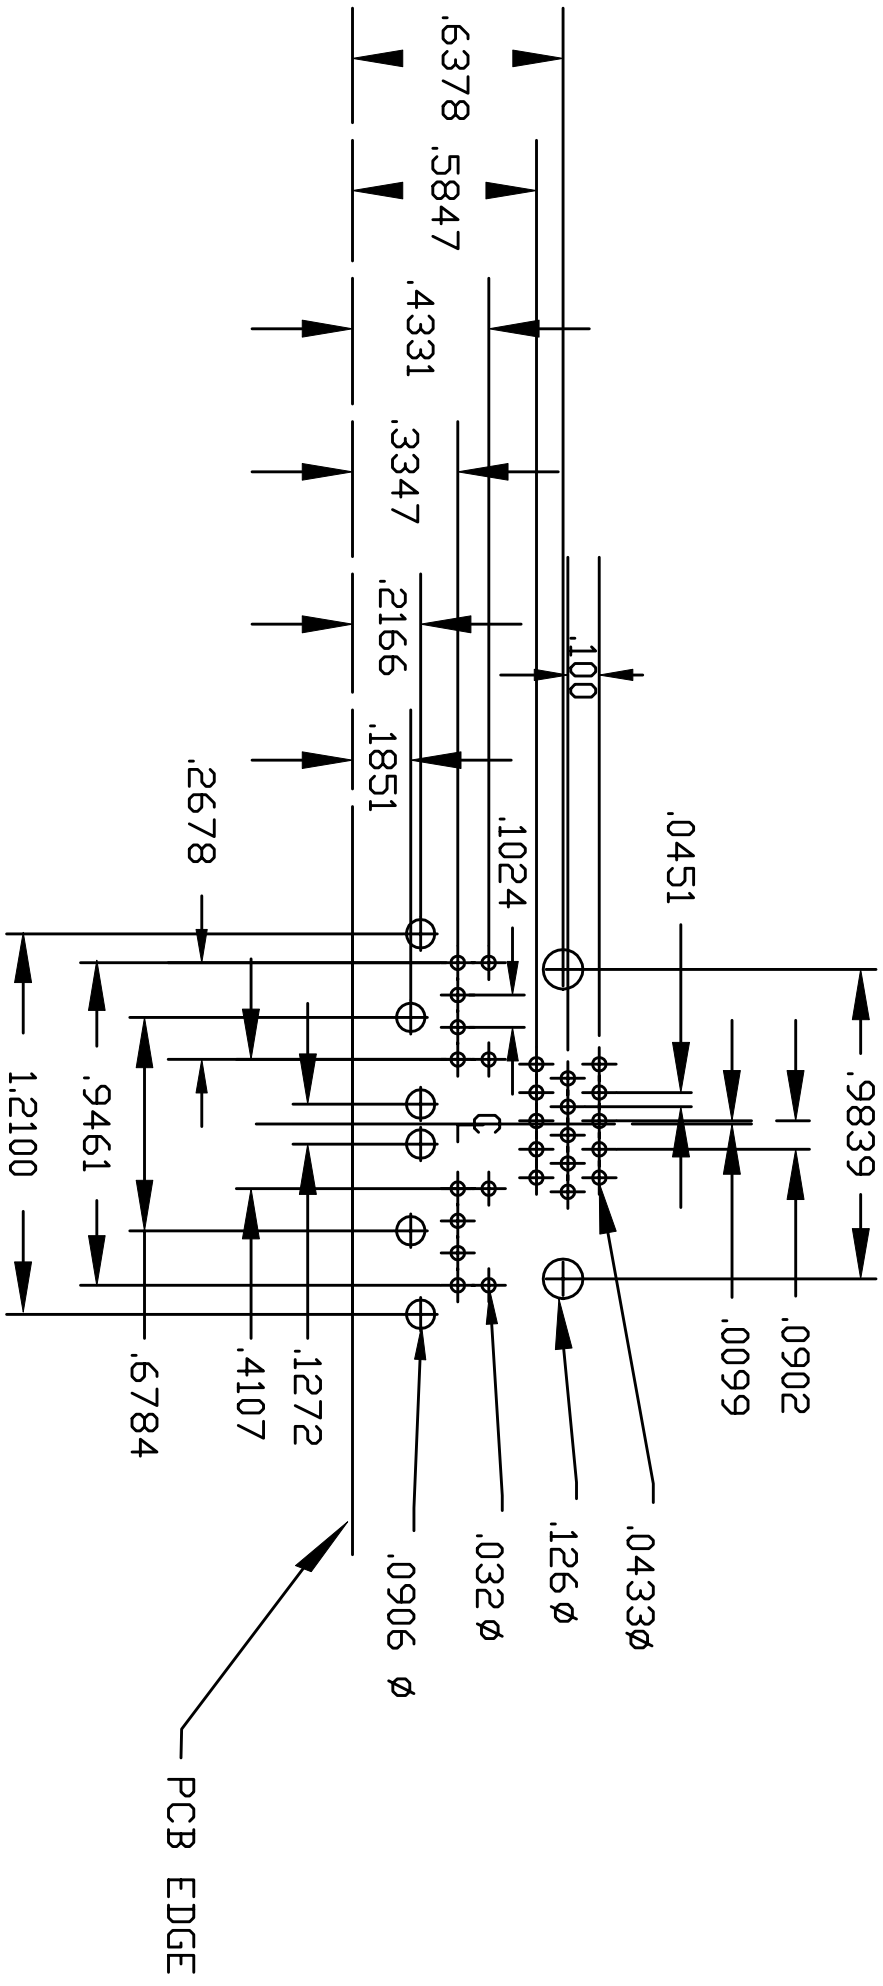

**NC**


THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF APPARATUS WITHOUT WRITTEN PERMISSION.


**NorComp**

DRAWN: PAM JENKINS		DATE: 4-25-01	
CHECKED:		DATE:	
SCALE:	SHEET 2	OF 2	REV 3
DWG NO. 999-H15-PS2-491			

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View PS2571 on WIN SOURCE](#)

 [CEL Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management