



ULTRA-SMALL CERAMIC


Power Splitter/Combiner

QCN-3+

2 Way-90° 50Ω 220 to 470 MHz

FEATURES

- Low insertion loss, 0.4 dB typ.
- High isolation, 25 dB typ.
- Wrap-around terminal for excellent solderability
- Ultra small, 0.12"X0.06"X0.035"



Generic photo used for illustration purposes only

CASE STYLE: FV1206-1

+RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

APPLICATIONS

- Balanced amplifiers
- Modulators
- VHF
- Defense communication

ELECTRICAL SPECIFICATIONS AT 25°C


Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		220		470	MHz
Insertion Loss, above 3.0 dB	220-470		0.6	0.8	dB
	270-350		0.4	0.7	
	350-450		0.6	0.8	
Isolation	220-470	18	24		dB
	270-350	18	25		
	350-450	20	30		
Phase Unbalance	220-470		1	8	Degree
	270-350		3	5	
	350-450		5	8	
Amplitude Unbalance	220-470		0.5	1.7	dB
	270-350		0.7	1.0	
	350-450		0.5	1.0	
VSWR	220-470		1.2		(:1)
	270-350		1.2		
	350-450		1.2		

MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	15W* max.

* Derate linearly to 7W at 100°C ambient.
Permanent damage may occur if any of these limits are exceeded.

ELECTRICAL SCHEMATIC





ULTRA-SMALL CERAMIC

Power Splitter/Combiner

QCN-3+

Mini-Circuits


2 Way-90° 50Ω 220 to 470 MHz

PIN CONNECTIONS

SUM PORT	1
PORT 1 (0°)	4
PORT 2 (+90°)	6
GROUND	2,5
50 OHM TERM EXTERNAL	3

PRODUCT MARKING: SB

DEMO BOARD MCL P/N: TB-255
SUGGESTED PCB LAYOUT (PL-131)


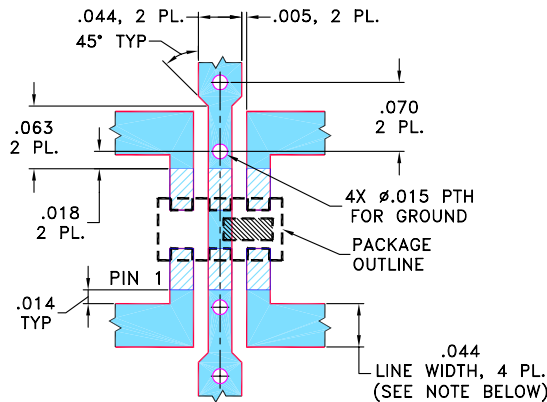


NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS $0.020" \pm 0.0015"$; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.


2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

OUTLINE DRAWING

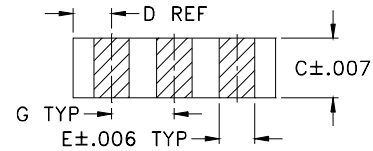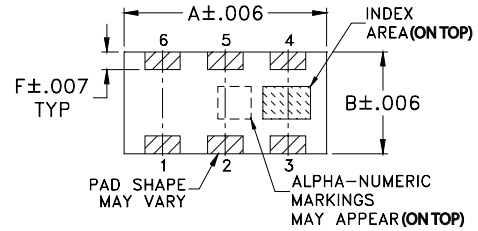

PCB Land Pattern



Suggested Layout,
Tolerance to be within ± 0.002

OUTLINE DIMENSIONS (Inches/mm)

A	B	C	D	E	F
.126	.063	.035	.024	.022	.011
3.20	1.60	0.89	0.61	0.56	0.28
G	H	J	K	wt	
.039	.024	.042	.123	grams	
0.99	0.61	1.07	3.12	.020	

TAPE & REEL INFORMATION: F75

Mini-Circuits



ULTRA-SMALL CERAMIC

Power Splitter/Combiner




QCN-3+

2 Way-90° 50Ω 220 to 470 MHz

TYPICAL PERFORMANCE DATA

Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR (:1)		
	S-1	S-2				S	1	2
220.00	3.91	3.00	0.91	23.23	90.40	1.07	1.12	1.07
230.00	3.77	3.11	0.67	23.41	90.55	1.06	1.12	1.06
250.00	3.55	3.31	0.23	23.85	90.86	1.05	1.11	1.06
260.00	3.45	3.41	0.05	24.11	91.02	1.05	1.11	1.05
270.00	3.37	3.49	0.12	24.37	91.18	1.04	1.10	1.05
290.00	3.24	3.64	0.39	24.96	91.53	1.04	1.10	1.04
310.00	3.16	3.76	0.60	25.67	91.88	1.03	1.09	1.03
330.00	3.12	3.83	0.72	26.46	92.26	1.03	1.08	1.03
350.00	3.11	3.88	0.77	27.38	92.67	1.04	1.08	1.02
370.00	3.14	3.88	0.74	28.47	93.12	1.05	1.07	1.02
390.00	3.22	3.85	0.63	29.82	93.63	1.07	1.07	1.02
410.00	3.35	3.78	0.42	31.55	94.16	1.09	1.07	1.01
430.00	3.55	3.66	0.11	33.99	94.80	1.11	1.07	1.01
450.00	3.82	3.50	0.32	37.16	95.56	1.14	1.07	1.02
470.00	4.19	3.29	0.90	38.74	96.48	1.17	1.08	1.02

1. Total Loss = Insertion Loss + 3 dB splitter loss.

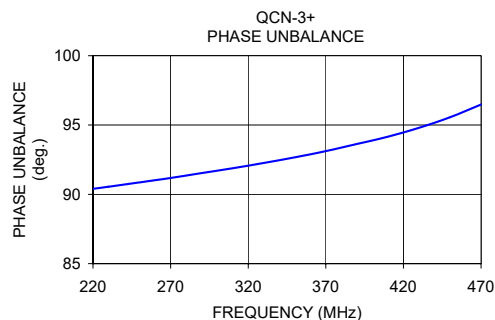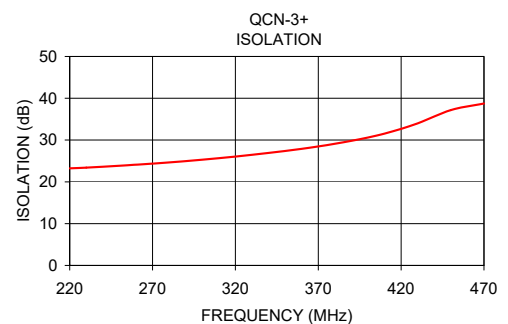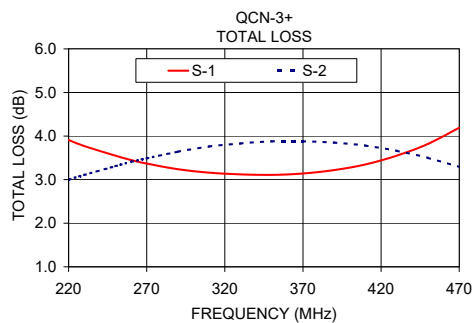


- NOTES**
- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 - B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 - C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html



Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View QCN-3+ on WIN SOURCE](#)

 [Mini-Circuits Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management