



**THE DATASHEET OF
RBL-3.305S/EH**



Features

- 1:1 input range
- 0.25W SIP7 package
- Efficiency up to 82%
- 1kVDC and 2kVDC isolation option
- -40°C to +100°C operating temperature range

Unregulated Converters



RBL/E

**0.25 Watt
SIP7
Single Output**




Description

The RBL/E series DC/DC converter has been designed to offer exceptionally high efficiency, low quiescent current and an extended operating temperature range. Uses include battery powered supplies, high efficiency designs or high temperature applications.

Selection Guide


Part Number	nom. Input Voltage [VDC]	Output Voltage [VDC]	Output Current [mA]	Efficiency typ. ⁽¹⁾ [%]	max. Capacitive Load ⁽²⁾ [µF]
RBL-3.305S/E ⁽³⁾	3.3	5	50	80	1000
RBL-0505S/E ⁽³⁾	5	5	50	82	1000
RBL-1205S/E ⁽³⁾	12	5	50	78	1000

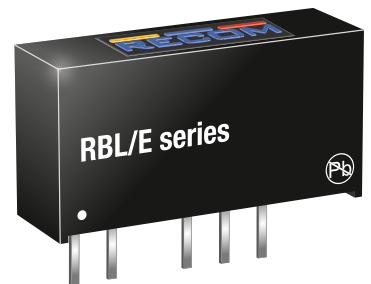

Notes:

- Note1: Efficiency is tested at nominal input and full load at +25°C ambient
 Note2: Max Cap Load is tested at nominal input and full resistive load and is defined as the capacitive load that will allow start up in under 1s without damage to the converter

Model Numbering

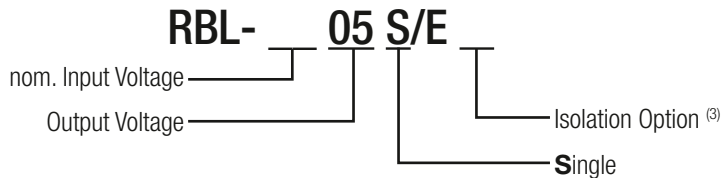

Notes:

Note3: add suffix „/H“ for 2kVDC isolation

Ordering Examples:

- RBL-1205S/E: 12VDC Input Voltage, 5VDC Output Voltage, Single Output
 RBL-0505S/EH: 5VDC Input Voltage, 5VDC Output Voltage, Single Output and 2kVDC isolation



EN60950-1 certified
 IEC60950-1 certified

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up otherwise stated)


BASIC CHARACTERISTICS

Parameter	Condition	Min.	Typ.	Max.
Input Voltage Range			±10%	
Quiescent Current	nom. Vin= 3.3VDC nom. Vin= 5VDC nom. Vin= 12VDC		11mA 6mA 4mA	
Minimum Load ⁽⁴⁾		0%		
Internal Operating Frequency		20kHz		70kHz
Output Ripple and Noise	20MHz BW		35mVp-p	50mVp-p

Notes:

Note4: Operation below 10% load will not harm the converter, but specifications may not be met


Efficiency vs. Load

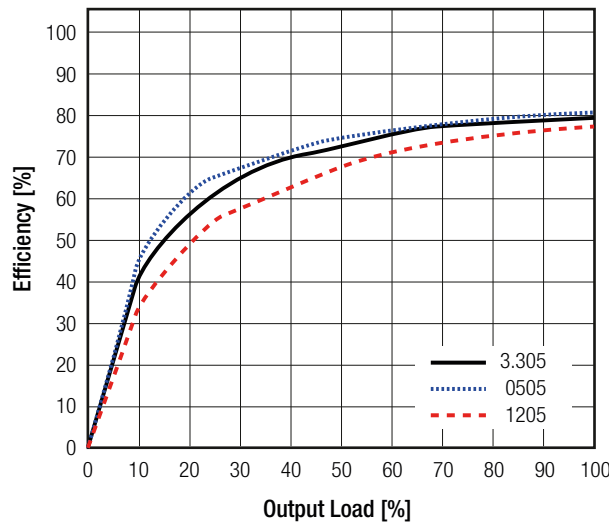

REGULATIONS

Parameter	Condition	Value
Output Accuracy		-2% typ. / ±5.0% max.
Line Regulation	low line to high line	±1.2% of 1.0% Vin typ.
Load Regulation	10% to 100% load	4.0% typ. / 10.0% max.


Tolerance Envelope

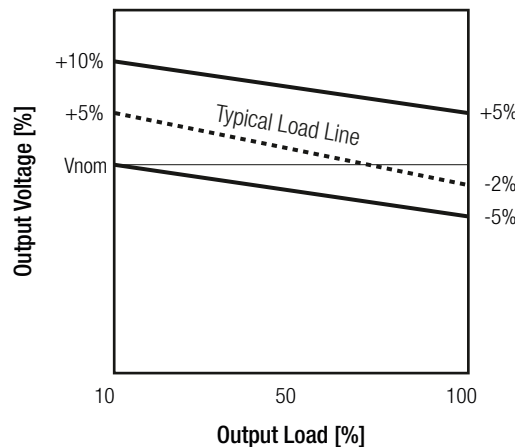

continued on next page

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up otherwise stated)

Deviation vs. Load

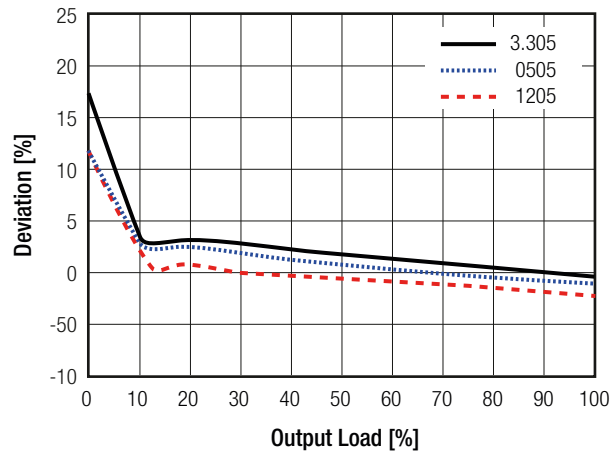


PROTECTIONS			
Parameter	Type		Value
Short Circuit Protection (SCP)			1 second
Isolation Voltage ⁽⁵⁾	I/P to O/P	without suffix	tested for 1 second rated for 1 minute 1kVDC 500VAC
		with suffix "/H"	tested for 1 second rated for 1 minute 2kVDC 1kVAC
Isolation Resistance			10GΩ min.
Isolation Capacitance			75pF max.
Insulation Grade			basic
Notes:			
Note5: For repeat Hi-Pot testing, reduce the time and/or the test voltage			
Note6: Refer to local wiring regulations if input over-current protection is also required. Recommended fuse: T0.25A slow blow type			

ENVIRONMENTAL			
Parameter	Condition		Value
Operating Temperature Range	full load (see graph)		-40°C to + 100°C
Operating Altitude			2000m
Operating Humidity	non-condensing		95% RH max.
Pollution Degree			PD2
MTBF	according to MIL-HDBK-217F, G.B.	+25°C	4494 x 10 ³ hours
		+100°C	1352 x 10 ³ hours
continued on next page			

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up otherwise stated)

Derating Graph

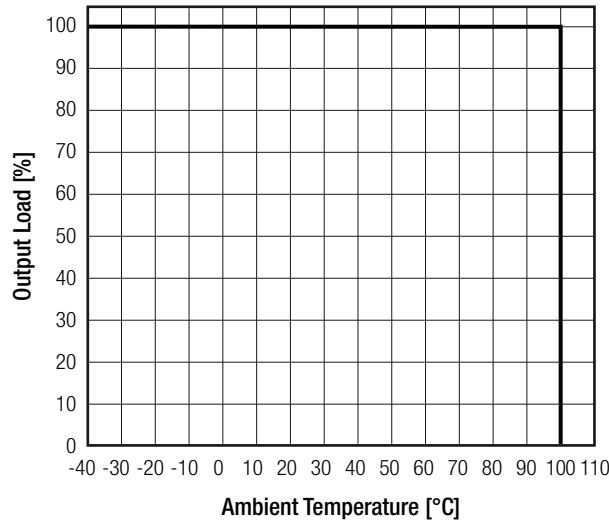

SAFETY AND CERTIFICATIONS


Certificate Type (Safety)	Report / File Number	Standard
Information Technology Equipment, General Requirements for Safety	1602031	IEC60950-1:2005, 2nd Edition + A2:2013 EN60950-1:2006 + A2:2013
EAC	RU-AT.49.09571	TP TC 004/2011
RoHs 2+		RoHS-2011/65/EU + AM-2015/863

DIMENSION AND PHYSICAL CHARACTERISTICS

Parameter	Type	Value
Material	case potting PCB	non-conductive black plastic (UL94 V-0) epoxy, (UL94 V-0) FR4, (UL94 V-0)
Dimension (LxWxH)		19.6 x 6.0 x 10.2mm
Weight		2.2g typ.

continued on next page

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up otherwise stated)

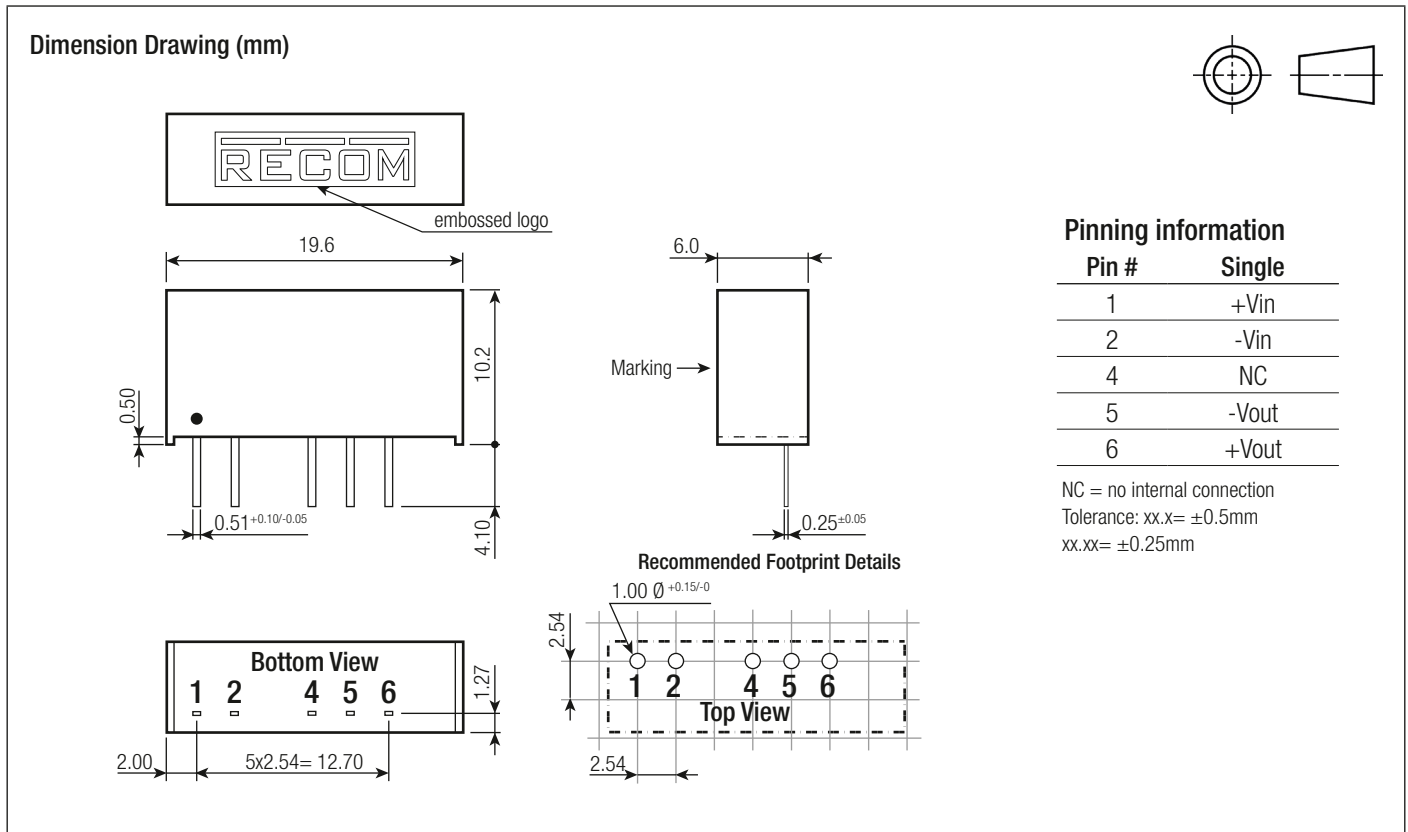



PACKAGING INFORMATION

Parameter	Type	Value
Packaging Dimension (LxWxH)	tube	520.0 x 16.0 x 9.0mm
Packaging Quantity	tube	25pcs
Storage Temperature Range		-55°C to +125°C
Storage Humidity		95% RH max.

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View RBL-3.305S/EH on WIN SOURCE](#)
-  [Recom Power Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management