



**THE DATASHEET OF
SCLF-30+**



Surface Mount Low Pass Filter

SCLF-30+

50Ω DC to 30 MHz

Maximum Ratings


| | |
|-----------------------|----------------|
| Operating Temperature | -40°C to 85°C |
| Storage Temperature | -55°C to 100°C |
| Power Input | 0.5W max. |

Permanent damage may occur if any of these limits are exceeded.


Pin Connections

| | |
|--------|-------------|
| INPUT | 1 |
| OUTPUT | 8 |
| GROUND | 2,3,4,5,6,7 |

Outline Drawing

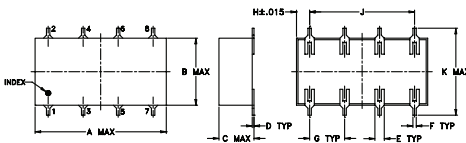


PCB Land Pattern



Outline Dimensions (inch)

| | | | | | | |
|-------|-------|-------|-------|------|------|-------|
| A | B | C | D | E | F | G |
| 0.75 | 0.38 | 0.28 | 0.01 | 0.05 | 0.02 | 0.2 |
| 19.05 | 9.65 | 7.11 | 0.25 | 1.27 | 0.51 | 5.08 |
| H | J | K | M | N | P | wt |
| 0.075 | 0.6 | 0.45 | 0.47 | 0.1 | 0.15 | grams |
| 1.91 | 15.24 | 11.43 | 11.94 | 2.54 | 3.81 | 1.60 |

Demo Board MCL P/N: TB-187+ Suggested PCB Layout (PL-049)

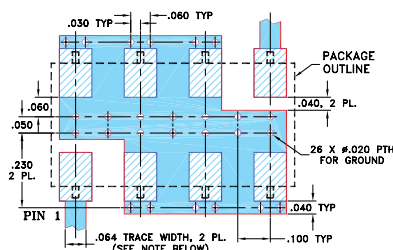

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- wide selection of cut-off frequencies
- excellent rejection
- custom models available


Applications

- defense communications
- receivers/transmitters
- harmonic rejection of VCOs


Electrical Specifications

| Parameter | F# | Frequency (MHz) | Min. | Typ. | Max. | Unit | |
|-----------|----------------|-----------------|--------|------|------|------|----|
| Pass Band | Insertion Loss | DC-F1 | DC-30 | — | — | 1.0 | dB |
| | Freq. Cut-Off | F2 | 35 | — | 3.0 | — | dB |
| | VSWR | DC-F1 | DC-30 | — | 1.7 | — | :1 |
| Stop Band | Rejection Loss | F3-F4 | 47-61 | 20 | — | — | dB |
| | | F4-F5 | 61-200 | 40 | — | — | dB |
| | VSWR | F3-F5 | 47-200 | — | 18 | — | :1 |

Typical Frequency Response



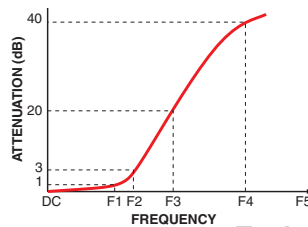


Electrical Schematic



Typical Performance Data

| Frequency (MHz) | Insertion Loss (dB) | Return Loss (dB) | Frequency (MHz) | Group Delay (nsec) | |
|-----------------|---------------------|------------------|-----------------|--------------------|-------|
| | \bar{x} | σ | | | |
| 1.00 | 0.04 | 0.10 | 1.00 | 24.20 | |
| 3.00 | 0.07 | 0.10 | 3.00 | 24.20 | |
| 9.00 | 0.13 | 0.10 | 9.00 | 24.50 | |
| 10.00 | 0.15 | 0.10 | 10.00 | 25.00 | |
| 11.00 | 0.17 | 0.10 | 11.00 | 25.20 | |
| 18.00 | 0.27 | 0.10 | 16.30 | 26.10 | |
| 30.00 | 0.45 | 0.10 | 21.60 | 39.50 | |
| 34.00 | 0.59 | 0.10 | 17.00 | 42.30 | |
| 35.00 | 0.90 | 0.20 | 11.70 | 47.70 | |
| 36.00 | 1.64 | 0.50 | 7.60 | 52.80 | |
| 42.00 | 14.01 | 1.80 | 1.00 | 36.00 | 58.10 |
| 44.00 | 18.75 | 1.70 | 0.80 | 38.00 | 54.80 |
| 45.00 | 20.87 | 1.70 | 0.80 | 42.00 | 31.20 |
| 46.00 | 22.85 | 1.60 | 0.70 | 43.00 | 22.80 |
| 47.00 | 24.78 | 1.60 | 0.70 | 44.00 | 18.50 |
| 49.00 | 28.37 | 1.50 | 0.60 | 45.00 | 15.50 |
| 54.00 | 36.33 | 1.40 | 0.50 | 46.00 | 14.40 |
| 58.00 | 41.83 | 1.10 | 0.10 | 47.00 | 12.90 |
| 59.00 | 43.10 | 1.10 | 0.10 | 49.00 | 11.30 |
| 60.00 | 44.18 | 1.10 | 0.10 | 51.00 | 9.20 |
| 61.00 | 45.51 | 0.90 | 0.00 | 54.00 | 6.20 |
| 70.00 | 55.55 | 1.50 | 0.30 | 56.00 | 6.90 |
| 105.00 | 77.30 | 9.90 | 0.30 | 58.00 | 6.20 |
| 122.00 | 73.76 | 4.40 | 0.30 | 59.00 | 2.70 |
| 139.00 | 78.03 | 9.10 | 0.30 | 60.00 | 5.80 |
| 157.00 | 74.23 | 4.80 | 0.20 | 61.00 | 5.20 |
| 174.00 | 79.94 | 4.80 | 0.20 | 70.00 | 3.60 |
| 183.00 | 75.66 | 3.00 | 0.20 | 96.00 | 3.40 |
| 191.00 | 77.64 | 7.00 | 0.20 | 105.00 | 3.20 |
| 200.00 | 75.91 | 6.00 | 0.20 | 113.00 | 3.10 |

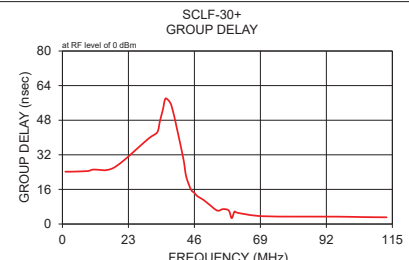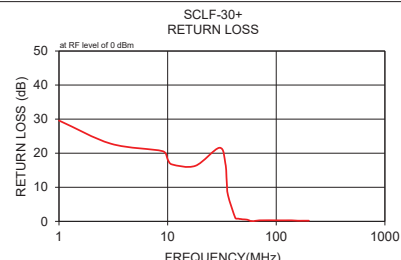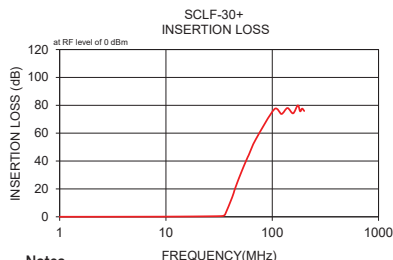

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp





Generic photo used for illustration purposes only
CASE STYLE: YY161

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View SCLF-30+ on WIN SOURCE](#)
-  [Mini-Circuits Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management