



**THE DATASHEET OF
SMS3924-015LF**



DATA SHEET

Surface Mount General-Purpose Schottky Diodes

Features

- Tight parameter distribution
- Available as singles, pairs and dual series pairs
- 100% DC tested
- Designed for high-volume commercial applications
- Available in tape and reel packaging
- Available lead (Pb)-free and RoHS-compliant MSL-1 @ 260 °C per JEDEC J-STD-020



Description

This series of 8, 20 and 70 V rated low-cost plastic packaged Schottky diodes are designed for general-purpose use in RF applications as detectors, mixers and switches and in digital pulse forming applications. All diodes are fully characterized including SPICE model parameters and deliver tight parameter distribution, minimizing performance variability. They are available in SC-70, SC-79, SC-88, SOD-323, SOT-23, SOT-143 and LGA packages. Wiring configurations include singles, common cathode, series pairs, unconnected pairs and dual series pairs. Available in tape and reel for pick and place manufacturing.

NEW Skyworks offers lead (Pb)-free, RoHS (Restriction of Hazardous Substances)-compliant packaging.



Absolute Maximum Ratings

Characteristic	Value
Reverse voltage (V_R)	Rated V_B
Forward current - steady state (I_F)	50 mA
Forward current - 1 ms pulse (I_F)	1A
Power dissipation (P_D)	75 mW
Storage temperature (T_{ST})	-65 °C to +150 °C
Operating temperature (T_{OP})	-65 °C to +150 °C
Junction temperature (T_J)	150 °C
Soldering temperature	260 °C for 5 seconds
Electrostatic Discharge (ESD) Human Body Mode (HBM)	Class 0
Electrostatic Discharge (ESD) Charged Device Model (CDM)	Class C4

Performance is guaranteed only under the conditions listed in the specifications table and is not guaranteed under the full range(s) described by the Absolute Maximum specifications. Exceeding any of the absolute maximum/minimum specifications may result in permanent damage to the device and will void the warranty.

CAUTION: Although this device is designed to be as robust as possible, ESD (Electrostatic Discharge) can damage this device. This device must be protected at all times from ESD. Static charges may easily produce potentials of several kilovolts on the human body or equipment, which can discharge without detection. Industry-standard ESD precautions must be employed at all times.

Single	Single	Single	Common Cathode	Series Pair	Unconnected Pair	Unconnected Pair	Dual Series Pair
SC-79	SOD-323	SOT-23	SOT-23	SOT-23	SOT-143	LGA	SC-88
SMS3922-079 Marking: Cathode	SMS3922-011 Marking: SA	SMS3922-001 Marking: SA1	SMS3922-004 Marking: SA3	SMS3922-005 Marking: SA2	SMS3922-015 Marking: SA7		
SMS3922-079LF Marking: Cathode	SMS3922-011LF Marking: XA	SMS3922-001LF Marking: XA1	SMS3922-004LF Marking: XA3	SMS3922-005LF Marking: XA2	SMS3922-015LF Marking: XA7		
SMS3923-079 Marking: Cathode	◆SMS3923-011 Marking: SB	SMS3923-001 Marking: SB1		SMS3923-005 Marking: SB2	SMS3923-015 Marking: SB7	SMS3923-517 Lead (Pb)-Free Marking: B	
SMS3923-079LF Marking: Cathode	◆SMS3923-011LF Marking: XB	SMS3923-001LF Marking: XB1		SMS3923-005LF Marking: XB2	SMS3923-015LF Marking: XB7		SMS3923-081LF Marking: XBQ
◆SMS3924-079 Marking: Cathode				SMS3924-005 Marking: SC2	SMS3924-015 Marking: SC7		
◆SMS3924-079LF Marking: Cathode				SMS3924-005LF Marking: XC2	SMS3924-015LF Marking: XC7		
$L_S = 0.7 \text{ nH}$	$L_S = 1.5 \text{ nH}$	$L_S = 1.5 \text{ nH}$	$L_S = 1.5 \text{ nH}$	$L_S = 1.5 \text{ nH}$	$L_S = 1.5 \text{ nH}$	$L_S = 0.6 \text{ nH}$	$L_S = 1.8 \text{ nH}$
				SC-70			
				SMS3924-075 Marking: SC2			
				SMS3924-075LF Marking: XC2			
				$L_S = 1.4 \text{ nH}$			

LF denotes lead (Pb)-free, RoHS-compliant packaging option as an alternative to our standard tin/lead (Sn/Pb) packaging.


Innovation to Go™
Select Linear Products (indicated by ◆) now available for purchase online.

Electrical Specifications at 25 °C


Per junction, unless otherwise noted

Part Number	$V_B @ 10 \mu\text{A} \text{ (V)}$	I_R	$C_T @ 0 \text{ V (pF)}$	$V_F @ 1 \text{ mA (mV)}$	Pair Configuration	V_F
	Min.				$\Delta V_F @ 1 \text{ mA (mV)}$	
SMS3922 Series	8	@ 1 V < 100 nA	0.63–1.03	280–340	10	@ 10 mA < 450 mV
SMS3923 Series	20	@ 15 V < 500 nA	0.83–1.23	310–370	10	@ 35 mA < 1000 mV
SMS3924 Series	70	@ 50 V < 200 nA	1.43–1.83	490–550	10	@ 15 mA < 1000 mV


Typical Performance Data

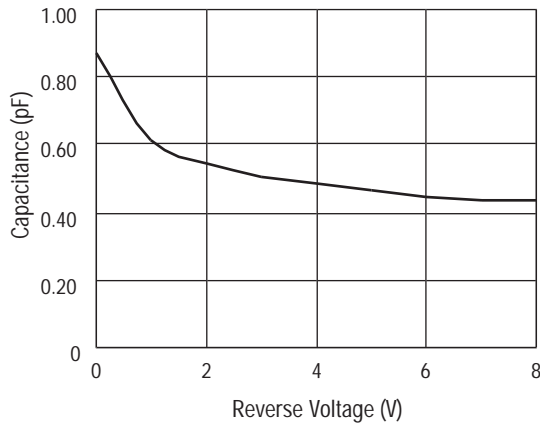


SMS3922 Total Capacitance vs. Reverse Voltage

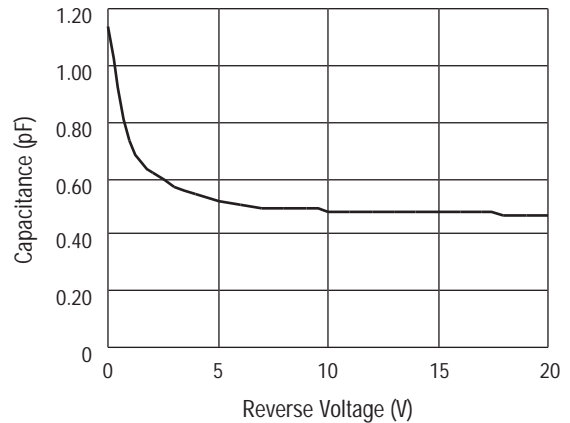

SMS3923 Total Capacitance vs. Reverse Voltage

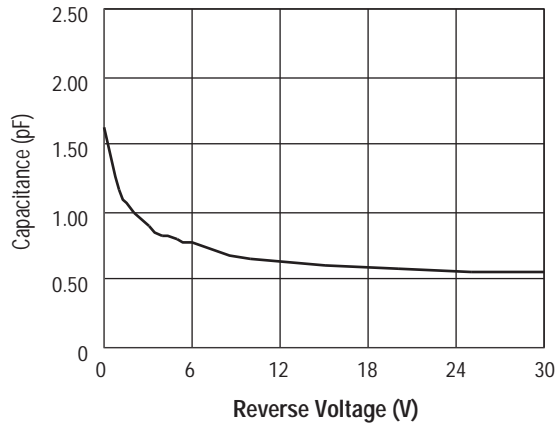

SMS3924 Total Capacitance vs. Reverse Voltage

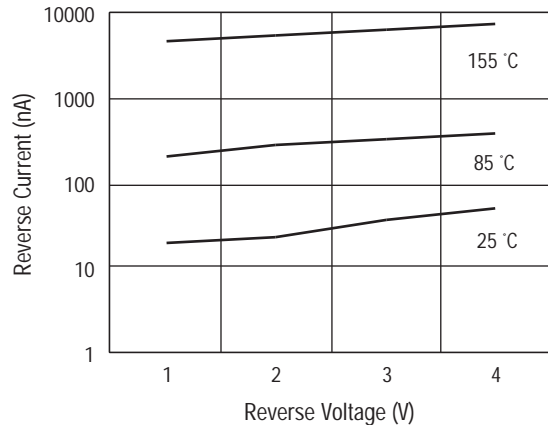

SMS3922 Reverse Current vs. Reverse Voltage

SPICE Model Parameters

Parameter	Unit	SMS3922	SMS3923	SMS3924
IS	A	3E-8	5E-9	2E-11
RS	Ω	9	11	11
N		1.08	1.05	1.08
TT	s	8E-11	8E-11	8E-11
CJO	pF	0.7	0.9	1.5
M		0.26	0.24	0.4
EG	eV	0.69	0.69	0.69
XTI		2	2	2
FC		0.5	0.5	0.5
BV	V	20	46	100
IBV	A	1E-5	1E-5	1E-5
VJ	V	0.595	0.64	0.84


Recommended Solder Reflow Profiles

Refer to the [“Recommended Solder Reflow Profile”](#) Application Note.


Tape and Reel Information

Refer to the [“Discrete Devices and IC Switch/Attenuators Tape and Reel Package Orientation”](#) Application Note.


SC-70

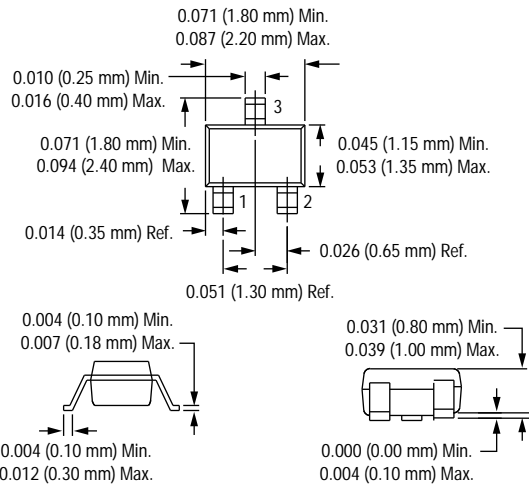


SOT-23

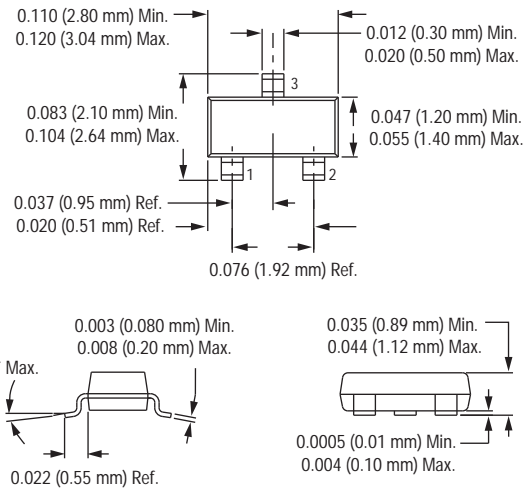


SC-79

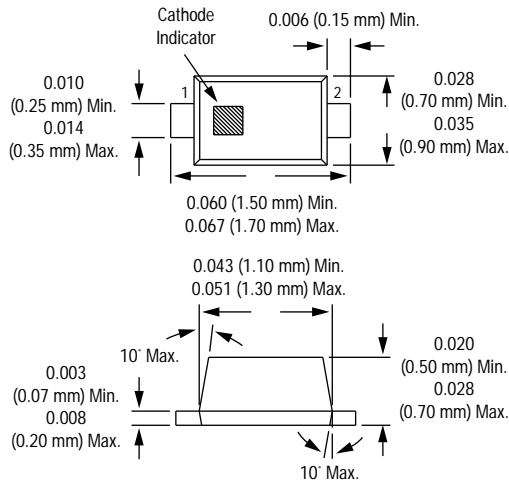


SOD-323

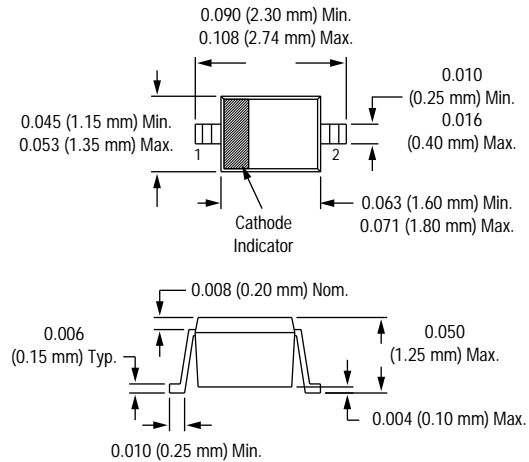


LGA (-517)

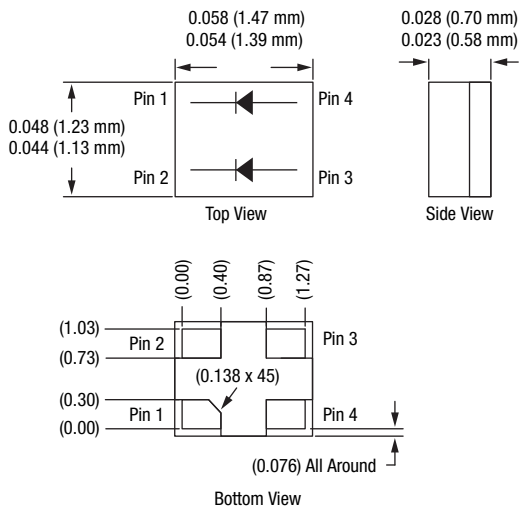


SOT-143

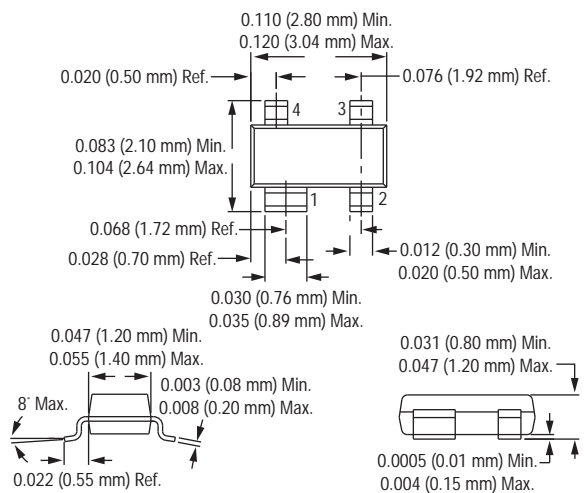


SC-88

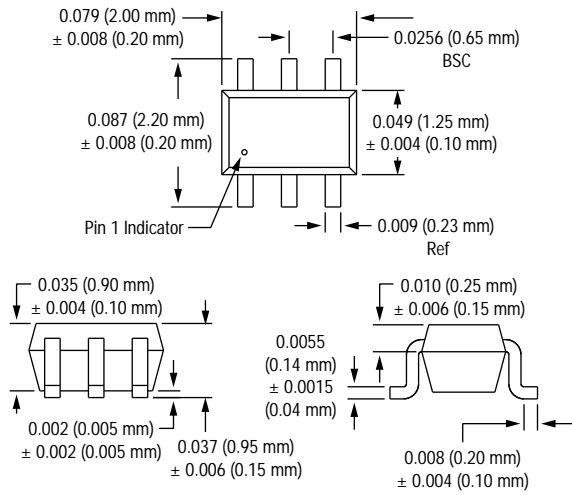

SMS3923-081LF Pin Out (Top View)



SMS3923-081LF Equivalent Circuit

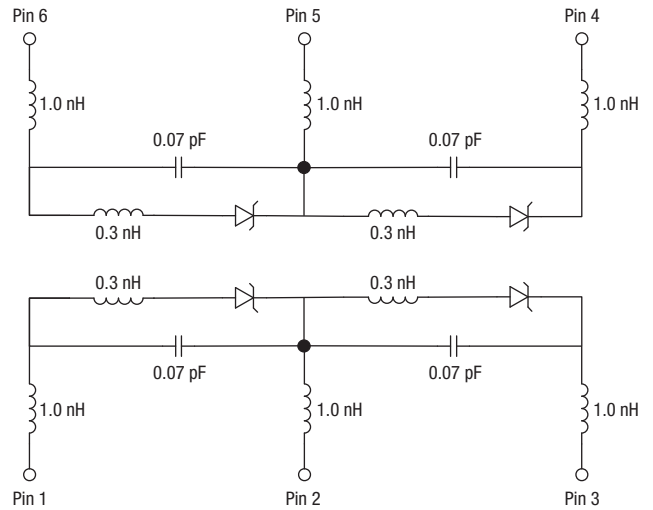

Copyright © 2002, 2003, 2004, 2005, 2006, 2007, Skyworks Solutions, Inc. All Rights Reserved.

Information in this document is provided in connection with Skyworks Solutions, Inc. ("Skyworks") products or services. These materials, including the information contained herein, are provided by Skyworks as a service to its customers and may be used for informational purposes only by the customer. Skyworks assumes no responsibility for errors or omissions in these materials or the information contained herein. Skyworks may change its documentation, products, services, specifications or product descriptions at any time, without notice. Skyworks makes no commitment to update the materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

No license, whether express, implied, by estoppel or otherwise, is granted to any intellectual property rights by this document. Skyworks assumes no liability for any materials, products or information provided hereunder, including the sale, distribution, reproduction or use of Skyworks products, information or materials, except as may be provided in Skyworks Terms and Conditions of Sale.

THE MATERIALS, PRODUCTS AND INFORMATION ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. SKYWORKS DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. SKYWORKS SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.



Skyworks products are not intended for use in medical, lifesaving or life-sustaining applications, or other equipment in which the failure of the Skyworks products could lead to personal injury, death, physical or environmental damage. Skyworks customers using or selling Skyworks products for use in such applications do so at their own risk and agree to fully indemnify Skyworks for any damages resulting from such improper use or sale.

Customers are responsible for their products and applications using Skyworks products, which may deviate from published specifications as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Skyworks assumes no liability for applications assistance, customer product design, or damage to any equipment resulting from the use of Skyworks products outside of stated published specifications or parameters.

Skyworks, the Skyworks symbol, "Breakthrough Simplicity" and "Innovation to Go" are trademarks or registered trademarks of Skyworks Solutions, Inc., in the United States and other countries. Third-party brands and names are for identification purposes only, and are the property of their respective owners. Additional information, including relevant terms and conditions, posted at www.skyworksinc.com, are incorporated by reference.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View SMS3924-015LF on WIN SOURCE](#)
-  [Skyworks Solutions Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management