




**THE DATASHEET OF
T491V337M010ZT7280**



T491V337M010ZT7280

Obsolete

Tantalum, MnO₂ Tantalum, 330 uF, 20%, 10 VDC, SMD, Molded, Low Profile, 7343, 2mm

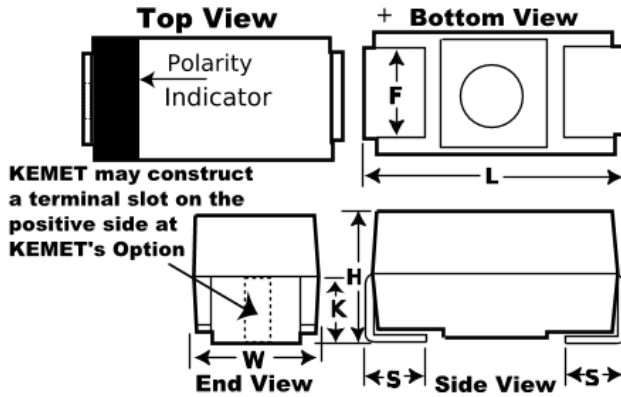

General Information

Dielectric	MnO ₂ Tantalum
Style	SMD Chip
Description	SMD, Molded, Low Profile
Features	Low Profile
RoHS	Yes
Termination	Tin
AEC-Q200	No
Notes	Obsolete. Old Part Number [Obsolete] Was B45194E2337M406.

Specifications

Capacitance	330 uF
Capacitance Tolerance	20%
Voltage DC	10 VDC (85C), 6.7 VDC (125C)
Temperature Range	-55/+125°C
Rated Temperature	85°C
Dissipation Factor	12%
Failure Rate	N/A
Leakage Current	33 uA

Dimensions

Footprint	7343
L	7.3mm +/-0.3mm
W	4.3mm +/-0.3mm
H	2mm MAX
S	1.3mm +/-0.3mm
F	2.4mm +/-0.1mm
K	1.7mm TYP

Packaging Specifications

Packaging	T&R, 330mm
Packaging Quantity	3750

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View T491V337M010ZT7280 on WIN SOURCE](#)

 [Kemet Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management