




**THE DATASHEET OF
T495C475M025ZTE530**



B45197A, Tantalum, MnO2 Tantalum, 4.7 uF, 20%, 25 V, SMD, Molded, Low ESR, Surge Robust, 530 mOhms, 6032, Height Max = 2.8mm

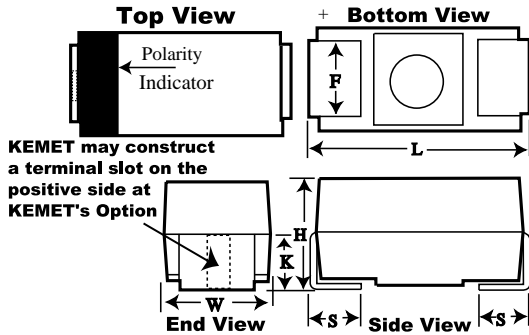

| General Information | |
|---------------------|--|
| Supplier: | KEMET |
| Series: | B45197A |
| Dielectric: | MnO2 Tantalum |
| Style: | SMD Chip |
| Description: | SMD, Molded, Low ESR, Surge Robust |
| Features: | Low ESR, Surge Robust |
| RoHS: | Yes |
| Termination: | Tin |
| Notes: | Obsolete. Old Part Number [Obsolete] Was B45197A5475M309 |

| Dimensions | |
|------------|----------------|
| Footprint | 6032 |
| L | 6mm +/-0.3mm |
| W | 3.2mm +/-0.3mm |
| H | 2.5mm +/-0.3mm |
| S | 1.3mm +/-0.3mm |
| F | 2.2mm +/-0.1mm |
| K | 1.8mm TYP |

| Packaging Specifications | |
|--------------------------|------------|
| Packaging: | T&R, 178mm |
| Packaging Quantity: | 750 |

| Specifications | |
|------------------------|--|
| Capacitance: | 4.7 uF |
| Capacitance Tolerance: | 20% |
| Voltage DC: | 25 VDC (85C), 16.75 VDC (125C) |
| Temperature Range: | -55/+125C |
| Rated Temperature: | 85C |
| Dissipation Factor: | 6% |
| Failure Rate: | N/A |
| Resistance: | 0.53 Ohms (100kHz) |
| Current: | 460 mAmps (25C), 414 mAmps (85C), 184 mAmps (125C) |
| Leakage Current: | 1.2 uA |

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View T495C475M025ZTE530 on WIN SOURCE](#)

 [Kemet Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management