




**THE DATASHEET OF
T495M107K006ZTE500**



B450, Tantalum, MnO2 Tantalum, 100 uF, 10%, 6.3 VDC, SMD, Molded, Low Profile, Low ESR, Surge Robust, 500 mOhms, 3528, Height Max = 1.5mm

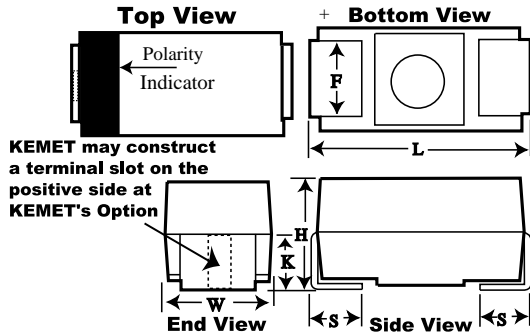

General Information	
Series:	B450
Dielectric:	MnO2 Tantalum
Style:	SMD Chip
Description:	SMD, Molded, Low Profile, Low ESR, Surge Robust
Features:	Low Profile, Low ESR, Surge Robust
RoHS:	Yes
Termination:	Tin
Notes:	Obsolete. Old Part Number [Obsolete] Was B45006Y1079K507

Dimensions	
Footprint	3528
L	3.5mm +/-0.2mm
W	2.8mm +/-0.2mm
H	1.5mm MAX
S	0.8mm +/-0.3mm
F	2.2mm +/-0.1mm
K	1.3mm TYP

Specifications	
Capacitance:	100 uF
Capacitance Tolerance:	10%
Voltage DC:	6.3 VDC (85C), 4.22 VDC (125C)
Temperature Range:	-55/+125C
Rated Temperature:	85°C
Dissipation Factor:	20%
Failure Rate:	N/A
Resistance:	0.5 Ohms (100kHz)
Ripple Current:	390 mAmps (25C), 351 mAmps (85C), 156 mAmps (125C)
Leakage Current:	6.3 uA

Packaging Specifications	
Packaging:	T&R, 178mm
Packaging Quantity:	2500

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View T495M107K006ZTE500 on WIN SOURCE](#)

 [Kemet Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management