




**THE DATASHEET OF
T495U226M016ZTE500**



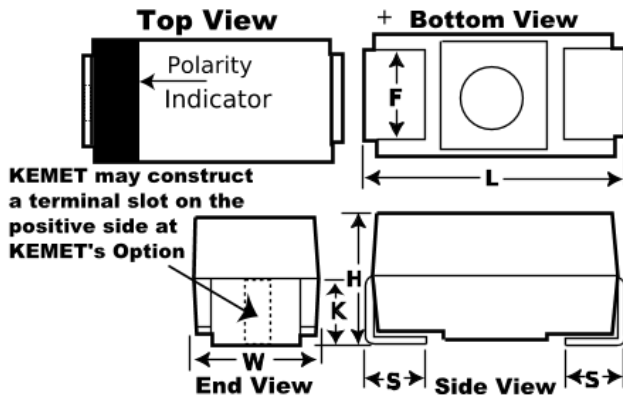

Dimensions

Footprint	6032
L	6mm +/-0.3mm
W	3.2mm +/-0.3mm
H	1.5mm MAX
S	1.3mm +/-0.3mm
F	2.2mm +/-0.1mm
K	1.3mm TYP

Packaging Specifications

Packaging	T&R, 178mm
Packaging Quantity	1250

General Information

Dielectric	MnO ₂ Tantalum
Style	SMD Chip
Description	SMD, Molded, Low Profile, Low ESR, Surge Robust
Features	Low Profile, Low ESR, Surge Robust
RoHS	Yes
Termination	Tin
AEC-Q200	No
Notes	Obsolete. Old Part Number [Obsolete] Was B45192R3226M309.

Specifications

Capacitance	22 uF
Capacitance Tolerance	20%
Voltage DC	16 VDC (85C), 10.72 VDC (125C)
Temperature Range	-55/+125°C
Rated Temperature	85°C
Dissipation Factor	6%
Failure Rate	N/A
ESR	0.5 Ohms (100kHz)
Ripple Current	420 mAmps (25C), 378 mAmps (85C), 168 mAmps (125C)
Leakage Current	3.5 uA

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View T495U226M016ZTE500 on WIN SOURCE](#)

 [Kemet Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management