




**THE DATASHEET OF
T498A106K006ZTE2K77280**



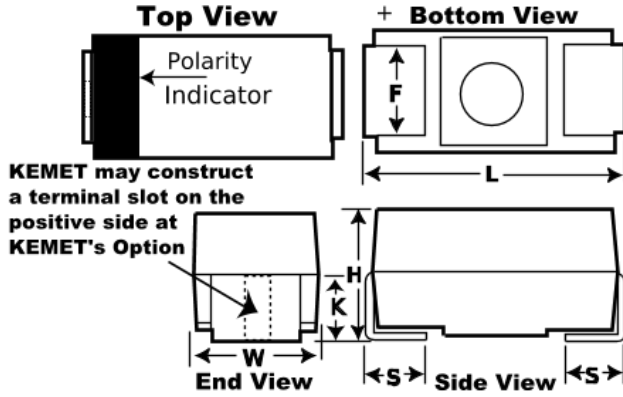

General Information	
Dielectric	MnO ₂ Tantalum
Style	SMD Chip
Description	SMD, Molded, High Temperature
Features	High Temperature, Automotive
RoHS	Yes
Termination	Tin
Qualifications	AEC-Q200
AEC-Q200	Yes
Notes	Obsolete.

Specifications	
Capacitance	10 uF
Capacitance Tolerance	10%
Voltage DC	6.3 VDC (85C), 5.02 VDC (125C), 4.22 VDC (150C)
Temperature Range	-55/+150°C
Rated Temperature	85°C
Dissipation Factor	4.5%
Failure Rate	N/A
ESR	2.7 Ohms (100kHz)
Ripple Current	166.7 mAmps (25C), 150 mAmps (85C), 66.7 mAmps (125C)
Leakage Current	0.6 uA

Dimensions	
Footprint	3216
L	3.2mm +/-0.2mm
W	1.6mm +/-0.2mm
H	1.6mm +/-0.2mm
S	0.8mm +/-0.3mm
F	1.2mm +/-0.1mm
K	1.3mm TYP

Packaging Specifications	
Packaging	T&R, 330mm
Packaging Quantity	9000

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View T498A106K006ZTE2K77280 on WIN SOURCE](#)

 [Kemet Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management