




**THE DATASHEET OF
T498A155M020ZTE5K2**



T498A155M020ZTE5K2

Obsolete

Tantalum, MnO2 Tantalum, High Temperature, 1.5 uF, 20%, 20 VDC, SMD, Molded, High Temperature, N/A, 5.2 Ohms, 3216, 1.8mm

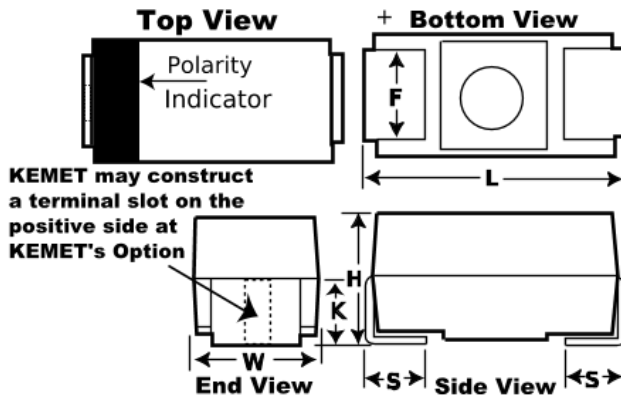

General Information

Dielectric	MnO2 Tantalum
Style	SMD Chip
Description	SMD, Molded, High Temperature
Features	High Temperature, Automotive
RoHS	Yes
Termination	Tin
Qualifications	AEC-Q200
AEC-Q200	Yes
Notes	Obsolete.

Specifications

Capacitance	1.5 uF
Capacitance Tolerance	20%
Voltage DC	20 VDC (85C), 15.94 VDC (125C), 13.4 VDC (150C)
Temperature Range	-55/+150°C
Rated Temperature	85°C
Dissipation Factor	4.5%
Failure Rate	N/A
ESR	5.2 Ohms (100kHz)
Ripple Current	120.1 mAmps (25C), 108.1 mAmps (85C), 48 mAmps (125C)
Leakage Current	0.5 uA

Dimensions

Footprint	3216
L	3.2mm +/-0.2mm
W	1.6mm +/-0.2mm
H	1.6mm +/-0.2mm
S	0.8mm +/-0.3mm
F	1.2mm +/-0.1mm
K	1.3mm TYP

Packaging Specifications

Packaging	T&R, 178mm
Packaging Quantity	2000

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View T498A155M020ZTE5K2 on WIN SOURCE](#)

 [Kemet Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management