




**THE DATASHEET OF  
T498A475K006ZTE3K6**



## T498A475K006ZTE3K6

Obsolete

Tantalum, MnO2 Tantalum, High Temperature, 4.7 uF, 10%, 6.3 VDC, SMD, Molded, High Temperature, N/A, 3.6 Ohms, 3216, 1.8mm

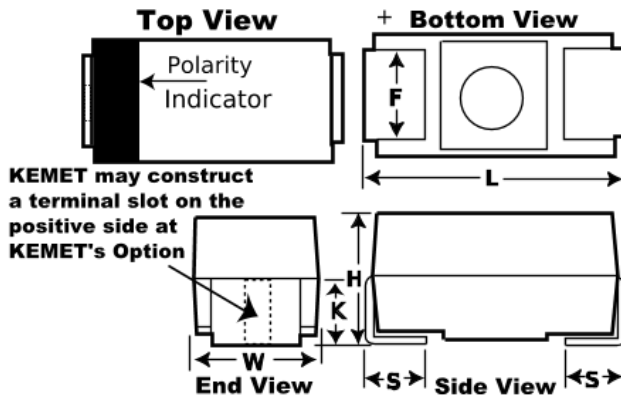

### Dimensions

Footprint	3216
L	3.2mm +/-0.2mm
W	1.6mm +/-0.2mm
H	1.6mm +/-0.2mm
S	0.8mm +/-0.3mm
F	1.2mm +/-0.1mm
K	1.3mm TYP

### Packaging Specifications

Packaging	T&R, 178mm
Packaging Quantity	2000

### General Information

Dielectric	MnO2 Tantalum
Style	SMD Chip
Description	SMD, Molded, High Temperature
Features	High Temperature, Automotive
RoHS	Yes
Termination	Tin
Qualifications	AEC-Q200
AEC-Q200	Yes
Notes	Obsolete.

### Specifications

Capacitance	4.7 uF
Capacitance Tolerance	10%
Voltage DC	6.3 VDC (85C), 5.02 VDC (125C), 4.22 VDC (150C)
Temperature Range	-55/+150°C
Rated Temperature	85°C
Dissipation Factor	4.5%
Failure Rate	N/A
ESR	3.6 Ohms (100kHz)
Ripple Current	144.3 mAmps (25C), 129.9 mAmps (85C), 57.7 mAmps (125C)
Leakage Current	0.5 uA

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View T498A475K006ZTE3K6 on WIN SOURCE](#)

 [Kemet Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management