



**THE DATASHEET OF
TACL10M4RTA**



Standard and Low Profile Tantalum Microchip Capacitors



FEATURES


- The world's smallest surface mount tantalum capacitor
- CV range: 0.10-150µF / 2-25V
- 11 case sizes available, standard and low profile



LEAD-FREE
LEAD-FREE COMPATIBLE
COMPONENT


APPLICATIONS

- Hearing Aids, Non-life support medical, Long life miniature designs
- Industrial and hand-held and wearable applications

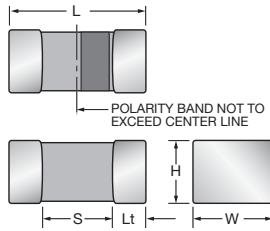

MARKING

A, B, H, I, J, K, L, R, T, U, V
CASE



STANDARD CASE DIMENSIONS: millimeters (inches)

| Code | EIA Code | EIA Metric | L+0.20 (0.008) -0.00 (0.000) | W+0.15 (0.006) -0.00 (0.000) | H+0.15 (0.006) -0.00 (0.000) | Termination Spacing(S) | Minimum Termination Length (Lt) |
|------|----------|------------|---------------------------------|--|--|------------------------|---------------------------------|
| A | 1206 | 3216-18 | 3.20 ± 0.20 (0.126 ± 0.008) | 1.60 ± 0.20 (0.063 ± 0.008) | 1.60 ± 0.20 (0.063 ± 0.008) | 1.80 (0.071) min | 0.15 (0.006) |
| B | 1210 | 3528-15 | 3.50 ± 0.20 (0.138 ± 0.008) | 2.80 +0.20 -0.10 +0.008 -0.004 (0.110) | 1.50 (0.059) max | 2.00 (0.079) min | 0.15 (0.006) |
| K | 0402 | 1005-07 | 1.00 (0.039) | 0.50 +0.20 -0.00 +0.008 -0.000 (0.020) | 0.50 +0.20 -0.00 +0.008 -0.000 (0.020) | 0.40 (0.016) min | 0.10 (0.004) |
| L | 0603 | 1608-10 | 1.60 (0.063) | 0.85 (0.033) | 0.85 (0.033) | 0.55 (0.022) min | 0.15 (0.006) |
| R | 0805 | 2012-15 | 2.00 (0.079) | 1.35 (0.053) | 1.35 (0.053) | 0.70 (0.028) min | 0.15 (0.006) |

LOW PROFILE CASE DIMENSIONS: millimeters (inches)

| Code | EIA Code | EIA Metric | L+0.20 (0.008) -0.00 (0.000) | W+0.15 (0.006) -0.00 (0.000) | H max | Termination Spacing(S) | Minimum Termination Length (Lt) |
|------|----------|------------|---------------------------------|--|--------------|------------------------|---------------------------------|
| H | 0805 | 2012-10 | 2.00 (0.079) | 1.35 (0.053) | 1.00 (0.039) | 0.70 (0.028) min | 0.15 (0.006) |
| I | 1206 | 3216-05 | 3.20±0.20 (0.126±0.008) | 1.60±0.20 (0.063±0.008) | 0.50 (0.020) | 1.80 (0.071) min. | 0.15 (0.006) |
| J | 0603 | 1608-08 | 1.60 (0.063) | 0.85 (0.033) | 0.75 (0.030) | 0.55 (0.022) min | 0.15 (0.006) |
| T | 1210 | 3528-12 | 3.50 ± 0.20 (0.138 ± 0.008) | 2.80 +0.20 -0.10 +0.008 -0.004 (0.110) | 1.20 (0.047) | 2.00 (0.079) min | 0.15 (0.006) |
| U | 0805 | 2012-06 | 2.00 (0.079) | 1.35 (0.053) | 0.60 (0.024) | 0.70 (0.028) min | 0.15 (0.006) |
| V | 1206 | 3216-08 | 3.20 ± 0.20 (0.126 ± 0.008) | 1.60 ± 0.20 (0.063 ± 0.008) | 0.75 (0.030) | 1.80 (0.071) min | 0.15 (0.006) |

HOW TO ORDER

| | | | | | | |
|---------------|-----------------|--|------------------|--|--|---|
| TAC | L | 226 | * | 004 | R | TA |
| Type | Case Size | Capacitance Code | Tolerance | Rated DC Voltage | Packaging | Alternative characters may be used for special requirements |
| TACmicrochip® | See table above | pF code: 1st two digits represent significant figures, 3rd digit represents multiplier (number of zeros to follow) | K=±10% M=±20% | 002=2Vdc 003=3Vdc 004=4Vdc 006=6.3Vdc 010=10Vdc 016=16Vdc 020=20Vdc 025=25Vdc | R, P = 7" Standard Tin Termination Plastic Tape X, Q = 4 1/4" Standard Tin Termination Plastic Tape A, M = 7" Gold Termination Plastic Tape F, N = 4 1/4" Gold Termination Plastic Tape | |

TECHNICAL SPECIFICATIONS

| | | | | | | | | | |
|------------------------------------|--|-----|-----|-----|-----|----|----|----|----|
| Technical Data: | All technical data relate to an ambient temperature of +25°C | | | | | | | | |
| Capacitance Range: | 0.10 µF to 150 µF | | | | | | | | |
| Capacitance Tolerance: | ±10%; ±20% | | | | | | | | |
| Leakage Current DCL: | 0.01CV or 0.5µA whichever is the greater | | | | | | | | |
| Rated Voltage (V _R) | ≤ +85°C: | 2 | 3 | 4 | 6.3 | 10 | 16 | 20 | 25 |
| Category Voltage (V _C) | ≤ +125°C: | 1.3 | 2 | 2.7 | 4 | 7 | 10 | 13 | 17 |
| Surge Voltage (V _S) | ≤ +85°C: | 2.7 | 3.9 | 5.2 | 8 | 13 | 20 | 26 | 32 |
| Surge Voltage (V _S) | ≤ +125°C: | 1.7 | 2.6 | 3.2 | 5 | 8 | 12 | 16 | 20 |
| Temperature Range: | -55°C to +125°C | | | | | | | | |
| Reliability: | 1% per 1000 hours at 85°C, V _R with 0.1Ω/V series impedance, 60% confidence level | | | | | | | | |
| Termination Finish: | Tin Plating over Nickel (standard), Gold Plating over Nickel option available upon request | | | | | | | | |

Standard and Low Profile Tantalum Microchip Capacitors

STANDARD MICROCHIP CAPACITANCE AND RATED VOLTAGE RANGE (LETTER DENOTES CASE SIZE)

| Capacitance | | Voltage Rating DC (V _R) at 85°C | | | | | | | |
|-------------|------|---|------|------|------|-------|-----|-----|-----|
| µF | Code | 2.0V | 3.0V | 4.0V | 6.3V | 10V | 16V | 20V | 25V |
| 0.10 | 104 | | | | | | K | | |
| 0.15 | 154 | | | | | K | K | | |
| 0.22 | 224 | | | | | K | K | K | |
| 0.33 | 334 | | | | | K | K | | |
| 0.47 | 474 | | | | | K/L | L | | |
| 0.68 | 684 | | | | | K/L | L | | |
| 1.0 | 105 | | | | K/L | K/L/R | L | | R |
| 1.5 | 155 | | | L | L | L | L | | |
| 2.2 | 225 | | K/L | L | K/L | L | L | | |
| 3.3 | 335 | K/L | K/L | L | L | L/R | | R | |
| 4.7 | 475 | K/L | K/L | L | L | L/R | | R | |
| 6.8 | 685 | K/L | L | L | L/R | L/R | | R | |
| 10 | 106 | K/L | L | L/R | L/R | L/R | R | | |
| 15 | 156 | | R | L/R | L/R | R | | | |
| 22 | 226 | R | L/R | L/R | R | R | | | |
| 33 | 336 | R | R | R | R | A/R | | | |
| 47 | 476 | R | R | R | A/R | B | | | |
| 68 | 686 | R | A/R | A | | | | | |
| 100 | 107 | | A/R | A/R | A | | | | |
| 150 | 157 | A | | | | | | | |
| 220 | 227 | | | | | | | | |

LOW PROFILE MICROCHIP CAPACITANCE AND RATED VOLTAGE RANGE (LETTER DENOTES CASE SIZE)

| Capacitance | | Voltage Rating DC (V _R) at 85°C | | | | | |
|-------------|------|---|------|------|---------------------|-----|-----|
| µF | Code | 2.0V | 3.0V | 4.0V | 6.3V | 10V | 16V |
| 1.0 | 105 | | | | | | U |
| 1.5 | 155 | | | | | | |
| 2.2 | 225 | | | | | U | |
| 3.3 | 335 | | | | U | | |
| 4.7 | 475 | | | U | | | |
| 6.8 | 685 | | | | | | |
| 10 | 106 | U | | J | ^(M) H | H/V | |
| 15 | 156 | | | | H | V | |
| 22 | 226 | | | | H | | |
| 33 | 336 | | | H | | | |
| 47 | 476 | | H | | | T | |
| 68 | 686 | | | | | T | |
| 100 | 107 | | | | | T | |

Released ratings ^(M tolerance only)

Note: Voltage ratings are minimum values. AVX reserves the right to supply higher voltage ratings in the same case size, to the same reliability standards.

RATINGS & PART NUMBER REFERENCE

| AVX Part No. | Case Size | Capacitance (µF) | Rated Voltage (V) | Rated Temperature (°C) | Category Voltage (V) | Category Temperature (°C) | DCL Max. (µA) | DF Max. (%) | ESR Max. @ 100kHz (Ω) | 100kHz RMS Current (mA) | | | Product Category | MSL |
|------------------------|-----------|------------------|-------------------|------------------------|----------------------|---------------------------|---------------|-------------|-----------------------|-------------------------|------|-------|------------------|-----|
| | | | | | | | | | | 25°C | 85°C | 125°C | | |
| 2 Volt @ 85°C | | | | | | | | | | | | | | |
| TACK335*002#TA | K | 3.3 | 2 | 85 | 1.3 | 125 | 0.5 | 8 | 15 | 32 | 28 | 13 | 3 | 1 |
| TACL335*002#TA | L | 3.3 | 2 | 85 | 1.3 | 125 | 0.5 | 6 | 7.5 | 58 | 52 | 23 | 2 | 1 |
| TACK475*002#TA | K | 4.7 | 2 | 85 | 1.3 | 125 | 0.5 | 12 | 15 | 32 | 28 | 13 | 3 | 1 |
| TACL475*002#TA | L | 4.7 | 2 | 85 | 1.3 | 125 | 0.5 | 6 | 7.5 | 58 | 52 | 23 | 1 | 1 |
| TACK685*002#TA | K | 6.8 | 2 | 85 | 1.3 | 125 | 0.5 | 20 | 15 | 32 | 28 | 13 | 3 | 1 |
| TACL685*002#TA | L | 6.8 | 2 | 85 | 1.3 | 125 | 0.5 | 6 | 7.5 | 58 | 52 | 23 | 2 | 1 |
| TACK106*002#TA | K | 10 | 2 | 85 | 1.3 | 125 | 0.5 | 15 | 15 | 32 | 28 | 13 | 3 | 1 |
| TACL106*002#TA | L | 10 | 2 | 85 | 1.3 | 125 | 0.5 | 10 | 7.5 | 58 | 52 | 23 | 3 | 1 |
| TACU106*002#TA | U | 10 | 2 | 85 | 1.3 | 125 | 0.5 | 8 | 5 | 84 | 75 | 33 | 1 | 1 |
| TACR226*002#TA | R | 22 | 2 | 85 | 1.3 | 125 | 0.5 | 8 | 5 | 95 | 85 | 38 | 1 | 1 |
| TACR336*002#TA | R | 33 | 2 | 85 | 1.3 | 125 | 0.7 | 10 | 5 | 95 | 85 | 38 | 2 | 1 |
| TACR476*002#TA | R | 47 | 2 | 85 | 1.3 | 125 | 0.9 | 10 | 5 | 95 | 85 | 38 | 2 | 1 |
| TACR686*002#TA | R | 68 | 2 | 85 | 1.3 | 125 | 1.4 | 14 | 5 | 95 | 85 | 38 | 2 | 1 |
| TACA157*002#TA | A | 150 | 2 | 85 | 1.3 | 125 | 3 | 20 | 1 | 200 | 180 | 80 | 2 | 1 |
| 3 Volt @ 85°C | | | | | | | | | | | | | | |
| TACK225*003#TA | K | 2.2 | 3 | 85 | 2 | 125 | 0.5 | 6 | 15 | 32 | 28 | 13 | 2 | 1 |
| TACL225*003#TA | L | 2.2 | 3 | 85 | 2 | 125 | 0.5 | 6 | 7.5 | 58 | 52 | 23 | 1 | 1 |
| TACK335*003#TA | K | 3.3 | 3 | 85 | 2 | 125 | 0.5 | 8 | 15 | 32 | 28 | 13 | 3 | 1 |
| TACL335*003#TA | L | 3.3 | 3 | 85 | 2 | 125 | 0.5 | 6 | 7.5 | 58 | 52 | 23 | 2 | 1 |
| TACK475*003#TA | K | 4.7 | 3 | 85 | 2 | 125 | 0.5 | 12 | 15 | 32 | 28 | 13 | 3 | 1 |
| TACL475*003#TA | L | 4.7 | 3 | 85 | 2 | 125 | 0.5 | 6 | 7.5 | 58 | 52 | 23 | 1 | 1 |
| TACL685*003#TA | L | 6.8 | 3 | 85 | 2 | 125 | 0.5 | 6 | 7.5 | 58 | 52 | 23 | 2 | 1 |
| TACL106*003#TA | L | 10 | 3 | 85 | 2 | 125 | 0.5 | 10 | 7.5 | 58 | 52 | 23 | 3 | 1 |
| TACR156*003#TA | R | 15 | 3 | 85 | 2 | 125 | 0.5 | 8 | 5 | 95 | 85 | 38 | 1 | 1 |
| TACL226*003#TA | L | 22 | 3 | 85 | 2 | 125 | 0.7 | 20 | 7.5 | 58 | 52 | 23 | 3 | 1 |
| TACR226*003#TA | R | 22 | 3 | 85 | 2 | 125 | 0.7 | 8 | 5 | 95 | 85 | 38 | 1 | 1 |
| TACR336*003#TA | R | 33 | 3 | 85 | 2 | 125 | 1 | 10 | 5 | 95 | 85 | 38 | 2 | 1 |
| TACH476*003#TA | H | 47 | 3 | 85 | 2 | 125 | 1.4 | 20 | 5 | 89 | 80 | 36 | 3 | 1 |
| TACR476*003#TA | R | 47 | 3 | 85 | 2 | 125 | 1.5 | 10 | 5 | 95 | 85 | 38 | 2 | 1 |
| TACA686*003#TA | A | 68 | 3 | 85 | 2 | 125 | 2 | 15 | 2 | 141 | 127 | 57 | 1 | 1 |
| TACR686*003#TA | R | 68 | 3 | 85 | 2 | 125 | 2 | 14 | 5 | 95 | 85 | 38 | 3 | 1 |
| TACA107*003#TA | A | 100 | 3 | 85 | 2 | 125 | 3 | 15 | 1 | 200 | 180 | 80 | 2 | 1 |
| TACR107*003#TA | R | 100 | 3 | 85 | 2 | 125 | 3 | 30 | 5 | 95 | 85 | 38 | 3 | 1 |
| 4 Volt @ 85°C | | | | | | | | | | | | | | |
| TACL155*004#TA | L | 1.5 | 4 | 85 | 2.7 | 125 | 0.5 | 6 | 7.5 | 58 | 52 | 23 | 1 | 1 |
| TACL225*004#TA | L | 2.2 | 4 | 85 | 2.7 | 125 | 0.5 | 6 | 7.5 | 58 | 52 | 23 | 1 | 1 |
| TACL335*004#TA | L | 3.3 | 4 | 85 | 2.7 | 125 | 0.5 | 6 | 7.5 | 58 | 52 | 23 | 2 | 1 |
| TACL475*004#TA | L | 4.7 | 4 | 85 | 2.7 | 125 | 0.5 | 6 | 7.5 | 58 | 52 | 23 | 1 | 1 |
| TACU475*004#TA | U | 4.7 | 4 | 85 | 2.7 | 125 | 0.5 | 8 | 5 | 84 | 75 | 33 | 1 | 1 |
| TACL685*004#TA | L | 6.8 | 4 | 85 | 2.7 | 125 | 0.5 | 8 | 7.5 | 58 | 52 | 23 | 2 | 1 |
| TACJ106*004#TA | J | 10 | 4 | 85 | 2.7 | 125 | 0.5 | 20 | 7.5 | 52 | 46 | 21 | 3 | 1 |
| TACL106*004#TA | L | 10 | 4 | 85 | 2.7 | 125 | 0.5 | 10 | 7.5 | 58 | 52 | 23 | 2 | 1 |
| TACR106*004#TA | R | 10 | 4 | 85 | 2.7 | 125 | 0.5 | 8 | 5 | 95 | 85 | 38 | 1 | 1 |
| TACL156*004#TA | L | 15 | 4 | 85 | 2.7 | 125 | 0.6 | 20 | 7.5 | 58 | 52 | 23 | 3 | 1 |
| TACR156*004#TA | R | 15 | 4 | 85 | 2.7 | 125 | 0.6 | 8 | 5 | 95 | 85 | 38 | 1 | 1 |
| TACL226*004#TA | L | 22 | 4 | 85 | 2.7 | 125 | 0.9 | 20 | 7.5 | 58 | 52 | 23 | 3 | 1 |
| TACR226*004#TA | R | 22 | 4 | 85 | 2.7 | 125 | 0.9 | 8 | 5 | 95 | 85 | 38 | 1 | 1 |
| TACH336*004#TA | H | 33 | 4 | 85 | 2.7 | 125 | 1.3 | 14 | 5 | 89 | 80 | 36 | 2 | 1 |
| TACR336*004#TA | R | 33 | 4 | 85 | 2.7 | 125 | 1.3 | 10 | 5 | 95 | 85 | 38 | 2 | 1 |
| TACR476*004#TA | R | 47 | 4 | 85 | 2.7 | 125 | 1.9 | 14 | 5 | 95 | 85 | 38 | 3 | 1 |
| TACA686*004#TA | A | 68 | 4 | 85 | 2.7 | 125 | 2.7 | 15 | 1 | 200 | 180 | 80 | 1 | 1 |
| TACA107*004#TA | A | 100 | 4 | 85 | 2.7 | 125 | 4 | 20 | 1 | 200 | 180 | 80 | 2 | 1 |
| TACR107*004#TA | R | 100 | 4 | 85 | 2.7 | 125 | 4 | 30 | 5 | 95 | 85 | 38 | 3 | 1 |
| 6.3 Volt @ 85°C | | | | | | | | | | | | | | |
| TACK105*006#TA | K | 1 | 6.3 | 85 | 4 | 125 | 0.5 | 6 | 15 | 32 | 28 | 13 | 2 | 1 |
| TACL105*006#TA | L | 1 | 6.3 | 85 | 4 | 125 | 0.5 | 6 | 7.5 | 58 | 52 | 23 | 1 | 1 |
| TACL155*006#TA | L | 1.5 | 6.3 | 85 | 4 | 125 | 0.5 | 6 | 7.5 | 58 | 52 | 23 | 1 | 1 |
| TACK225*006#TA | K | 2.2 | 6.3 | 85 | 4 | 125 | 0.5 | 8 | 15 | 32 | 28 | 13 | 3 | 1 |
| TACL225*006#TA | L | 2.2 | 6.3 | 85 | 4 | 125 | 0.5 | 6 | 7.5 | 58 | 52 | 23 | 1 | 1 |
| TACL335*006#TA | L | 3.3 | 6.3 | 85 | 4 | 125 | 0.5 | 6 | 7.5 | 58 | 52 | 23 | 2 | 1 |
| TACU335*006#TA | U | 3.3 | 6.3 | 85 | 4 | 125 | 0.5 | 8 | 5 | 84 | 75 | 33 | 1 | 1 |
| TACL475*006#TA | L | 4.7 | 6.3 | 85 | 4 | 125 | 0.5 | 8 | 7.5 | 58 | 52 | 23 | 2 | 1 |
| TACL685*006#TA | L | 6.8 | 6.3 | 85 | 4 | 125 | 0.5 | 10 | 7.5 | 58 | 52 | 23 | 2 | 1 |
| TACR685*006#TA | R | 6.8 | 6.3 | 85 | 4 | 125 | 0.5 | 8 | 5 | 95 | 85 | 38 | 1 | 1 |
| TACL106M006#TA | I | 10 | 6.3 | 85 | 4 | 125 | 0.6 | 20 | 5 | 84 | 75 | 33 | 2 | 1 |
| TACL106*006#TA | L | 10 | 6.3 | 85 | 4 | 125 | 0.6 | 10 | 6 | 65 | 58 | 26 | 2 | 1 |
| TACR106*006#TA | R | 10 | 6.3 | 85 | 4 | 125 | 0.6 | 8 | 5 | 95 | 85 | 38 | 1 | 1 |
| TACH156*006#TA | H | 15 | 6.3 | 85 | 4 | 125 | 0.9 | 8 | 5 | 89 | 80 | 36 | 3 | 1 |
| TACL156*006#TA | L | 15 | 6.3 | 85 | 4 | 125 | 0.9 | 20 | 7.5 | 58 | 52 | 23 | 3 | 1 |
| TACR156*006#TA | R | 15 | 6.3 | 85 | 4 | 125 | 0.9 | 8 | 5 | 95 | 85 | 38 | 1 | 1 |

RATINGS & PART NUMBER REFERENCE

| AVX Part No. | Case Size | Capacitance (µF) | Rated Voltage (V) | Rated Temperature (°C) | Category Voltage (V) | Category Temperature (°C) | DCL Max. (µA) | DF Max. (%) | ESR Max. @ 100kHz (Ω) | 100kHz RMS Current (mA) | | | Product Category | MSL |
|-----------------------|-----------|------------------|-------------------|------------------------|----------------------|---------------------------|---------------|-------------|-----------------------|-------------------------|------|-------|------------------|-----|
| | | | | | | | | | | 25°C | 85°C | 125°C | | |
| TACH226*006#TA | H | 22 | 6.3 | 85 | 4 | 125 | 1.4 | 10 | 5 | 89 | 80 | 36 | 2 | 1 |
| TACR226*006#TA | R | 22 | 6.3 | 85 | 4 | 125 | 1.4 | 10 | 5 | 95 | 85 | 38 | 1 | 1 |
| TACR336*006#TA | R | 33 | 6.3 | 85 | 4 | 125 | 2.1 | 12 | 5 | 95 | 85 | 38 | 2 | 1 |
| TACA476*006#TA | A | 47 | 6.3 | 85 | 4 | 125 | 3 | 15 | 1 | 200 | 180 | 80 | 1 | 1 |
| TACR476*006#TA | R | 47 | 6.3 | 85 | 4 | 125 | 3 | 20 | 5 | 95 | 85 | 38 | 3 | 1 |
| TACT686*006#TA | T | 68 | 6.3 | 85 | 4 | 125 | 4.3 | 15 | 1 | 200 | 180 | 80 | 2 | 1 |
| TACA107*006#TA | A | 100 | 6.3 | 85 | 4 | 125 | 6.3 | 20 | 1 | 200 | 180 | 80 | 2 | 1 |
| TACT107*006#TA | T | 100 | 6.3 | 85 | 4 | 125 | 6.3 | 12 | 1 | 200 | 180 | 80 | 2 | 1 |
| 10 Volt @ 85°C | | | | | | | | | | | | | | |
| TACK154*010#TA | K | 0.15 | 10 | 85 | 7 | 125 | 0.5 | 6 | 40 | 19 | 17 | 8 | 1 | 1 |
| TACK224*010#TA | K | 0.22 | 10 | 85 | 7 | 125 | 0.5 | 6 | 30 | 22 | 20 | 9 | 1 | 1 |
| TACK334*010#TA | K | 0.33 | 10 | 85 | 7 | 125 | 0.5 | 6 | 20 | 27 | 25 | 11 | 1 | 1 |
| TACK474*010#TA | K | 0.47 | 10 | 85 | 7 | 125 | 0.5 | 6 | 15 | 32 | 28 | 13 | 1 | 1 |
| TACL474*010#TA | L | 0.47 | 10 | 85 | 7 | 125 | 0.5 | 6 | 7.5 | 58 | 52 | 23 | 1 | 1 |
| TACK684*010#TA | K | 0.68 | 10 | 85 | 7 | 125 | 0.5 | 8 | 15 | 32 | 28 | 13 | 2 | 1 |
| TACL684*010#TA | L | 0.68 | 10 | 85 | 7 | 125 | 0.5 | 6 | 7.5 | 58 | 52 | 23 | 1 | 1 |
| TACK105*010#TA | K | 1 | 10 | 85 | 7 | 125 | 0.5 | 6 | 15 | 32 | 28 | 13 | 2 | 1 |
| TACL105*010#TA | L | 1 | 10 | 85 | 7 | 125 | 0.5 | 6 | 7.5 | 58 | 52 | 23 | 1 | 1 |
| TACR105*010#TA | R | 1 | 10 | 85 | 7 | 125 | 0.5 | 6 | 7 | 80 | 72 | 32 | 1 | 1 |
| TACL155*010#TA | L | 1.5 | 10 | 85 | 7 | 125 | 0.5 | 6 | 7.5 | 58 | 52 | 23 | 1 | 1 |
| TACL225*010#TA | L | 2.2 | 10 | 85 | 7 | 125 | 0.5 | 6 | 7.5 | 58 | 52 | 23 | 1 | 1 |
| TACU225*010#TA | U | 2.2 | 10 | 85 | 7 | 125 | 0.5 | 8 | 5 | 84 | 75 | 33 | 1 | 1 |
| TACL335*010#TA | L | 3.3 | 10 | 85 | 7 | 125 | 0.5 | 8 | 7.5 | 58 | 52 | 23 | 2 | 1 |
| TACR335*010#TA | R | 3.3 | 10 | 85 | 7 | 125 | 0.5 | 8 | 5 | 95 | 85 | 38 | 1 | 1 |
| TACL475*010#TA | L | 4.7 | 10 | 85 | 7 | 125 | 0.5 | 10 | 6 | 65 | 58 | 26 | 2 | 1 |
| TACR475*010#TA | R | 4.7 | 10 | 85 | 7 | 125 | 0.5 | 8 | 6 | 87 | 78 | 35 | 1 | 1 |
| TACL685*010#TA | L | 6.8 | 10 | 85 | 7 | 125 | 0.7 | 20 | 7.5 | 58 | 52 | 23 | 3 | 1 |
| TACR685*010#TA | R | 6.8 | 10 | 85 | 7 | 125 | 0.7 | 8 | 5 | 95 | 85 | 38 | 1 | 1 |
| TACH106*010#TA | H | 10 | 10 | 85 | 7 | 125 | 1.0 | 8 | 5 | 89 | 80 | 36 | 2 | 1 |
| TACL106*010#TA | L | 10 | 10 | 85 | 7 | 125 | 1 | 20 | 7.5 | 58 | 52 | 23 | 3 | 1 |
| TACR106*010#TA | R | 10 | 10 | 85 | 7 | 125 | 1 | 8 | 5 | 95 | 85 | 38 | 1 | 1 |
| TACV106*010#TA | V | 10 | 10 | 85 | 7 | 125 | 1.0 | 10 | 2 | 132 | 119 | 53 | 2 | 1 |
| TACR156*010#TA | R | 15 | 10 | 85 | 7 | 125 | 1.5 | 10 | 5 | 95 | 85 | 38 | 1 | 1 |
| TACV156*010#TA | V | 15 | 10 | 85 | 7 | 125 | 1.5 | 10 | 2 | 132 | 119 | 53 | 2 | 1 |
| TACR226*010#TA | R | 22 | 10 | 85 | 7 | 125 | 2.2 | 14 | 5 | 95 | 85 | 38 | 2 | 1 |
| TACA336*010#TA | A | 33 | 10 | 85 | 7 | 125 | 3.3 | 12 | 1 | 200 | 180 | 80 | 1 | 1 |
| TACR336*010#TA | R | 33 | 10 | 85 | 7 | 125 | 3.3 | 20 | 5 | 95 | 85 | 38 | 3 | 1 |
| TACB476*010#TA | B | 47 | 10 | 85 | 7 | 125 | 4.7 | 15 | 1 | 200 | 180 | 80 | 1 | 1 |
| TACT476*010#TA | T | 47 | 10 | 85 | 7 | 125 | 4.7 | 12 | 1 | 200 | 180 | 80 | 1 | 1 |
| 16 Volt @ 85°C | | | | | | | | | | | | | | |
| TACK104*016#TA | K | 0.1 | 16 | 85 | 10 | 125 | 0.5 | 6 | 40 | 19 | 17 | 8 | 1 | 1 |
| TACK154*016#TA | K | 0.15 | 16 | 85 | 10 | 125 | 0.5 | 6 | 30 | 22 | 20 | 9 | 1 | 1 |
| TACK224*016#TA | K | 0.22 | 16 | 85 | 10 | 125 | 0.5 | 6 | 20 | 27 | 25 | 11 | 1 | 1 |
| TACK334*016#TA | K | 0.33 | 16 | 85 | 10 | 125 | 0.5 | 6 | 20 | 27 | 25 | 11 | 1 | 1 |
| TACK474*016#TA | L | 0.47 | 16 | 85 | 10 | 125 | 0.5 | 6 | 7.5 | 58 | 52 | 23 | 1 | 1 |
| TACL684*016#TA | L | 0.68 | 16 | 85 | 10 | 125 | 0.5 | 6 | 7.5 | 58 | 52 | 23 | 1 | 1 |
| TACL105*016#TA | L | 1 | 16 | 85 | 10 | 125 | 0.5 | 6 | 7.5 | 58 | 52 | 23 | 1 | 1 |
| TACU105*016#TA | U | 1 | 16 | 85 | 10 | 125 | 0.5 | 8 | 5 | 84 | 75 | 33 | 1 | 1 |
| TACL225*016#TA | L | 2.2 | 16 | 85 | 10 | 125 | 0.5 | 10 | 7.5 | 58 | 52 | 23 | 1 | 1 |
| TACR106*016#TA | R | 10 | 16 | 85 | 10 | 125 | 1.6 | 10 | 5 | 95 | 85 | 38 | 2 | 1 |
| 20 Volt @ 85°C | | | | | | | | | | | | | | |
| TACK224*020#TA | K | 0.22 | 20 | 85 | 13 | 125 | 0.5 | 6 | 20 | 27 | 25 | 11 | 1 | 1 |
| TACR335*020#TA | R | 3.3 | 20 | 85 | 13 | 125 | 0.7 | 8 | 5 | 95 | 85 | 38 | 1 | 1 |
| TACR475*020#TA | R | 4.7 | 20 | 85 | 13 | 125 | 0.9 | 8 | 5 | 95 | 85 | 38 | 1 | 1 |
| 25 Volt @ 85°C | | | | | | | | | | | | | | |
| TACR105*025#TA | R | 1 | 25 | 85 | 17 | 125 | 0.5 | 8 | 5 | 95 | 85 | 38 | 1 | 1 |

Moisture Sensitivity Level (MSL) is defined according to J-STD-020.

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts.

DCL is measured at rated voltage after 5 minutes.

For typical weight and composition see page 274.

NOTE: AVX reserves the right to supply higher voltage ratings or tighter tolerance part in the same case size, to the same reliability standards.

Standard and Low Profile Tantalum Microchip Capacitors

QUALIFICATION TABLE – CATEGORY 1

| TEST | TAC series (Temperature range -55°C to +125°C) | | | | | | | | | | |
|------------------------------|---|---------------|---------------|--------------------|------------------------------------|-----------|------------|-----------|------------|---------|-----------|
| | Condition | | | Characteristics | | | | | | | |
| Endurance | Apply rated voltage (Ur) at 85°C and / or category voltage (Uc) at 125°C for 2000 hours through a circuit impedance of $\leq 0.1\Omega/V$. Stabilize at room temperature for 1-2 hours before measuring. | | | Visual examination | no visible damage | | | | | | |
| | | | | DCL | 1.25 x initial limit | | | | | | |
| | | | | $\Delta C/C$ | within $\pm 10\%$ of initial value | | | | | | |
| | | | | DF | 1.5 x initial limit | | | | | | |
| | | | | ESR | 1.5 x initial limit | | | | | | |
| Humidity | Store at 40°C and 90-95% relative humidity for 1344 hours, with no applied voltage. Stabilize at room temperature and humidity for 1-2 hours before measuring. | | | Visual examination | no visible damage | | | | | | |
| | | | | DCL | initial limit | | | | | | |
| | | | | $\Delta C/C$ | within $\pm 5\%$ of initial value | | | | | | |
| | | | | DF | 1.2 x initial limit | | | | | | |
| | | | | ESR | 1.2 x initial limit | | | | | | |
| Temperature Stability | Step | Temperature°C | Duration(min) | | +20°C | -55°C | +20°C | +85°C | +125°C | +20°C | |
| | 1 | +20 | 15 | DCL | IL* | n/a | IL* | 10 x IL* | 12.5 x IL* | IL* | |
| | 2 | -55 | 15 | | $\Delta C/C$ | n/a | +0/-10% | $\pm 5\%$ | +10/-0% | +15/-0% | $\pm 5\%$ |
| | 3 | +20 | 15 | DF | IL* | 1.5 x IL* | IL* | 1.5 x IL* | 2 x IL* | IL* | |
| | 4 | +85 | 15 | | ESR | IL* | 1.25 x IL* | IL* | 1.25 x IL* | 2 x IL* | IL* |
| | 5 | +125 | 15 | | | | | | | | |
| | 6 | +20 | 15 | | | | | | | | |
| Surge Voltage | Apply 1.3x rated voltage (Ur) at 85°C for 1000 cycles of duration 6 min (30 sec charge, 5 min 30 sec discharge) through a charge / discharge resistance of 1000 Ω . | | | Visual examination | no visible damage | | | | | | |
| | | | | DCL | initial limit | | | | | | |
| | | | | $\Delta C/C$ | within $\pm 10\%$ of initial value | | | | | | |
| | | | | DF | initial limit | | | | | | |
| | | | | ESR | initial limit | | | | | | |

*Initial Limit

QUALIFICATION TABLE – CATEGORY 2

| TEST | TAC series (Temperature range -55°C to +125°C) | | | | | | | | | | |
|------------------------------|---|---------------|---------------|--------------------|------------------------------------|-----------|------------|-----------|------------|---------|-----------|
| | Condition | | | Characteristics | | | | | | | |
| Endurance | Apply rated voltage (Ur) at 85°C and / or category voltage (Uc) at 125°C for 2000 hours through a circuit impedance of $\leq 0.1\Omega/V$. Stabilize at room temperature for 1-2 hours before measuring. | | | Visual examination | no visible damage | | | | | | |
| | | | | DCL | 1.25 x initial limit | | | | | | |
| | | | | $\Delta C/C$ | within $\pm 15\%$ of initial value | | | | | | |
| | | | | DF | 1.5 x initial limit | | | | | | |
| | | | | ESR | 1.5 x initial limit | | | | | | |
| Humidity | Store at 40°C and 90-95% relative humidity for 1344 hours, with no applied voltage. Stabilize at room temperature and humidity for 1-2 hours before measuring. | | | Visual examination | no visible damage | | | | | | |
| | | | | DCL | initial limit | | | | | | |
| | | | | $\Delta C/C$ | within $\pm 10\%$ of initial value | | | | | | |
| | | | | DF | 1.2 x initial limit | | | | | | |
| | | | | ESR | 1.2 x initial limit | | | | | | |
| Temperature Stability | Step | Temperature°C | Duration(min) | | +20°C | -55°C | +20°C | +85°C | +125°C | +20°C | |
| | 1 | +20 | 15 | DCL | IL* | n/a | IL* | 10 x IL* | 12.5 x IL* | IL* | |
| | 2 | -55 | 15 | | $\Delta C/C$ | n/a | +0/-15% | $\pm 5\%$ | +15/-0% | +20/-0% | $\pm 5\%$ |
| | 3 | +20 | 15 | DF | IL* | 1.5 x IL* | IL* | 1.5 x IL* | 2 x IL* | IL* | |
| | 4 | +85 | 15 | | ESR | IL* | 1.25 x IL* | IL* | 1.25 x IL* | 2 x IL* | IL* |
| | 5 | +125 | 15 | | | | | | | | |
| | 6 | +20 | 15 | | | | | | | | |
| Surge Voltage | Apply 1.3x rated voltage (Ur) at 85°C for 1000 cycles of duration 6 min (30 sec charge, 5 min 30 sec discharge) through a charge / discharge resistance of 1000 Ω . | | | Visual examination | no visible damage | | | | | | |
| | | | | DCL | 1.5 x initial limit | | | | | | |
| | | | | $\Delta C/C$ | within $\pm 15\%$ of initial value | | | | | | |
| | | | | DF | 1.5 x initial limit | | | | | | |
| | | | | ESR | 1.5 x initial limit | | | | | | |

*Initial Limit

QUALIFICATION TABLE – CATEGORY 3


| TEST | TAC series (Temperature range -55°C to +125°C) | | | | | | | | | | |
|------------------------------|---|---------------|---------------|--------------------|------------------------------------|-------|------------|-----------|------------|---------|------------|
| | Condition | | | Characteristics | | | | | | | |
| Endurance | Apply rated voltage (Ur) at 85°C and / or category voltage (Uc) at 125°C for 2000 hours through a circuit impedance of $\leq 0.1\Omega/V$. Stabilize at room temperature for 1-2 hours before measuring. | | | Visual examination | no visible damage | | | | | | |
| | | | | DCL | 1.25 x initial limit | | | | | | |
| | | | | $\Delta C/C$ | within $\pm 30\%$ of initial value | | | | | | |
| | | | | DF | 1.5 x initial limit | | | | | | |
| | | | | ESR | 1.5 x initial limit | | | | | | |
| Humidity | Store at 40°C and 90-95% relative humidity for 1344 hours, with no applied voltage. Stabilize at room temperature and humidity for 1-2 hours before measuring. | | | Visual examination | no visible damage | | | | | | |
| | | | | DCL | 2 x initial limit | | | | | | |
| | | | | $\Delta C/C$ | within $\pm 30\%$ of initial value | | | | | | |
| | | | | DF | 1.5 x initial limit | | | | | | |
| | | | | ESR | 1.25 x initial limit | | | | | | |
| Temperature Stability | Step | Temperature°C | Duration(min) | | +20°C | -55°C | +20°C | +85°C | +125°C | +20°C | |
| | 1 | +20 | 15 | DCL | IL* | n/a | IL* | 10 x IL* | 12.5 x IL* | IL* | |
| | 2 | -55 | 15 | | $\Delta C/C$ | n/a | +0/-25% | $\pm 5\%$ | +20/-0% | +25/-0% | $\pm 20\%$ |
| | 3 | +20 | 15 | DF | | IL* | 1.5 x IL* | IL* | 1.5 x IL* | 2 x IL* | 1.5 x IL* |
| | 4 | +85 | 15 | | ESR | IL* | 1.25 x IL* | IL* | 1.25 x IL* | 2 x IL* | 1.5 x IL* |
| | 5 | +125 | 15 | | | | | | | | |
| | 6 | +20 | 15 | | | | | | | | |
| Surge Voltage | Apply 1.3x rated voltage (Ur) at 85°C for 1000 cycles of duration 6 min (30 sec charge, 5 min 30 sec discharge) through a charge / discharge resistance of 1000 Ω . | | | Visual examination | no visible damage | | | | | | |
| | | | | DCL | 2 x initial limit | | | | | | |
| | | | | $\Delta C/C$ | within $\pm 30\%$ of initial value | | | | | | |
| | | | | DF | 2 x initial limit | | | | | | |
| | | | | ESR | 2 x initial limit | | | | | | |

*Initial Limit


AVX SOLID ELECTROLYTE CAPACITOR ROADMAP



Five Capacitor Construction Styles

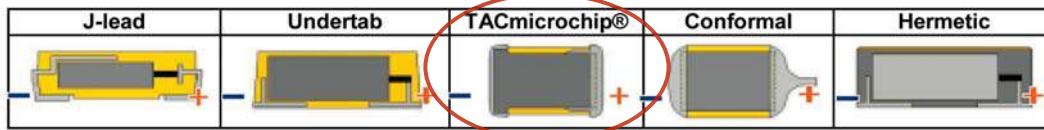

SERIES LINE UP: CONVENTIONAL SMD MnO₂

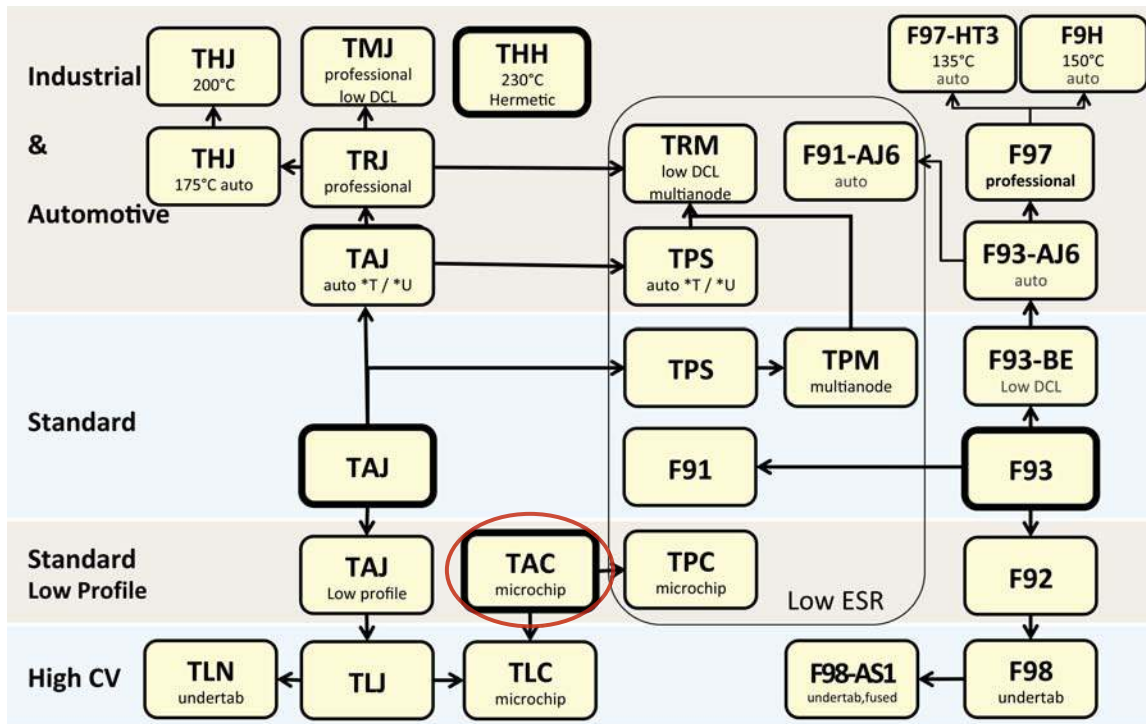

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View TACL10M4RTA on WIN SOURCE](#)

 [AVX Corporation](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management