




**THE DATASHEET OF**  
**750310084**




CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

(6B)




TERM. NO.'s FOR REF. ONLY  
CUSTOMER TERM. NO.'s IN ( )

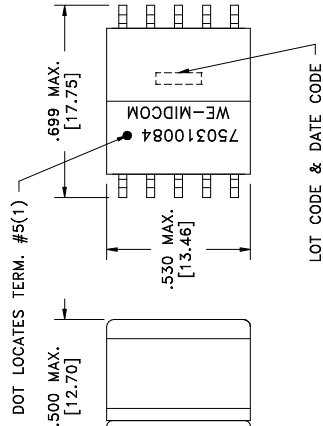

DOT LOCATES TERM. #5(1)

LOT CODE & DATE CODE

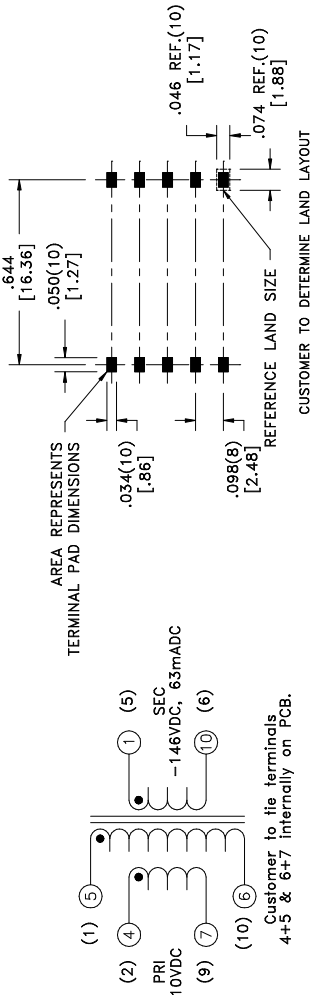

AREA REPRESENTS  
TERMINAL PAD DIMENSIONS

Customer to tie terminals  
4+5 & 6+7 internally on PCB.

REFERENCE LAND SIZE  
CUSTOMER TO DETERMINE LAND LAYOUT

ELECTRICAL SPECIFICATIONS @ 25°C unless

PARAMETER	TEST CONDITION
D.C. RESISTANCE	5-6 @20°C
D.C. RESISTANCE	4-7 @20°C
D.C. RESISTANCE	1-10 @20°C
INDUCTANCE	5-6 tie(4+5, 6+7) 100kHz, 100mVAC
DIELECTRIC	5-1 tie(4+5, 6+7), 625VAC
TURNS RATIO	(1-10):(5-6), tie(4+5)

(6D)

(6C) GENERAL SPECIFICATIONS:  
OPERATING TEMPERATURE RANGE: -40°C to +125°C

DETAILS SUBJECT TO CHANGE

REV.	DATE	Packaging Specifications	DRAWING TITLE	PART
6E	5/11	Method: Tape & Reel (6B)	<b>TRANSFORMER</b>	750310084
6D	4/08	PKG-0499 www.we-online.com/midcom		
6C	10/07	SEE REVISION SHEET FOR REVISION LEVEL		
6B	7/07		eiSos p/n: 750310084	SPECIFICATIONS <b>RoHS</b> compliant

Tolerances unless otherwise specified:  
Angles: ±1°  
Fractions: ±1/64  
Decimals: ±.005  
Footprint: ±.005  
This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 750310084 on WIN SOURCE](#)

 [Wurth Electronics Inc Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management