



**THE DATASHEET OF  
TCD-13-4+**





SURFACE MOUNT

# Directional Coupler

## TCD-13-4+

Mini-Circuits

50Ω 5 to 1000 MHz

### FEATURES

- Wideband, 5 to 1000 MHz
- Low mainline loss, 0.7 dB typ.
- Aqueous washable
- Leads for excellent solderability
- Protected by US Patent 6,140,887



Generic photo used for illustration purposes only

CASE STYLE: DB714

### APPLICATIONS

- VHF/UHF
- CATV
- Cellular

#### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our website for methodologies and qualifications

### ELECTRICAL SPECIFICATIONS AT 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range	—	5	—	1000	MHz
Mainline Loss <sup>1</sup>	5-50	—	0.7	1.3	dB
	50-500	—	0.7	1.3	
	500-1000	—	0.8	1.5	
Coupling	5-1000	—	13±0.5	—	dB
Coupling Flatness (±)	5-1000	—	±0.6	—	dB
Directivity	5-50	17	21	—	dB
	50-500	12	18	—	
	500-1000	—	15	—	
VSWR	5-1000	—	1.2	—	:1
Input Power	5-50	—	—	0.5	W
	50-1000	—	—	1.0	

1. Mainline loss includes theoretical power loss at coupled port.


### MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-40°C to 85°C*
Storage Temperature	-55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.

\* Case temperature is defined as temperature on ground leads.

### ELECTRICAL SCHEMATIC

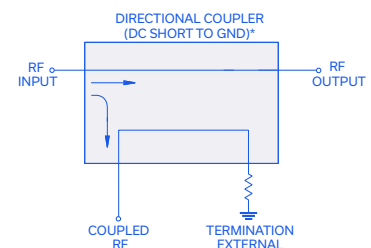

\*Electrical schematic is for Directional coupler with internal transformer(s) and external termination







SURFACE MOUNT

# Directional Coupler




## TCD-13-4+

Mini-Circuits

50Ω 5 to 1000 MHz

### TYPICAL PERFORMANCE DATA

Frequency (MHz)	Mainline Loss (dB)	Coupling (dB)	Directivity (dB)	Return Loss (dB)		
	In-Out			In	Out	Cpl
5.00	0.96	13.23	22.93	18.39	22.11	20.63
100.00	0.80	13.07	21.46	21.56	29.75	23.23
200.00	0.82	13.07	19.90	22.09	29.67	22.99
300.00	0.84	13.06	18.25	22.15	27.88	22.67
400.00	0.86	13.03	16.68	21.58	24.86	22.04
500.00	0.86	12.96	15.34	20.44	22.11	21.08
600.00	0.87	12.88	14.27	19.08	19.99	20.15
700.00	0.91	12.82	13.42	17.97	18.61	19.42
800.00	0.93	12.73	12.75	17.33	17.64	18.67
1000.00	1.02	12.56	11.88	17.83	17.63	17.78

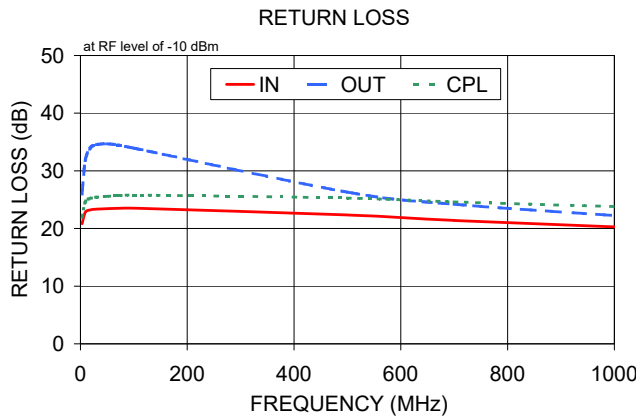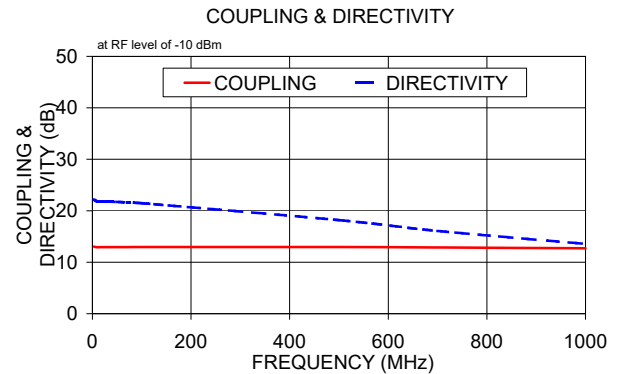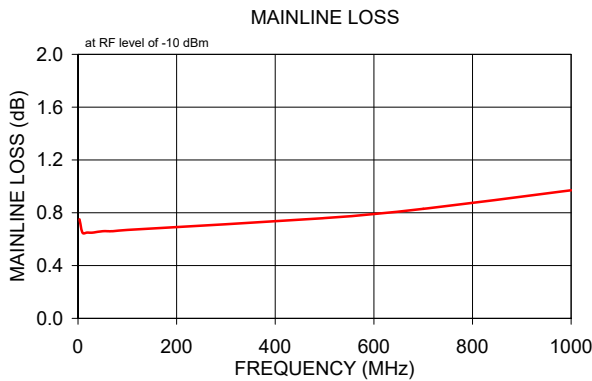


- NOTES**
- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
  - B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
  - C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)



## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View TCD-13-4+ on WIN SOURCE](#)

 [Mini-Circuits Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management