





THE DATASHEET OF TX1267NLT



T1/E1/CEPT/ISDN-PRI TRANSFORMER

Quad Port SMT Transformer/Choke Modules,
1500 Vrms, Extended Temperature Range

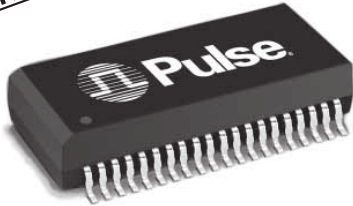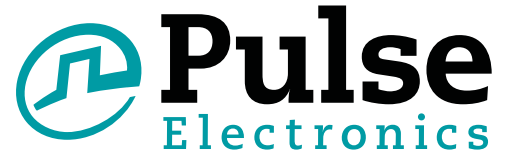

- ⊕ RoHS peak reflow temperature rating: 245°C
- ⊕ Optimized for enhanced EMC performance
- ⊕ Quad-port SMT package contains Transformers with optional Common Mode Chokes on both transmit and receive channels
- ⊕ Extended temperature range
- ⊕ Isolation Voltage: 1500 Vrms

Electrical Specifications @ 25°C — Operating Temperature -40°C to +85°C


RoHS Compliant Part Number		Turns Ratio (Pri:Sec ±2%)		Line Side OCL (mH MIN)	Cw/w (pF MAX)	Primary Pins	
w/CMC	wo/CMC	TX	RX			TX	RX
TX1263NL	TX1262NL	1:2	1:2	1.2	35	1-2, 6-7, 11-12, 16-17	3-4, 8-9, 13-14, 18-19
TX1267NL	TX1266NL	1:2	1:1	1.2	35	1-3, 6-8, 11-13, 16-18	4-5, 9-10, 14-15, 19-20

- NOTES:**
- Other Transformer/Choke modules available. Please contact Pulse Applications Engineering. Please refer to data sheet T622 for a list of additional Octal Transformers without Common Mode Chokes.
 - RoHS compliant parts have an "NL" suffix at the end of the part number, TX1267NL.
 - To order Tape & Reel packaging add a "T" suffix to the part number (i.e. TX1263NL becomes TX1263NLT).

Mechanical


Schematic

TX1263NL / 1267NL

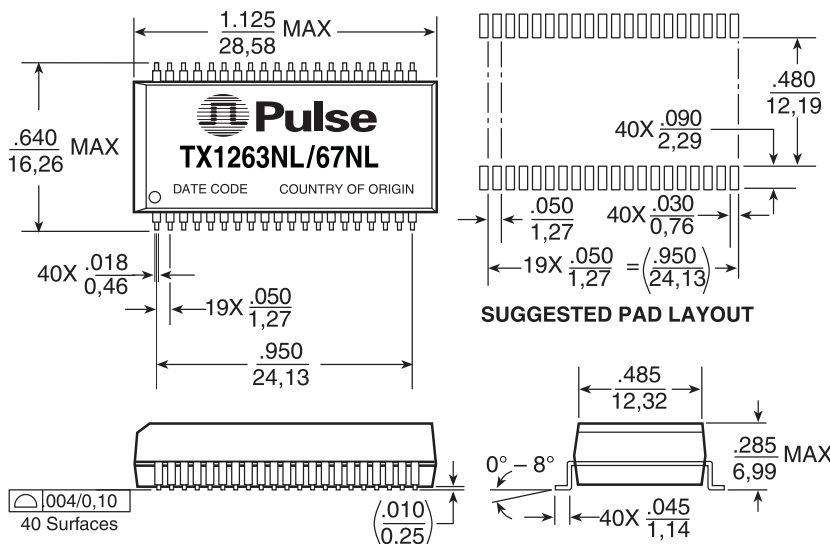

TX1263NL


TX1267NL

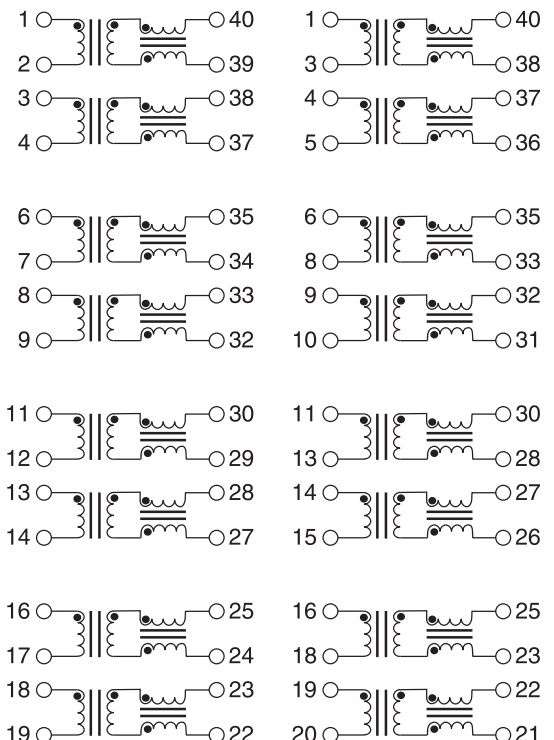

Weight.....5.0 grams Dimensions: $\frac{\text{Inches}}{\text{mm}}$
 Tape & Reel..... 250/reel Unless otherwise specified, all tolerances are $\pm \frac{.010}{0,25}$
 Tube..... 15/tube

T1/E1/CEPT/ISDN-PRI TRANSFORMER



Quad Port SMT Transformer/Choke Modules, 1500 Vrms, Extended Temperature Range

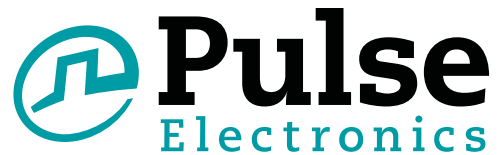


Mechanical

Schematics

TX1262NL, TX1266NL

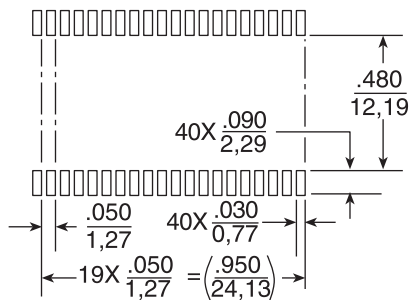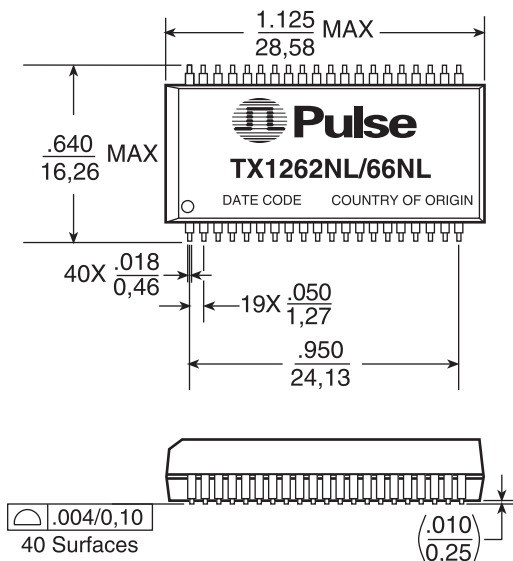


SUGGESTED PAD LAYOUT

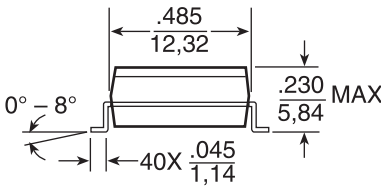


Weight.....4.0 grams
Tape & Reel..... 250/reel
Tube.....15/tube

Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified, all tolerances are $\pm \frac{.010}{0,25}$

TX1262NL

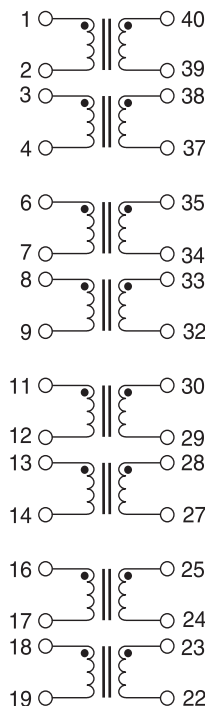

TX1266NL

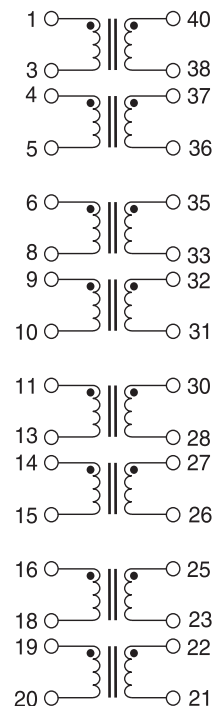

For More Information:

Pulse North American Headquarters

12220 World Trade Dr.
San Diego, CA 92128
U.S.A.

TEL: 858 674 8100
FAX: 858 674 8262

Pulse European Headquarters

Einsteinstrasse 1
D-71083 Herrenberg
Germany

TEL: 49 7032 7806 0
FAX: 49 7032 7806 12

Pulse China Headquarters

B402, Shenzhen Academy of
Aerospace Technology Bldg.
10th Kejinan Rd.
High-Tech Zone
Nanshan District
Shenzhen, PR China 518057

TEL: 86 755 33966678
FAX: 86 755 33966700

Pulse North China

Room 1503
XinYin Building
No. 888 YiShan Rd.
Shanghai 200233
China

TEL: 86 21 32181071
FAX: 86 21 32181396

Pulse South Asia

150 Kampong Ampat
#07-01/02
KA Centre
Singapore 368324

TEL: 65 6287 8998
FAX: 65 6280 0080

Pulse North Asia

No. 26
Kao Ching Rd.
Yang Mei Chen
Taoyuan Hsien
Taiwan, R. O. C.
32667

TEL: 886 3 4643715
FAX: 886 3 4641911

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View TX1267NLT on WIN SOURCE](#)

 [Pulse Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management