
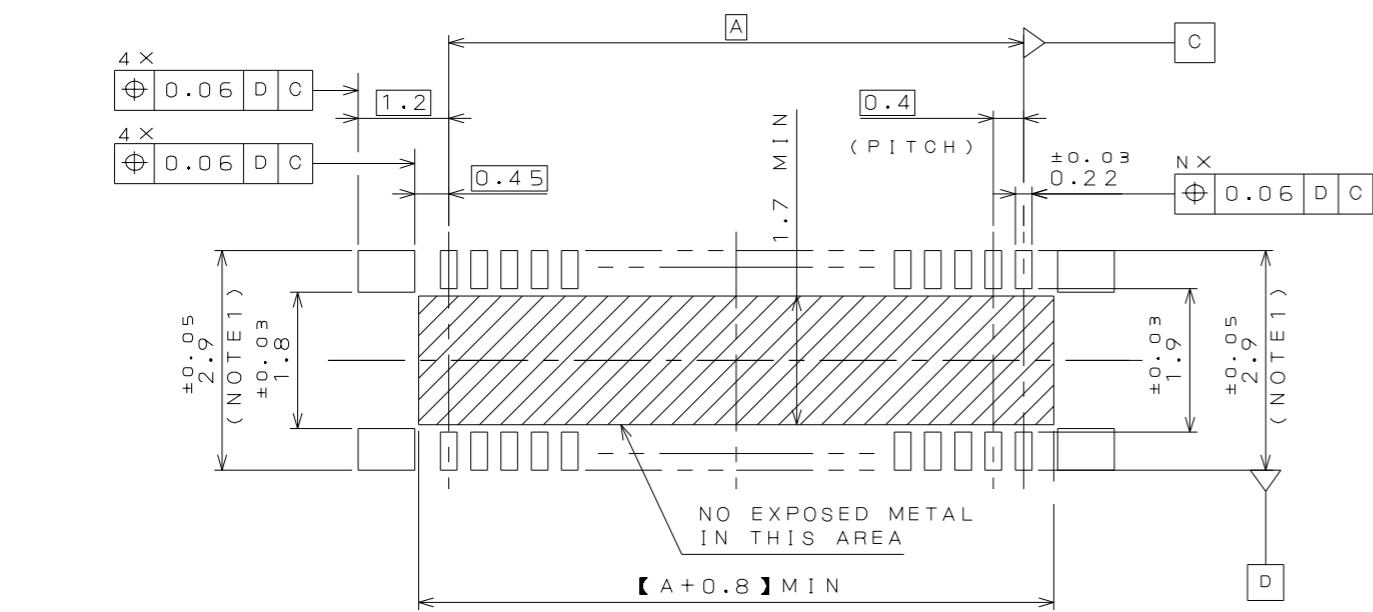


18811181S  
( 'ON ΘNIMVARD) 台機理図

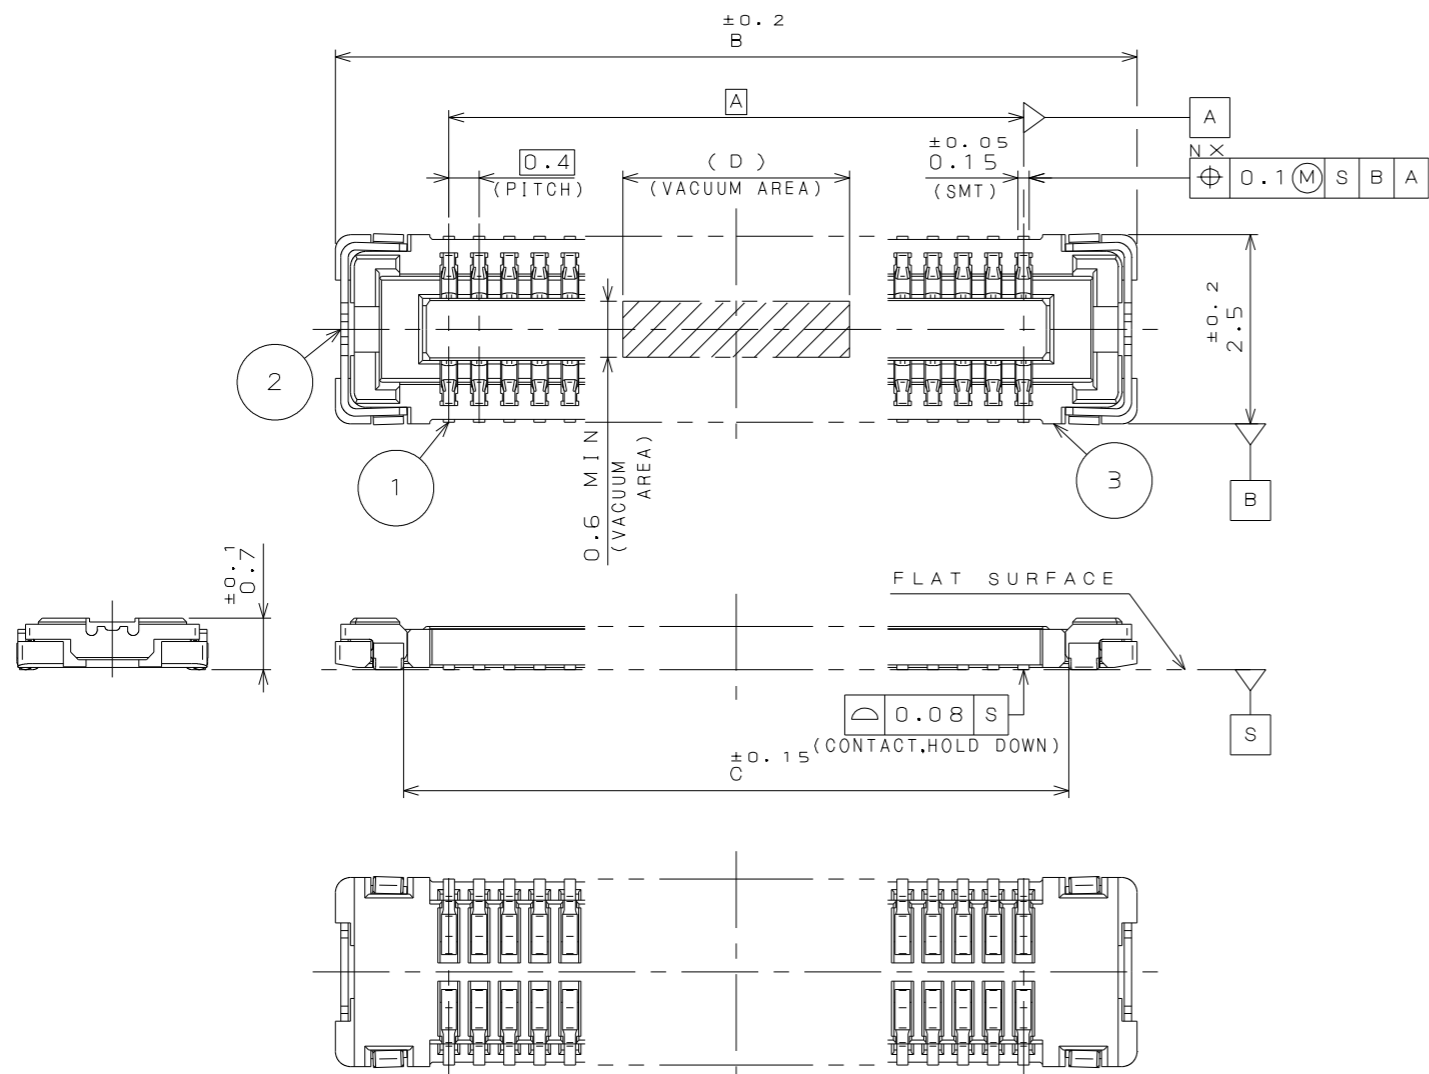


APPLICABLE P.C.B. DIMENSION (REF.)  
適合基板寸法 (参考)

| 版数<br>VER. | 年月日<br>DATE | CN NO. | 変更内容<br>DESCRIPTION         | 製図<br>DR. | 担当<br>CHK.  | 査閲<br>APPD. | 承認<br>APPD. |
|------------|-------------|--------|-----------------------------|-----------|-------------|-------------|-------------|
| 2          | 22.Mar.2012 | 002137 | REVISED PLATING INDICATION. | E.MURANO  | H.MATSUZAKI | T.NISHIMURA | H.OBIKANE   |
| 3          | 15.Mar.2013 | 005713 | ADDED ITEM.                 |           | H.MATSUZAKI | T.NISHIMURA | H.OBIKANE   |

TABLE 1

| DIMENSIONS<br>寸法<br>NUMBER OF CONTACTS<br>芯数 | A    | B    | C    | D   |
|--|------|------|------|-----|
|  | 34   | 6.4  | 9.4  | 7.6 |
| 40   | 7.6  | 10.6 | 8.8  | 5.0 |
| 50   | 9.6  | 12.6 | 10.8 | 5.0 |
| 60   | 11.6 | 14.6 | 12.8 | 5.0 |
| 70   | 13.6 | 16.6 | 14.8 | 5.0 |

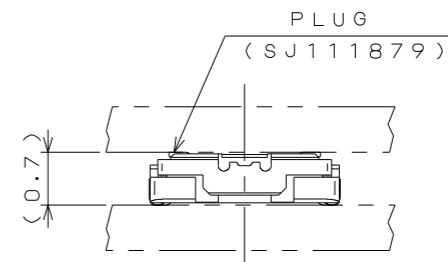

MATED CONDITION (REF.)  
嵌合状態図 (参考)

NOTE 1. IT SHOULD BE 3.5<sup>±0.05</sup> IF REPAIRING IS NEEDED.

注 1. リペアーが必要な場合、この寸法は 3.5<sup>±0.05</sup> を推奨する。

|                                   |                      |                                    |                                     |   |  |
|-----------------------------------|----------------------|------------------------------------|-------------------------------------|---|--|
| 3                                 | INSULATOR<br>インシュレータ | 1                                  | HEAT RESISTING PLASTICS<br>耐熱プラスチック |   |  |
| 2                                 | HOLD-DOWN<br>ホルツダウン  | 2                                  | COPPER ALLOY<br>銅合金                 | TIN PLATING<br>Snめっき  |  |
| 1                                 | CONTACT<br>コンタクト     | N                                  | COPPER ALLOY<br>銅合金                 | GOLD PLATING OVER NICKEL<br>金メッキ                                | CONTACT AREA: GOLD(0.1μmMIN)<br>TERMINAL AREA: GOLD(0.05μmMIN) |
| 符号<br>NO.                         | 名称<br>DESCRIPTION    | 個数<br>QTY.                         | 材料<br>MATERIAL                      | 仕上<br>FINISH  | 備考<br>REMARKS  |
| 仕様書 (SPECIFICATION)<br>JACS-10818 |                      | 第1版 (ORIGINAL DATE)<br>21.Jun.2011 |                                     | 尺度 (SCALE)<br>10:1  | シリーズ (SERIES)<br>WP7B  |
| 一般公差 (GENERAL TOLERANCE)          |                      | 製図<br>DR.                          | 名称 (TITLE)<br>WP7B-S***VA1          |   |  |
| 寸法 (DIMENSION)                    | 角度 (ANGLES)          | 担当<br>CHK.                         | H.MATSUZAKI                         | 日本航空電子工業株式会社<br>JAPAN AVIATION<br>ELECTRONICS<br>INDUSTRY, LTD. |  |
| . ±                               | ° ±                  | 査閲<br>APPD.                        | T.NISHIMURA                         |   |  |
| .x ±                              | °x ±                 | 承認<br>APPD.                        | H.OBIKANE                           |   |  |
| .xx ±                             |                      | 質量 (MASS)                          |                                     | 図面番号 (DRAWING NO.)<br>SJ111881                                  |  |
| .xxx ±                            | 単位 (UNIT): mm        |                                    |                                     | 版数 (VER.)<br>3  |  |

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

[View WP7B-S050VA1-R6000 on WIN SOURCE](#)

[JAE Electronics Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management