



**THE DATASHEET OF
OSTTA240161B**



1

2

3


4

5

SIGN	DATE

THIS IS CAD DRAWING



E

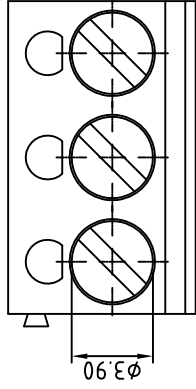

Material

- Terminal body: Brass(Cu)
- Terminal screw: Steel Zi
- Wire guard: Stainless st
- Terminal housing: Therm

D

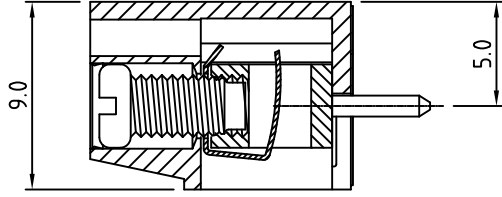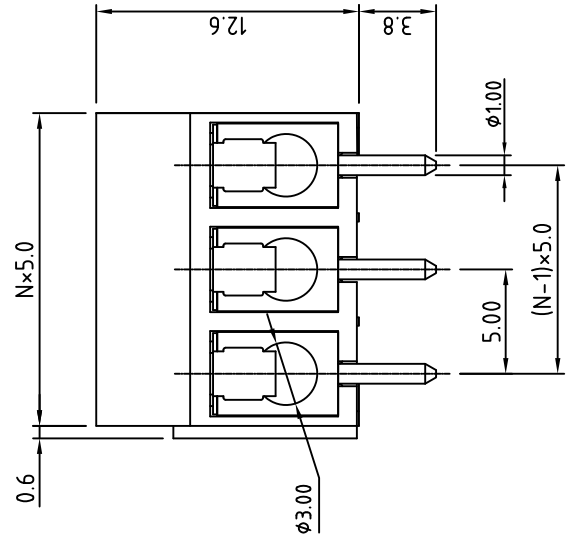

Electrical UL/CSA/V

- Voltage rating: 300VAC
- Current rating: 16A
- Wire range: Solid wire(AWG): 14-26 Stranded wire(AWG): 14-26
- Torque: 2.6lb-In
- Screw: M3
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.5kV
- Operating temperature: -40 to 105°C
- Soldering temperature: 235°C
- Safety Approval:


RoHS Compliant

PART NUMBER:

OSTTAXX

- No. of Poles
- 02 2 Poles
- 03 3 Poles
-
- 24 24 Poles

B

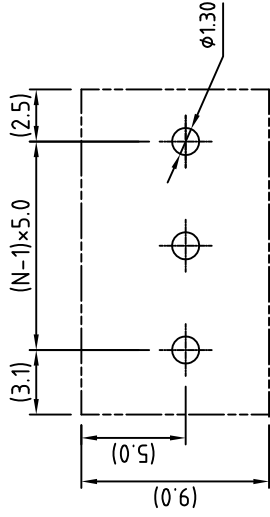

RECOMMENDED PCB LAYOUT

A

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE	OSTTA - 5.0mm series 1-Interlock		
PART NO.	OSTTAXX0161B		
APPROVED	Marvin	DESIGNED	DRAWN
	2010.05.18	Marvin	2010.05.18
		2010.05.18	2010.05.18

1

2

3

4

5

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View OSTTA240161B on WIN SOURCE](#)

 [On Shore Technology Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management