



**THE DATASHEET OF  
FH29BJ-60S-0.2SHW(05)**





# FH29 Series

0.2mm Pitch 1.2 mm Height  
Space Saving FPC Connectors


Mounting Pitch  
0.4mm



## ◆ Features


1. Space saving and light weight
2. Easy mounting in double-sided lead design: 0.4 mm mounting lead pitch
3. FPC alignment mechanism enables high connection reliability
4. Unique and user-friendly actuator operation:  
Tactile sensation allows reliable actuator retention
5. Board surface under the connector is available for PCB patterning
6. Suitable for FPC with mating area thickness of  $0.2\pm 0.03\text{mm}$   
[Industry standard thickness]
7. Satisfies RoHS requirements

## ◆ Dimensions

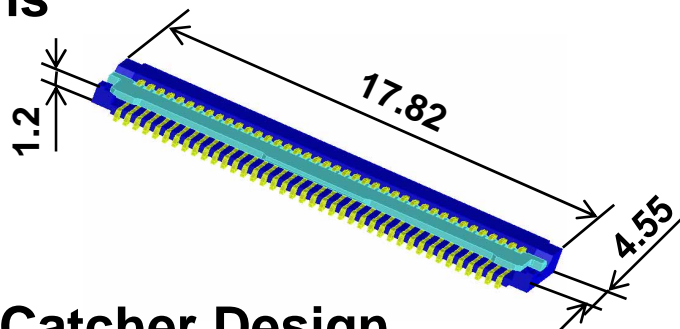

## ◆ FPC Side-Catcher Design

1. FPC is temporarily retained before the actuator is closed.
2. Precise FPC positioning prevents angled FPC insertion  
→ High production quality independent of each workers' capability
3. Enhanced FPC retention force

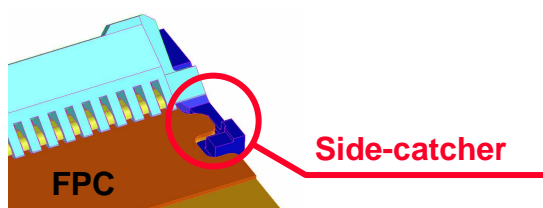

**Secure and Highly  
Reliable Connection!!**

Specifications herein are subject to change without notice. Contact Hirose for latest specifications, drawings or availabilities.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View FH29BJ-60S-0.2SHW\(05\) on WIN SOURCE](#)
- ⊖ [Hirose Electric Co Ltd Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management