



**THE DATASHEET OF  
SS16LSHRVG**



## Surface Mount Schottky Barrier Rectifier

### FEATURES

- Ideal for automated placement
- Compact package size, profile <0.85mm
- High surge current capability
- Low power loss, high efficiency
- AEC-Q101 qualified and Halogen free only
- Moisture sensitivity level: level 1, per J-STD-020
- Compliant to RoHS Directive 2011/65/EU and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21 definition


**SOD-123HE**


### TYPICAL APPLICATIONS

The devices are designed for high frequency miniature switched mode power supplies such as adapters, lighting and on-board DC/DC converters.

### MECHANICAL DATA

**Case:** SOD-123HE

Molding compound, UL flammability classification rating 94V-0

Base P/N with suffix "G" on packing code - green compound (halogen-free)

Base P/N with prefix "H" on packing code - AEC-Q101 qualified

**Terminal:** Matte tin plated leads, solderable per JESD22-B102

with prefix "H" on packing code meet JESD 201 class 2 whisker test

**Polarity:** Indicated by cathode band

**Weight:** 21mg (approximately)

| MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (T <sub>A</sub> =25°C unless otherwise noted) |                    |              |            |            |              |             |             |      |
|--|--------------------|--------------|------------|------------|--------------|-------------|-------------|------|
| PARAMETER  | SYMBOL             | SS12<br>LS   | SS13<br>LS | SS14<br>LS | SS16<br>LS   | SS110<br>LS | SS115<br>LS | UNIT |
| Marking code   |                    | 12LS         | 13LS       | 14LS       | 16LS         | 10LS        | A5LS        |      |
| Maximum repetitive peak reverse voltage  | V <sub>RRM</sub>   | 20           | 30         | 40         | 60           | 100         | 150         | V    |
| Maximum RMS voltage  | V <sub>RMS</sub>   | 14           | 21         | 28         | 42           | 70          | 105         | V    |
| Maximum DC blocking voltage  | V <sub>DC</sub>    | 20           | 30         | 40         | 60           | 100         | 150         | V    |
| Maximum average forward rectified current  | I <sub>F(AV)</sub> | 1            |            |            |              |             |             | A    |
| Peak forward surge current, 8.3 ms single half sine-wave superimposed on rated load          | I <sub>FSM</sub>   | 30           |            |            |              |             |             | A    |
| Maximum instantaneous forward voltage @ 0.5 A (Note 1)<br>@ 1.0 A                            | V <sub>F</sub>     | -            | -          | 0.51       | 0.58         | 0.70        | 0.75        | V    |
|  |                    | 0.45         | 0.50       | 0.55       | 0.70         | 0.80        | 0.90        |      |
| Maximum reverse current @ rated VR T <sub>J</sub> =25 °C<br>T <sub>J</sub> =125 °C           | I <sub>R</sub>     | 0.4          |            |            |              | 0.05        |             | mA   |
|  |                    | -            |            |            |              | 0.5         |             |      |
| Typical junction capacitance (Note 2)  | C <sub>J</sub>     | 80           |            |            |              |             |             | pF   |
| Typical thermal resistance   | R <sub>θJC</sub>   | 25           |            |            |              |             |             | °C/W |
|  | R <sub>θJA</sub>   | 70           |            |            |              |             |             |      |
| Operating junction temperature range   | T <sub>J</sub>     | - 55 to +125 |            |            | - 55 to +150 |             |             | °C   |
| Storage temperature range  | T <sub>STG</sub>   | - 55 to +150 |            |            |              |             |             | °C   |

Note 1: Pulse test with PW=300μs, 1% duty cycle

Note 2: Measured at 1 MHz and Applied Reverse Voltage of 4.0V DC

**ORDERING INFORMATION**

| PART NO.            | AEC-Q101 QUALIFIED | PACKING CODE | GREEN COMPOUND CODE | PACKAGE                | PACKING                              |
|---------------------|--------------------|--------------|---------------------|------------------------|--------------------------------------|
| SS1xxLS (Note 1, 2) | Prefix "H"         | RV<br>RQ     | Suffix "G"          | SOD-123HE<br>SOD-123HE | 3,000 / 7" Reel<br>10,000 / 13" Reel |

Note 1: "xx" defines voltage from 20V (SS12LS) to 150V (SS115LS)

Note 2: Whole series with AEC-Q101 qualified and green compound (halogen-free)

**EXAMPLE**

| PREFERRED P/N | PART NO. | AEC-Q101 QUALIFIED | PACKING CODE | GREEN COMPOUND CODE | DESCRIPTION                          |
|---------------|----------|--------------------|--------------|---------------------|--------------------------------------|
| SS115LSHRVG   | SS115LS  | H                  | RV           | G                   | AEC-Q101 qualified<br>Green compound |

**RATINGS AND CHARACTERISTICS CURVES**

(TA=25°C unless otherwise noted)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

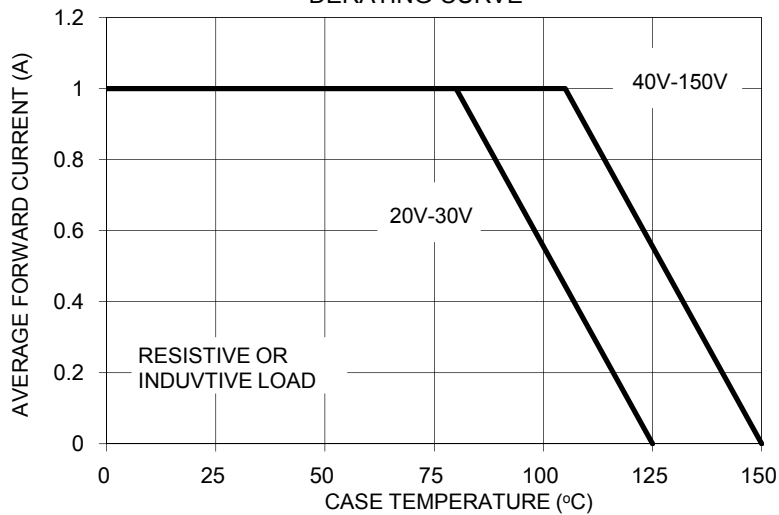


FIG. 2- TYPICAL REVERSE CHARACTERISTICS

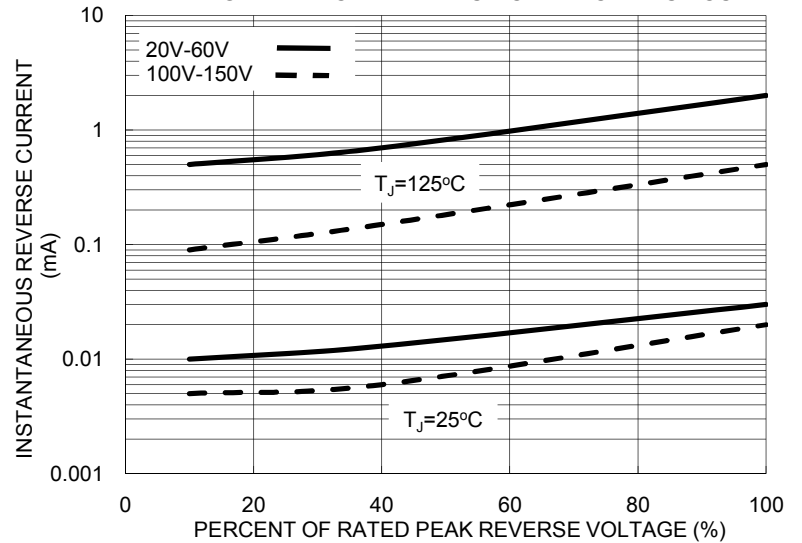


FIG. 3- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

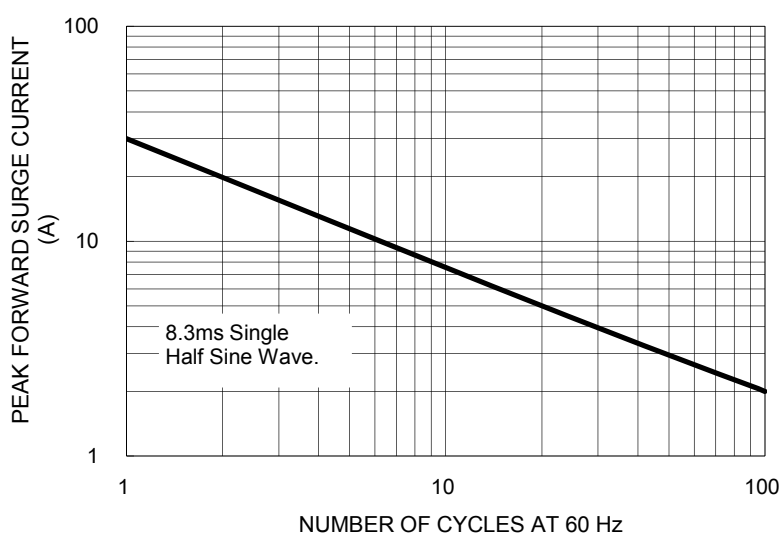


FIG. 4- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS



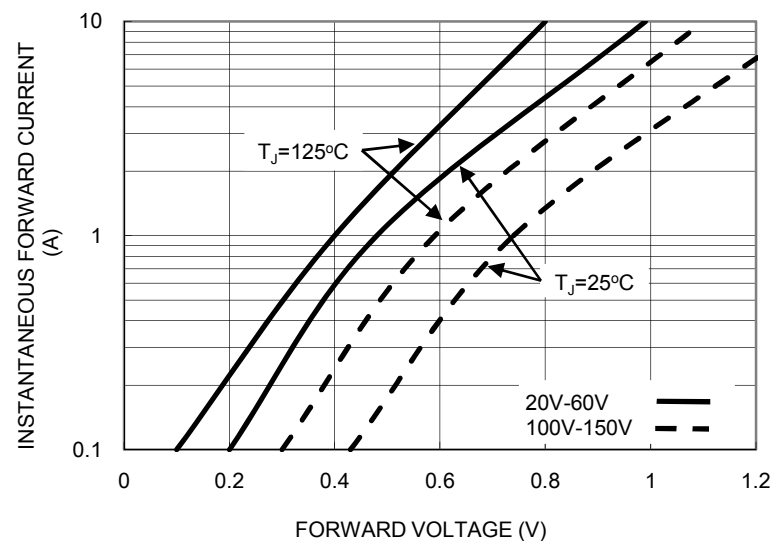


FIG. 5- TYPICAL JUNCTION CAPACITANCE

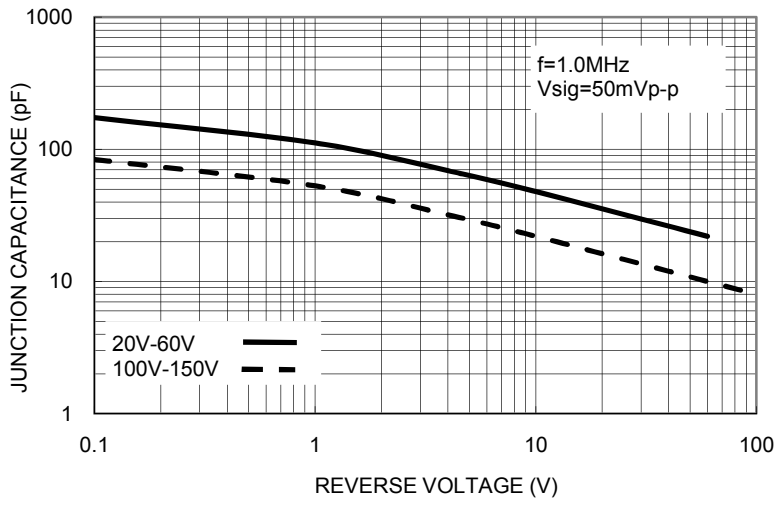


PACKAGE OUTLINE DIMENSIONS

**SOD-123HE**

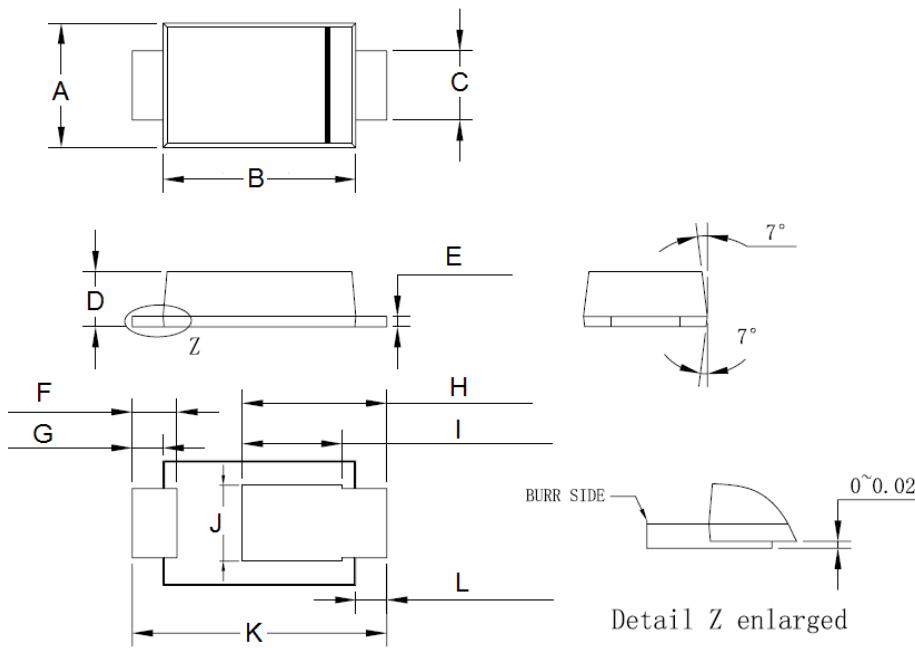


| DIM. | Unit (mm) |      | Unit (inch) |       |
|------|-----------|------|-------------|-------|
|      | Min       | Max  | Min         | Max   |
| A    | 1.65      | 1.95 | 0.065       | 0.077 |
| B    | 2.60      | 3.00 | 0.102       | 0.118 |
| C    | 0.85      | 1.15 | 0.033       | 0.045 |
| D    | 0.75      | 0.85 | 0.030       | 0.033 |
| E    | 0.10      | 0.20 | 0.004       | 0.008 |
| F    | 0.55      | 0.75 | 0.022       | 0.030 |
| G    | 0.35      | 0.55 | 0.014       | 0.022 |
| H    | 1.90      | 2.30 | 0.075       | 0.091 |
| I    | 1.35      | 1.55 | 0.053       | 0.061 |
| J    | 0.95      | 1.25 | 0.037       | 0.049 |
| K    | 3.50      | 3.90 | 0.138       | 0.154 |
| L    | 0.35      | 0.55 | 0.014       | 0.022 |

SUGGESTED PAD LAYOUT

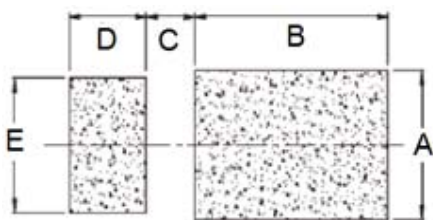

| Symbol | Unit (mm) | Unit (inch) |
|--------|-----------|-------------|
| A      | 1.40      | 0.055       |
| B      | 2.40      | 0.094       |
| C      | 0.70      | 0.028       |
| D      | 0.90      | 0.035       |
| E      | 1.40      | 0.055       |

MARKING DIAGRAM



P/N = Marking Code  
 YW = Date Code  
 F = Factory Code

## Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

[View SS16LSHRVG on WIN SOURCE](#)

[Taiwan Semiconductor Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management