



**1N5913B THRU 1N5956B**  
**SILICON ZENER DIODE**  
**1.5 WATT, 3.3 THRU 200 VOLTS**




[www.centrasemi.com](http://www.centrasemi.com)

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR 1N5913B series silicon Zener diode is a high quality voltage regulator designed for use in automotive, industrial, commercial, entertainment and computer applications.

**MARKING: FULL PART NUMBER**

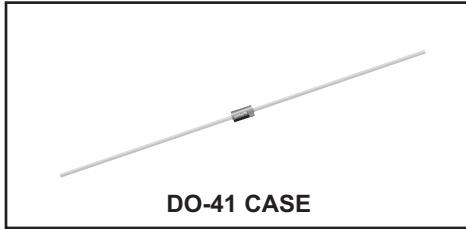

**DO-41 CASE**

**MAXIMUM RATINGS:**

Power Dissipation ( $T_L=75^\circ\text{C}$ )  
 Operating and Storage Temperature  
 $V_Z$  Tolerance: Part number with "B" suffix  
 $V_Z$  Tolerance: Part number with "C" suffix  
 $V_Z$  Tolerance: Part number with "D" suffix

**SYMBOL**

$P_D$   
 $T_J, T_{stg}$

**UNITS**

W  
 $^\circ\text{C}$   
 %  
 %  
 %

**ELECTRICAL CHARACTERISTICS:** ( $T_L=30^\circ\text{C}$ )  $V_F=1.5\text{V MAX @ } I_F=200\text{mA}$  (for all types)

| TYPE    | ZENER VOLTAGE<br>$V_Z @ I_{ZT}$ |     |       | TEST CURRENT | MAXIMUM ZENER IMPEDANCE |                   |               | MAXIMUM REVERSE CURRENT |          | MAXIMUM DC CURRENT |
|---------|---------------------------------|-----|-------|--------------|-------------------------|-------------------|---------------|-------------------------|----------|--------------------|
|         | MIN                             | NOM | MAX   | $I_{ZT}$     | $Z_{ZT} @ I_{ZT}$       | $Z_{ZK} @ I_{ZK}$ | $I_R @ V_R$   |                         | $I_{ZM}$ |                    |
|         | V                               | V   | V     | mA           | $\Omega$                | $\Omega$          | $\mu\text{A}$ | V                       | mA       |                    |
| 1N5913B | 3.135                           | 3.3 | 3.465 | 113.6        | 10                      | 500               | 1.0           | 100                     | 1.0      | 454                |
| 1N5914B | 3.420                           | 3.6 | 3.780 | 104.2        | 9.0                     | 500               | 1.0           | 75                      | 1.0      | 416                |
| 1N5915B | 3.705                           | 3.9 | 4.095 | 96.1         | 7.5                     | 500               | 1.0           | 25                      | 1.0      | 384                |
| 1N5916B | 4.085                           | 4.3 | 4.515 | 87.2         | 6.0                     | 500               | 1.0           | 5.0                     | 1.0      | 348                |
| 1N5917B | 4.465                           | 4.7 | 4.935 | 79.8         | 5.0                     | 500               | 1.0           | 5.0                     | 1.5      | 319                |
| 1N5918B | 4.845                           | 5.1 | 5.355 | 73.5         | 4.0                     | 350               | 1.0           | 5.0                     | 2.0      | 294                |
| 1N5919B | 5.320                           | 5.6 | 5.880 | 66.9         | 2.0                     | 250               | 1.0           | 5.0                     | 3.0      | 267                |
| 1N5920B | 5.890                           | 6.2 | 6.510 | 60.5         | 2.0                     | 200               | 1.0           | 5.0                     | 4.0      | 241                |
| 1N5921B | 6.460                           | 6.8 | 7.140 | 55.1         | 3.0                     | 200               | 1.0           | 5.0                     | 5.2      | 220                |
| 1N5922B | 7.130                           | 7.5 | 7.880 | 50           | 3.0                     | 400               | 0.5           | 5.0                     | 6.0      | 200                |
| 1N5923B | 7.790                           | 8.2 | 8.610 | 45.7         | 4.0                     | 400               | 0.5           | 5.0                     | 6.5      | 182                |
| 1N5924B | 8.650                           | 9.1 | 9.560 | 41.2         | 4.0                     | 500               | 0.5           | 5.0                     | 7.0      | 164                |
| 1N5925B | 9.500                           | 10  | 10.50 | 37.5         | 5.0                     | 500               | 0.25          | 5.0                     | 8.0      | 150                |
| 1N5926B | 10.45                           | 11  | 11.55 | 34.1         | 6.0                     | 550               | 0.25          | 1.0                     | 8.4      | 136                |
| 1N5927B | 11.40                           | 12  | 12.60 | 31.2         | 7.0                     | 550               | 0.25          | 1.0                     | 9.1      | 125                |
| 1N5928B | 12.35                           | 13  | 13.65 | 28.8         | 7.0                     | 550               | 0.25          | 1.0                     | 9.9      | 115                |
| 1N5929B | 14.25                           | 15  | 15.75 | 25           | 9.0                     | 600               | 0.25          | 1.0                     | 11.4     | 100                |
| 1N5930B | 15.20                           | 16  | 16.80 | 23.4         | 10                      | 600               | 0.25          | 1.0                     | 12.2     | 93                 |
| 1N5931B | 17.10                           | 18  | 18.90 | 20.8         | 12                      | 650               | 0.25          | 1.0                     | 13.7     | 83                 |
| 1N5932B | 19.00                           | 20  | 21.00 | 18.7         | 14                      | 650               | 0.25          | 1.0                     | 15.2     | 75                 |
| 1N5933B | 20.90                           | 22  | 23.10 | 17           | 18                      | 650               | 0.25          | 1.0                     | 16.7     | 68                 |

R3 (8-March 2012)


**1N5913B THRU 1N5956B**  
**SILICON ZENER DIODE**  
**1.5 WATT, 3.3 THRU 200 VOLTS**



**ELECTRICAL CHARACTERISTICS - Continued:** ( $T_L=30^\circ\text{C}$ )  $V_F=1.5\text{V MAX @ } I_F=200\text{mA}$  (for all types)

| TYPE    | ZENER VOLTAGE<br>$V_Z @ I_{ZT}$ |     |       | TEST CURRENT | MAXIMUM ZENER IMPEDANCE |                   |               | MAXIMUM REVERSE CURRENT |          | MAXIMUM DC CURRENT |
|---------|---------------------------------|-----|-------|--------------|-------------------------|-------------------|---------------|-------------------------|----------|--------------------|
|         | MIN                             | NOM | MAX   | $I_{ZT}$     | $Z_{ZT} @ I_{ZT}$       | $Z_{ZK} @ I_{ZK}$ | $I_R @ V_R$   |                         | $I_{ZM}$ |                    |
|         | V                               | V   | V     | mA           | $\Omega$                | $\Omega$          | $\mu\text{A}$ | V                       | mA       |                    |
| 1N5934B | 22.80                           | 24  | 25.20 | 15.6         | 19                      | 700               | 0.25          | 1.0                     | 18.2     | 62                 |
| 1N5935B | 25.65                           | 27  | 28.35 | 13.9         | 23                      | 700               | 0.25          | 1.0                     | 20.6     | 55                 |
| 1N5936B | 28.50                           | 30  | 31.50 | 12.5         | 26                      | 750               | 0.25          | 1.0                     | 22.8     | 50                 |
| 1N5937B | 31.35                           | 33  | 34.65 | 11.4         | 33                      | 800               | 0.25          | 1.0                     | 25.1     | 45                 |
| 1N5938B | 34.20                           | 36  | 37.80 | 10.4         | 38                      | 850               | 0.25          | 1.0                     | 27.4     | 41                 |
| 1N5939B | 37.05                           | 39  | 40.95 | 9.6          | 45                      | 900               | 0.25          | 1.0                     | 29.7     | 38                 |
| 1N5940B | 40.85                           | 43  | 45.15 | 8.7          | 53                      | 950               | 0.25          | 1.0                     | 32.7     | 34                 |
| 1N5941B | 44.65                           | 47  | 49.35 | 8.0          | 67                      | 1000              | 0.25          | 1.0                     | 35.8     | 31                 |
| 1N5942B | 48.45                           | 51  | 53.55 | 7.3          | 70                      | 1100              | 0.25          | 1.0                     | 38.8     | 29                 |
| 1N5943B | 53.20                           | 56  | 58.80 | 6.7          | 86                      | 1300              | 0.25          | 1.0                     | 42.6     | 26                 |
| 1N5944B | 58.90                           | 62  | 65.10 | 6.0          | 100                     | 1500              | 0.25          | 1.0                     | 47.1     | 24                 |
| 1N5945B | 64.60                           | 68  | 71.40 | 5.5          | 120                     | 1700              | 0.25          | 1.0                     | 51.2     | 22                 |
| 1N5946B | 71.25                           | 75  | 78.75 | 5.0          | 140                     | 2000              | 0.25          | 1.0                     | 56.0     | 20                 |
| 1N5947B | 77.90                           | 82  | 86.10 | 4.6          | 160                     | 2500              | 0.25          | 1.0                     | 62.2     | 18                 |
| 1N5948B | 86.45                           | 91  | 95.55 | 4.1          | 200                     | 3000              | 0.25          | 1.0                     | 69.2     | 16                 |
| 1N5949B | 95.00                           | 100 | 105.0 | 3.7          | 250                     | 3100              | 0.25          | 1.0                     | 76.0     | 15                 |
| 1N5950B | 104.5                           | 110 | 115.5 | 3.4          | 300                     | 4000              | 0.25          | 1.0                     | 83.6     | 13                 |
| 1N5951B | 114.0                           | 120 | 126.0 | 3.1          | 380                     | 4500              | 0.25          | 1.0                     | 91.2     | 12                 |
| 1N5952B | 123.5                           | 130 | 136.5 | 2.9          | 450                     | 5000              | 0.25          | 1.0                     | 98.8     | 11                 |
| 1N5953B | 142.5                           | 150 | 157.5 | 2.5          | 600                     | 6000              | 0.25          | 1.0                     | 114.0    | 10                 |
| 1N5954B | 152.0                           | 160 | 168.0 | 2.3          | 700                     | 6500              | 0.25          | 1.0                     | 121.6    | 9.0                |
| 1N5955B | 171.0                           | 180 | 189.0 | 2.1          | 900                     | 7000              | 0.25          | 1.0                     | 136.8    | 8.0                |
| 1N5956B | 190.0                           | 200 | 210.0 | 1.9          | 1200                    | 8000              | 0.25          | 1.0                     | 152.0    | 7.0                |

**DO-41 CASE - MECHANICAL OUTLINE**

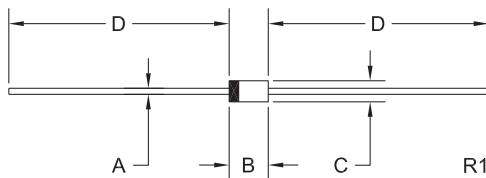

| SYMBOL | DIMENSIONS |       |             |      |
|--------|------------|-------|-------------|------|
|        | INCHES     |       | MILLIMETERS |      |
|        | MIN        | MAX   | MIN         | MAX  |
| A      | 0.028      | 0.034 | 0.71        | 0.86 |
| B      | 0.160      | 0.205 | 4.06        | 5.21 |
| C      | 0.080      | 0.107 | 2.03        | 2.72 |
| D      | 1.000      | -     | 25.40       | -    |

DO-41 (REV: R1)

R3 (8-March 2012)

## OUTSTANDING SUPPORT AND SUPERIOR SERVICES



---

### PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

---

### DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2<sup>nd</sup> day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

---

### REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix " TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix " PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

---

### CONTACT US

#### Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.  
145 Adams Avenue  
Hauppauge, NY 11788 USA  
Main Tel: (631) 435-1110  
Main Fax: (631) 435-1824  
Support Team Fax: (631) 435-3388  
[www.centrasemi.com](http://www.centrasemi.com)

**Worldwide Field Representatives:**  
[www.centrasemi.com/wwreps](http://www.centrasemi.com/wwreps)

**Worldwide Distributors:**  
[www.centrasemi.com/wwdistributors](http://www.centrasemi.com/wwdistributors)

---

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: [www.centrasemi.com/terms](http://www.centrasemi.com/terms)



<http://www.centrasemi.com>

# Product End of Life Notification

|                           |          |
|---------------------------|----------|
| <b>PDN ID:</b>            | PDN01048 |
| <b>Notification Date:</b> | 8/19/16  |
| <b>Last Buy Date:</b>     | 2/19/17  |
| <b>Last Shipment Date</b> | 8/19/17  |

Summary: The 1N5913B through 1N5916B, 1.5 watt Zener diodes in the DO-41 case, are discontinued and now classified as End of Life (EOL).

Although Central Semiconductor Corp. makes every effort to continue to produce devices that have been proclaimed EOL (End of Life) by various manufacturers, it is an accepted industry practice to discontinue certain devices when customer demand falls below a minimum level of sustainability. Accordingly, the following product(s) have been transitioned to End of Life status as part of Central's Product Management Process. Any replacement product will be noted below. The effective date for placing the last purchase order will be six(6) months from the date of this notice and twelve(12) months from the notice date for final shipments; this may be extended if inventory is available.

| <b>Central Part Number</b> | <b>Replacement</b> |
|----------------------------|--------------------|
| 1N5913B BK                 | N/A                |
| 1N5913B TR                 | N/A                |
| 1N5914B TR                 | N/A                |
| 1N5915B BK                 | N/A                |
| 1N5915B TR                 | N/A                |
| 1N5916B BK                 | N/A                |
| 1N5916B TR                 | N/A                |

Central would be happy to assist you by providing additional information or technical data to help locate an alternate source if we have no replacement available. Please email your requests to [engineering@centrasemi.com](mailto:engineering@centrasemi.com).

DISCLAIMER: This End of Life (EOL) notification is in accordance with JEDEC standard JESD48 - Product Discontinuance. Central Semiconductor Corp. will make every effort to offer life-time buy (LTB) opportunities and/or offer replacement devices to existing customers for discontinued devices, however, one or both may not be possible for all devices. Please contact your local Central Semiconductor sales representative for LTB opportunities/additional information.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- [View 1N5926B TR on WIN SOURCE](#)
- [Central Semiconductor Corp Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management