



# THE DATASHEET OF C1Q 1



# Type C1Q

## Surface Mount Very Fast-Acting Chip Fuse

**HF** **Pb** C1Q Series - 1206 Size

RoHS 6 Compliant

### Features

- Fast Acting
- Small size, 1206 SMD
- Current rating from 250mA to 7A
- Wide operating temperature range from -55 °C to 125 °C
- Tape & Reel for automatic SMD placement
- Compatible with reflow and wave soldering
- RoHS 6 compliant (MSL = 1)
- Halogen Free
- Leadfree

### Applications

- Notebook
- LCD monitor
- PC computer
- Office electronic equipment
- Industrial equipment
- Medical equipment
- POE, POE+
- LCD / LED monitor
- Power supply
- LCD / LED TV
- DC-DC Converter

LEAD FREE = **Pb**  
 HALOGEN FREE = **HF**



### Electrical Characteristics (UL/CSA/STD. 248-14)

Testing Current	Blow Time	
	Minimum	Maximum
100%	4 Hrs.	N/A
200%	N/A	5 Sec
300%	N/A	0.2 Sec

### Safety Agency Approvals

SAFETY AGENCY	SAFETY AGENCY CERTIFICATE	VOLTAGE RATING (V)	AMPERE RANGE / VOLT @ I.R. ABILITY*
<b>SP</b>	LR39772	250mA - 5A / 125V AC 63V DC 7A / 63V AC & DC	250mA - 5A / 125V AC @ 100A 63V DC @ 50A
<b>UL</b> US	E20624		
<b>cUL</b> US	E20624		7A / 63V AC & DC @ 50A

\* I.R. = INTERRUPTING RATING = SHORT CIRCUIT RATING (AMPS)

### Physical Specifications

Materials	Body : Ceramic Substrate
	Terminations : Ag / Ni / Sn (100% Lead-free)
	Element Cover Coating : Lead-free Glass
Marking	On Fuse :
	None
	On Label :
	"bel", "C1Q", "Current Rating", "Voltage Rating", "Interrupting Rating", "Appropriate Safety Logos" and "♻️", "♻️" (China RoHS compliant).

Specifications subject to change without notice



Bel Fuse Inc.  
 206 Van Vorst Street  
 Jersey City, NJ 07302 USA

+1 201.432.0463  
 techhelp@belf.com  
[belfuse.com](http://belfuse.com)


# Type C1Q

## Surface Mount Very Fast-Acting Chip Fuse


HF (Pb) C1Q Series - 1206 Size

RoHS 6 Compliant

### Average Time Current Curve

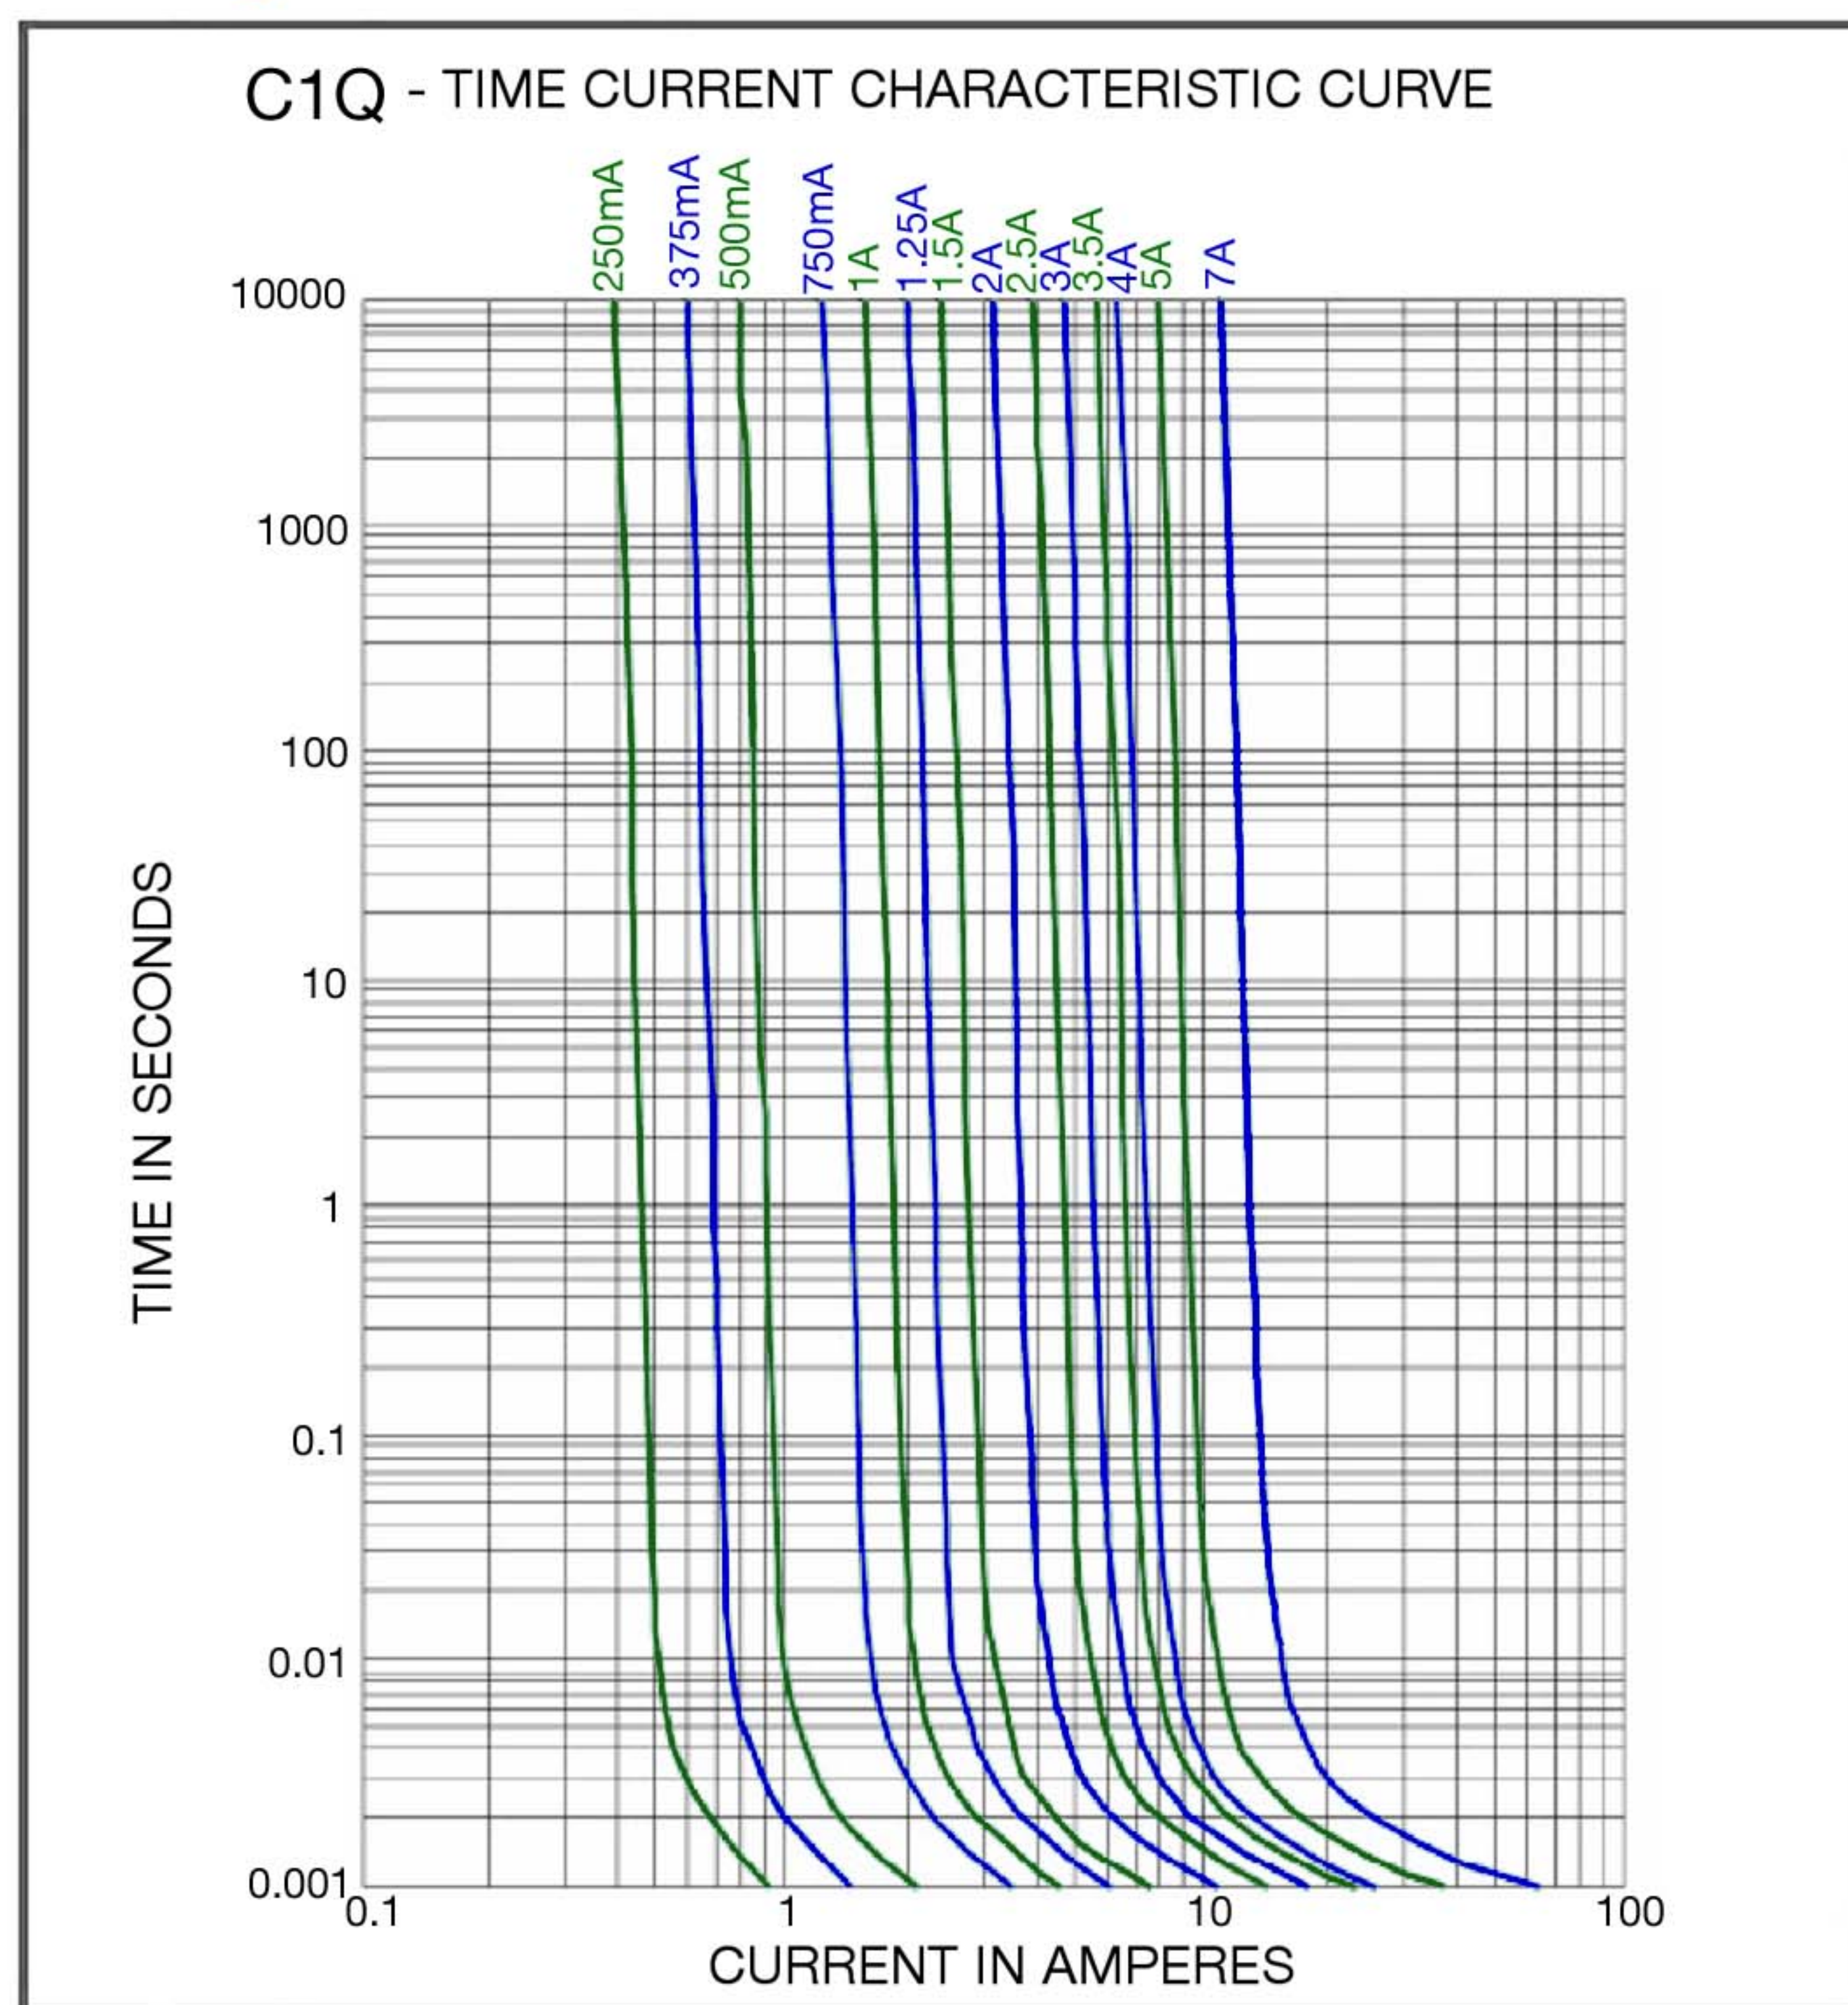

### Temperature Derating Curve

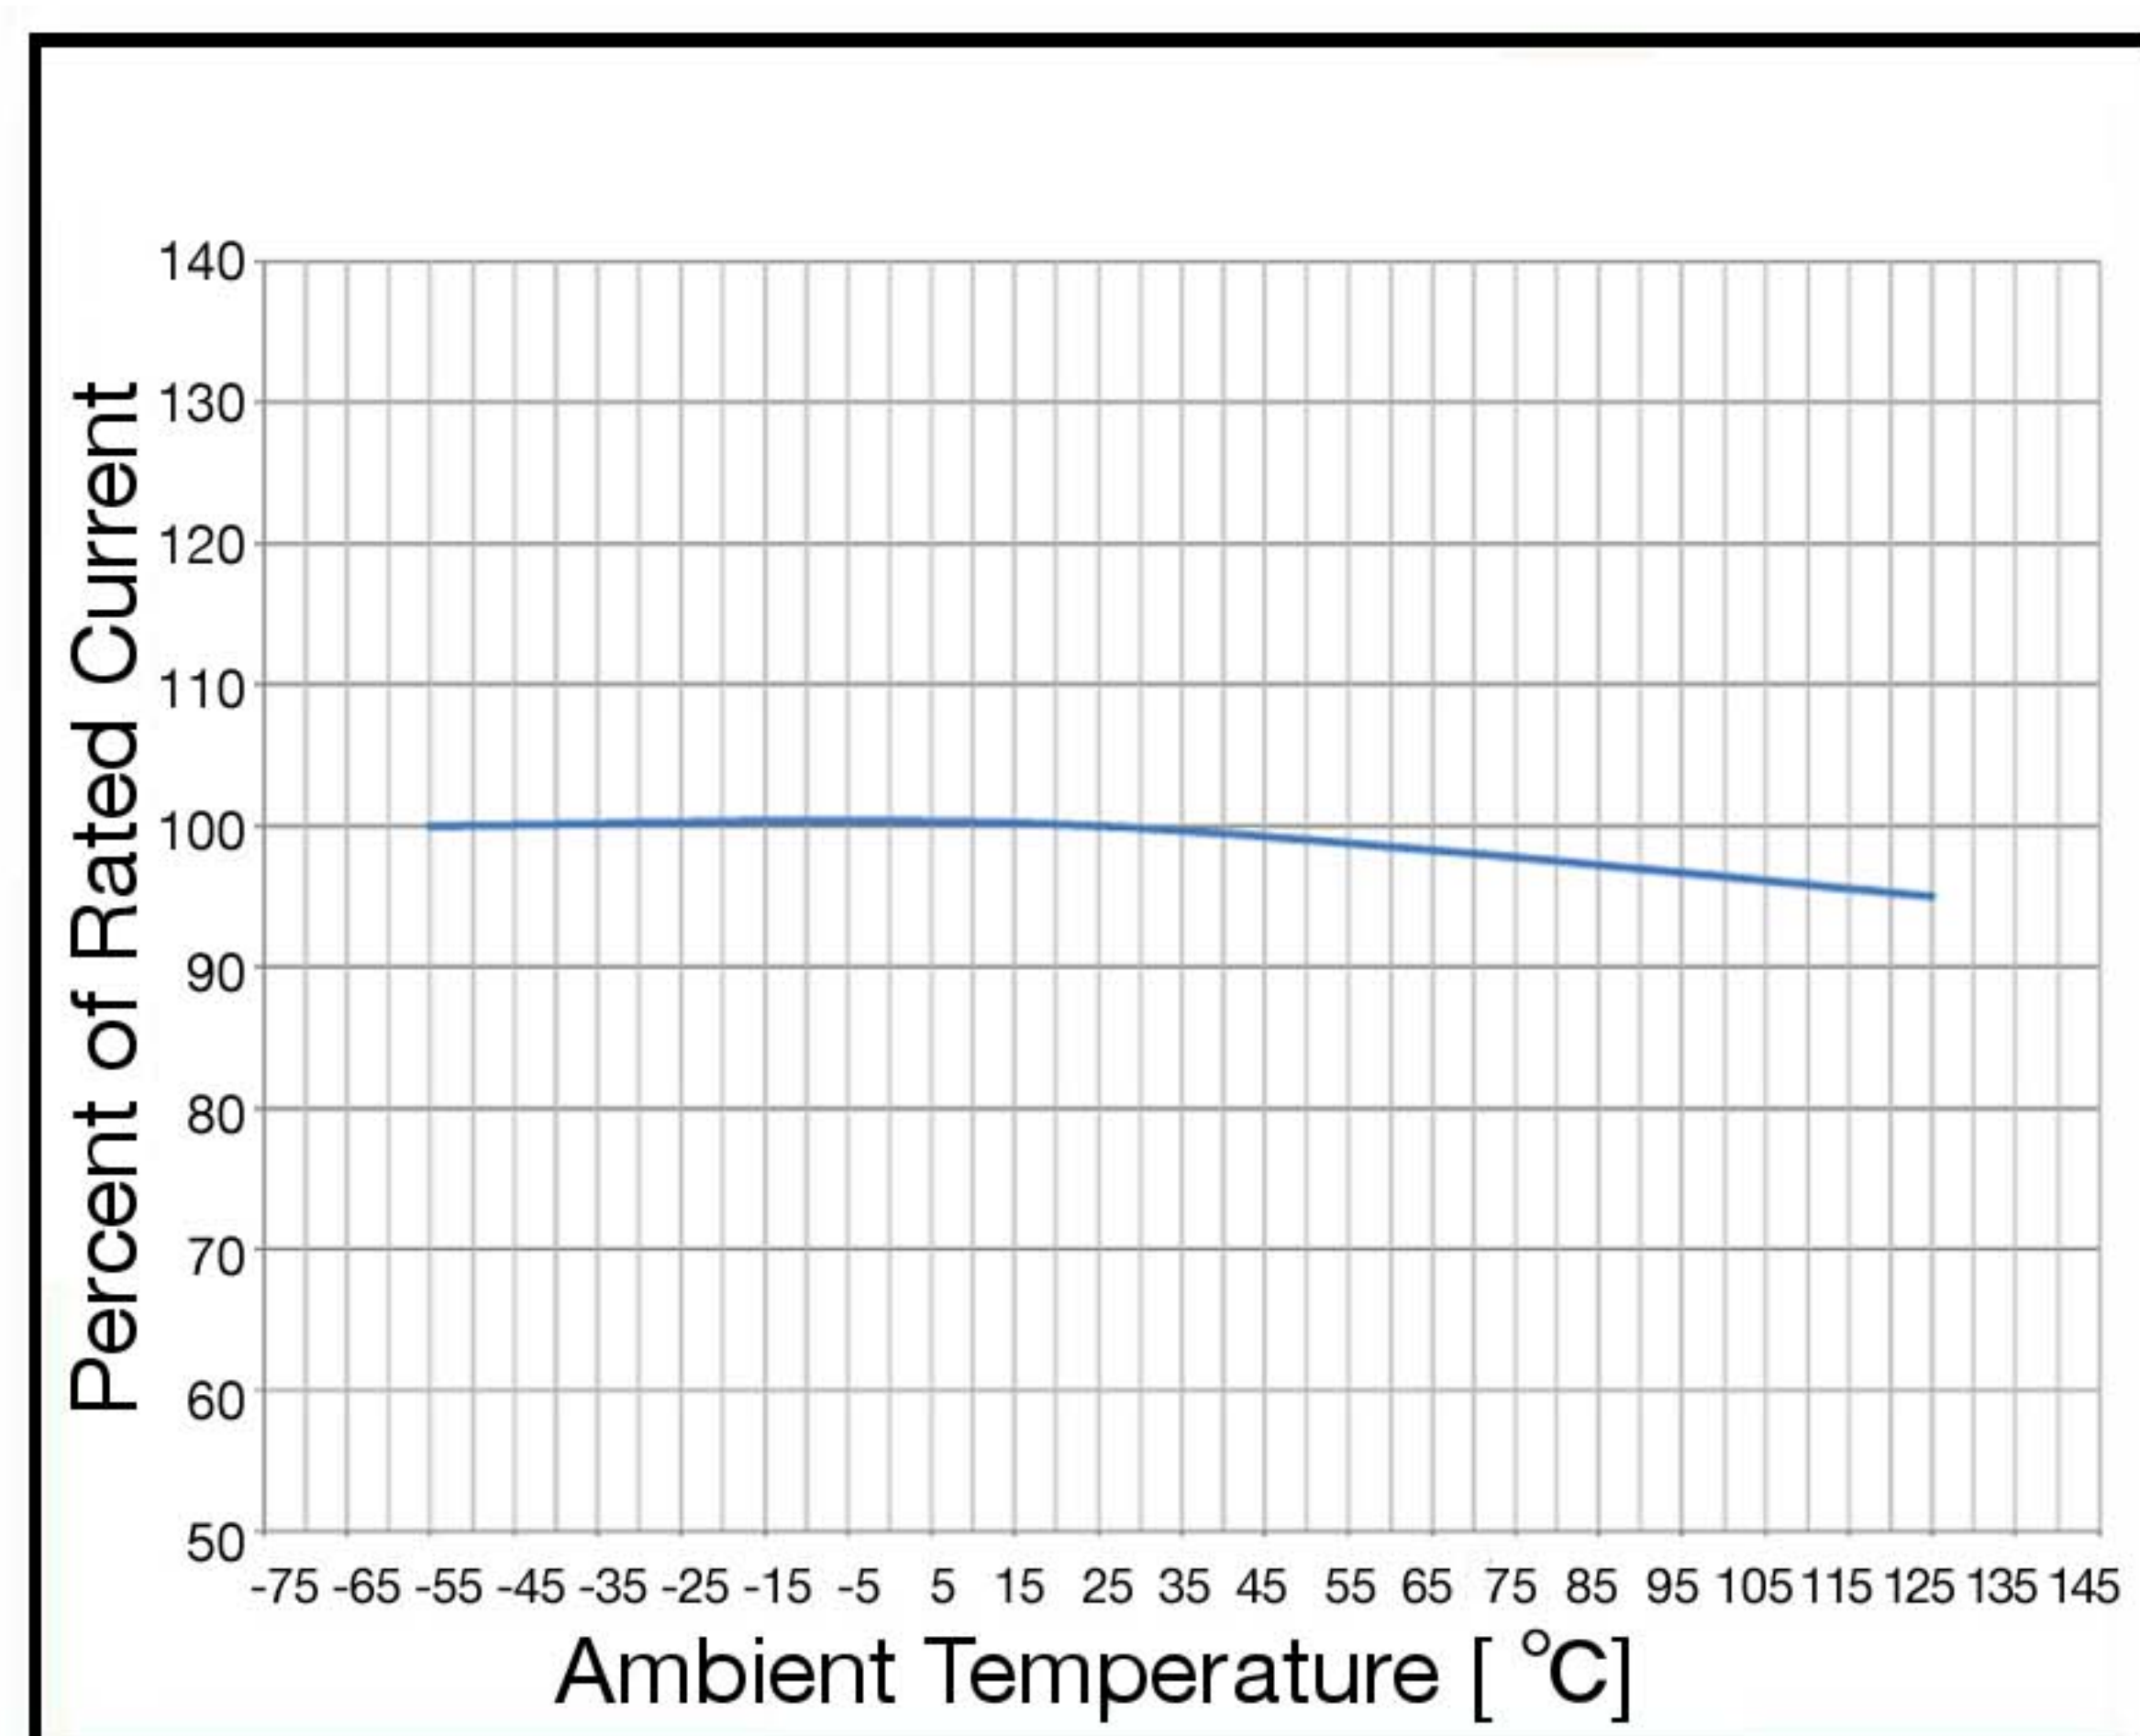

### Electrical Specifications

Catalog Number	Ampere Rating (A)	Nominal Cold Resistance (ohm)	Nominal Volt-drop @100% In (Volt) max.	Voltage and Interrupting Ratings	Melting I <sup>2</sup> T <10 m Sec (A <sup>2</sup> Sec)	Melting I <sup>2</sup> T @10 In (A <sup>2</sup> Sec)	Nominal Power Dissipation @100% In (W)	Agency Approvals		
								UL US	RU US	SE
C1Q 250	250mA	0.85	0.250		0.0018	0.0001	0.06	Y		Y
C1Q 375	375mA	0.48	0.222		0.0044	0.0004	0.08	Y		Y
C1Q 500	500mA	0.32	0.195		0.008	0.001	0.10	Y		Y

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

[View C1Q 1 on WIN SOURCE](#)

[Bel Fuse Inc. Information](#)

#### Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management