



**THE DATASHEET OF  
1N5401RLG**



# 1N5400 thru 1N5408

## Axial-Lead Glass Passivated Standard Recovery Rectifiers

Lead mounted standard recovery rectifiers are designed for use in power supplies and other applications having need of a device with the following features:

### Features

- High Current to Small Size
- High Surge Current Capability
- Low Forward Voltage Drop
- Void-Free Economical Plastic Package
- Available in Volume Quantities
- Plastic Meets UL 94 V-0 for Flammability
- These are Pb-Free Devices

### Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 1.1 Gram (Approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Polarity: Cathode Indicated by Polarity Band

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.



**ON Semiconductor®**


[www.onsemi.com](http://www.onsemi.com)

**STANDARD RECOVERY  
RECTIFIERS  
50–1000 VOLTS  
3.0 AMPERES**



**AXIAL LEAD  
CASE 267-05  
STYLE 1**

### MARKING DIAGRAM



A = Assembly Location  
1N540x = Device Number  
x = 0, 1, 2, 4, 6, 7 or 8  
YY = Year  
WW = Work Week  
▪ = Pb-Free Package

(Note: Microdot may be in either location)

### ORDERING INFORMATION

See detailed ordering and shipping information on page 5 of this data sheet.

# 1N5400 thru 1N5408

## MAXIMUM RATINGS

| Rating   | Symbol                          | 1N5400                       | 1N5401 | 1N5402 | 1N5404 | 1N5406 | 1N5407 | 1N5408 | Unit             |
|--|---------------------------------|------------------------------|--------|--------|--------|--------|--------|--------|------------------|
| Peak Repetitive Reverse Voltage<br>Working Peak Reverse Voltage<br>DC Blocking Voltage                           | $V_{RRM}$<br>$V_{RWM}$<br>$V_R$ | 50                           | 100    | 200    | 400    | 600    | 800    | 1000   | V                |
| Non-repetitive Peak Reverse Voltage  | $V_{RSM}$                       | 100                          | 200    | 300    | 525    | 800    | 1000   | 1200   | V                |
| Average Rectified Forward Current<br>(Single Phase Resistive Load,<br>1/2 in. Leads, $T_L = 105^\circ\text{C}$ ) | $I_O$                           | 3.0                          |        |        |        |        |        |        | A                |
| Non-repetitive Peak Surge Current<br>(8 ms Single Half-Sine-Wave)  | $I_{FSM}$                       | 200 (one cycle)              |        |        |        |        |        |        | A                |
| Operating and Storage Junction<br>Temperature Range  | $T_J$<br>$T_{stg}$              | - 65 to +150<br>- 65 to +175 |        |        |        |        |        |        | $^\circ\text{C}$ |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

## THERMAL CHARACTERISTICS

| Characteristic  | Symbol          | Typ | Unit                      |
|---|-----------------|-----|---------------------------|
| Thermal Resistance, Junction-to-Ambient (PC Board Mount, 1/2 in. Leads) | $R_{\theta JA}$ | 53  | $^\circ\text{C}/\text{W}$ |

## ELECTRICAL CHARACTERISTICS

| Characteristic  | Symbol | Min | Typ | Max      | Unit          |
|---|--------|-----|-----|----------|---------------|
| Forward Voltage ( $I_F = 3.0\text{ A}$ , $T_A = 25^\circ\text{C}$ )                         | $V_F$  | -   | -   | 1.0      | V             |
| Reverse Current (Rated DC Voltage)<br>$T_A = 25^\circ\text{C}$<br>$T_A = 100^\circ\text{C}$ | $I_R$  | -   | -   | 10<br>50 | $\mu\text{A}$ |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

Ratings at  $25^\circ\text{C}$  ambient temperature unless otherwise specified.

60 Hz resistive or inductive loads.

For capacitive load, derate current by 20%.

# 1N5400 thru 1N5408


## NOTE 1 — AMBIENT MOUNTING DATA

Data shown for thermal resistance junction-to-ambient ( $R_{\theta JA}$ ) for the mountings shown is to be used as typical guideline values for preliminary engineering or in case the tie point temperature cannot be measured.


### TYPICAL VALUES FOR $R_{\theta JA}$ IN STILL AIR

| Mounting Method | Lead Length, L (IN) |     |     |     | $R_{\theta JA}$             |
|-----------------|---------------------|-----|-----|-----|-----------------------------|
|                 | 1/8                 | 1/4 | 1/2 | 3/4 |                             |
| 1               | 50                  | 51  | 53  | 55  | $^{\circ}\text{C}/\text{W}$ |
| 2               | 58                  | 59  | 61  | 63  | $^{\circ}\text{C}/\text{W}$ |
| 3               | 28                  |     |     |     | $^{\circ}\text{C}/\text{W}$ |


**MOUNTING METHOD 1**  
P.C. Board Where Available  
Copper Surface area is small



**MOUNTING METHOD 2**  
Vector Push-In Terminals T-28



**MOUNTING METHOD 3**  
P.C. Board with  
1-1/2" x 1-1/2" Copper Surface



# 1N5400 thru 1N5408

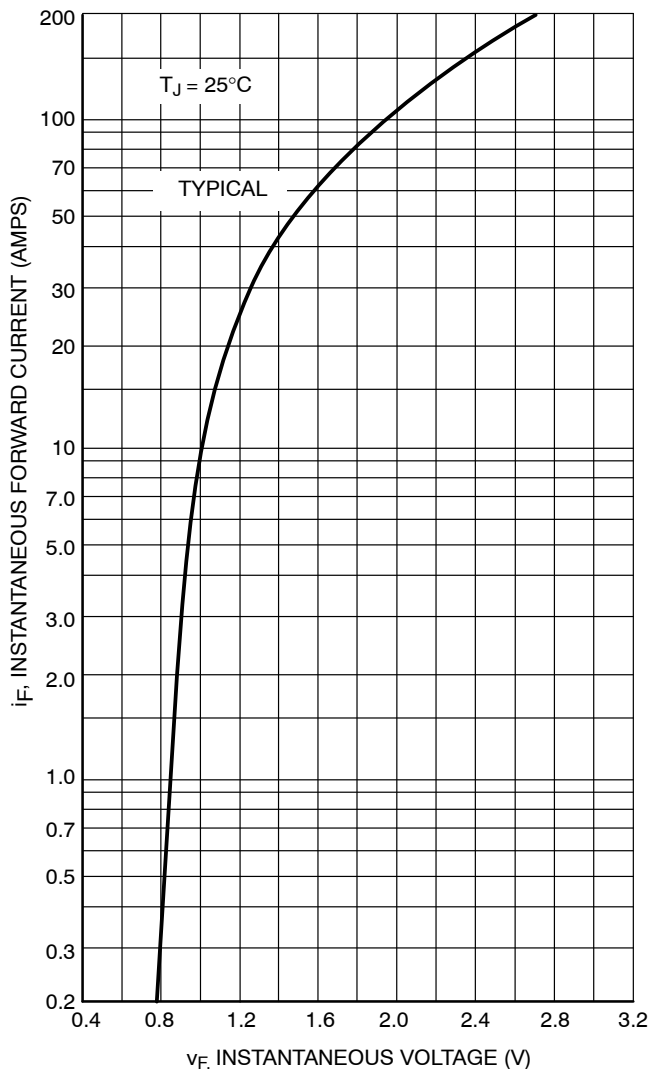


Figure 1. Forward Voltage

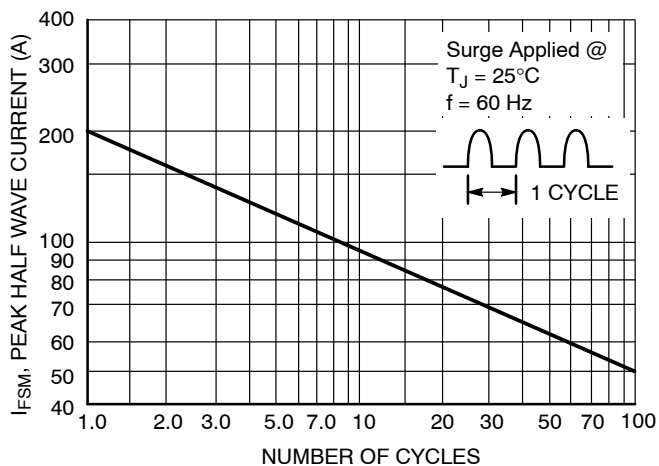


Figure 2. Maximum Nonrepetitive Surge Current

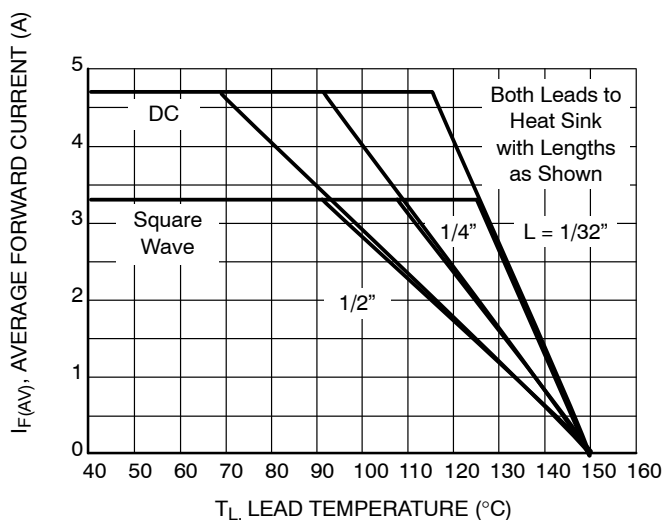


Figure 3. Maximum Current Derating, Lead, Various Lengths

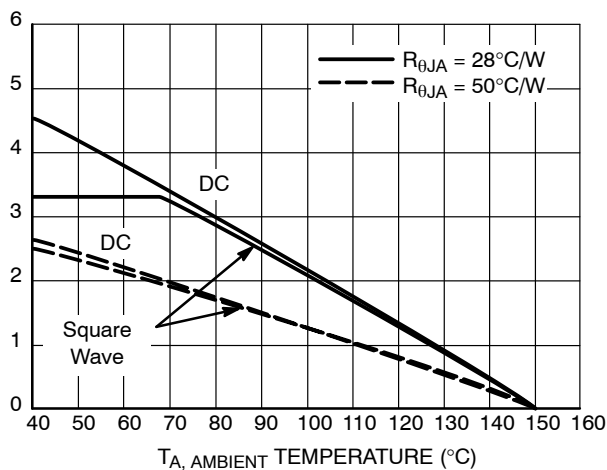


Figure 4. Maximum Current Derating, Ambient, PC Board Mounting

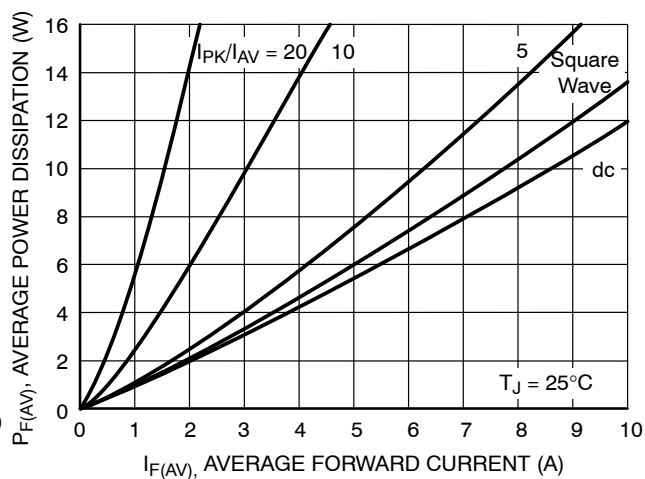


Figure 5. Forward Power Dissipation

# 1N5400 thru 1N5408

## ORDERING INFORMATION

| Device    | Package     | Shipping†        |
|-----------|-------------|------------------|
| 1N5400G   | Axial Lead* | 500 Units/Box    |
| 1N5400RLG | Axial Lead* | 1200/Tape & Reel |
| 1N5401G   | Axial Lead* | 500 Units/Box    |
| 1N5401RLG | Axial Lead* | 1200/Tape & Reel |
| 1N5402G   | Axial Lead* | 500 Units/Box    |
| 1N5402RLG | Axial Lead* | 1200/Tape & Reel |
| 1N5404G   | Axial Lead* | 500 Units/Box    |
| 1N5404RLG | Axial Lead* | 1200/Tape & Reel |
| 1N5406G   | Axial Lead* | 500 Units/Box    |
| 1N5406RLG | Axial Lead* | 1200/Tape & Reel |
| 1N5407G   | Axial Lead* | 500 Units/Box    |
| 1N5407RLG | Axial Lead* | 1200/Tape & Reel |
| 1N5408G   | Axial Lead* | 500 Units/Box    |
| 1N5408RLG | Axial Lead* | 1200/Tape & Reel |


†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

\*This package is inherently Pb-Free.

# 1N5400 thru 1N5408

## PACKAGE DIMENSIONS

### AXIAL LEAD CASE 267-05 ISSUE G

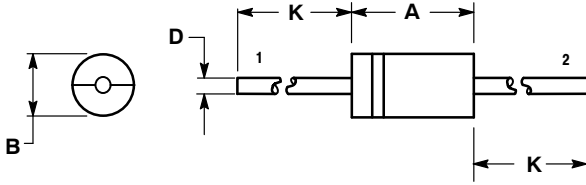


#### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

| DIM | INCHES |       | MILLIMETERS |      |
|-----|--------|-------|-------------|------|
|     | MIN    | MAX   | MIN         | MAX  |
| A   | 0.287  | 0.374 | 7.30        | 9.50 |
| B   | 0.189  | 0.209 | 4.80        | 5.30 |
| D   | 0.047  | 0.051 | 1.20        | 1.30 |
| K   | 1.000  | ---   | 25.40       | ---  |

#### STYLE 1:

- PIN 1. CATHODE (POLARITY BAND)
- PIN 2. ANODE

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)

**Order Literature:** <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 1N5401RLG on WIN SOURCE](#)

 [ON Semiconductor](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management