




THE DATASHEET OF
04331.75NR



433 Series Fuse

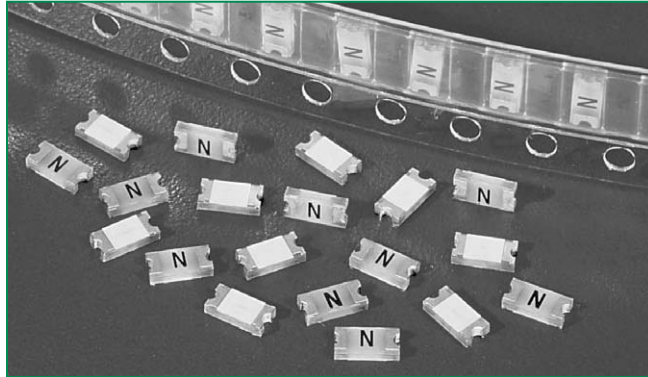

Description



The 433 series fast-acting surface mount fuse series is a small (1206 size) thin-film device designed for secondary protection of circuits used in space constrained applications such as hand-held portable electronic devices.

For RoHS compliant and lead-free design, please refer to the Littelfuse 466 series thin film fuse. For new designs of 7 amp please refer to Littelfuse 429 series thin film fuse.

Features

- The SlimLine 1206 fuse is an extremely small, low profile design (1206 chip size) utilizing thin-film technology to achieve precise control of electrical characteristics.
- The lower height profile produces a flat surface for improved performance in pick-and-place operations and an alternate solution for height critical application.
- Mounting pad and electrical specification are identical to the popular 429 Series specifications.

Agency Approvals

| Agency | Agency File Number | Ampere Range |
|---|--------------------|--------------|
|  | E10480 | 125mA - 5A |
|  | LR29862 | 125mA - 5A |

Electrical Characteristics for Series



| % of Ampere Rating | Opening Time at 25°C |
|--------------------|----------------------|
| 100% | 4 hours, Minimum |
| 200% | 5 sec., Maximum |
| 300% | 0.2 sec., Maximum |

Applications

Secondary protection for space constrained applications such as:

- Cell phones
- Battery packs
- Digital cameras
- DVD players
- Hard disk drives.

Electrical Specifications by Item

| Ampere Rating (A) | Amp Code | Max Voltage Rating (V) | Interrupting Rating | Nominal Cold Resistance (Ohms) | Nominal Melting I ² t (A ² sec) | Agency Approvals | |
|-------------------|----------|------------------------|---------------------|--------------------------------|---|---|---|
| | | | | | |  |  |
| 0.125 | .125 | 125 | 50A @125 V AC/DC | 3.45000 | 0.00040 | x | x |
| 0.200 | .200 | 125 | | 0.93800 | 0.00055 | x | x |
| 0.250 | .250 | 125 | | 0.62500 | 0.00100 | x | x |
| 0.375 | .375 | 125 | | 0.37500 | 0.00280 | x | x |
| 0.50 | .500 | 63 | 50A @63 V AC/DC | 0.24050 | 0.00600 | x | x |
| 0.60 | .600 | 63 | | 0.21000 | 0.01310 | x | x |
| 0.75 | .750 | 63 | | 0.13700 | 0.01700 | x | x |
| 0.80 | .800 | 63 | | 0.12250 | 0.03050 | x | x |
| 1.00 | .001 | 63 | | 0.09950 | 0.03500 | x | x |
| 1.25 | 1.25 | 63 | | 0.07475 | 0.06500 | x | x |
| 1.50 | 01.5 | 63 | | 0.06250 | 0.12500 | x | x |
| 1.75 | 1.75 | 63 | | 0.05000 | 0.15000 | x | x |
| 2.00 | 02.0 | 63 | | 0.03975 | 0.23000 | x | x |
| 2.50 | 02.5 | 32 | | 50A @32 V AC/DC | 0.03065 | 0.50000 | x |
| 3.00 | 03.0 | 32 | 0.02625 | | 0.70000 | x | x |
| 4.00 | 04.0 | 24 | 50A @24 V AC/DC | 0.01400 | 1.0240 | x | x |
| 5.00 | 05.0 | 24 | | 0.01100 | 1.6000 | x | x |

1. Measured at 10% of rated current, 25°C.

2. Measured at rated voltage.

Temperature Derating Curve



Average Time Current Curves



Soldering Parameters - Wave Soldering

| | | |
|--|------------------------------------|-------------------------|
| Reflow Condition | | Pb – Free assembly |
| Pre Heat | - Temperature Min ($T_{s(min)}$) | 150°C |
| | - Temperature Max ($T_{s(max)}$) | 200°C |
| | - Time (Min to Max) (t_s) | 60 – 180 secs |
| Average ramp up rate (Liquidus Temp (T_L) to peak) | | 5°C/second max |
| $T_{s(max)}$ to T_L - Ramp-up Rate | | 5°C/second max |
| Reflow | - Temperature (T_L) (Liquidus) | 217°C |
| | - Temperature (t_l) | 60 – 150 seconds |
| Peak Temperature (T_p) | | 250 ^{+0/-5} °C |
| Time within 5°C of actual peak Temperature (t_p) | | 20 – 40 seconds |
| Ramp-down Rate | | 5°C/second max |
| Time 25°C to peak Temperature (T_p) | | 8 minutes Max. |
| Do not exceed | | 260°C |




Product Characteristics

| | |
|------------------------------|--|
| Materials | Body: Epoxy Substrate Terminations: 95% Tin / 5% Lead over Nickel over Copper Element Cover Coat: Conformal Coating |
| Operating Temperature | - 55°C to 90°C. Consult temperature derating curve chart. |
| Thermal Shock | Withstands 5 cycles of - 55°C to 125°C |

| | |
|--|--|
| Humidity | MIL-STD-202F Method 103B Condition D |
| Vibration | Per MIL-STD-202F, Method 201A |
| Insulation Resistance (After Opening) | Greater than 10,000 ohms. |
| Resistance to Soldering Heat | Withstands 60 seconds above 200°C and up to 260°C, maximum |

Dimensions

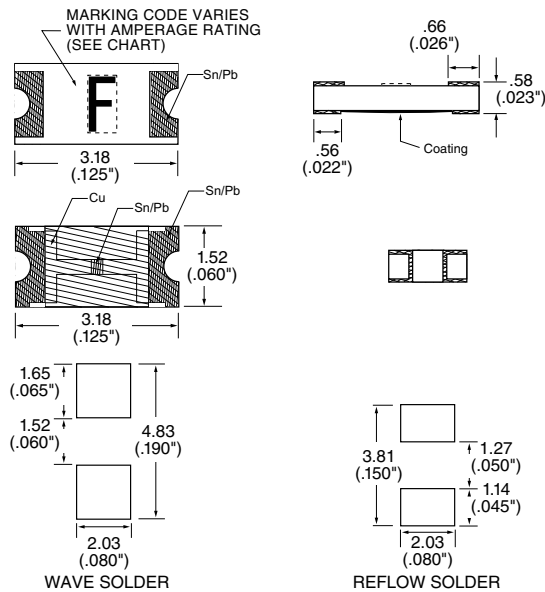

Part Marking System

| Amp Code | Marking Code |
|----------|--------------|
| .125 | B |
| .200 | C |
| .250 | D |
| .375 | E |
| .500 | F |
| .600 | .6 |
| .750 | G |
| .800 | .8 |
| 001. | H |
| 1.25 | J |
| 01.5 | K |
| 1.75 | L |
| 002. | N |
| 02.5 | O |
| 003. | P |
| 03.5 | R |
| 004. | S |
| 005. | T |

Part Numbering System



Packaging

| Packaging Option | Packaging Specification | Quantity | Quantity & Packaging Code |
|------------------------|--------------------------------|----------|---------------------------|
| Tape & Reel - 8mm tape | EIA RS-481-1 (IEC 286, part 3) | 5000 | NR |

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 04331.75NR on WIN SOURCE](#)

 [Littelfuse Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management