



**THE DATASHEET OF
OSTT2140151**



1

2


3

4



5

SIGN	DATE

THIS IS CAD DRAWING



- Material**
- Terminal body
 - (metal housing): Brass(C)
 - Terminal screw: Steel Z
 - Contact: Brass
 - Surface of solder tail: Tin
 - Insulator (housing): Thermoplastic

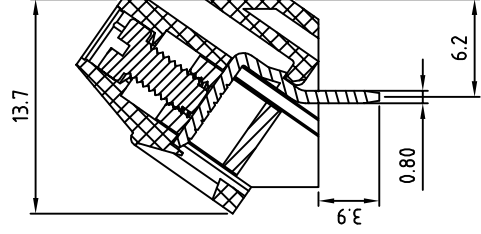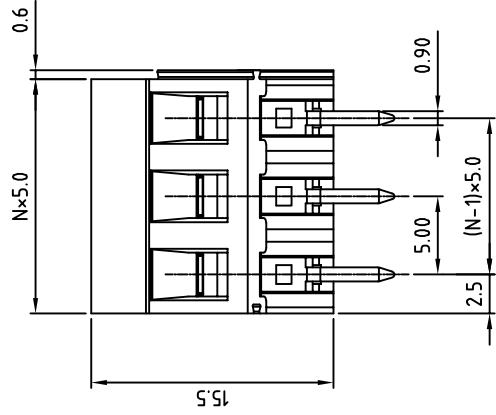

- Voltage rating: 300VAC
- Current rating: 10A
- Wire range: Solid wire(AWG): 12-24 Stranded wire(AWG): 12-24
- Torque(Lb-In): 3.5
- Screw: M2.5
- Wire strip length: 6-7mm
- Withstanding Voltage: 1000V
- Operating temperature: -40 to 105°C
- Soldering temperature: 260°C
- Safety Approval: CE, RoHS

RoHS Compliant


PART NUMBER

OSTT

N=Number of poles

- No. of Poles**
- 02: 2 Poles
 - 03: 3 Poles
 -
 - 24: 24 Poles

P.C.B LAYOUT

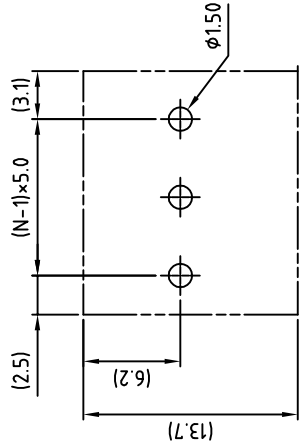

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE	OSTT2 - 5.0mm series solid block 2p-pole		
PART NO.	OSTT2XX0151		
APPROVED	CHECKED	DESIGNED	DRAWN
Shi Jun 2006.10.20	Shi Jun 2006.10.20	xionghaitao 2006.10.20	xionghaitao 2006.10.20

1

2

3

4

5

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View OSTT2140151 on WIN SOURCE](#)
- ⊖ [On Shore Technology Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management