



RF Filters for Cellular Phones

Series/Type: B4167

The following products presented in this data sheet are being withdrawn.

Ordering Code	Substitute Product	Date of Withdrawal	Deadline Last Orders	Last Shipments
B39182B4167U510	B39182B4142U410	2009-04-03	2009-07-15	2009-10-15


For further information please contact your nearest EPCOS sales office, which will also support you in selecting a suitable substitute. The addresses of our worldwide sales network are presented at www.epcos.com/sales.


 Ceramic package **DCC6D**
Features

- Low-loss RF filter for mobile telephone PCN systems, receive path
- Low amplitude ripple
- Usable passband 75 MHz
- Unbalanced to balanced operation
- Impedance transformation from 50Ω to 200Ω
- Package for **S**urface **M**ounted **T**echnology (**SMT**)
- Ceramic SMD package

Terminals


- Ni, gold-plated

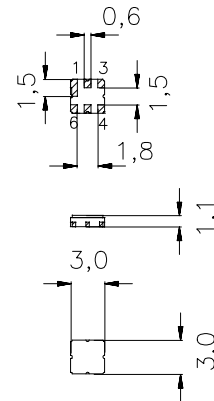

Dimensions in mm, approx. weight 0,037 g

Pin configuration

2	Input, unbalanced
4, 6	Output, balanced
1, 3	Input ground
1, 3, 5	To be grounded



Type	Ordering code	Marking and Package according to	Packing according to
B4167	B39182-B4167-U510	C61157-A7-A68	F61074-V8089-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 20 / + 75	°C	source/load impedance 50/200 Ω peak power of GSM signal, duty cycle 2 : 8
Storage temperature range	T_{stg}	- 40 / + 85	°C	
DC voltage	V_{DC}	5	V	
Input power max.				
1710 ... 1785 MHz	P_{IN}	11	dBm	
1805 ... 1880 MHz	P_{IN}	11	dBm	
elsewhere	P_{IN}	0	dBm	

Data Sheet

Characteristics

Operating Temperature Range:	$T = +25 \pm 2 \text{ }^\circ\text{C}$
Terminating source impedance:	$Z_S = 50\Omega$ (unbalanced)
Terminating load impedance:	$Z_L = 200\Omega \parallel 22 \text{ nH}$ (balanced)

		min.	typ.	max.	
Center frequency	f_C	—	1842,5	—	MHz
Maximum insertion attenuation	α_{\max}	—	2,0	3,5	dB
1805,0 ... 1880,0 MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	0,9	2,0	dB
1805,0 ... 1880,0 MHz					
Input VSWR		—	1,8	2,3	
1805,0 ... 1880,0 MHz					
Output VSWR		—	1,8	2,3	
1805,0 ... 1880,0 MHz					
Output amplitude balance (S_{31}/S_{21})		-1,5	-1,1 / +0,6	1,5	dB
1805,0 ... 1880,0 MHz					
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^\circ$)		-12	+/- 6	12	°
1805,0 ... 1880,0 MHz					
Attenuation	α				
0,0 ... 1000,0 MHz		40	50	—	dB
1000,0 ... 1550,0 MHz		30	40	—	dB
1550,0 ... 1705,0 MHz		25	28	—	dB
1705,0 ... 1785,0 MHz		12	18	—	dB
1920,0 ... 1980,0 MHz		12	17	—	dB
1980,0 ... 2010,0 MHz		18	22	—	dB
2010,0 ... 2500,0 MHz		20	26	—	dB
2500,0 ... 3840,0 MHz		25	35	—	dB
3840,0 ... 6000,0 MHz		20	32	—	dB

Data Sheet


Characteristics

Operating Temperature Range:	$T = -10 \text{ to } +80^{\circ}\text{C}$
Terminating source impedance:	$Z_S = 50\Omega$ (unbalanced)
Terminating load impedance:	$Z_L = 200\Omega$ (balanced) 22 nH


		min.	typ.	max.	
Center frequency	f_C	—	1842,5	—	MHz
Maximum insertion attenuation	α_{\max}	—	2,5	4,0	dB
1805,0 ... 1880,0 MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	1,4	2,5	dB
1805,0 ... 1880,0 MHz					
Input VSWR		—	1,8	2,4	
1805,0 ... 1880,0 MHz					
Output VSWR		—	1,8	2,4	
1805,0 ... 1880,0 MHz					
Output amplitude balance (S_{31}/S_{21})		-1,5	-1,1 / +0,6	1,5	dB
1805,0 ... 1880,0 MHz					
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^{\circ}$)		-15	+/- 6	15	°
1805,0 ... 1880,0 MHz					
Attenuation	α				
0,0 ... 1000,0 MHz		40	50	—	dB
1000,0 ... 1550,0 MHz		30	40	—	dB
1550,0 ... 1705,0 MHz		25	28	—	dB
1705,0 ... 1785,0 MHz		10	15	—	dB
1920,0 ... 1980,0 MHz		10	17	—	dB
1980,0 ... 2010,0 MHz		18	22	—	dB
2010,0 ... 2500,0 MHz		20	26	—	dB
2500,0 ... 3840,0 MHz		25	35	—	dB
3840,0 ... 6000,0 MHz		20	32	—	dB



Transfer function

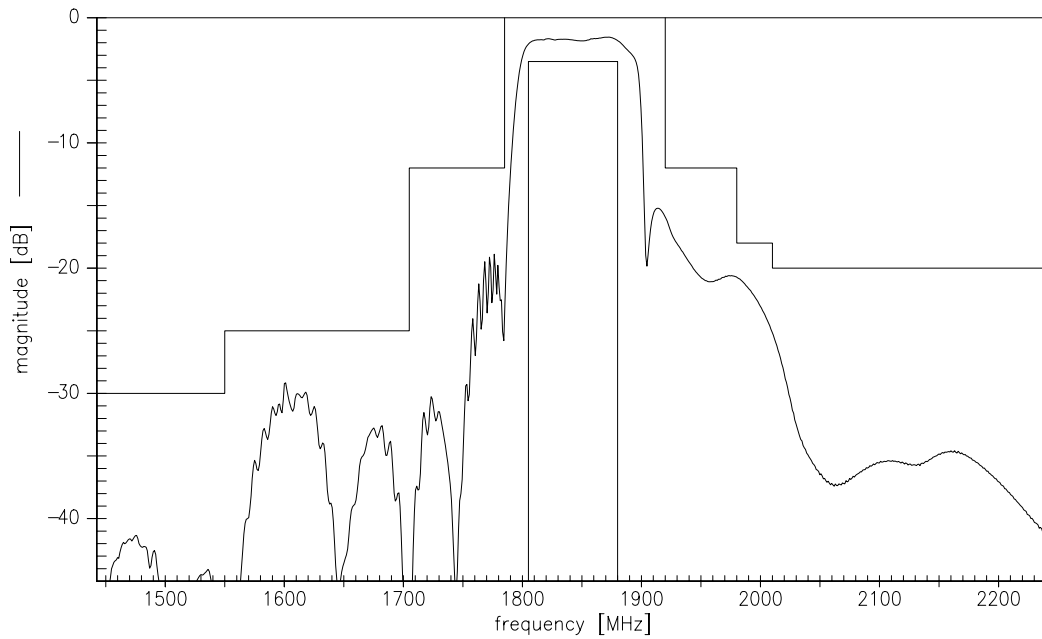

Transfer function (wide band)

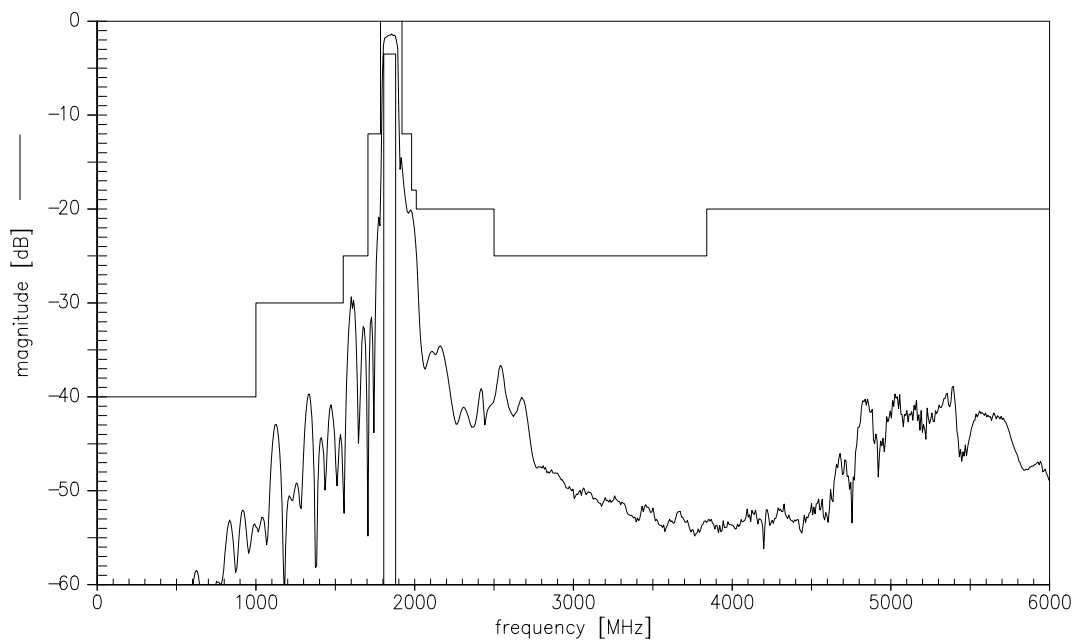

**Published by EPCOS AG****Surface Acoustic Wave Components Division, OFW E MF****P.O. Box 80 17 09, D-81617 München**

© EPCOS AG 1999. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.



Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View B39182B4167U510 on WIN SOURCE](#)
-  [Qualcomm Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management