




THE DATASHEET OF EDSTL950/3



EDZ1710/X

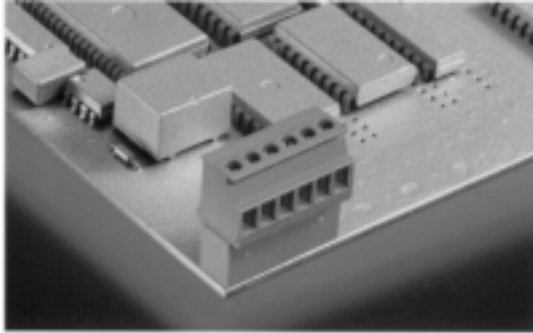

2-20 poles, Spacing 3.81 mm
insert required no. of poles **x**
How to order see page 5



Ratings:

Rated Voltage	300 V	160 V
Rated Current	8 A	9 A (T60)
Wire Size	AWG 28-16	1.5 mm²
Test Voltage		4 kV/3
Rated Torque/ScrewSize		0.4 Nm/M2

Max. Rated Cross Section

Single Wire (solid)	1.5 mm²
Stranded Wire (flexible)	1.0 mm²
Stranded wire with Ferrules	1.0 mm²

Dimensions


Spacing	3.81 mm
Stripped Length	7.0 mm

Materials


Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Terminal Block	CuZn
Contact	CuSn

Color

Green

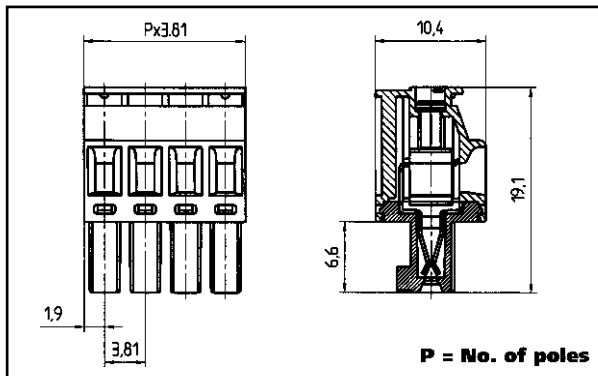

EDSTL950/X (5.0 mm) EDSTLZ950/X (5.08 mm)

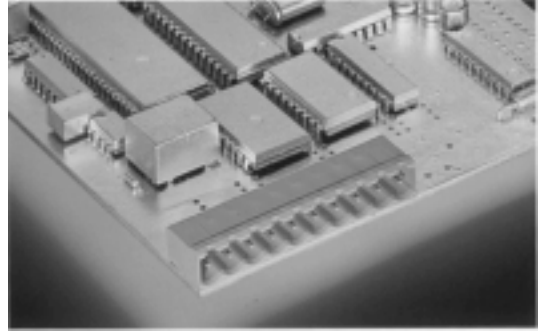

2-24 poles, Spacing 5.0 mm or 5.08 mm
insert required no. of poles **x**
How to order see page 5



Ratings:

Rated Voltage	300 V	250 V
Rated Current	15 A	12 A (T60)
Rating Impulse Voltage/Dirt Level		4 kV/3

Dimensions


Spacing	5.0 mm (5.08 mm)
PCB Hole Diameter	1.4 mm

Materials

Insulating Material	PA/PBTP
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Contact Pin	Cu

Color

Green

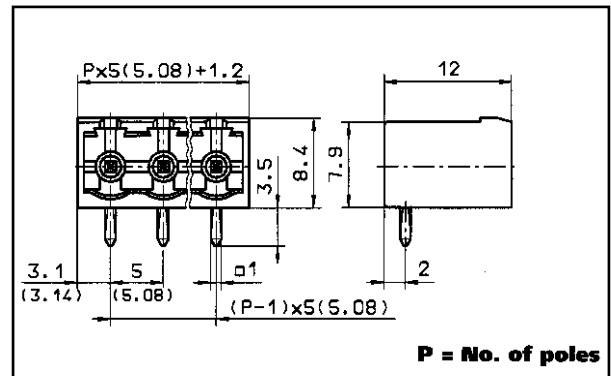

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View EDSTL950/3 on WIN SOURCE](#)
- ⊖ [On Shore Technology Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management