



Specification Status: RELEASED

PHYSICAL DESCRIPTION

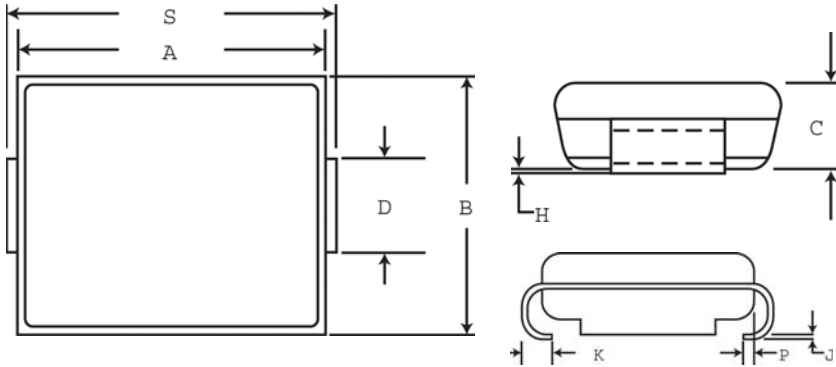

	A		B		C		D**		H		J		K	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	4.06	4.57	3.30	3.81	1.90	2.41	1.96	2.11	0.051	0.152	0.15	0.30	0.76	1.27
in*:	(0.160)	(0.180)	(0.130)	(0.150)	(0.075)	(0.095)	(0.077)	(0.083)	(0.002)	(0.006)	(0.006)	(0.012)	(0.030)	(0.050)

	P	S	
	REF	MIN	MAX
mm:	0.51	5.21	5.59
in*:	(0.020)	(0.205)	(0.220)

*Rounded off approximation
** D DIMENSION SHALL BE MEASURED WITHIN DIMENSION P

Other Physical Characteristics

Form Factor: SMB (Surface Mount, JEDEC DO-214AA Package)
Lead Material: Matte Tin Finish
Encapsulation Material: Epoxy, meets UL94 V-0 requirements
Solderability: per MIL-STD-750, Method 2026
Solder Heat Withstand: per MIL-STD-750, Method 2031
Solvent Resistance: per MIL-STD-750, Method 1022
Mechanical Shock: per MIL-STD-750, Method 2016
Vibration: per MIL-STD-750, Method 2056

Tape and Reel packaging per EIA 481-1

Agency Recognition: UL
Precedence: This specification takes precedence over documents referenced herein.
CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

Materials Information

RoHS Compliant ELV Compliant

Directive 2002/95/EC
Compliant

Directive 2000/53/EC
Compliant

OBSOLETE
NOT the LATEST
REVISION

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View TVB200SA-L on WIN SOURCE](#)

 [Littelfuse Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management