



**THE DATASHEET OF  
NTCS0805E4474JXT**



## SMD 0805, NTC Thermistors AgPd Terminations


**REMARK**

Non preferred type

(replaced by NTCS0805E3.....T/2381 615 5....)

QUICK REFERENCE DATA		
PARAMETER	VALUE	UNIT
Resistance value at 25 °C	2K to 470K	Ω
Tolerance on $R_{25}$ - value <sup>(1)</sup>	± 5	%
$B_{25/85}$ - value	3528 to 4130	K
Tolerance on $B_{25/85}$ - value	± 1, ± 1.5, ± 3	%
Maximum dissipation at 25 °C	210	mW
Thermal time constant t	≈ 10	s
Operating temperature range	- 55 to + 150	°C
R/T values	See tables	
Climatic category	40/125/56	
Mass	≈ 0.0155	g

**Note**
<sup>(1)</sup> Tighter tolerances are available upon request

**FEATURES**

- TCR from 6 %/K to 2 %/K even at high temperatures
- Tolerance on  $B_{25/85}$  down to 1 %
- AgPd terminations
- Suitable for wave or reflow soldering
- Old part number was 2322 615 1...
- Compliant to RoHS Directive 2002/95/EC and in accordance to WEEE 2002/96/EC


**RoHS**  
COMPLIANT

**APPLICATIONS**

Temperature compensation, sensing and protection in, for example:

- Battery chargers
- Consumer equipment
- Office equipment

**DESCRIPTION**

Size 0805 chip thermistors with a negative temperature coefficient. The device has no marking.

**PACKAGING**

Available in 8 mm punched paper tape on reel package of 4000 units.

SOLDERABILITY AND RESISTANCE TO SOLDERING HEAT				
IEC 60068-2-20	TEST METHOD	TEST	PROCEDURE	REQUIREMENTS
6	$T_C$	Solderability	3 s at 215 °C; 2 s at 235 °C	$\Delta R/R < 5 \%$

ELECTRICAL DATA AND ORDERING INFORMATION					
$R_{25}$ - VALUE (kΩ)	TOLERANCE ON $R_{25}$ °C	$B_{25/85}$ - VALUE (K)	TOLERANCE ON $B_{25/85}$ (%)	12 NC ORDERING CODE 2381 615 13...	SAP MATERIAL NO. NTCS0805E4... <sup>(2)</sup>
2	5 %	3680	± 3	202	202JMT
2.2	5 %	3680	± 3	222	222JMT
4.7	5 %	3560	± 1	472	472JMT
10	5 %	3620	± 1	103	103JMT
15	5 %	3528	± 1	153	153JMT
22	5 %	3930	± 1.5	223	223JHT
33	5 %	3960	± 3	333	333JHT
47	5 %	4090	± 1.5	473	473JXT
68	5 %	3740	± 3	683	683JMT
100	5 %	3650	± 1	104	104JMT
330	5 %	4015	± 3	334	334JXT
470	5 %	4130	± 3	474	474JXT

**Note**
<sup>(2)</sup> Replace digit Y in SAP part no by J for 5 %


# NTCS0805E4.../2381 615 1....



Vishay BCcomponents

SMD 0805, NTC Thermistors AgPd  
Terminations

## DIMENSIONS in millimeters

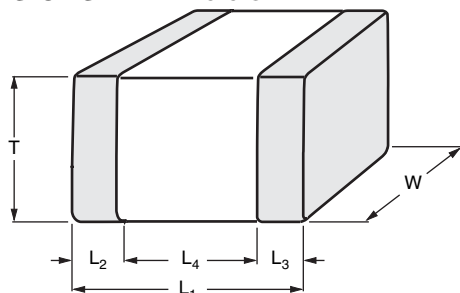

L <sub>1</sub>	W	T MAX.	L <sub>2</sub> and L <sub>3</sub> MIN.	L <sub>4</sub> MIN.
2.0 ± 0.2	1.25 ± 0.2	1.25	0.5 ± 0.25	0.5

## RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH R<sub>25</sub> AT 2000 Ω

T <sub>OPER</sub> (°C)	CATALOG NUMBER 2381 615 13202 OR SAP NO. NTCS0805E4202JMT				
	R <sub>T</sub> /R <sub>25</sub>	TCR (%/K)	R <sub>T</sub> (Ω)	5 % Tol. ΔR/R (%)	5 % Tol. ΔT (K)
-40	27.23	-6.21	54 462.6	15.94	2.57
-35	20.06	-6.02	40 118.4	14.88	2.47
-30	14.92	-5.83	29 834.5	13.87	2.38
-25	11.20	-5.65	22 393.8	12.89	2.28
-20	8.481	-5.47	16 961.6	11.95	2.19
-15	6.480	-5.29	12 960.5	11.05	2.09
-10	4.994	-5.13	9987.9	10.19	1.99
-5	3.880	-4.97	7760.8	9.36	1.89
0	3.393	-4.81	6078.6	8.56	1.78
5	2.399	-4.66	4797.7	7.79	1.67
10	1.908	-4.51	3815.0	7.05	1.56
15	1.528	-4.37	3055.3	6.34	1.45
20	1.232	-4.24	2463.8	5.66	1.34
25	1.000	-4.11	2000.0	5.00	1.22
30	0.8170	-3.98	1633.9	5.64	1.42
35	0.6715	-3.86	1343.1	6.26	1.62
40	0.5553	-3.74	1110.5	6.87	1.83
45	0.4618	-3.63	923.5	7.46	2.05
50	0.3861	-3.53	772.2	8.04	2.28
55	0.3245	-3.42	649.0	8.61	2.51
60	0.2742	-3.32	548.3	9.16	2.76
65	0.2327	-3.23	465.5	9.69	3.00
70	0.1985	-3.14	397.0	10.22	3.26
75	0.1701	-3.05	340.2	10.73	3.52
80	0.1464	-2.96	292.7	11.23	3.79
85	0.1265	-2.88	252.9	11.72	4.07
90	0.1097	-2.80	219.4	12.20	4.35
95	0.0956	-2.73	191.1	12.66	4.65
100	0.0835	-2.65	167.1	13.12	4.95
105	0.0733	-2.58	146.6	13.56	5.25
110	0.0645	-2.51	129.1	14.00	5.57
115	0.0570	-2.45	114.0	14.42	5.89
120	0.0505	-2.38	101.0	14.84	6.22
125	0.0449	-2.32	89.8	15.24	6.56
130	0.0400	-2.26	80.1	15.64	6.91
135	0.0358	-2.21	71.6	16.03	7.26
140	0.0321	-2.15	64.2	16.41	7.62
145	0.0289	-2.10	57.7	16.78	7.99
150	0.0260	-2.05	52.1	17.15	8.37

**RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH  $R_{25}$  AT 2200  $\Omega$** 

$T_{OPER}$ (°C)	CATALOG NUMBER 2381 615 13222 OR SAP NO. NTCS0805E4222JMT				
	$R_T/R_{25}$	TCR (%/K)	$R_T$ ( $\Omega$ )	5 % Tol. $\Delta R/R$ (%)	5 % Tol. $\Delta T$ (K)
-40	27.23	- 6.21	59 909	15.94	2.57
-35	20.06	- 6.02	44 130	14.88	2.47
-30	14.92	- 5.83	12 818	13.87	2.38
-25	11.20	- 5.65	24 633	12.89	2.28
-20	8.481	- 5.47	18 658	11.95	2.19
-15	6.480	- 5.29	14 257	11.05	2.09
-10	4.994	- 5.13	10 987	10.19	1.99
-5	3.880	- 4.97	8537	9.36	1.89
0	3.393	- 4.81	6686	8.56	1.78
5	2.399	- 4.66	5278	7.79	1.67
10	1.908	- 4.51	4196	7.05	1.56
15	1.528	- 4.37	3361	6.34	1.45
20	1.232	- 4.24	2710	5.66	1.34
25	1.000	- 4.11	2200	5.00	1.22
30	0.8170	- 3.98	1797	5.64	1.42
35	0.6715	- 3.86	1477	6.26	1.62
40	0.5553	- 3.74	1222	6.87	1.83
45	0.4618	- 3.63	1016	7.46	2.05
50	0.3861	- 3.53	849.4	8.04	2.28
55	0.3245	- 3.42	714.0	8.61	2.51
60	0.2742	- 3.32	603.2	9.16	2.76
65	0.2327	- 3.23	512.0	9.69	3.00
70	0.1985	- 3.14	436.7	10.22	3.26
75	0.1701	- 3.05	374.2	10.73	3.52
80	0.1464	- 2.96	322.0	11.23	3.79
85	0.1265	- 2.88	278.2	11.72	4.07
90	0.1097	- 2.80	241.4	12.20	4.35
95	0.0956	- 2.73	210.2	12.66	4.65
100	0.0835	- 2.65	183.8	13.12	4.95
105	0.0733	- 2.58	161.3	13.56	5.25
110	0.0645	- 2.51	142.0	14.00	5.57
115	0.0570	- 2.45	125.4	14.42	5.89
120	0.0505	- 2.38	111.2	14.84	6.22
125	0.0449	- 2.32	98.81	15.24	6.56
130	0.0400	- 2.26	88.10	15.64	6.91
135	0.0358	- 2.21	78.78	16.03	7.26
140	0.0321	- 2.15	70.65	16.41	7.62
145	0.0289	- 2.10	63.52	16.78	7.99
150	0.0260	- 2.05	57.26	17.15	8.37

**RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH  $R_{25}$  AT 4700  $\Omega$** 

$T_{OPER}$ (°C)	CATALOG NUMBER 2381 615 13472 OR SAP NO. NTCS0805E4472JMT				
	$R_T/R_{25}$	TCR (%/K)	$R_T$ ( $\Omega$ )	5 % Tol. $\Delta R/R$ (%)	5 % Tol. $\Delta T$ (K)
-40	21.9261	- 5.75	103 053	8.50	1.48
-35	16.5224	- 5.57	77 655	8.16	1.46
-30	12.5583	- 5.40	59 024	7.84	1.45
-25	9.62492	- 5.24	45 237	7.53	1.44
-20	7.43618	- 5.08	34 950	7.23	1.42
-15	5.78976	- 4.93	27 212	6.94	1.41
-10	4.54158	- 4.78	21 345	6.67	1.39
-5	3.58813	- 4.64	16 864	6.40	1.38
0	2.85449	- 4.51	13 416	6.15	1.36
5	2.28599	- 4.38	10 744	5.90	1.35



<b>RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH R<sub>25</sub> AT 4700 Ω</b>					
T <sub>OPER</sub> (°C)	CATALOG NUMBER 2381 615 13472 OR SAP NO. NTCS0805E4472JMT				
	R <sub>T</sub> /R <sub>25</sub>	TCR (%/K)	R <sub>T</sub> (Ω)	5 % Tol. ΔR/R (%)	5 % Tol. ΔT (K)
10	1.84245	- 4.25	8659.5	5.66	1.33
15	1.49414	- 4.13	7022.5	5.44	1.32
20	1.21887	- 4.01	5728.7	5.21	1.30
25	1.00	- 3.90	4700.0	5.00	1.28
30	0.82494	- 3.80	3877.2	5.21	1.37
35	0.68413	- 3.69	3215.4	5.41	1.46
40	0.57025	- 3.59	2680.2	5.60	1.56
45	0.47765	- 3.50	2245.0	5.79	1.66
50	0.40198	- 3.40	1889.3	5.97	1.75
55	0.33984	- 3.31	1597.2	6.15	1.85
60	0.28856	- 3.23	1356.2	6.32	1.96
65	0.24606	- 3.15	1156.5	6.48	2.06
70	0.21067	- 3.07	990.1	6.64	2.17
75	0.18108	- 2.99	851.06	6.80	2.28
80	0.15623	- 2.91	734.29	6.95	2.39
85	0.13529	- 2.84	635.86	7.10	2.50
90	0.11757	- 2.77	552.56	7.24	2.61
95	0.10251	- 2.71	481.81	7.38	2.73
100	0.08968	- 2.64	421.50	7.52	2.85
105	0.07871	- 2.58	369.91	7.65	2.97
110	0.06928	- 2.52	325.64	7.78	3.09
115	0.06117	- 2.46	287.51	7.91	3.21
120	0.05416	- 2.41	254.57	8.03	3.34
125	0.04809	- 2.35	226.03	8.15	3.47
130	0.04282	- 2.30	201.23	8.27	3.60
135	0.03822	- 2.25	179.62	8.38	3.73
140	0.0342	- 2.20	160.73	8.49	3.86
145	0.03068	- 2.15	144.17	8.60	4.00
150	0.02758	- 2.10	129.63	8.70	4.14

<b>RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH R<sub>25</sub> AT 10 000 Ω</b>					
T <sub>OPER</sub> (°C)	CATALOG NUMBER 2381 615 13103 OR SAP NO. NTCS0805E4103JMT				
	R <sub>T</sub> /R <sub>25</sub>	TCR (%/K)	R <sub>T</sub> (Ω)	5 % Tol. ΔR/R (%)	5 % Tol. ΔT (K)
- 40	23.0973	- 5.84	230 973	8.50	1.45
- 35	17.3222	- 5.67	173 222	8.16	1.44
- 30	13.1054	- 5.49	131 054	7.84	1.43
- 25	9.99934	- 5.33	99 993	7.53	1.41
- 20	7.69193	- 5.17	76 919	7.23	1.40
- 15	5.96369	- 5.01	59 637	6.94	1.38
- 10	4.6589	- 4.86	46 589	6.67	1.37
- 5	3.66623	- 4.72	36 662	6.40	1.36
0	2.9054	- 4.58	29 054	6.15	1.34
5	2.31806	- 4.45	23 181	5.90	1.33
10	1.86153	- 4.32	18 615.3	5.66	1.31
15	1.50429	- 4.20	15 042.9	5.44	1.29
20	1.22295	- 4.08	12 229.5	5.21	1.28
25	1.00	- 3.97	10 000.0	5.00	1.26
30	0.82227	- 3.86	8222.7	5.21	1.35
35	0.67977	- 3.75	6797.7	5.41	1.44
40	0.56487	- 3.65	5648.7	5.60	1.53
45	0.47174	- 3.55	4717.4	5.79	1.63
50	0.39585	- 3.46	3958.5	5.97	1.72
55	0.33371	- 3.37	3337.1	6.15	1.82



<b>RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH <math>R_{25}</math> AT 10 000 <math>\Omega</math></b>					
<b>T<sub>OPER</sub> (°C)</b>	<b>CATALOG NUMBER 2381 615 13103 OR SAP NO. NTCS0805E4103JMT</b>				
	<b><math>R_T/R_{25}</math></b>	<b>TCR (%/K)</b>	<b><math>R_T</math> (<math>\Omega</math>)</b>	<b>5 % Tol. <math>\Delta R/R</math> (%)</b>	<b>5 % Tol. <math>\Delta T</math> (K)</b>
60	0.28258	- 3.28	2825.8	6.32	1.92
65	0.24031	- 3.20	2403.1	6.48	2.03
70	0.20521	- 3.12	2052.1	6.64	2.13
75	0.17594	- 3.04	1759.37	6.80	2.24
80	0.15142	- 2.96	1514.20	6.95	2.35
85	0.1308	- 2.89	1308.04	7.10	2.46
90	0.1134	- 2.82	1134.00	7.24	2.57
95	0.09865	- 2.75	986.53	7.38	2.68
100	0.08611	- 2.69	861.10	7.52	2.80
105	0.0754	- 2.62	754.04	7.65	2.92
110	0.06624	- 2.56	662.36	7.78	3.04
115	0.05836	- 2.50	583.58	7.91	3.16
120	0.05157	- 2.45	515.67	8.03	3.28
125	0.4569	- 2.39	456.94	8.15	3.41
130	0.0406	- 2.34	406.01	8.27	3.54
135	0.03617	- 2.29	361.71	8.38	3.67
140	0.03231	- 2.23	323.06	8.49	3.80
145	0.02893	- 2.19	289.26	8.60	3.93
150	0.02596	- 2.14	259.61	8.70	4.07

<b>RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH <math>R_{25}</math> AT 15 000 <math>\Omega</math></b>					
<b>T<sub>OPER</sub> (°C)</b>	<b>CATALOG NUMBER 2381 615 13153 OR SAP NO. NTCS0805E4153JMT</b>				
	<b><math>R_T/R_{25}</math></b>	<b>TCR (%/K)</b>	<b><math>R_T</math> (<math>\Omega</math>)</b>	<b>5 % Tol. <math>\Delta R/R</math> (%)</b>	<b>5 % Tol. <math>\Delta T</math> (K)</b>
- 40	23.3421	- 6.06	350 131	8.46	1.40
- 35	17.336	- 5.84	260 040	8.13	1.39
- 30	13.0176	- 5.62	195 263	7.81	1.39
- 25	9.87717	- 5.42	148 158	7.50	1.38
- 20	7.56881	- 5.23	113 532	7.21	1.38
- 15	5.8546	- 5.05	87 819	6.93	1.37
- 10	4.56918	- 4.87	68 538	6.65	1.37
- 5	3.59635	- 4.71	53 945	6.39	1.36
0	2.85356	- 4.55	42 803	6.14	1.35
5	2.28163	- 4.40	34 224	5.89	1.34
10	1.83772	- 4.26	27 566	5.66	1.33
15	1.49054	- 4.12	22 358	5.43	1.32
20	1.21701	- 3.99	18 255	5.21	1.31
25	1.00	- 3.87	15 000	5.00	1.29
30	0.83154	- 3.75	12 473	5.20	1.39
35	0.69408	- 3.63	10 411	5.40	1.49
40	0.58149	- 3.53	8722.3	5.60	1.59
45	0.48893	- 3.42	7334.0	5.78	1.69
50	0.41256	- 3.32	6188.5	5.96	1.79
55	0.34933	- 3.23	5240.0	6.14	1.90
60	0.2968	- 3.14	4451.9	6.31	2.01
65	0.253	- 3.05	3794.9	6.47	2.12
70	0.21635	- 2.97	3245.3	6.63	2.24
75	0.1856	- 2.89	2784.0	6.78	2.35
80	0.15971	- 2.81	2395.7	6.94	2.47
85	0.13785	- 2.73	2067.7	7.08	2.59
90	0.11932	- 2.66	1789.8	7.22	2.71
95	0.10358	- 2.59	1553.7	7.36	2.84
100	0.09016	- 2.53	1352.4	7.50	2.97
105	0.0787	- 2.46	1180.5	7.63	3.10



RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH $R_{25}$ AT 15 000 $\Omega$					
$T_{OPER}$ (°C)	CATALOG NUMBER 2381 615 13153 OR SAP NO. NTCS0805E4153JMT				
	$R_T/R_{25}$	TCR (%/K)	$R_T$ ( $\Omega$ )	5 % Tol. $\Delta R/R$ (%)	5 % Tol. $\Delta T$ (K)
110	0.06887	- 2.40	1033.1	7.76	3.23
115	0.06043	- 2.34	906.41	7.88	3.36
120	0.05315	- 2.29	797.27	8.00	3.50
125	0.04687	- 2.23	702.99	8.12	3.64
130	0.04142	- 2.18	621.33	8.24	3.78
135	0.03669	- 2.13	550.42	8.35	3.92
140	0.03258	- 2.08	488.72	8.46	4.07
145	0.02899	- 2.03	434.88	8.57	4.22
150	0.02585	- 1.98	387.81	8.67	4.37

RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH $R_{25}$ AT 22 000 $\Omega$					
$T_{OPER}$ (°C)	CATALOG NUMBER 2381 615 13223 OR SAP NO. NTCS0805E4223JHT				
	$R_T/R_{25}$	TCR (%/K)	$R_T$ ( $\Omega$ )	5 % Tol. $\Delta R/R$ (%)	5 % Tol. $\Delta T$ (K)
- 40	30.7958	- 6.42	677 507.99	16.71	2.60
- 35	22.4562	- 6.21	494 036.94	15.59	2.51
- 30	16.5404	- 6.02	363 888.31	14.50	2.41
- 25	12.3010	- 5.83	270 622.69	13.47	2.31
- 20	9.2333	- 5.65	203 131.71	12.47	2.21
- 15	6.9923	- 5.47	153 831.44	11.51	2.10
- 10	5.3406	- 5.31	117 492.27	10.59	2.00
- 5	4.1124	- 5.15	90 473.18	9.70	1.88
0	3.1916	- 4.99	70 215.46	8.85	1.77
5	2.4957	- 4.85	54 904.79	8.02	1.66
10	1.9656	- 4.70	43 243.49	7.23	1.54
15	1.5589	- 4.57	34 295.62	6.46	1.41
20	1.2446	- 4.44	27 380.67	5.72	1.29
25	1.0000	- 4.31	22 000.00	5.00	1.16
30	0.8084	- 4.19	17 785.47	5.69	1.36
35	0.6574	- 4.08	14 463.33	6.36	1.56
40	0.5377	- 3.97	11 828.57	7.01	1.77
45	0.4421	- 3.86	9726.63	7.64	1.98
50	0.3655	- 3.76	8040.24	8.25	2.20
55	0.3036	- 3.66	6679.83	8.84	2.42
60	0.2535	- 3.56	5576.61	9.41	2.64
65	0.2126	- 3.47	4677.41	9.97	2.87
70	0.1791	- 3.38	3940.90	10.51	3.11
75	0.1516	- 3.30	3334.80	11.03	3.35
80	0.1288	- 3.22	2833.74	11.54	3.59
85	0.1099	- 3.14	2417.69	12.04	3.84
90	0.0941	- 3.06	2070.77	12.52	4.09
95	0.0809	- 2.99	1780.29	12.99	4.35
100	0.0698	- 2.92	1536.11	13.45	4.61
105	0.0605	- 2.85	1330.07	13.89	4.88
110	0.0525	- 2.78	1155.56	14.32	5.15
115	0.0458	- 2.72	1007.23	14.74	5.43
120	0.0400	- 2.65	880.71	15.15	5.71
125	0.0351	- 2.59	772.44	15.55	6.00
130	0.0309	- 2.54	679.48	15.94	6.29
135	0.0272	- 2.48	599.41	16.32	6.58
140	0.0241	- 2.43	530.24	16.70	6.88
145	0.0214	- 2.37	470.31	17.06	7.19
150	0.0190	- 2.32	418.23	17.41	7.50



<b>RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH <math>R_{25}</math> AT 33 000 <math>\Omega</math></b>					
$T_{OPER}$ (°C)	CATALOG NUMBER 2381 615 13333 OR SAP NO. NTCS0805E4333JHT				
	$R_T/R_{25}$	TCR (%/K)	$R_T$ ( $\Omega$ )	5 % Tol. $\Delta R/R$ (%)	5 % Tol. $\Delta T$ (K)
-40	32.68563	-6.59	1 078 626	16.66	2.53
-35	23.6478	-6.36	780 377	15.54	2.44
-30	17.29545	-6.15	570 750	14.46	2.35
-25	12.78101	-5.95	421 773	13.43	2.26
-20	9.538645	-5.76	314 775	12.44	2.16
-15	7.186265	-5.57	237 147	11.48	2.06
-10	5.463007	-5.40	180 279	10.56	1.96
-5	4.18889	-5.23	138 233	9.68	1.85
0	3.238476	-5.07	106 870	8.83	1.74
5	2.523488	-4.91	83 275	8.01	1.63
10	1.9812223	-4.77	65 380.4	7.22	1.51
15	1.566743	-4.62	51 702.5	6.45	1.40
20	1.247561	-4.49	41 169.5	5.71	1.27
25	1.00	-4.36	33 000.0	5.00	1.15
30	0.806666	-4.24	26 620.0	5.69	1.34
35	0.654682	-4.12	21 604.5	6.36	1.54
40	0.534445	-4.00	17 636.7	7.00	1.75
45	0.438742	-3.89	14 478.5	7.63	1.96
50	0.362121	-3.79	11 950.0	8.24	2.18
55	0.30043	-3.68	9914.2	8.82	2.39
60	0.250491	-3.59	8266.2	9.40	2.62
65	0.209854	-3.49	6925.2	9.95	2.85
70	0.17662	-3.40	5828.5	10.49	3.08
75	0.149308	-3.32	4927.18	11.01	3.32
80	0.126759	-3.23	4183.06	11.52	3.56
85	0.108058	-3.15	3565.93	12.01	3.81
90	0.092482	-3.07	3051.89	12.49	4.06
95	0.079453	-3.00	2621.93	12.96	4.32
100	0.068511	-2.93	2260.85	13.41	4.58
105	0.059286	-2.86	1956.42	13.85	4.85
110	0.051479	-2.79	1698.80	14.28	5.12
115	0.044848	-2.73	1479.98	14.70	5.39
120	0.039196	-2.66	1293.47	15.11	5.67
125	0.034363	-2.60	1133.96	15.51	5.96
130	0.030215	-2.54	997.09	15.90	6.25
135	0.026645	-2.49	879.28	16.28	6.55
140	0.023562	-2.43	777.55	16.65	6.84
145	0.020892	-2.38	689.45	17.01	7.15
150	0.018573	-2.33	612.93	17.36	7.46

<b>RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH <math>R_{25}</math> AT 47 000 <math>\Omega</math></b>					
$T_{OPER}$ (°C)	CATALOG NUMBER 2381 615 13473 OR SAP NO. NTCS0805E4473JXT				
	$R_T/R_{25}$	TCR (%/K)	$R_T$ ( $\Omega$ )	5 % Tol. $\Delta R/R$ (%)	5 % Tol. $\Delta T$ (K)
-40	37.156	-6.82	1 746 331	11.02	1.62
-35	26.5657	-6.60	1 248 589	10.44	1.58
-30	19.2065	-6.38	902 705	9.89	1.55
-25	14.0347	-6.17	659 632	9.35	1.52
-20	10.3608	-5.97	486 956	8.84	1.48
-15	7.72365	-5.78	363 012	8.35	1.44
-10	5.81188	-5.60	273 158	7.87	1.41
-5	4.41266	-5.42	207 395	7.42	1.37
0	3.37917	-5.25	158 821	6.98	1.33
5	2.60609	-5.09	122 627	6.55	1.29



<b>RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH <math>R_{25}</math> AT 47 000 <math>\Omega</math></b>					
$T_{OPER}$ (°C)	CATALOG NUMBER 2381 615 13473 OR SAP NO. NTCS0805E4473JXT				
	$R_T/R_{25}$	TCR (%/K)	$R_T$ ( $\Omega$ )	5 % Tol. $\Delta R/R$ (%)	5 % Tol. $\Delta T$ (K)
10	2.03042	- 4.94	95 430	6.14	1.24
15	1.59206	- 4.79	74 827	5.75	1.20
20	1.2574	- 4.65	59 098	5.37	1.15
25	1.00	- 4.51	47 000	5.00	1.11
30	0.8006	- 4.38	37 628	5.36	1.22
35	0.64506	- 4.26	30 318	5.70	1.34
40	0.52294	- 4.14	24 578	6.04	1.46
45	0.42644	- 4.02	20 043	6.36	1.58
50	0.34971	- 3.91	16 437	6.67	1.71
55	0.28836	- 3.81	13 553	6.98	1.83
60	0.23901	- 3.70	11 233	7.27	1.96
65	0.1991	- 3.60	9358	7.56	2.10
70	0.16666	- 3.51	7833	7.83	2.23
75	0.14016	- 3.42	6587	8.10	2.37
80	0.1184	- 3.33	5565	8.37	2.51
85	0.10045	- 3.25	4721	8.62	2.66
90	0.08557	- 3.16	4022	8.87	2.80
95	0.07319	- 3.09	3440	9.11	2.95
100	0.06285	- 3.01	2954	9.34	3.10
105	0.05416	- 2.94	2546	9.57	3.26
110	0.04685	- 2.87	2202	9.79	3.42
115	0.04066	- 2.80	1911	10.01	3.58
120	0.03541	- 2.73	1664	10.22	3.74
125	0.03094	- 2.67	1454	10.43	3.91
130	0.02711	- 2.61	1274	10.63	4.08
135	0.02383	- 2.55	1120	10.82	4.25
140	0.02101	- 2.49	987.6	11.02	4.42
145	0.01858	- 2.44	873.2	11.20	4.60
150	0.01647	- 2.38	774.1	11.38	4.78

<b>RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH <math>R_{25}</math> AT 68 000 <math>\Omega</math></b>					
$T_{OPER}$ (°C)	CATALOG NUMBER 2381 615 13683 OR SAP NO. NTCS0805E4683JMT				
	$R_T/R_{25}$	TCR (%/K)	$R_T$ ( $\Omega$ )	5 % Tol. $\Delta R/R$ (%)	5 % Tol. $\Delta T$ (K)
- 40	25.783	- 6.07	1 753 245	16.02	2.64
- 35	19.1253	- 5.88	1 300 524	14.96	2.54
- 30	14.32	- 5.70	973 759.8	13.94	2.45
- 25	10.8187	- 5.52	735 674.7	12.96	2.35
- 20	8.24438	- 5.35	560 618	12.02	2.25
- 15	6.33489	- 5.19	430 772.3	11.12	2.14
- 10	4.90655	- 5.03	333 645.6	10.26	2.04
- 5	3.82943	- 4.88	260 401.1	9.42	1.93
0	3.01078	- 4.74	204 733.3	8.62	1.82
5	2.3839	- 4.60	162 105	7.84	1.70
10	1.90036	- 4.47	129 224.7	7.09	1.59
15	1.52479	- 4.34	103 686	6.37	1.47
20	1.23112	- 4.22	83 716.26	5.67	1.35
25	1.00	- 4.10	68 000	5.00	1.22
30	0.81697	- 3.99	55 554.14	5.65	1.42
35	0.67116	- 3.88	45 638.98	6.28	1.62
40	0.55433	- 3.77	37 694.27	6.89	1.83
45	0.46019	- 3.67	31 292.96	7.48	2.04
50	0.38393	- 3.58	26 107.56	8.06	2.25
55	0.32184	- 3.48	21 885.36	8.61	2.47



<b>RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH <math>R_{25}</math> AT 68 000 <math>\Omega</math></b>					
$T_{OPER}$ (°C)	CATALOG NUMBER 2381 615 13683 OR SAP NO. NTCS0805E4683JMT				
	$R_T/R_{25}$	TCR (%/K)	$R_T$ ( $\Omega$ )	5 % Tol. $\Delta R/R$ (%)	5 % Tol. $\Delta T$ (K)
60	0.27103	- 3.39	18 430.3	9.15	2.70
65	0.22926	- 3.30	15 589.41	9.67	2.93
70	0.19475	- 3.22	13 242.67	10.18	3.16
75	0.16611	- 3.14	11 295.44	10.67	3.40
80	0.14225	- 3.06	9672.73	11.15	3.64
85	0.12228	- 2.99	8314.81	11.62	3.89
90	0.1055	- 2.92	7173.88	12.07	4.14
95	0.09135	- 2.85	6211.55	12.51	4.40
100	0.07936	- 2.78	5396.80	12.94	4.66
105	0.06918	- 2.71	4704.48	13.36	4.92
110	0.0605	- 2.65	4114.12	13.77	5.19
115	0.05307	- 2.59	3609	14.16	5.47
120	0.0467	- 2.53	3175.38	14.55	5.75
125	0.04121	- 2.47	2801.96	14.92	6.03
130	0.03646	- 2.42	2479.38	15.29	6.32
135	0.03235	- 2.37	2199.88	15.65	6.62
140	0.02878	- 2.31	1957.02	16.00	6.91
145	0.02567	- 2.26	1745.39	16.34	7.22
150	0.02295	- 2.22	1560.48	16.67	7.52

<b>RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH <math>R_{25}</math> AT 100 000 <math>\Omega</math></b>					
$T_{OPER}$ (°C)	CATALOG NUMBER 2381 615 13104 OR SAP NO. NTCS0805E4104JMT				
	$R_T/R_{25}$	TCR (%/K)	$R_T$ ( $\Omega$ )	5 % Tol. $\Delta R/R$ (%)	5 % Tol. $\Delta T$ (K)
- 40	23.8997	- 5.92	2 389 969	8.58	1.45
- 35	17.8586	- 5.74	1 785 861	8.24	1.44
- 30	13.465	- 5.56	1 346 502	7.91	1.42
- 25	10.2407	- 5.39	1 024 071	7.59	1.41
- 20	7.85378	- 5.23	785 378.1	7.28	1.39
- 15	6.07181	- 5.07	607 181.2	6.99	1.38
- 10	4.73061	- 4.92	473 061.1	6.71	1.36
- 5	3.7132	- 4.77	371 319.7	6.44	1.35
0	2.93554	- 4.63	293 553.6	6.18	1.33
5	2.33677	- 4.50	233 677.1	5.92	1.32
10	1.87249	- 4.37	187 249.2	5.68	1.30
15	1.51004	- 4.24	151 003.9	5.45	1.28
20	1.22522	- 4.12	122 522.4	5.22	1.27
25	1.00	- 4.01	100 000	5.00	1.25
30	0.82081	- 3.89	82 081.36	5.21	1.34
35	0.67742	- 3.79	67 741.67	5.42	1.43
40	0.56201	- 3.68	56 201.1	5.62	1.52
45	0.46863	- 3.59	46 862.56	5.81	1.62
50	0.39266	- 3.49	39 266.09	5.99	1.72
55	0.33055	- 3.40	33 055.34	6.18	1.82
60	0.27953	- 3.31	27 952.66	6.35	1.92
65	0.23741	- 3.22	23 740.56	6.52	2.02
70	0.20248	- 3.14	20 247.74	6.69	2.13
75	0.17339	- 3.06	17 338.63	6.85	2.24
80	0.14905	- 2.99	14 905.37	7.00	2.34
85	0.12862	- 2.91	12 861.77	7.15	2.46
90	0.11139	- 2.84	11 138.64	7.30	2.57
95	0.0968	- 2.77	9680.13	7.44	2.68
100	0.08441	- 2.71	8441.05	7.58	2.80
105	0.07385	- 2.64	7384.60	7.72	2.92



RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH $R_{25}$ AT 100 000 $\Omega$					
$T_{OPER}$ (°C)	CATALOG NUMBER 2381 615 13104 OR SAP NO. NTCS0805E4104JMT				
	$R_T/R_{25}$	TCR (%/K)	$R_T$ ( $\Omega$ )	5 % Tol. $\Delta R/R$ (%)	5 % Tol. $\Delta T$ (K)
110	0.06481	- 2.58	6480.76	7.85	3.04
115	0.05705	- 2.52	5704.87	7.98	3.17
120	0.05037	- 2.46	5036.67	8.11	3.29
125	0.04459	- 2.41	4459.40	8.23	3.42
130	0.03959	- 2.35	3959.18	8.35	3.55
135	0.03524	- 2.30	3524.43	8.46	3.68
140	0.03146	- 2.25	3145.52	8.58	3.81
145	0.02814	- 2.20	2814.35	8.69	3.95
150	0.02524	- 2.15	2524.15	8.80	4.09

RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH $R_{25}$ AT 330 000 $\Omega$					
$T_{OPER}$ (°C)	CATALOG NUMBER 2381 615 13334 OR SAP NO. NTCS0805E4334JXT				
	$R_T/R_{25}$	TCR (%/K)	$R_T$ ( $\Omega$ )	5 % Tol. $\Delta R/R$ (%)	5 % Tol. $\Delta T$ (K)
- 40	33.3434	- 6.58	11 003.3	16.83	2.56
- 35	24.1285	- 6.36	7962.4	15.69	2.46
- 30	17.6422	- 6.16	5821.9	14.60	2.37
- 25	13.0283	- 5.97	4299.4	13.55	2.27
- 20	9.7132	- 5.78	3205.4	12.54	2.17
- 15	7.3081	- 5.60	2411.7	11.57	2.07
- 10	5.5470	- 5.43	1830.5	10.64	1.96
- 5	4.2457	- 5.27	1401.1	9.75	1.85
0	3.2760	- 5.11	1081.1	8.88	1.74
5	2.5474	- 4.96	840.63	8.05	1.62
10	1.9955	- 4.81	658.52	7.25	1.51
15	1.5744	- 4.67	519.55	6.47	1.39
20	1.2506	- 4.54	412.71	5.72	1.26
25	1.0000	- 4.41	330.00	5.00	1.13
30	0.8046	- 4.29	265.53	5.70	1.33
35	0.6514	- 4.17	214.95	6.38	1.53
40	0.5304	- 4.05	175.02	7.03	1.73
45	0.4343	- 3.94	143.31	7.67	1.94
50	0.3575	- 3.84	117.97	8.28	2.16
55	0.2958	- 3.74	97.62	8.88	2.36
60	0.2460	- 3.64	81.18	9.46	2.60
65	0.2056	- 3.55	67.83	10.02	2.83
70	0.1726	- 3.45	56.94	10.56	3.06
75	0.1455	- 3.37	48.02	11.09	3.29
80	0.1232	- 3.28	40.66	11.61	3.53
85	0.1048	- 3.20	34.57	12.11	3.78
90	0.0894	- 3.12	29.52	12.59	4.03
95	0.0767	- 3.05	25.30	13.07	4.29
100	0.0659	- 2.98	21.76	13.53	4.54
105	0.0569	- 2.91	18.78	13.97	4.81
110	0.0493	- 2.84	16.27	14.41	5.08
115	0.0429	- 2.77	14.14	14.84	5.35
120	0.0374	- 2.71	12.33	15.25	5.63
125	0.0327	- 2.65	10.79	15.65	5.91
130	0.0287	- 2.59	9.463	16.05	6.20
135	0.0252	- 2.53	8.326	16.43	6.49
140	0.0223	- 2.48	7.347	16.81	6.79
145	0.0197	- 2.42	6.500	17.17	7.09
150	0.0175	- 2.37	5.767	17.53	7.40



<b>RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH <math>R_{25}</math> AT 470 000 <math>\Omega</math></b>					
<b>T<sub>OPER</sub> (°C)</b>	<b>CATALOG NUMBER 2381 615 13474 OR SAP NO. NTCS0805E4474JXT</b>				
	<b><math>R_T/R_{25}</math></b>	<b>TCR (%/K)</b>	<b><math>R_T</math> (<math>\Omega</math>)</b>	<b>5 % Tol. <math>\Delta R/R</math> (%)</b>	<b>5 % Tol. <math>\Delta T</math> (K)</b>
- 40	37.1288	- 6.79	17450.5	17.16	2.53
- 35	26.5910	- 6.57	12497.8	15.99	2.44
- 30	19.2505	- 6.36	9047.8	14.87	2.34
- 25	14.0812	- 6.15	6618.2	13.79	2.24
- 20	10.4026	- 5.96	4889.2	12.76	2.14
- 15	7.7582	- 5.77	3646.4	11.76	2.04
- 10	5.8389	- 5.60	2744.3	10.80	1.93
- 5	4.4329	- 5.43	2083.5	9.88	1.82
0	3.3937	- 5.26	1595.0	8.99	1.71
5	2.6190	- 5.10	1230.93	8.14	1.59
10	2.0367	- 4.95	957.26	7.31	1.48
15	1.5956	- 4.81	749.94	6.51	1.35
20	1.2589	- 4.67	591.68	5.74	1.23
25	1.0000	- 4.54	470.00	5.00	1.10
30	0.7995	- 4.41	375.78	5.72	1.30
35	0.6433	- 4.29	302.34	6.42	1.50
40	0.5207	- 4.17	244.71	7.09	1.70
45	0.4239	- 4.06	199.22	7.74	1.91
50	0.3470	- 3.95	163.08	8.38	2.12
55	0.2856	- 3.84	134.22	8.99	2.34
60	0.2362	- 3.74	111.03	9.58	2.56
65	0.1964	- 3.65	92.30	10.16	2.79
70	0.1640	- 3.55	77.10	10.72	3.02
75	0.1377	- 3.46	64.70	11.27	3.25
80	0.1160	- 3.38	54.53	11.80	3.49
85	0.0982	- 3.29	46.16	12.31	3.74
90	0.0835	- 3.21	39.23	12.81	3.99
95	0.0712	- 3.13	33.48	13.30	4.24
100	0.0610	- 3.06	28.68	13.77	4.50
105	0.0525	- 2.99	24.66	14.23	4.77
110	0.0453	- 2.92	21.27	14.68	5.03
115	0.0392	- 2.85	18.42	15.12	5.31
120	0.0340	- 2.78	16.00	15.54	5.58
125	0.0297	- 2.72	13.94	15.96	5.87
130	0.0259	- 2.66	12.189	16.36	6.15
135	0.0227	- 2.60	10.688	16.76	6.45
140	0.0200	- 2.54	9.398	17.15	6.74
145	0.0176	- 2.49	8.288	17.52	7.05
150	0.0156	- 2.43	7.329	17.89	7.35



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## Material Category Policy

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.**

**Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.**

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.**

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View NTCS0805E4474JXT on WIN SOURCE](#)

 [Vishay Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management