


EDSTLZ 1555

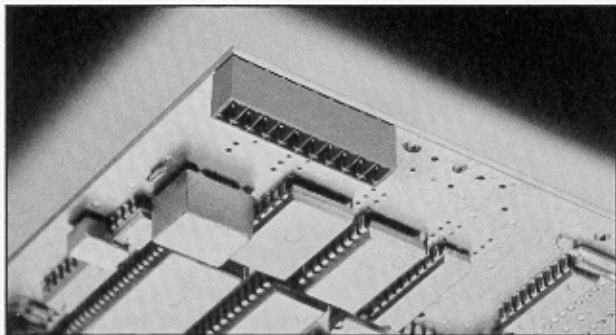

2-16 poles, Spacing 3.81 mm
 Insert required no. of poles **
 How to order see page 6

** Approx. pricing

Ratings:

Rated Voltage	Rated Current	Test Voltage
125 V	8 A	1.39 kV
150 V	8 A	8 A (T60)
125 V	8 A	1.39 kV

UL1059

CSA 22.2 No. 158




Dimensions

Spacing 3.81 mm
 PCB Hole Diameter 1.2 mm



Materials

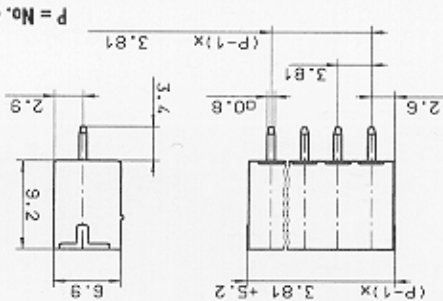Insulating Material PA
 Flammability Class UL94 V-0
 Temperature Range -30°C/+105°C
 Contact Pin Cu
 Color Green



Looking for pricing, stock, or lifecycle

Click below to explore more details on WIN SOURCE

-  View [EDSTLZ1555/14](#) on WIN SOURCE
-  [On Shore Technology Inc.](#) Information

Optimize Your Supply Chain with

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management