



# THE DATASHEET OF PS2501L-2





APPLICATION BASED  
**OPTOCOUPLER**  
DESIGN GUIDE

## Solutions as Easy as 1-2-3

Quickly select the right optocoupler for your application. We made it as simple as **1-2-3** regardless if you are a seasoned engineer or novice.

Simply follow the steps below to find your optocoupler solution:


1. Select your application.
2. Look at the block diagram. Follow the corresponding color coded tables. (See reference tables on back page for series specs.)
3. Answer the questions in the block diagram to determine an orderable part. Visit [www.cel.com/Optocouplers](http://www.cel.com/Optocouplers) for a detailed datasheet.

## What is your Application?


- ▶ [Switch Mode Power Supply](#)
- ▶ [Factory Automation](#)
- ▶ [Motor Drive and Control](#)
- ▶ [Power Over Ethernet \(PoE\)](#)
- ▶ [Power Line Communication \(PLC\)](#)
- ▶ [Smart Meters](#)
- ▶ [Solar Power](#)

## Choose your Application:


### Switch Mode Power Supply AC to DC Converter

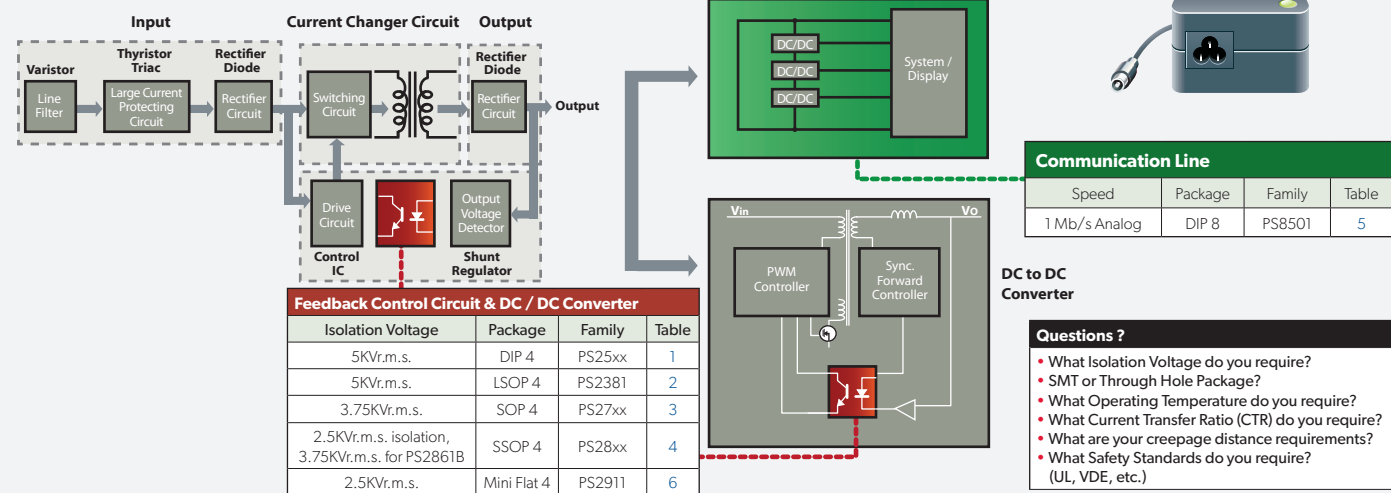

### Factory Automation

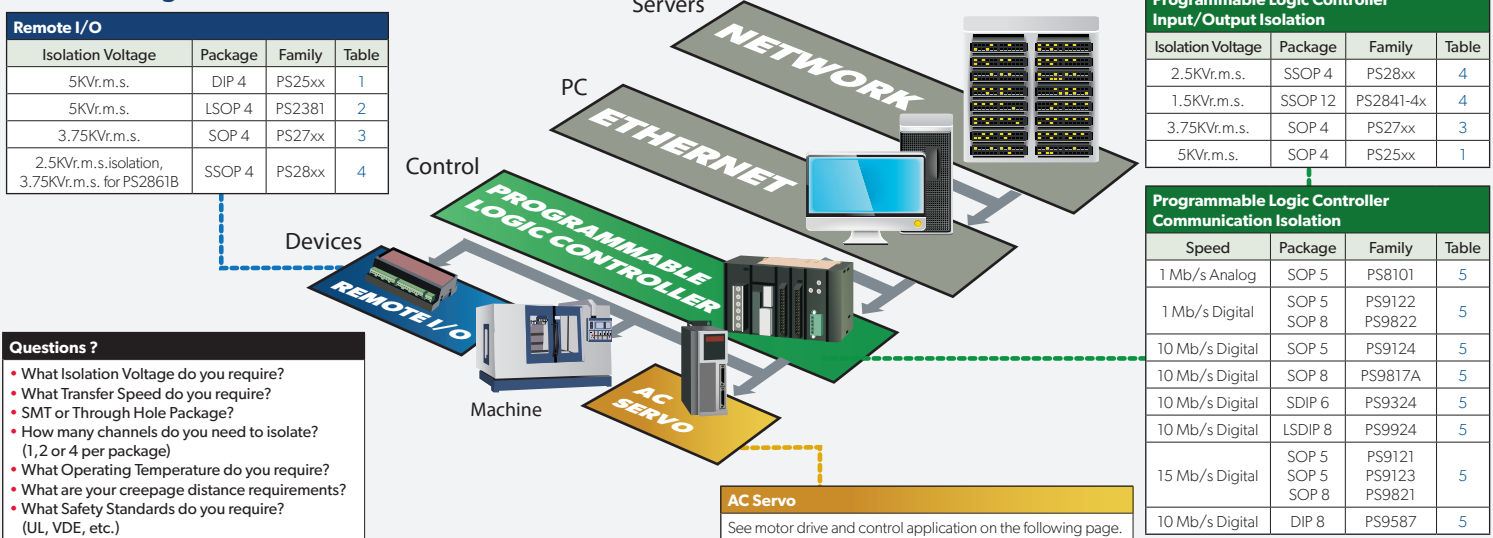

## Motor Driven and Control

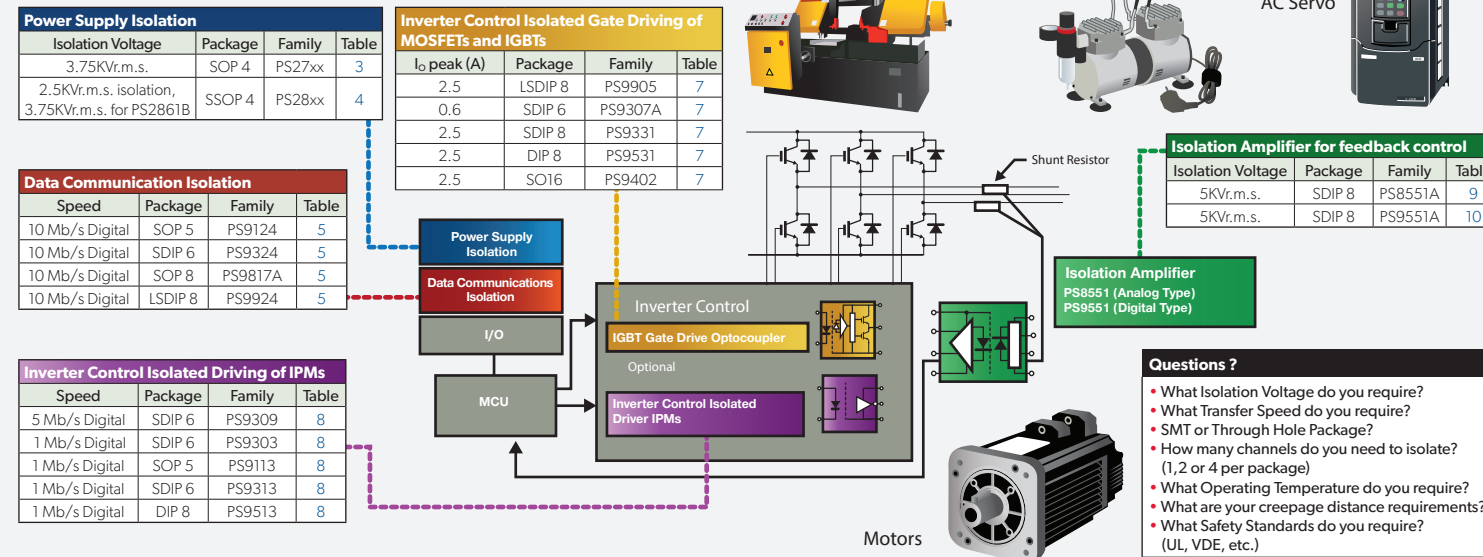

Power Supply Isolation			
Isolation Voltage	Package	Family	Table
3.75Kv.r.m.s.	SOP 4	PS27xx	3
2.5Kv.r.m.s. isolation, 3.75Kv.r.m.s. for PS2861B	SSOP 4	PS28xx	4

Inverter Control Isolated Gate Driving of MOSFETs and IGBTs			
I <sub>o</sub> peak (A)	Package	Family	Table
2.5	LSDIP 8	PS9905	7
0.6	SDIP 6	PS9307A	7
2.5	SDIP 8	PS9331	7
2.5	DIP 8	PS9531	7
2.5	SO16	PS9402	7


Data Communication Isolation			
Speed	Package	Family	Table
10 Mb/s Digital	SOP 5	PS9124	5
10 Mb/s Digital	SDIP 6	PS9324	5
10 Mb/s Digital	SOP 8	PS9817A	5
10 Mb/s Digital	LSDIP 8	PS9924	5

Inverter Control Isolated Driving of IPMs			
Speed	Package	Family	Table
5 Mb/s Digital	SDIP 6	PS9309	8
1 Mb/s Digital	SDIP 6	PS9303	8
1 Mb/s Digital	SOP 5	PS9113	8
1 Mb/s Digital	SDIP 6	PS9313	8
1 Mb/s Digital	DIP 8	PS9513	8

Isolation Amplifier for feedback control			
Isolation Voltage	Package	Family	Table
5Kv.r.m.s.	SDIP 8	PS8551A	9
5Kv.r.m.s.	SDIP 8	PS9551A	10

- Questions ?**
- What Isolation Voltage do you require?
  - What Transfer Speed do you require?
  - SMT or Through Hole Package?
  - How many channels do you need to isolate? (1, 2 or 4 per package)
  - What Operating Temperature do you require?
  - What are your creepage distance requirements?
  - What Safety Standards do you require? (UL, VDE, etc.)

## PoE (Power Over Ethernet)

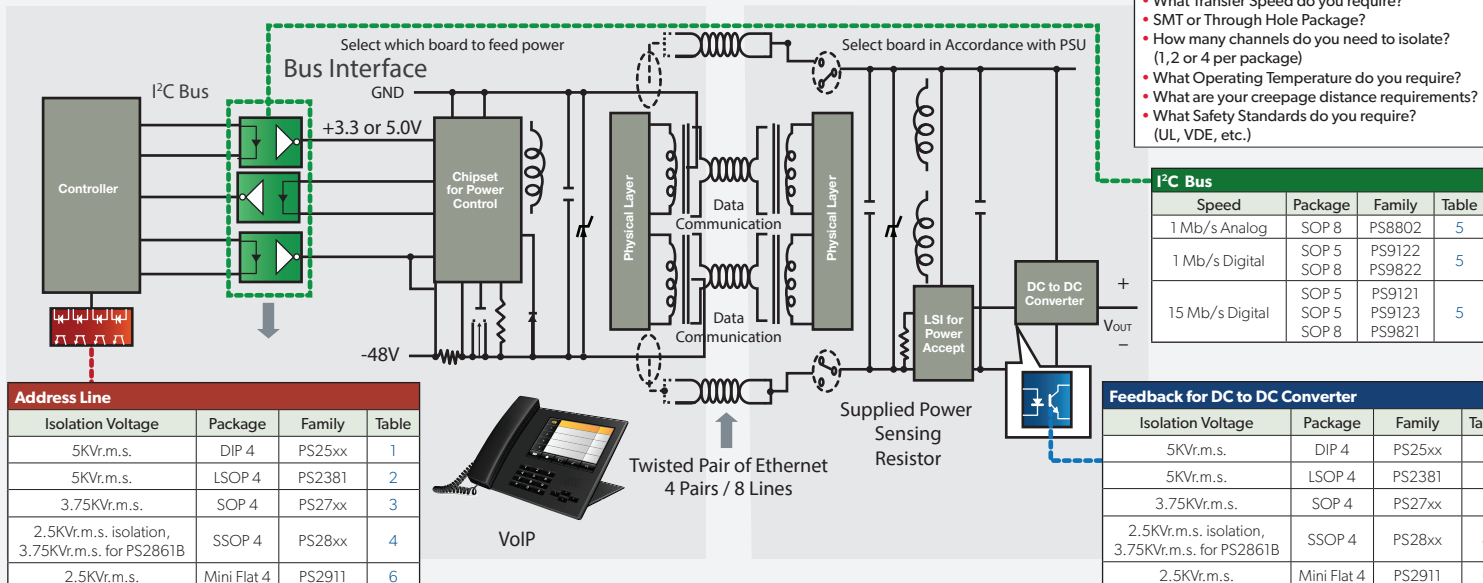


Address Line			
Isolation Voltage	Package	Family	Table
5Kv.r.m.s.	DIP 4	PS25xx	1
5Kv.r.m.s.	LSOP 4	PS2381	2
3.75Kv.r.m.s.	SOP 4	PS27xx	3
2.5Kv.r.m.s. isolation, 3.75Kv.r.m.s. for PS2861B	SSOP 4	PS28xx	4
2.5Kv.r.m.s.	Mini Flat 4	PS2911	6

I <sup>2</sup> C Bus			
Speed	Package	Family	Table
1 Mb/s Analog	SOP 8	PS8802	5
1 Mb/s Digital	SOP 5	PS9122	5
	SOP 8	PS9822	
15 Mb/s Digital	SOP 5	PS9121	5
	SOP 5	PS9123	
	SOP 8	PS9821	

Feedback for DC to DC Converter			
Isolation Voltage	Package	Family	Table
5Kv.r.m.s.	DIP 4	PS25xx	1
5Kv.r.m.s.	LSOP 4	PS2381	2
3.75Kv.r.m.s.	SOP 4	PS27xx	3
2.5Kv.r.m.s. isolation, 3.75Kv.r.m.s. for PS2861B	SSOP 4	PS28xx	4
2.5Kv.r.m.s.	Mini Flat 4	PS2911	6

- Questions ?**
- What Isolation Voltage do you require?
  - What Transfer Speed do you require?
  - SMT or Through Hole Package?
  - How many channels do you need to isolate? (1, 2 or 4 per package)
  - What Operating Temperature do you require?
  - What are your creepage distance requirements?
  - What Safety Standards do you require? (UL, VDE, etc.)

## PLC (Power Line Communication)

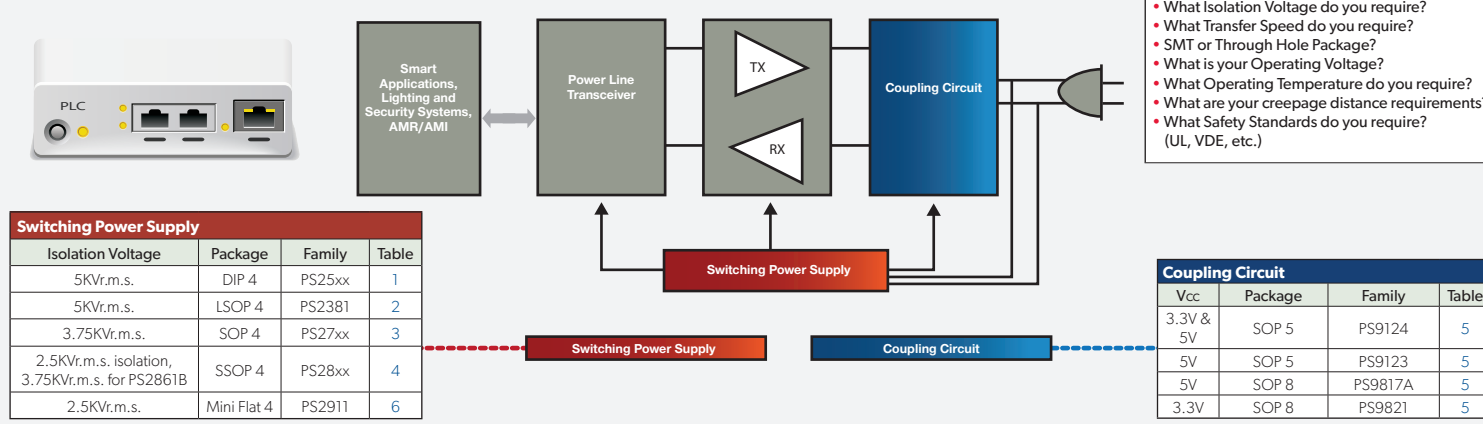

Switching Power Supply			
Isolation Voltage	Package	Family	Table
5Kv.r.m.s.	DIP 4	PS25xx	1
5Kv.r.m.s.	LSOP 4	PS2381	2
3.75Kv.r.m.s.	SOP 4	PS27xx	3
2.5Kv.r.m.s. isolation, 3.75Kv.r.m.s. for PS2861B	SSOP 4	PS28xx	4
2.5Kv.r.m.s.	Mini Flat 4	PS2911	6

Coupling Circuit			
V <sub>cc</sub>	Package	Family	Table
3.3V & 5V	SOP 5	PS9124	5
5V	SOP 5	PS9123	5
5V	SOP 8	PS9817A	5
3.3V	SOP 8	PS9821	5


- Questions ?**
- What Isolation Voltage do you require?
  - What Transfer Speed do you require?
  - SMT or Through Hole Package?
  - What is your Operating Voltage?
  - What Operating Temperature do you require?
  - What are your creepage distance requirements?
  - What Safety Standards do you require? (UL, VDE, etc.)

## Smart Meters

Isolation Voltage	Package	Family	Table
5KVr.m.s.	DIP 4	PS2561D	1

Speed	Package	Family	Table
10 Mb/s Digital	SOP 5	PS9124	5
10 Mb/s Digital	SDIP 6	PS9324	5

Isolation Voltage	Package	Family	Table
5KVr.m.s.	DIP 4	PS2561D	1

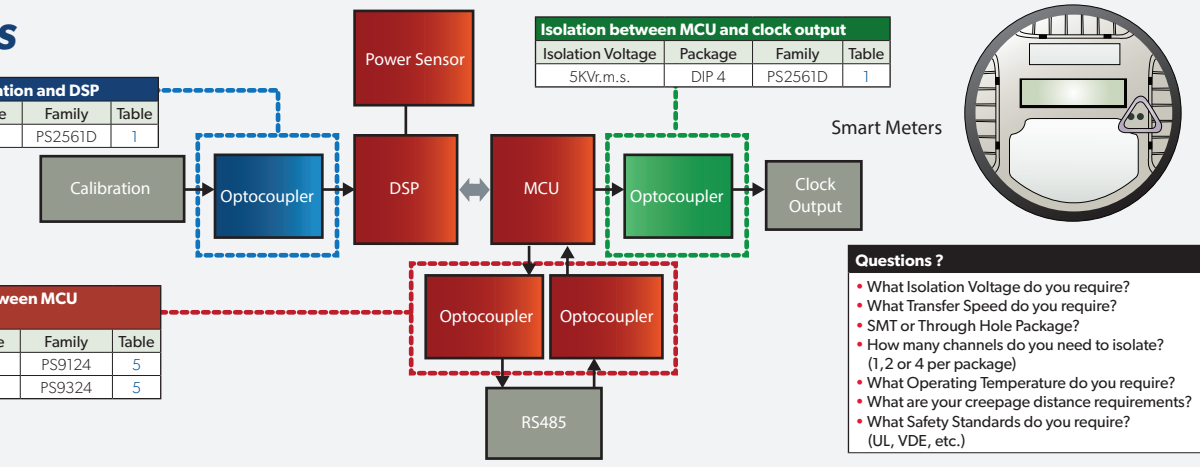


- Questions ?**
- What Isolation Voltage do you require?
  - What Transfer Speed do you require?
  - SMT or Through Hole Package?
  - How many channels do you need to isolate? (1, 2 or 4 per package)
  - What Operating Temperature do you require?
  - What are your creepage distance requirements?
  - What Safety Standards do you require? (UL, VDE, etc.)

## Solar Power

Home System  
Solar Cell

Plant / Building  
System

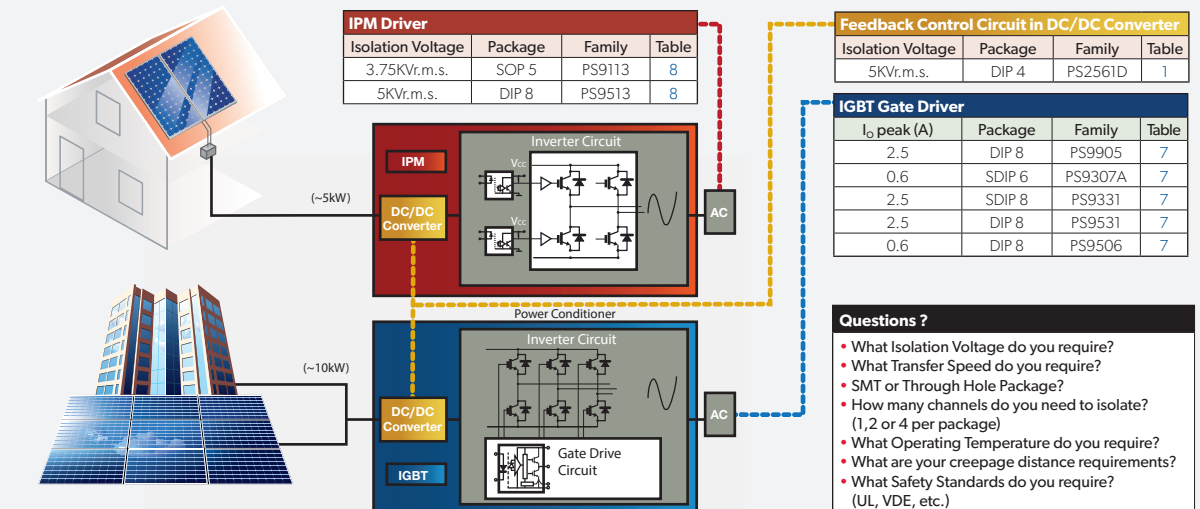


Isolation Voltage	Package	Family	Table
5KVr.m.s.	DIP 4	PS2561D	1

I <sub>c</sub> peak (A)	Package	Family	Table
2.5	DIP 8	PS9905	7
0.6	SDIP 6	PS9307A	7
2.5	SDIP 8	PS9331	7
2.5	DIP 8	PS9531	7
0.6	DIP 8	PS9506	7

- Questions ?**
- What Isolation Voltage do you require?
  - What Transfer Speed do you require?
  - SMT or Through Hole Package?
  - How many channels do you need to isolate? (1, 2 or 4 per package)
  - What Operating Temperature do you require?
  - What are your creepage distance requirements?
  - What Safety Standards do you require? (UL, VDE, etc.)

## Part Numbering System

**Note:** This diagram is intended to explain existing part numbers and is not to be used to create part numbers since NOT all combinations are available.

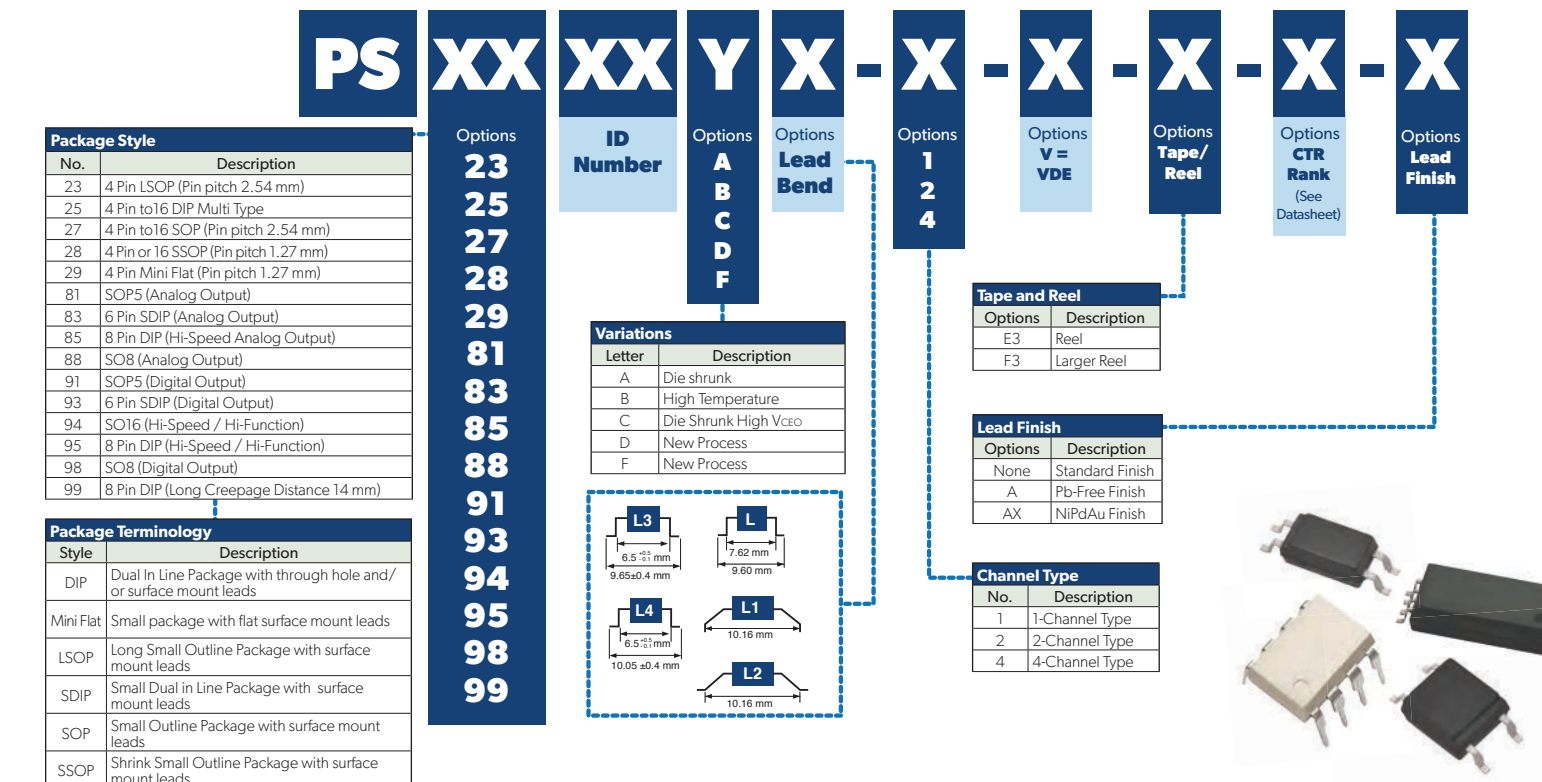

# Reference Tables

**Bold\***= Focus Products

Table 1	Root Part	Input	Output	Operating Temperature Range (°C)	V <sub>ceo</sub> Max (V)	I <sub>f</sub> Max (mA)	CTR (%)	CTR Rank Available	Comments
	<b>PS2561D*</b>	<b>DC</b>	<b>Standard</b>	<b>-55 to +110</b>	<b>80</b>	<b>40</b>	<b>50-400</b>	<b>Yes</b>	<b>Low cost version of PS2561B, PS2501 and PS2501A, High temp</b>
	PS2514	DC	Standard	-55 to +100	40	30	50-200	Yes	Standard
	PS2561F	DC	Standard	-55 to +110	80	30	300-600	No	Low cost version of PS2501-I-K, High temp

Table 2	Root Part	Input	Output	Operating Temperature Range (°C)	V <sub>ceo</sub> Max (V)	I <sub>f</sub> Max (mA)	CTR (%)	CTR Rank Available	Comments
	<b>PS2381*</b>	<b>DC</b>	<b>Standard</b>	<b>-40 to +115</b>	<b>80</b>	<b>60</b>	<b>50-450</b>	<b>Yes</b>	<b>Stretched package, high temp operation</b>

Table 3	Root Part	Input	Output	Operating Temperature Range (°C)	V <sub>ceo</sub> Max (V)	I <sub>f</sub> Max (mA)	CTR (%)	CTR Rank Available	Comments	
	<b>PS2761B*</b>	<b>DC</b>	<b>Standard</b>	<b>-55 to +110</b>	<b>70</b>	<b>25</b>	<b>50-400</b>	<b>Yes</b>	<b>High temp, low cost version of PS2701 and PS2701A</b>	
		PS2711	DC	Standard	-55 to +100	40	50	100-400	Yes	Low Input Current
		PS2701A	DC	Standard	-55 to +100	70	30	50-300	Yes	Low cost version of PS2701
	PS2705A	AC	Standard	-55 to +100	80	±30	50-300	Yes	AC Input	

Table 4	Root Part	Input	Output	Operating Temperature Range (°C)	V <sub>ceo</sub> Max (V)	I <sub>f</sub> Max (mA)	CTR (%)	CTR Rank Available	Comments	
	<b>PS2801C*</b>	<b>DC</b>	<b>Standard</b>	<b>-55 to +100</b>	<b>80</b>	<b>30</b>	<b>50-400</b>	<b>Yes</b>	<b>Low cost version of PS2801</b>	
		PS2861B	DC	Standard	-55 to +110	70	50	50-400	No	High temp version of PS2801 and PS2801C
		PS2811	DC	Standard	-55 to +100	40	50	100-400	Yes	Low Input Current
		PS2805C	AC	Standard	-55 to +100	80	±30	50-400	Yes	AC Input
	PS2841-4x	x=A common cathode x=B common anode	Common Collector	-40 to +100	70	20	100-400	No	Ultra SSOP, quad channel with 12 leads	

Table 5	Root Part	Type	Speed	Operating Temperature Range (°C)	Package	Isolation Voltage (Vr.m.s.)	CMR (KV/μS)	V <sub>cc</sub> Max (V)	V <sub>cc</sub> TYP (V)	Comments	
	<b>PS8501*</b>	<b>High Speed / High Function</b>	<b>1 Mbps</b>	<b>-55 to +100</b>	<b>8 pin DIP</b>	<b>5K</b>	<b>-</b>	<b>35</b>	<b>-</b>	<b>8mm creepage, 8 pin DIP</b>	
	<b>PS9122*</b>	<b>High Speed / High Function</b>	<b>1 Mbps</b>	<b>-40 to +100</b>	<b>5 pin SOP</b>	<b>3.75K</b>	<b>±15</b>	<b>7</b>	<b>3.3 or 5</b>	<b>3.3V &amp; 5V versions, Open Collector</b>	
	<b>PS9124*</b>	<b>High Speed / High Function</b>	<b>10 Mbps</b>	<b>-40 to +100</b>	<b>5 pin SOP</b>	<b>3.75K</b>	<b>±15</b>	<b>7</b>	<b>3.3 or 5</b>	<b>3.3V &amp; 5V versions, Low Distortion</b>	
	<b>PS9821*</b>	<b>High Speed / High Function</b>	<b>15 Mbps</b>	<b>-40 to +85</b>	<b>SO8</b>	<b>2.5K</b>	<b>±15</b>	<b>7</b>	<b>3.3</b>	<b>3.3V, Low Distortion</b>	
	<b>PS9324L/L2*</b>	<b>High Speed / High Function</b>	<b>10 Mbps</b>	<b>-40 to +110</b>	<b>6 pin SDIP</b>	<b>5K</b>	<b>±15</b>	<b>7</b>	<b>3.3 or 5</b>	<b>3.3V &amp; 5V versions, Open Collector, Low Distortion</b>	
	<b>PS9123*</b>	<b>High Speed / High Function</b>	<b>15 Mbps</b>	<b>-40 to +100</b>	<b>5 pin SOP</b>	<b>3.75K</b>	<b>±15</b>	<b>7</b>	<b>5</b>	<b>Totem Pole Output, Low Distortion</b>	
		PS8101	High Speed / High Function	1 Mbps	-55 to +100	5 pin SOP	3.75K	±15	35	-	High CMR analog output
		PS9924	High Speed / High Function	10 Mbps	-40 to +100	LS DIP	7.5K	±15	7	3.3 or 5	3.3V & 5V, 14mm creepage
		PS8802	High Speed / High Function	10 Mbps	-55 to +100	SO8	2.5K	±10	35	5	High CMR analog output
		PS9822	High Speed / High Function	1 Mbps	-40 to +100	SO8	2.5K	±20	7	3.3 or 5	3.3V & 5V versions, Open Collector
		PS9121	High Speed / High Function	15 Mbps	-40 to +85	5 pin SOP	3.75K	±15	7	3.3	3.3V, Low Distortion
		PS9817A	High Speed / High Function	10 Mbps	-40 to +85	SO8	2.5K	±15	7	5	5V, Low Distortion
		PS9317	High Speed / High Function	10 Mbps	-40 to +85	6 pin SDIP	5K	±15	7	5	8mm creepage, 6 pin SDIP
		PS9587	High Speed / High Function	10 Mbps	-40 to +85	8 pin DIP	5K	±15	7	5	8mm creepage, 8 pin DIP
		PS9851	High Speed / High Function	15 Mbps	-40 to +100	SO8	2.5K	±10	5.5	5	5V, 100°C max operating temp

Table 6	Root Part	Input	Output	Operating Temperature Range (°C)	V <sub>ceo</sub> Max (V)	I <sub>f</sub> Max (mA)	CTR (%)	CTR Rank Available	Comments
	<b>PS2911*</b>	<b>DC</b>	<b>Standard</b>	<b>-55 to +100</b>	<b>40</b>	<b>50</b>	<b>100 - 400</b>	<b>Yes</b>	<b>Ultra small flat-lead package</b>

Table 7	Root Part	Input	t <sub>PH</sub> / t <sub>PHL</sub> (μS)	Operating Temperature Range (°C)	Isolation Voltage (Vr.m.s.)	I <sub>f</sub> Max (mA)	CMR (KV/μS)	V <sub>cc</sub> Max (V)	Comments
	<b>PS9905*</b>	<b>DC</b>	<b>0.25</b>	<b>-40 to +110</b>	<b>7.5K</b>	<b>25</b>	<b>±25</b>	<b>30</b>	<b>14mm Long creepage, 8 pin LSDIP</b>
	<b>PS9307A*</b>	<b>DC</b>	<b>0.150</b>	<b>-40 to +125</b>	<b>5K</b>	<b>25</b>	<b>±50</b>	<b>35</b>	<b>6 pin SDIP</b>
	<b>PS9531*</b>	<b>DC</b>	<b>0.175</b>	<b>-40 to +125</b>	<b>5K</b>	<b>25</b>	<b>±50</b>	<b>35</b>	<b>UVLO (Under Voltage Lock Out) protection with hysteresis</b>
	<b>PS9402*</b>	<b>DC</b>	<b>0.2</b>	<b>-40 to +110</b>	<b>5K</b>	<b>25</b>	<b>±25</b>	<b>33</b>	<b>Fault detection (desaturation detection, UVLO protection and active Miller clamping)</b>
		PS9506	DC	0.4	-40 to +110	5K	25	±25	30
	PS9331	DC	0.175	-40 to +125	5K	25	±50	33	UVLO (Under Voltage Lock Out) protection with hysteresis

Table 8	Root Part	Input	t <sub>PH</sub> / t <sub>PHL</sub> (nS)	Operating Temperature Range (°C)	Isolation Voltage (Vr.m.s.)	I <sub>f</sub> Max (mA)	CMR (KV/μS)	V <sub>cc</sub> Max (V)	Comments	
	<b>PS9309*</b>	<b>DC</b>	<b>250/250</b>	<b>-40 to +110</b>	<b>5K</b>	<b>20</b>	<b>±15</b>	<b>20</b>	<b>5 Mbps Totem Pole output type, 6 pin SDIP, IPM driver</b>	
		PS9303	DC	500/550	-40 to +110	5K	20	±15	25	1 Mbps Totem Pole output type, 6 pin SDIP, IPM driver
		PS9113	DC	750/500	-40 to +110	3.75K	25	±15	25	1 Mbps, open collector output, 5 pin SOP (SOS) IPM driver
		PS9313	DC	750/500	-40 to +110	5K	25	±15	25	1 Mbps, open collector output, 8mm creepage 6 pin SDIP IPM driver
	PS9513	DC	750/500	-40 to +100	5K	30	±15	25	1 Mbps, open collector output, 8mm creepage 8 pin DIP IPM driver	

Table 9	Root Part	Operating Temperature Range (°C)	Bandwidth TYP (kHz)	Input Supply <sup>001</sup> Max (mA)	Output Supply <sup>002</sup> Max (mA)	Gain v/v TYP	Gain Error (%)	CMR (KV/μS)	Comments
	<b>PS8551A*</b>	<b>-40 to +105</b>	<b>100</b>	<b>16</b>	<b>16</b>	<b>8</b>	<b>±1</b>	<b>±10</b>	<b>High CMR analog output isolation amplifier</b>

Table 10	Root Part	Operating Temperature Range (°C)	V <sub>cc</sub> Max (V)	V <sub>cc</sub> Range Recommended (V)	Input Supply <sup>001</sup> Max (mA)	Output Supply <sup>002</sup> Max (mA)	ENOB (Bits Min)	Output Clock Frequency (MHz Typ)	Comments
		PS9551A	-40 to +105	5.5	4.5 to 5.5	18	15	10	10



**CEL Headquarters**

4590 Patrick Henry Drive  
Santa Clara, CA 95054  
Tel: (408) 919-2500  
E-mail: [oc@cel.com](mailto:oc@cel.com)



**Learn more**  
[www.cel.com/optocouplers](http://www.cel.com/optocouplers)




For a complete list of sales offices, representatives and distributors,  
Please visit our website: [www.cel.com/contactus](http://www.cel.com/contactus)

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View PS2501L-2 on WIN SOURCE](#)

 [CEL Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management