



THE DATASHEET OF ESZP04100




REV	ECN	APPD
-	4807	

L=PITCH X POSITIONS

ESZPXX100

NUMBER OF POSITIONS (02-24)

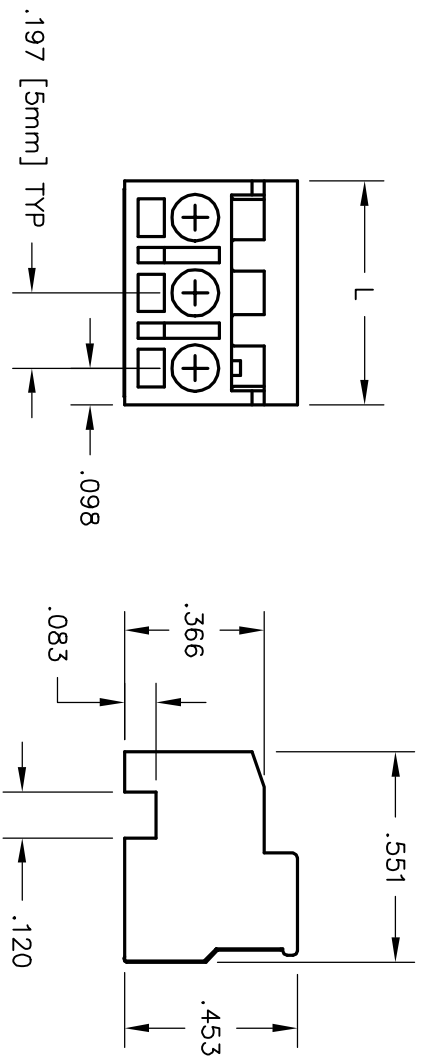


OPERATING TEMPERATURE RANGE: -40°C TO 110°C

INSTALLATION RECOMMENDATIONS

RANGE: 14-30 AWG
 STRIP LENGTH: .160-.240
 TIGHTENING TORQUE: 4.4 LB-IN.

MATERIALS


INSULATING: POLYAMIDE 6/6, COLOR: BLACK
 CONTACT: COPPER ALLOY, TIN PLATED
 TERMINAL WELD / CAGE CLAMP: COPPER ALLOY, NICKEL PLATED



SPECIFICATION DRAWING

ENGR I. QUINN 2/4/02

CHKD APPD



TITLE
 ESZP SERIES
 STICK PIN PLUG
 .197 [5MM] PITCH

SIZE A DWG NO.

ESZP02100

REV -

CODE: 58982



SCALE: NONE

SHEET 1 OF 1

DOCUMENT CONTAINS INFORMATION WHICH IS THE IDENTICAL PROPERTY OF PEABODY, MA, USA

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View ESZP04100 on WIN SOURCE](#)
-  [Amphenol PCD Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management