



**THE DATASHEET OF
NOJA475M006RWJ**



Standard and Low Profile Niobium Oxide Capacitors



FEATURES


- Non-burn safe technology
- Reliability level: 0.5%/1000 hours at 85°C
- 13 case sizes available, standard and low profile
- Environmentally friendly, RoHS Compliant
- CV range: 2.2-1000µF / 1.8-10V
- Elektra Component of the Year Award, 2005



Elektra Award
2005

APPLICATIONS

- Automotive, Avionics, Digital, FPGA, Industrial low voltage control circuits
- Downsized industrial and automotive DC/DC converters

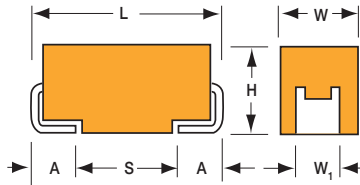

MARKING

A, B, C, D, E, F, S, T, V, W, X, Y CASE



P CASE



STANDARD CASE DIMENSIONS: millimeters (inches)

| Code | EIA Code | EIA Metric | L±0.20 (0.008) | W+0.20 (0.008) -0.10 (0.004) | H+0.20 (0.008) -0.10 (0.004) | W ₁ ±0.20 (0.008) | A+0.30 (0.012) -0.20 (0.008) | S Min. |
|------|----------|------------|----------------|------------------------------|------------------------------|------------------------------|------------------------------|--------------|
| A | 1206 | 3216-18 | 3.20 (0.126) | 1.60 (0.063) | 1.60 (0.063) | 1.20 (0.047) | 0.80 (0.031) | 1.10 (0.043) |
| B | 1210 | 3528-21 | 3.50 (0.138) | 2.80 (0.110) | 1.90 (0.075) | 2.20 (0.087) | 0.80 (0.031) | 1.40 (0.055) |
| C | 2312 | 6032-28 | 6.00 (0.236) | 3.20 (0.126) | 2.60 (0.102) | 2.20 (0.087) | 1.30 (0.051) | 2.90 (0.114) |
| D | 2917 | 7343-31 | 7.30 (0.287) | 4.30 (0.169) | 2.90 (0.114) | 2.40 (0.094) | 1.30 (0.051) | 4.40 (0.173) |
| E | 2917 | 7343-43 | 7.30 (0.287) | 4.30 (0.169) | 4.10 (0.162) | 2.40 (0.094) | 1.30 (0.051) | 4.40 (0.173) |
| V | 2924 | 7361-38 | 7.30 (0.287) | 6.10 (0.240) | 3.55 (0.140) | 3.10 (0.120) | 1.30 (0.051) | 4.40 (0.173) |

W₁ dimension applies to the termination width for A dimensional area only.

LOW PROFILE CASE DIMENSIONS: millimeters (inches)

| Code | EIA Code | EIA Metric | L±0.20 (0.008) | W+0.20 (0.008) -0.10 (0.004) | H Max | W ₁ ±0.20 (0.008) | A+0.30 (0.012) -0.20 (0.008) | S Min. |
|------|----------|------------|----------------|------------------------------|--------------|------------------------------|------------------------------|--------------|
| F | 2312 | 6032-20 | 6.00 (0.236) | 3.20 (0.126) | 2.00 (0.079) | 2.20 (0.087) | 1.30 (0.051) | 2.90 (0.114) |
| P | 0805 | 2012-15 | 2.05 (0.081) | 1.35 (0.053) | 1.50 (0.059) | 1.00±0.10 (0.039±0.004) | 0.50 (0.020) | 0.85 (0.033) |
| S | 1206 | 3216-12 | 3.20 (0.126) | 1.60 (0.063) | 1.20 (0.047) | 1.20 (0.047) | 0.80 (0.031) | 1.10 (0.043) |
| T | 1210 | 3528-12 | 3.50 (0.138) | 2.80 (0.110) | 1.20 (0.047) | 2.20 (0.087) | 0.80 (0.031) | 1.40 (0.055) |
| W | 2312 | 6032-15 | 6.00 (0.236) | 3.20 (0.126) | 1.50 (0.059) | 2.20 (0.087) | 1.30 (0.051) | 2.90 (0.114) |
| X | 2917 | 7343-15 | 7.30 (0.287) | 4.30 (0.169) | 1.50 (0.059) | 2.40 (0.094) | 1.30 (0.051) | 4.40 (0.173) |
| Y | 2917 | 7343-20 | 7.30 (0.287) | 4.30 (0.169) | 2.00 (0.079) | 2.40 (0.094) | 1.30 (0.051) | 4.40 (0.173) |

W₁ dimension applies to the termination width for A dimensional area only.
Pad Stand-off is 0.1±0.1.

HOW TO ORDER

| | | | | | | | |
|-------------|--------------------------------------|--|----------------------------|--|---|--|--|
| NOJ | D | 107 | M | 006 | R | WJ | - |
| Type | Case Size See tables above | Capacitance Code 1st two digits represent significant figures, 3rd digit represents multiplier in pF | Tolerance M=±20% | Rated DC Voltage 001 = 1.8Vdc 002 = 2.5Vdc 004 = 4Vdc 006 = 6.3Vdc 010 = 10Vdc | Packaging R = Pure Tin 7" Reel S = Pure Tin 13" Reel | Specification Suffix WJ = Standard WB = Low ESR | Additional characters may be added for special requirements V = dry pack option (selected ratings only - dry pack is standard for all D, E, V, X, Y case size ratings) |

TECHNICAL SPECIFICATIONS

| | | | | | | | |
|------------------------------------|---|-----|-----|-----|-----|----|--|
| Technical Data: | All technical data relate to an ambient temperature of +25°C is not stated | | | | | | |
| Capacitance Range: | 2.2 µF to 1000 µF | | | | | | |
| Capacitance Tolerance: | ±20% | | | | | | |
| Leakage Current DCL: | 0.02CV or 1.0µA whichever is the greater | | | | | | |
| Rated Voltage DC (V _R) | ≤ +85°C: | 1.8 | 2.5 | 4 | 6.3 | 10 | |
| Category Voltage (V _C) | ≤ +105°C: | 1.2 | 1.7 | 2.7 | 4 | 7 | |
| Surge Voltage (V _S) | ≤ +85°C: | 2.3 | 3.3 | 5.2 | 8 | 13 | |
| Surge Voltage (V _S) | ≤ +105°C: | 1.6 | 2.2 | 3.4 | 5 | 8 | |
| Temperature Range: | -55°C to +105°C | | | | | | |
| Reliability: | 0.5% per 1000 hours at 85°C, V _R , 0.1Ω/V series impedance, 60% confidence level Meets requirements of AEC-Q200 | | | | | | |

Standard and Low Profile Niobium Oxide Capacitors

STANDARD NIOBIUM OXIDE CAPACITANCE AND RATED VOLTAGE RANGE (LETTER DENOTES CASE SIZE)

| Capacitance | | Rated Voltage DC (V _R) to 85°C | | | | |
|-------------|------|--|----------|------------|--------------|------------|
| µF | Code | 1.8V (x) | 2.5V (e) | 4V (G) | 6.3V (J) | 10V (A) |
| 4.7 | 475 | | | | A | A |
| 6.8 | 685 | | | | A | A |
| 10 | 106 | | | | A | A/B |
| 15 | 156 | | | A | A/B | A/B |
| 22 | 226 | | A | A/B | A/B | B/C/B(700) |
| 33 | 336 | | A/B | A/B | B/C/B(700) | C |
| 47 | 476 | A | A/B | A/B/C | B/C | C |
| 68 | 686 | B | B/C | B/C | B/C | C |
| 100 | 107 | B/C | B/C | B/C/B(250) | B/C/D/B(400) | D/D(150) |
| 150 | 157 | C | C | C/D | C/D | |
| 220 | 227 | C | C | C/D | C/D/E | |
| 330 | 337 | C | C/D | D | D/E | |
| 470 | 477 | | D/E | D/E | E/V/E(75) | |
| 680 | 687 | | E | E/V | | |
| 1000 | 108 | | V | V | | |

LOW PROFILE NIOBIUM OXIDE CAPACITANCE AND RATED VOLTAGE RANGE (LETTER DENOTES CASE SIZE)

| Capacitance | | Rated Voltage DC (V _R) to 85°C | | | | |
|-------------|------|--|----------|--------|----------|---------|
| µF | Code | 1.8V (x) | 2.5V (e) | 4V (G) | 6.3V (J) | 10V (A) |
| 1.0 | 105 | | | | | |
| 1.5 | 155 | | | | | |
| 2.2 | 225 | | | | | P |
| 3.3 | 335 | | | | | P |
| 4.7 | 475 | | | | P/S | T |
| 6.8 | 685 | | | P/S | P/S/T | T |
| 10 | 106 | | P/S | P/S/T | P/T | T |
| 15 | 156 | P/S | P/S/T | P/T | | |
| 22 | 226 | P/S/T | P/T | T | T | |
| 33 | 336 | T | T | T | W | |
| 47 | 476 | T | T | W | W | |
| 68 | 686 | | W | W | X/Y | |
| 100 | 107 | W | W | W/X | F/Y | |
| 150 | 157 | | X | Y | F/Y | |
| 220 | 227 | X | Y | F/Y | Y | |
| 330 | 337 | Y | Y | Y | | |
| 470 | 477 | Y | | | | |

Released ratings (ESR ratings in mOhms in parentheses)

Note: Voltage ratings are minimum values. AVX reserves the right to supply higher voltage ratings in the same case size, to the same reliability standards

Standard and Low Profile Niobium Oxide Capacitors

RATINGS & PART NUMBER REFERENCE

| AVX Part No. | Case Size | Capacitance (µF) | Rated Voltage (V) | Rated Temperature (°C) | Category Voltage (V) | Category Temperature (°C) | DCL Max. (µA) | DF Max. (%) | ESR Max. @ 100kHz (Ω) | 100kHz RMS Current (A) | | | MSL |
|------------------------|-----------|------------------|-------------------|------------------------|----------------------|---------------------------|---------------|-------------|-----------------------|------------------------|-------|-------|-----|
| | | | | | | | | | | 25°C | 85°C | 105°C | |
| 1.8 Volt @ 85°C | | | | | | | | | | | | | |
| NOJP156M001#WJ | P | 15 | 1.8 | 85 | 1.2 | 105 | 1.0 | 10 | 4.1 | 0.133 | 0.119 | 0.053 | 1 |
| NOJS156M001#WJ | S | 15 | 1.8 | 85 | 1.2 | 105 | 1.0 | 6 | 2 | 0.197 | 0.178 | 0.079 | 1 |
| NOJP226M001#WJ | P | 22 | 1.8 | 85 | 1.2 | 105 | 1.0 | 10 | 3.8 | 0.138 | 0.124 | 0.055 | 1 |
| NOJS226M001#WJ | S | 22 | 1.8 | 85 | 1.2 | 105 | 1.0 | 8 | 1.9 | 0.203 | 0.182 | 0.081 | 1 |
| NOJT226M001#WJ | T | 22 | 1.8 | 85 | 1.2 | 105 | 1.0 | 6 | 1.8 | 0.231 | 0.208 | 0.092 | 1 |
| NOJT336M001#WJ | T | 33 | 1.8 | 85 | 1.2 | 105 | 1.2 | 6 | 1.7 | 0.238 | 0.214 | 0.095 | 1 |
| NOJA476M001#WJ | A | 47 | 1.8 | 85 | 1.2 | 105 | 1.7 | 8 | 1.6 | 0.237 | 0.213 | 0.095 | 1 |
| NOJB476M001#WJ | B | 47 | 1.8 | 85 | 1.2 | 105 | 1.7 | 6 | 1.6 | 0.252 | 0.227 | 0.101 | 1 |
| NOJT476M001#WJ | T | 47 | 1.8 | 85 | 1.2 | 105 | 1.7 | 10 | 1.6 | 0.245 | 0.220 | 0.098 | 1 |
| NOJB686M001#WJ | B | 68 | 1.8 | 85 | 1.2 | 105 | 2.5 | 6 | 1.5 | 0.261 | 0.235 | 0.104 | 1 |
| NOJB107M001#WJ | B | 100 | 1.8 | 85 | 1.2 | 105 | 3.6 | 6 | 1.4 | 0.270 | 0.243 | 0.108 | 1 |
| NOJC107M001#WJ | C | 100 | 1.8 | 85 | 1.2 | 105 | 3.6 | 6 | 0.4 | 0.574 | 0.517 | 0.230 | 1 |
| NOJW107M001#WJ | W | 100 | 1.8 | 85 | 1.2 | 105 | 3.6 | 6 | 0.4 | 0.520 | 0.468 | 0.208 | 1 |
| NOJC157M001#WJ | C | 150 | 1.8 | 85 | 1.2 | 105 | 5.4 | 8 | 0.4 | 0.574 | 0.517 | 0.230 | 1 |
| NOJC227M001#WJ | C | 220 | 1.8 | 85 | 1.2 | 105 | 8.0 | 8 | 0.4 | 0.574 | 0.517 | 0.230 | 1 |
| NOJX227M001#WJ | X | 220 | 1.8 | 85 | 1.2 | 105 | 8.0 | 8 | 0.4 | 0.548 | 0.493 | 0.219 | 3 |
| NOJC337M001#WJ | C | 330 | 1.8 | 85 | 1.2 | 105 | 11.9 | 8 | 0.3 | 0.663 | 0.597 | 0.265 | 1 |
| NOJY337M001#WJ | Y | 330 | 1.8 | 85 | 1.2 | 105 | 11.9 | 8 | 0.3 | 0.707 | 0.636 | 0.283 | 3 |
| NOJY477M001#WJ | Y | 470 | 1.8 | 85 | 1.2 | 105 | 17.0 | 8 | 0.3 | 0.707 | 0.636 | 0.283 | 3 |
| 2.5 Volt @ 85°C | | | | | | | | | | | | | |
| NOJP106M002#WJ | P | 10 | 2.5 | 85 | 1.7 | 105 | 1.0 | 6 | 4.5 | 0.126 | 0.114 | 0.051 | 1 |
| NOJS106M002#WJ | S | 10 | 2.5 | 85 | 1.7 | 105 | 1.0 | 6 | 2.2 | 0.188 | 0.169 | 0.075 | 1 |
| NOJP156M002#WJ | P | 15 | 2.5 | 85 | 1.7 | 105 | 1.0 | 6 | 4 | 0.134 | 0.121 | 0.054 | 1 |
| NOJS156M002#WJ | S | 15 | 2.5 | 85 | 1.7 | 105 | 1.0 | 8 | 2 | 0.197 | 0.178 | 0.079 | 1 |
| NOJT156M002#WJ | T | 15 | 2.5 | 85 | 1.7 | 105 | 1.0 | 6 | 2 | 0.219 | 0.197 | 0.088 | 1 |
| NOJA226M002#WJ | A | 22 | 2.5 | 85 | 1.7 | 105 | 1.1 | 6 | 1.9 | 0.218 | 0.196 | 0.087 | 1 |
| NOJP226M002#WJ | P | 22 | 2.5 | 85 | 1.7 | 105 | 1.1 | 10 | 3.8 | 0.138 | 0.124 | 0.055 | 1 |
| NOJT226M002#WJ | T | 22 | 2.5 | 85 | 1.7 | 105 | 1.1 | 6 | 1.9 | 0.225 | 0.202 | 0.090 | 1 |
| NOJA336M002#WJ | A | 33 | 2.5 | 85 | 1.7 | 105 | 1.7 | 6 | 1.7 | 0.230 | 0.207 | 0.092 | 1 |
| NOJB336M002#WJ | B | 33 | 2.5 | 85 | 1.7 | 105 | 1.7 | 6 | 1.7 | 0.245 | 0.220 | 0.098 | 1 |
| NOJT336M002#WJ | T | 33 | 2.5 | 85 | 1.7 | 105 | 1.7 | 6 | 1.7 | 0.238 | 0.214 | 0.095 | 1 |
| NOJA476M002#WJ | A | 47 | 2.5 | 85 | 1.7 | 105 | 2.4 | 8 | 1.6 | 0.237 | 0.213 | 0.095 | 1 |
| NOJB476M002#WJ | B | 47 | 2.5 | 85 | 1.7 | 105 | 2.4 | 6 | 1.6 | 0.252 | 0.227 | 0.101 | 1 |
| NOJT476M002#WJ | T | 47 | 2.5 | 85 | 1.7 | 105 | 2.4 | 10 | 1.6 | 0.245 | 0.220 | 0.098 | 1 |
| NOJB686M002#WJ | B | 68 | 2.5 | 85 | 1.7 | 105 | 3.4 | 6 | 1.5 | 0.261 | 0.235 | 0.104 | 1 |
| NOJC686M002#WJ | C | 68 | 2.5 | 85 | 1.7 | 105 | 3.4 | 6 | 0.5 | 0.514 | 0.462 | 0.206 | 1 |
| NOJW686M002#WJ | W | 68 | 2.5 | 85 | 1.7 | 105 | 3.4 | 6 | 0.4 | 0.520 | 0.468 | 0.208 | 1 |
| NOJB107M002#WJ | B | 100 | 2.5 | 85 | 1.7 | 105 | 5.0 | 6 | 1.4 | 0.270 | 0.243 | 0.108 | 1 |
| NOJC107M002#WJ | C | 100 | 2.5 | 85 | 1.7 | 105 | 5.0 | 6 | 0.4 | 0.574 | 0.517 | 0.230 | 1 |
| NOJW107M002#WJ | W | 100 | 2.5 | 85 | 1.7 | 105 | 5.0 | 6 | 0.4 | 0.520 | 0.468 | 0.208 | 1 |
| NOJC157M002#WJ | C | 150 | 2.5 | 85 | 1.7 | 105 | 7.5 | 6 | 0.4 | 0.574 | 0.517 | 0.230 | 1 |
| NOJX157M002#WJ | X | 150 | 2.5 | 85 | 1.7 | 105 | 7.5 | 6 | 0.4 | 0.548 | 0.493 | 0.219 | 3 |
| NOJC227M002#WJ | C | 220 | 2.5 | 85 | 1.7 | 105 | 11.0 | 8 | 0.4 | 0.574 | 0.517 | 0.230 | 1 |
| NOJY227M002#WJ | Y | 220 | 2.5 | 85 | 1.7 | 105 | 11.0 | 8 | 0.4 | 0.612 | 0.551 | 0.245 | 3 |
| NOJC337M002#WJ | C | 330 | 2.5 | 85 | 1.7 | 105 | 16.5 | 10 | 0.3 | 0.663 | 0.597 | 0.265 | 1 |
| NOJD337M002#WJ | D | 330 | 2.5 | 85 | 1.7 | 105 | 16.5 | 10 | 0.3 | 0.775 | 0.697 | 0.310 | 3 |
| NOJY337M002#WJ | Y | 330 | 2.5 | 85 | 1.7 | 105 | 16.5 | 10 | 0.3 | 0.707 | 0.636 | 0.283 | 3 |
| NOJD477M002#WJ | D | 470 | 2.5 | 85 | 1.7 | 105 | 23.5 | 12 | 0.3 | 0.775 | 0.697 | 0.310 | 3 |
| NOJE477M002#WJ | E | 470 | 2.5 | 85 | 1.7 | 105 | 23.5 | 10 | 0.3 | 0.812 | 0.731 | 0.325 | 3 |
| NOJE687M002#WJ | E | 680 | 2.5 | 85 | 1.7 | 105 | 34.0 | 14 | 0.3 | 0.812 | 0.731 | 0.325 | 3 |
| NOJV108M002#WJ | V | 1000 | 2.5 | 85 | 1.7 | 105 | 50.0 | 16 | 0.3 | 1.000 | 0.900 | 0.400 | 3 |
| 4 Volt @ 85°C | | | | | | | | | | | | | |
| NOJP685M004#WJ | P | 6.8 | 4 | 85 | 2.7 | 105 | 1.0 | 6 | 5.3 | 0.117 | 0.105 | 0.047 | 1 |
| NOJS685M004#WJ | S | 6.8 | 4 | 85 | 2.7 | 105 | 1.0 | 6 | 2.6 | 0.173 | 0.156 | 0.069 | 1 |
| NOJP106M004#WJ | P | 10 | 4 | 85 | 2.7 | 105 | 1.0 | 20 | 4.5 | 0.126 | 0.114 | 0.051 | 1 |
| NOJS106M004#WJ | S | 10 | 4 | 85 | 2.7 | 105 | 1.0 | 8 | 2.2 | 0.188 | 0.169 | 0.075 | 1 |
| NOJT106M004#WJ | T | 10 | 4 | 85 | 2.7 | 105 | 1.0 | 6 | 2.2 | 0.209 | 0.188 | 0.084 | 1 |
| NOJA156M004#WJ | A | 15 | 4 | 85 | 2.7 | 105 | 1.2 | 6 | 2 | 0.212 | 0.191 | 0.085 | 1 |
| NOJP156M004#WJ | P | 15 | 4 | 85 | 2.7 | 105 | 1.2 | 10 | 4.1 | 0.133 | 0.119 | 0.053 | 1 |
| NOJT156M004#WJ | T | 15 | 4 | 85 | 2.7 | 105 | 1.2 | 6 | 2 | 0.219 | 0.197 | 0.088 | 1 |
| NOJA226M004#WJ | A | 22 | 4 | 85 | 2.7 | 105 | 1.8 | 6 | 1.9 | 0.218 | 0.196 | 0.087 | 1 |
| NOJB226M004#WJ | B | 22 | 4 | 85 | 2.7 | 105 | 1.8 | 6 | 1.9 | 0.232 | 0.209 | 0.093 | 1 |
| NOJT226M004#WJ | T | 22 | 4 | 85 | 2.7 | 105 | 1.8 | 6 | 1.8 | 0.231 | 0.208 | 0.092 | 1 |
| NOJA336M004#WJ | A | 33 | 4 | 85 | 2.7 | 105 | 2.6 | 10 | 1.7 | 0.230 | 0.207 | 0.092 | 1 |
| NOJB336M004#WJ | B | 33 | 4 | 85 | 2.7 | 105 | 2.6 | 6 | 1.7 | 0.245 | 0.220 | 0.098 | 1 |
| NOJT336M004#WJ | T | 33 | 4 | 85 | 2.7 | 105 | 2.6 | 14 | 2 | 0.219 | 0.197 | 0.088 | 1 |
| NOJA476M004#WJ | A | 47 | 4 | 85 | 2.7 | 105 | 3.8 | 18 | 2.2 | 0.202 | 0.182 | 0.081 | 1 |
| NOJB476M004#WJ | B | 47 | 4 | 85 | 2.7 | 105 | 3.8 | 6 | 1.6 | 0.252 | 0.227 | 0.101 | 1 |
| NOJC476M004#WJ | C | 47 | 4 | 85 | 2.7 | 105 | 3.8 | 6 | 0.5 | 0.514 | 0.462 | 0.206 | 1 |
| NOJW476M004#WJ | W | 47 | 4 | 85 | 2.7 | 105 | 3.8 | 6 | 0.5 | 0.465 | 0.418 | 0.186 | 1 |

Standard and Low Profile Niobium Oxide Capacitors

RATINGS & PART NUMBER REFERENCE

| AVX Part No. | Case Size | Capacitance (µF) | Rated Voltage (V) | Rated Temperature (°C) | Category Voltage (V) | Category Temperature (°C) | DCL Max. (µA) | DF Max. (%) | ESR Max. @ 100kHz (Ω) | 100kHz RMS Current (A) | | | MSL |
|------------------------|-----------|------------------|-------------------|------------------------|----------------------|---------------------------|---------------|-------------|-----------------------|------------------------|-------|-------|-----|
| | | | | | | | | | | 25°C | 85°C | 105°C | |
| NOJB686M004#WJ | B | 68 | 4 | 85 | 2.7 | 105 | 5.4 | 6 | 1.5 | 0.261 | 0.235 | 0.104 | 1 |
| NOJC686M004#WJ | C | 68 | 4 | 85 | 2.7 | 105 | 5.4 | 6 | 0.5 | 0.514 | 0.462 | 0.206 | 1 |
| NOJW686M004#WJ | W | 68 | 4 | 85 | 2.7 | 105 | 5.4 | 6 | 0.4 | 0.520 | 0.468 | 0.208 | 1 |
| NOJB107M004#WJ | B | 100 | 4 | 85 | 2.7 | 105 | 8.0 | 16 | 1.4 | 0.270 | 0.243 | 0.108 | 1 |
| NOJB107M004#WB | B | 100 | 4 | 85 | 2.7 | 105 | 8.0 | 16 | 0.25 | 0.639 | 0.575 | 0.255 | 3 |
| NOJC107M004#WJ | C | 100 | 4 | 85 | 2.7 | 105 | 8.0 | 6 | 0.4 | 0.574 | 0.517 | 0.230 | 1 |
| NOJW107M004#WJ | W | 100 | 4 | 85 | 2.7 | 105 | 8.0 | 8 | 0.4 | 0.520 | 0.468 | 0.208 | 1 |
| NOJX107M004#WJ | X | 100 | 4 | 85 | 2.7 | 105 | 8.0 | 6 | 0.4 | 0.548 | 0.493 | 0.219 | 3 |
| NOJC157M004#WJ | C | 150 | 4 | 85 | 2.7 | 105 | 12.0 | 6 | 0.4 | 0.574 | 0.517 | 0.230 | 1 |
| NOJD157M004#WJ | D | 150 | 4 | 85 | 2.7 | 105 | 12.0 | 6 | 0.3 | 0.775 | 0.697 | 0.310 | 3 |
| NOJY157M004#WJ | Y | 150 | 4 | 85 | 2.7 | 105 | 12.0 | 6 | 0.4 | 0.612 | 0.551 | 0.245 | 3 |
| NOJC227M004#WJ | C | 220 | 4 | 85 | 2.7 | 105 | 17.6 | 8 | 0.4 | 0.574 | 0.517 | 0.230 | 1 |
| NOJD227M004#WJ | D | 220 | 4 | 85 | 2.7 | 105 | 17.6 | 8 | 0.4 | 0.671 | 0.604 | 0.268 | 3 |
| NOJF227M004#WJ | F | 220 | 4 | 85 | 2.7 | 105 | 17.6 | 10 | 0.4 | 0.548 | 0.493 | 0.219 | 1 |
| NOJY227M004#WJ | Y | 220 | 4 | 85 | 2.7 | 105 | 17.6 | 10 | 0.4 | 0.612 | 0.551 | 0.245 | 3 |
| NOJD337M004#WJ | D | 330 | 4 | 85 | 2.7 | 105 | 26.4 | 8 | 0.3 | 0.775 | 0.697 | 0.310 | 3 |
| NOJY337M004#WJ | Y | 330 | 4 | 85 | 2.7 | 105 | 26.4 | 12 | 0.3 | 0.707 | 0.636 | 0.283 | 3 |
| NOJD477M004#WJ | D | 470 | 4 | 85 | 2.7 | 105 | 37.6 | 12 | 0.3 | 0.775 | 0.697 | 0.310 | 3 |
| NOJE477M004#WJ | E | 470 | 4 | 85 | 2.7 | 105 | 37.6 | 12 | 0.3 | 0.812 | 0.731 | 0.325 | 3 |
| NOJE687M004#WJ | E | 680 | 4 | 85 | 2.7 | 105 | 54.4 | 14 | 0.3 | 0.812 | 0.731 | 0.325 | 3 |
| NOJV687M004#WJ | V | 680 | 4 | 85 | 2.7 | 105 | 54.4 | 14 | 0.3 | 1.000 | 0.900 | 0.400 | 3 |
| NOJV108M004#WJ | V | 1000 | 4 | 85 | 2.7 | 105 | 80.0 | 18 | 0.3 | 1.000 | 0.900 | 0.400 | 3 |
| 6.3 Volt @ 85°C | | | | | | | | | | | | | |
| NOJA475M006#WJ | A | 4.7 | 6.3 | 85 | 4 | 105 | 1.1 | 6 | 3.2 | 0.168 | 0.151 | 0.067 | 1 |
| NOJP475M006#WJ | P | 4.7 | 6.3 | 85 | 4 | 105 | 1.0 | 6 | 6.1 | 0.109 | 0.098 | 0.043 | 1 |
| NOJS475M006#WJ | S | 4.7 | 6.3 | 85 | 4 | 105 | 1.0 | 6 | 3.2 | 0.156 | 0.141 | 0.062 | 1 |
| NOJA685M006#WJ | A | 6.8 | 6.3 | 85 | 4 | 105 | 1.1 | 6 | 2.6 | 0.186 | 0.167 | 0.074 | 1 |
| NOJP685M006#WJ | P | 6.8 | 6.3 | 85 | 4 | 105 | 1.0 | 10 | 5.2 | 0.118 | 0.106 | 0.047 | 1 |
| NOJS685M006#WJ | S | 6.8 | 6.3 | 85 | 4 | 105 | 1.0 | 8 | 2.7 | 0.170 | 0.153 | 0.068 | 1 |
| NOJT685M006#WJ | T | 6.8 | 6.3 | 85 | 4 | 105 | 1.0 | 6 | 2.6 | 0.192 | 0.173 | 0.077 | 1 |
| NOJA106M006#WJ | A | 10 | 6.3 | 85 | 4 | 105 | 1.2 | 6 | 2.2 | 0.202 | 0.182 | 0.081 | 1 |
| NOJP106M006#WJ | P | 10 | 6.3 | 85 | 4 | 105 | 1.2 | 10 | 4.5 | 0.126 | 0.114 | 0.051 | 1 |
| NOJT106M006#WJ | T | 10 | 6.3 | 85 | 4 | 105 | 1.2 | 6 | 2.2 | 0.209 | 0.188 | 0.084 | 1 |
| NOJA156M006#WJ | A | 15 | 6.3 | 85 | 4 | 105 | 1.8 | 8 | 2 | 0.212 | 0.191 | 0.085 | 1 |
| NOJB156M006#WJ | B | 15 | 6.3 | 85 | 4 | 105 | 1.8 | 6 | 2 | 0.226 | 0.203 | 0.090 | 1 |
| NOJA226M006#WJ | A | 22 | 6.3 | 85 | 4 | 105 | 2.6 | 8 | 1.8 | 0.224 | 0.201 | 0.089 | 1 |
| NOJB226M006#WJ | B | 22 | 6.3 | 85 | 4 | 105 | 2.6 | 6 | 1.9 | 0.232 | 0.209 | 0.093 | 1 |
| NOJT226M006#WJ | T | 22 | 6.3 | 85 | 4 | 105 | 2.6 | 8 | 1.8 | 0.231 | 0.208 | 0.092 | 1 |
| NOJB336M006#WJ | B | 33 | 6.3 | 85 | 4 | 105 | 4.0 | 6 | 1.7 | 0.245 | 0.220 | 0.098 | 1 |
| NOJB336M006#WB | B | 33 | 6.3 | 85 | 4 | 105 | 4.0 | 6 | 0.7 | 0.382 | 0.344 | 0.153 | 3 |
| NOJC336M006#WJ | C | 33 | 6.3 | 85 | 4 | 105 | 4.0 | 6 | 0.5 | 0.514 | 0.462 | 0.206 | 1 |
| NOJW336M006#WJ | W | 33 | 6.3 | 85 | 4 | 105 | 4.0 | 6 | 0.5 | 0.465 | 0.418 | 0.186 | 1 |
| NOJB476M006#WJ | B | 47 | 6.3 | 85 | 4 | 105 | 5.6 | 6 | 0.8 | 0.357 | 0.321 | 0.143 | 1 |
| NOJC476M006#WJ | C | 47 | 6.3 | 85 | 4 | 105 | 5.7 | 6 | 0.5 | 0.514 | 0.462 | 0.206 | 1 |
| NOJW476M006#WJ | W | 47 | 6.3 | 85 | 4 | 105 | 5.7 | 6 | 0.5 | 0.465 | 0.418 | 0.186 | 1 |
| NOJB686M006#WJ | B | 68 | 6.3 | 85 | 4 | 105 | 8.2 | 20 | 1.5 | 0.261 | 0.235 | 0.104 | 1 |
| NOJC686M006#WJ | C | 68 | 6.3 | 85 | 4 | 105 | 8.2 | 6 | 0.5 | 0.514 | 0.462 | 0.206 | 1 |
| NOJX686M006#WJ | X | 68 | 6.3 | 85 | 4 | 105 | 8.2 | 6 | 0.5 | 0.490 | 0.441 | 0.196 | 3 |
| NOJY686M006#WJ | Y | 68 | 6.3 | 85 | 4 | 105 | 8.2 | 6 | 0.5 | 0.548 | 0.493 | 0.219 | 3 |
| NOJB107M006#WJ | B | 100 | 6.3 | 85 | 4 | 105 | 60.0 | 20 | 1.7 | 0.245 | 0.220 | 0.098 | 1 |
| NOJB107M006#WB | B | 100 | 6.3 | 85 | 4 | 105 | 60.0 | 20 | 0.4 | 0.505 | 0.454 | 0.202 | 3 |
| NOJC107M006#WJ | C | 100 | 6.3 | 85 | 4 | 105 | 12.0 | 8 | 0.4 | 0.574 | 0.517 | 0.230 | 1 |
| NOJD107M006#WJ | D | 100 | 6.3 | 85 | 4 | 105 | 12.0 | 6 | 0.4 | 0.671 | 0.604 | 0.268 | 3 |
| NOJF107M006#WJ | F | 100 | 6.3 | 85 | 4 | 105 | 12 | 8 | 0.4 | 0.548 | 0.493 | 0.219 | 1 |
| NOJY107M006#WJ | Y | 100 | 6.3 | 85 | 4 | 105 | 12.0 | 6 | 0.4 | 0.612 | 0.551 | 0.245 | 3 |
| NOJC157M006#WJ | C | 150 | 6.3 | 85 | 4 | 105 | 18.0 | 6 | 0.4 | 0.574 | 0.517 | 0.230 | 1 |
| NOJD157M006#WJ | D | 150 | 6.3 | 85 | 4 | 105 | 18.0 | 6 | 0.4 | 0.671 | 0.604 | 0.268 | 3 |
| NOJF157M006#WJ | F | 150 | 6.3 | 85 | 4 | 105 | 18.0 | 8 | 0.4 | 0.548 | 0.493 | 0.219 | 1 |
| NOJY157M006#WJ | Y | 150 | 6.3 | 85 | 4 | 105 | 18.0 | 6 | 0.4 | 0.612 | 0.551 | 0.245 | 3 |
| NOJC227M006#WJ | C | 220 | 6.3 | 85 | 4 | 105 | 26.4 | 14 | 0.4 | 0.574 | 0.517 | 0.230 | 1 |
| NOJD227M006#WJ | D | 220 | 6.3 | 85 | 4 | 105 | 26.4 | 8 | 0.4 | 0.671 | 0.604 | 0.268 | 3 |
| NOJE227M006#WJ | E | 220 | 6.3 | 85 | 4 | 105 | 26.4 | 12 | 0.4 | 0.704 | 0.633 | 0.281 | 3 |
| NOJY227M006#WJ | Y | 220 | 6.3 | 85 | 4 | 105 | 26.4 | 10 | 0.4 | 0.612 | 0.551 | 0.245 | 3 |
| NOJD337M006#WJ | D | 330 | 6.3 | 85 | 4 | 105 | 39.6 | 10 | 0.3 | 0.775 | 0.697 | 0.310 | 3 |
| NOJE337M006#WJ | E | 330 | 6.3 | 85 | 4 | 105 | 39.6 | 12 | 0.3 | 0.812 | 0.731 | 0.325 | 3 |
| NOJE477M006#WJ | E | 470 | 6.3 | 85 | 4 | 105 | 56.4 | 16 | 0.3 | 0.812 | 0.731 | 0.325 | 3 |
| NOJE477M006#WB | E | 470 | 6.3 | 85 | 4 | 105 | 56.4 | 16 | 0.075 | 1.625 | 1.462 | 0.650 | 3 |
| NOJV477M006#WJ | V | 470 | 6.3 | 85 | 4 | 105 | 56.4 | 14 | 0.3 | 1.000 | 0.900 | 0.400 | 3 |

OxiCap® NOJ Series



Standard and Low Profile Niobium Oxide Capacitors

RATINGS & PART NUMBER REFERENCE

| AVX Part No. | Case Size | Capacitance (μF) | Rated Voltage (V) | Rated Temperature (°C) | Category Voltage (V) | Category Temperature (°C) | DCL Max. (μA) | DF Max. (%) | ESR Max. @ 100kHz (Ω) | 100kHz RMS Current (A) | | | MSL |
|-----------------------|-----------|------------------|-------------------|------------------------|----------------------|---------------------------|---------------|-------------|-----------------------|------------------------|-------|-------|-----|
| | | | | | | | | | | 25°C | 85°C | 105°C | |
| 10 Volt @ 85°C | | | | | | | | | | | | | |
| NOJP225M010#WJ | P | 2.2 | 10 | 85 | 7 | 105 | 1.0 | 8 | 8.3 | 0.093 | 0.084 | 0.037 | 1 |
| NOJP335M010#WJ | P | 3.3 | 10 | 85 | 7 | 105 | 1.0 | 8 | 7 | 0.101 | 0.091 | 0.041 | 1 |
| NOJA475M010#WJ | A | 4.7 | 10 | 85 | 7 | 105 | 1.0 | 6 | 3.1 | 0.170 | 0.153 | 0.068 | 1 |
| NOJT475M010#WJ | T | 4.7 | 10 | 85 | 7 | 105 | 1.0 | 6 | 3.1 | 0.176 | 0.158 | 0.070 | 1 |
| NOJA685M010#WJ | A | 6.8 | 10 | 85 | 7 | 105 | 1.4 | 6 | 2.6 | 0.186 | 0.167 | 0.074 | 1 |
| NOJT685M010#WJ | T | 6.8 | 10 | 85 | 7 | 105 | 1.4 | 6 | 2.6 | 0.192 | 0.173 | 0.077 | 1 |
| NOJA106M010#WJ | A | 10 | 10 | 85 | 7 | 105 | 2.0 | 6 | 2.2 | 0.202 | 0.182 | 0.081 | 1 |
| NOJB106M010#WJ | B | 10 | 10 | 85 | 7 | 105 | 2.0 | 6 | 1 | 0.319 | 0.287 | 0.128 | 1 |
| NOJT106M010#WJ | T | 10 | 10 | 85 | 7 | 105 | 2.0 | 6 | 2.2 | 0.209 | 0.188 | 0.084 | 1 |
| NOJA156M010#WJ | A | 15 | 10 | 85 | 7 | 105 | 3.0 | 6 | 2 | 0.212 | 0.191 | 0.085 | 1 |
| NOJB156M010#WJ | B | 15 | 10 | 85 | 7 | 105 | 3.0 | 6 | 2 | 0.226 | 0.203 | 0.090 | 1 |
| NOJB226M010#WJ | B | 22 | 10 | 85 | 7 | 105 | 4.4 | 6 | 1.8 | 0.238 | 0.214 | 0.095 | 1 |
| NOJB226M010#WB | B | 22 | 10 | 85 | 7 | 105 | 4.4 | 6 | 0.7 | 0.382 | 0.344 | 0.153 | 3 |
| NOJC226M010#WJ | C | 22 | 10 | 85 | 7 | 105 | 4.4 | 6 | 0.5 | 0.514 | 0.462 | 0.206 | 1 |
| NOJC336M010#WJ | C | 33 | 10 | 85 | 7 | 105 | 6.6 | 6 | 0.5 | 0.514 | 0.462 | 0.206 | 1 |
| NOJC476M010#WJ | C | 47 | 10 | 85 | 7 | 105 | 9.4 | 6 | 0.4 | 0.574 | 0.517 | 0.230 | 1 |
| NOJC686M010#WJ | C | 68 | 10 | 85 | 7 | 105 | 13.6 | 12 | 0.5 | 0.514 | 0.462 | 0.206 | 1 |
| NOJD107M010#WJ | D | 100 | 10 | 85 | 7 | 105 | 20.0 | 12 | 0.4 | 0.671 | 0.604 | 0.268 | 3 |
| NOJD107M010#WB | D | 100 | 10 | 85 | 7 | 105 | 20.0 | 12 | 0.15 | 1.095 | 0.986 | 0.438 | 3 |

Moisture Sensitivity Level (MSL) is defined according to J-STD-020.

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.

The EIA & CECC standards for capacitors allow an ESR movement to 1.25 times catalog limit post mounting.

For typical weight and composition see page 274.

NOTE: AVX reserves the right to supply higher voltage ratings in the same case size, to the same reliability standards.

Standard and Low Profile Niobium Oxide Capacitors

QUALIFICATION TABLE

| TEST | NOJ series (Temperature range -55°C to +105°C) | | | | | | | | | | |
|------------------------------|---|---------------|---------------|--------------------|------------------------------------|-----------|------------|------------|------------|------------|--|
| | Condition | | | Characteristics | | | | | | | |
| Endurance | Apply rated voltage (Ur) at 85°C and / or category voltage (Uc) at 105°C for 2000 hours through a circuit impedance of $\leq 0.1\Omega/V$. Stabilize at room temperature for 1-2 hours before measuring. | | | Visual examination | no visible damage | | | | | | |
| | | | | DCL | initial limit | | | | | | |
| | | | | $\Delta C/C$ | within $\pm 10\%$ of initial value | | | | | | |
| | | | | DF | initial limit | | | | | | |
| | | | | ESR | 1.25 x initial limit | | | | | | |
| Storage Life | Store at 105°C, no voltage applied, for 2000 hours. Stabilize at room temperature for 1-2 hours before measuring. | | | Visual examination | no visible damage | | | | | | |
| | | | | DCL | initial limit | | | | | | |
| | | | | $\Delta C/C$ | within $\pm 10\%$ of initial value | | | | | | |
| | | | | DF | initial limit | | | | | | |
| | | | | ESR | 1.25 x initial limit | | | | | | |
| Humidity | Store at 65°C and 95% relative humidity for 500 hours, with no applied voltage. Stabilize at room temperature and humidity for 1-2 hours before measuring. | | | Visual examination | no visible damage | | | | | | |
| | | | | DCL | 1.5 x initial limit | | | | | | |
| | | | | $\Delta C/C$ | within $\pm 10\%$ of initial value | | | | | | |
| | | | | DF | 1.2 x initial limit | | | | | | |
| | | | | ESR | 1.25 x initial limit | | | | | | |
| Biased Humidity | Apply rated voltage (Ur) at 85°C, 85% relative humidity for 1000 hours. Stabilize at room temperature and humidity for 1-2 hours before measuring. | | | Visual examination | no visible damage | | | | | | |
| | | | | DCL | 2 x initial limit | | | | | | |
| | | | | $\Delta C/C$ | within $\pm 10\%$ of initial value | | | | | | |
| | | | | DF | 1.2 x initial limit | | | | | | |
| | | | | ESR | 1.25 x initial limit | | | | | | |
| Temperature Stability | Step | Temperature°C | Duration(min) | | +20°C | -55°C | +20°C | +85°C | +105°C | +20°C | |
| | 1 | +20 | 15 | DCL | IL* | n/a | IL* | 10 x IL* | 12.5 x IL* | IL* | |
| | 2 | -55 | 15 | $\Delta C/C$ | n/a | +0/-10% | $\pm 5\%$ | +10/-0% | +12/-0% | $\pm 5\%$ | |
| | 3 | +20 | 15 | DF | IL* | 1.5 x IL* | IL* | 1.5 x IL* | 2 x IL* | IL* | |
| | 4 | +85 | 15 | ESR | 1.25 x IL* | 2.5 x IL* | 1.25 x IL* | 1.25 x IL* | 1.25 x IL* | 1.25 x IL* | |
| | 5 | +105 | 15 | | | | | | | | |
| | 6 | +20 | 15 | | | | | | | | |
| Surge Voltage | Apply 1.3x category voltage (Uc) at 105°C for 1000 cycles of duration 6 min (30 sec charge, 5 min 30 sec discharge) through a charge / discharge resistance of 1000 Ω | | | Visual examination | no visible damage | | | | | | |
| | | | | DCL | initial limit | | | | | | |
| | | | | $\Delta C/C$ | within $\pm 5\%$ of initial value | | | | | | |
| | | | | DF | initial limit | | | | | | |
| | | | | ESR | 1.25 x initial limit | | | | | | |
| Mechanical Shock | MIL-STD-202, Method 213, Condition F | | | Visual examination | no visible damage | | | | | | |
| | | | | DCL | initial limit | | | | | | |
| | | | | $\Delta C/C$ | within $\pm 5\%$ of initial value | | | | | | |
| | | | | DF | initial limit | | | | | | |
| | | | | ESR | 1.25 x initial limit | | | | | | |
| Vibration | MIL-STD-202, Method 204, Condition D | | | Visual examination | no visible damage | | | | | | |
| | | | | DCL | initial limit | | | | | | |
| | | | | $\Delta C/C$ | within $\pm 5\%$ of initial value | | | | | | |
| | | | | DF | initial limit | | | | | | |
| | | | | ESR | 1.25 x initial limit | | | | | | |

*Initial Limit

AVX SOLID ELECTROLYTE CAPACITOR ROADMAP



Five Capacitor Construction Styles



SERIES LINE UP: NIOBIUM OXIDE OXICAP® CAPACITORS



Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View NOJA475M006RWJ on WIN SOURCE](#)

 [AVX Corporation](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management