WINSOURCE ELECTRONICS

# THE DATASHEET OF

# LPC1114FBD48/303,1

www.win-source.net 0086-755-83957316

# UM10398

## LPC111x/LPC11Cxx User manual

**Rev. 12.4 — 22 December 2016** **User manual**

### Document information

| Info | Content |
|---|---|
| **Keywords** | ARM Cortex-M0, LPC1111, LPC1112, LPC1113, LPC1114, LPC1115, LPC11C12, LPC11C14, LPC1100, LPC1100L, LPC11C00, LPC11C22, LPC11C24, LPC11D14, LPC1100XL |
| **Abstract** | LPC111x/LPC11Cxx User manual |

## Revision history

| Rev | Date | Description |
|---|---|---|
| 12.4 | 20161222 | LPC111x/LPC11C1x/LPC11C2x User manual |
| Modifications: | • Added part LPC111x/303 to the LPC1100XL series. See Section 1.1 “Introduction”.<br>• Update Bit 7 (RX) of Table 251 “CAN test register (CANTEST, address 0x4005 0014) bit description”:<br>0: Dominant. The CAN bus is dominant (CAN_RXD = 0).<br>1: Recessive. The CAN bus is recessive (CAN_RXD = 1).<br>• Updated Section 26.3.1 “Bootloader”: Added text: PIO1_6 is ISP_RXD and PIO1_7 is ISP_TXD. | |
| 12.3 | 20140610 | LPC111x/LPC11C1x/LPC11C2x User manual |
| Modifications: | Section 5.2 added to describe the requirement to disable all interrupts before calling the power profiles and the requirement to use default mode when calling the IAP functions. | |
| 12.2 | 20140324 | LPC111x/LPC11C1x/LPC11C2x User manual |
| Modifications: | • Parts LPC1112JHI33/203, LPC1114JHN33/333, LPC1115JET48/303, and LPC1115JBD48/303 added.<br>• C_CAN Figure 67 “Bit timing” and TSEG1 bit description in Table 249 “CAN bit timing register (CANBT, address 0x4005 000C) bit description” updated for clarification.<br>• Section 16.7.5.2 “Calculating the C_CAN bit rate” added.<br>• Parts added: LPC1114JHI33/303, LPC1111JHN33/103, LPC1112JHN33/203, LPC1113JHN33/203, LPC1114JHN33/303, LPC1114JBD48/333, LPC1112FHI33/102, LPC1114JBD48/303, LPC1114JBD48/323, LPC1113JHN33/303, LPC1112JHN33/103, LPC1111JHN33/203, LPC1114JHN33/203.<br>• Pin description tables for $\overline{\text{RESET}}$/PIO0_0 updated: In deep power-down mode, this pin must be pulled HIGH externally. The $\overline{\text{RESET}}$ pin can be left unconnected or be used as a GPIO pin if an external $\overline{\text{RESET}}$ function is not needed.<br>• Pin description notes relating to open-drain I2C-bus pins updated for clarity.<br>• Pin description of the WAKEUP pin updated for clarity.<br>• Remark added to Section 3.9.3.3 “Wake-up from Deep-sleep mode”: After wake-up, reprogram the clock source for the main clock. | |
| 12.1 | 20130807 | LPC111x/LPC11C1x/LPC11C2x User manual |
| Modifications: | • Remove instruction breakpoints from feature list for SWD. See Section 27.2.<br>• IRQLATENCY register added in SYSCON block. See Table 35.<br>• Reset value of the C_CAN CANCLKDIV register changed to 0x1, See Table 275.<br>• RAM used by ISP sizes updated. See Section 26.4.8, Section 26.4.9.<br>• SSEL1_LOC Register description corrected. See Table 152.<br>• Added LPC1115FET48.<br>• Editorial updates.<br>• Updated Go command Section 26.5.8. | |
| 12 | 20120924 | LPC111x/LPC11C1x/LPC11C2x User manual |
| Modifications: | • BOD level 0 for reset added. See Table 33.<br>• Description of the TEMT bit in the UART LSR register updated. See Table 196. | |
| 11 | 20120726 | LPC111x/LPC11C1x/LPC11C2x User manual |
| Modifications: | • Function SSEL1 added to pin PIO2_0 in Table 170 and Figure 28.<br>• BOD level 0 for reset and interrupt removed. | |
| 10 | 20120626 | LPC111x/LPC11C1x/LPC11C2x User manual |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Revision history** *...continued*

| Rev | Date | Description |
|---|---|---|
| Modifications: | | • LPC1112FHN24 pinout corrected in Table 161 and Figure 18.<br>• Description of BYPASS bit corrected in Table 12 “System oscillator control register (SYSOSCCTRL, address 0x4004 8020) bit description”. |

## Contact information

For more information, please visit: **http://www.nxp.com**

For sales office addresses, please send an email to: **salesaddresses@nxp.com**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Revision history** *...continued*

| Rev | Date | Description |
|---|---|---|
| 9 | 20120517 | LPC111x/LPC11C1x/LPC11C2x/LPC11D14 User manual |
| Modifications: | • LPC11D14/PCF8576D block diagram updated (see Figure 5).<br>• Description of interrupt use with IAP calls updated (see Section 26.4.7).<br>• SYSRSTSTAT register access changed to R/W (Table 7).<br>• Frequency values for FREQSEL bits in the WDTOSCCTRL register corrected (see Table 13).<br>• Figure 9 updated ($\overline{\text{RESET}}$ changed to internal reset).<br>• Limit number of bytes copied in Copy RAM to flash ISP and IAP commands for parts with less than 4 kB SRAM (see Table 381 and Table 396).<br>• Figure 14 updated with pseudo open-drain mode.<br>• Part LPC1112FHN24/202 added.<br>• Part IDs added for parts LPC1110FD20, LPC1111FDH20/002, LPC1112FD20/102, LPC1112FDH20/102, LPC1112FDH28/102, LPC1114FDH28/102, LPC1114FN28/102.<br>• SRAM use by bootloader specified in Section 26.3.1. | |
| 8 | 20120308 | LPC111x/LPC11C1x/LPC11C2x User manual |
| 7 | 20110919 | LPC111x/LPC11C1x/LPC11C2x User manual |
| 6 | 20110822 | LPC111x/LPC11C1x/LPC11C2x User manual |
| 5 | 20110621 | LPC111x/LPC11C1x/LPC11C2x User manual |
| 4 | 20110304 | LPC111x/LPC11C1x/LPC11C2x User manual |
| 3 | 20110114 | LPC111x/LPC11C1x/LPC11C2x User manual |
| 2 | 20101102 | LPC111x/LPC11C1x User manual |
| 1 | 20100721 | LPC111x/LPC11C1x User manual |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 1.1 Introduction

The LPC111x/LPC11Cxx are a ARM Cortex-M0 based, low-cost 32-bit MCU family, designed for 8/16-bit microcontroller applications, offering performance, low power, simple instruction set and memory addressing together with reduced code size compared to existing 8/16-bit architectures.

The LPC111x/LPC11Cxx operate at CPU frequencies of up to 50 MHz.

The peripheral complement of the LPC111x/LPC11Cxx includes up to 32 kB of flash memory, up to 8 kB of data memory, one C_CAN controller (LPC11Cxx), one Fast-mode Plus $I^2C$-bus interface, one RS-485/EIA-485 UART, up to two SPI interfaces with SSP features, four general purpose timers, a 10-bit ADC, and up to 42 general purpose I/O pins.

On-chip C_CAN drivers and flash In-System Programming tools via C_CAN are included on the LPC11Cxx. In addition, parts LPC11C2x are equipped with an on-chip CAN transceiver.

**Remark:** This user manual covers the LPC111x/LPC11Cxx parts and the LPC11D14 dual-chip part with PCF8576D LCD controller. The LPC111x/LPC11Cxx parts are grouped by the following series and part names (see Table 1 for a feature overview):

- LPC1100 series (parts LPC111x/101/201/301)
- LPC1100L series (parts LPC111x/102/202/302) and part LPC11D14 with LCD controller.
- LPC1100XL series (parts LPC111x/103/203/303/323/333)
- LPC11C00 series (parts LPC11C1x/301 and LPC11C2x/301) with C_CAN controller.

For related documentation, see Section 29.2 “References”.



All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 1. LPC111x/LPC11Cxx feature changes**

| Series | Features overview |
|---|---|
| LPC1100 series | • I2C, SSP, UART, GPIO<br>• Timers and watch dog timer<br>• 10-bit ADC<br>• Flash/SRAM memory<br>• For a full feature list, see Section 1.2. |
| LPC1100L series | LPC1100 series features plus the following additional features:<br>• Power profiles with lower power consumption in Active and Sleep modes.<br>• Internal pull-up resistors pull up pins to full $V_{DD}$ level.<br>• Programmable pseudo open-drain mode for GPIO pins.<br>• WWDT with clock source lock capability.<br>• Small packages (TSSOP, SO, DIP, HVQFN) |
| LPC1100XL series | LPC1100L series features plus the following new features:<br>• Flash page erase In-Application Programming (IAP) function.<br>• Timer, UART, and SSP functions pinned out on additional pins.<br>• One capture function added for each timer.<br>• Capture-clear feature on the 16-bit and 32-bit timers for easy pulse-width measurements. |
| LPC11C00 series | LPC1100 series features plus the following additional features:<br>• CAN controller.<br>• On-chip CAN drivers.<br>• On-chip CAN transceiver (LPC11C2x).<br>• WDT (not windowed) with clock source lock capability. |
| LPC11D14 (LPC1100L series) | LPC1100L series with LCD controller PCF8576D in a dual-chip package. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 1.2 Features

- System:
  - ARM Cortex-M0 processor, running at frequencies of up to 50 MHz.
  - ARM Cortex-M0 built-in Nested Vectored Interrupt Controller (NVIC).
  - Serial Wire Debug.
  - System tick timer.
- Memory:
  - On-chip flash programming memory for LPC1100, LPC1100L, and LPC1100C series: 32 kB (LPC1114/LPC11C14), 24 kB (LPC1113), 16 kB (LPC1112/LPC11C12), or 8 kB (LPC1111), 4kB (LPC1110).
  - On-chip flash programming memory for LPC1100XL series: 8 kB (LPC1111), 16 kB (LPC1112), 24 kB (LPC1113), 32 kB (LPC1114/203/303), 48 kB (LPC1114/323), 56 kB (LPC1114/333), 64 kB (LPC1115).
  - 8 kB, 4 kB, 2 kB, or 1 kB SRAM.
  - In-System Programming (ISP) and In-Application Programming (IAP) via on-chip bootloader software.
  - LPC1100XL series only: page erase IAP command.
- Digital peripherals:
  - Up to 42 General Purpose I/O (GPIO) pins with configurable pull-up/pull-down resistors. Number of GPIO pins is reduced for smaller packages and LPC11C22/C24.
  - GPIO pins can be used as edge and level sensitive interrupt sources.
  - High-current output driver (20 mA) on one pin.
  - High-current sink drivers (20 mA) on two $I^2C$-bus pins in Fast-mode Plus.
  - Four general purpose timers/counters with a total of four capture inputs and up to 13 match outputs.
  - Programmable WatchDog Timer (WDT).
- Analog peripherals:
  - 10-bit ADC with input multiplexing among up to 8 pins.
- Serial interfaces:
  - UART with fractional baud rate generation, internal FIFO, and RS-485 support.
  - Two SPI controllers with SSP features and with FIFO and multi-protocol capabilities (second SPI on LQFP48 packages only).
  - $I^2C$-bus interface supporting full $I^2C$-bus specification and Fast-mode Plus with a data rate of 1 Mbit/s with multiple address recognition and monitor mode.
  - C_CAN controller (LPC11Cxx only). On-chip CAN and CANopen drivers included.
  - On-chip, high-speed CAN transceiver (parts LPC11C22/C24 only).
- Clock generation:
  - 12 MHz internal RC oscillator trimmed to 1% accuracy that can optionally be used as a system clock.
  - Crystal oscillator with an operating range of 1 MHz to 25 MHz.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

  - Programmable watchdog oscillator with a frequency range of 7.8 kHz to 1.8 MHz.
  - PLL allows CPU operation up to the maximum CPU rate without the need for a high-frequency crystal. May be run from the system oscillator or the internal RC oscillator.
  - Clock output function with divider that can reflect the system oscillator clock, IRC clock, CPU clock, and the Watchdog clock.
- Power control:
  - Integrated PMU (Power Management Unit) to minimize power consumption during Sleep, Deep-sleep, and Deep power-down modes.
  - Power profiles residing in boot ROM allowing to optimize performance and minimize power consumption for any given application through one simple function call. (On LPC1100L and LPC1100XL parts only).
  - Three reduced power modes: Sleep, Deep-sleep, and Deep power-down.
  - Processor wake-up from Deep-sleep mode via a dedicated start logic using up to 13 of the functional pins.
  - Power-On Reset (POR).
  - Brownout detect with up to four separate thresholds for interrupt and forced reset.
- Unique device serial number for identification.
- Single 3.3 V power supply (1.8 V to 3.6 V).
- Available as LQFP48 package, HVQFN33 package.
- LPC1100L series also available as HVQFN24, TSSOP28 package, DIP28 package, TSSOP20 package, and SO20 package.
- Available as dual-chip module consisting of the LPC1114 single-chip microcontroller combined with a PCF8576D Universal LCD driver in a 100-pin LQFP package (part LPC11D14FBD100/302).[1]

1. For details on the PCF8576D operation, see Ref. 3.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 1.3 Ordering information

**Table 2. Ordering information**

| Type number | Package | | |
|---|---|---|---|
| | Name | Description | Version |
| **SO20, TSSOP20, TSSOP28, and DIP28 packages** | | | |
| LPC1110FD20 | SO20 | SO20: plastic small outline package; 20 leads; body width 7.5 mm | SOT163-1 |
| LPC1111FDH20/002 | TSSOP20 | TSSOP20: plastic thin shrink small outline package; 20 leads; body width 4.4 mm | SOT360-1 |
| LPC1112FD20/102 | SO20 | SO20: plastic small outline package; 20 leads; body width 7.5 mm | SOT163-1 |
| LPC1112FDH20/102 | TSSOP20 | TSSOP20: plastic thin shrink small outline package; 20 leads; body width 4.4 mm | SOT360-1 |
| LPC1112FDH28/102 | TSSOP28 | TSSOP28: plastic thin shrink small outline package; 28 leads; body width 4.4 mm | SOT361-1 |
| LPC1114FDH28/102 | TSSOP28 | TSSOP28: plastic thin shrink small outline package; 28 leads; body width 4.4 mm | SOT361-1 |
| LPC1114FN28/102 | DIP28 | DIP28: plastic dual in-line package; 28 leads (600 mil) | SOT117-1 |
| **HVQFN24/33, LQFP48, and TFBGA48 packages** | | | |
| LPC1111FHN33/101 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 7 × 7 × 0.85 mm | n/a |
| LPC1111FHN33/102 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 7 × 7 × 0.85 mm | n/a |
| LPC1111FHN33/201 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 7 × 7 × 0.85 mm | n/a |
| LPC1111FHN33/202 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 7 × 7 × 0.85 mm | n/a |
| LPC1111FHN33/103 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 7 × 7 × 0.85 mm | n/a |
| LPC1111JHN33/103 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 7 × 7 × 0.85 mm | n/a |
| LPC1111FHN33/203 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 7 × 7 × 0.85 mm | n/a |
| LPC1111JHN33/203 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 7 × 7 × 0.85 mm | n/a |
| LPC1112FHN33/101 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 7 × 7 × 0.85 mm | n/a |
| LPC1112FHN33/102 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 7 × 7 × 0.85 mm | n/a |
| LPC1112FHN33/201 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 7 × 7 × 0.85 mm | n/a |
| LPC1112FHN33/202 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 7 × 7 × 0.85 mm | n/a |
| LPC1112FHN24/202 | HVQFN24 | HVQFN24: plastic thermal enhanced very thin quad flat package; no leads; 24 terminals; body 4 x 4 x 0.85 mm | SOT616-3 |
| LPC1112FHI33/102 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 5 × 5 × 0.85 mm | n/a |
| LPC1112FHI33/202 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 5 × 5 × 0.85 mm | n/a |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 2. Ordering information** *…continued*

| Type number | Package | | |
|---|---|---|---|
| | Name | Description | Version |
| LPC1112FHI33/203 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 5 × 5 × 0.85 mm | n/a |
| LPC1112JHI33/203 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 5 × 5 × 0.85 mm | n/a |
| LPC1112FHN33/103 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 7 × 7 × 0.85 mm | n/a |
| LPC1112JHN33/103 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 7 × 7 × 0.85 mm | n/a |
| LPC1112JHN33/203 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 7 × 7 × 0.85 mm | n/a |
| LPC1112FHN33/203 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 7 × 7 × 0.85 mm | n/a |
| LPC1113FHN33/201 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 7 × 7 × 0.85 mm | n/a |
| LPC1113FHN33/202 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 7 × 7 × 0.85 mm | n/a |
| LPC1113FHN33/203 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 7 × 7 × 0.85 mm | n/a |
| LPC1113JHN33/203 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 7 × 7 × 0.85 mm | n/a |
| LPC1113FHN33/301 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 7 × 7 × 0.85 mm | n/a |
| LPC1113FHN33/302 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 7 × 7 × 0.85 mm | n/a |
| LPC1113FHN33/303 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 7 × 7 × 0.85 mm | n/a |
| LPC1113JHN33/303 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 7 × 7 × 0.85 mm | n/a |
| LPC1114FHN33/201 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 7 × 7 × 0.85 mm | n/a |
| LPC1114FHN33/202 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 7 × 7 × 0.85 mm | n/a |
| LPC1114FHN33/301 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 7 × 7 × 0.85 mm | n/a |
| LPC1114FHN33/302 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 7 × 7 × 0.85 mm | n/a |
| LPC1114FHI33/302 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 5 × 5 × 0.85 mm | n/a |
| LPC1114FHI33/303 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 5 × 5 × 0.85 mm | n/a |
| LPC1114JHI33/303 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 5 × 5 × 0.85 mm | n/a |
| LPC1114FHN33/203 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 7 × 7 × 0.85 mm | n/a |
| LPC1114JHN33/203 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 7 × 7 × 0.85 mm | n/a |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 2. Ordering information** *…continued*

| Type number | Package | | |
|---|---|---|---|
| | Name | Description | Version |
| LPC1114FHN33/303 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 7 × 7 × 0.85 mm | n/a |
| LPC1114JHN33/303 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 7 × 7 × 0.85 mm | n/a |
| LPC1114FHN33/333 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 7 × 7 × 0.85 mm | n/a |
| LPC1114JHN33/333 | HVQFN33 | HVQFN: plastic thermal enhanced very thin quad flat package; no leads; 33 terminals; body 7 × 7 × 0.85 mm | n/a |
| LPC1113FBD48/301 | LQFP48 | LQFP48: plastic low profile quad flat package; 48 leads; body 7 × 7 × 1.4 mm | SOT313-2 |
| LPC1113FBD48/302 | LQFP48 | LQFP48: plastic low profile quad flat package; 48 leads; body 7 × 7 × 1.4 mm | SOT313-2 |
| LPC1113FBD48/303 | LQFP48 | LQFP48: plastic low profile quad flat package; 48 leads; body 7 × 7 × 1.4 mm | SOT313-2 |
| LPC1113JBD48/303 | LQFP48 | LQFP48: plastic low profile quad flat package; 48 leads; body 7 × 7 × 1.4 mm | SOT313-2 |
| LPC1114FBD48/301 | LQFP48 | LQFP48: plastic low profile quad flat package; 48 leads; body 7 × 7 × 1.4 mm | SOT313-2 |
| LPC1114FBD48/302 | LQFP48 | LQFP48: plastic low profile quad flat package; 48 leads; body 7 × 7 × 1.4 mm | SOT313-2 |
| LPC1114FBD48/303 | LQFP48 | LQFP48: plastic low profile quad flat package; 48 leads; body 7 × 7 × 1.4 mm | SOT313-2 |
| LPC1114JBD48/303 | LQFP48 | LQFP48: plastic low profile quad flat package; 48 leads; body 7 × 7 × 1.4 mm | SOT313-2 |
| LPC1114FBD48/323 | LQFP48 | LQFP48: plastic low profile quad flat package; 48 leads; body 7 × 7 × 1.4 mm | SOT313-2 |
| LPC1114JBD48/323 | LQFP48 | LQFP48: plastic low profile quad flat package; 48 leads; body 7 × 7 × 1.4 mm | SOT313-2 |
| LPC1114FBD48/333 | LQFP48 | LQFP48: plastic low profile quad flat package; 48 leads; body 7 × 7 × 1.4 mm | SOT313-2 |
| LPC1114JBD48/333 | LQFP48 | LQFP48: plastic low profile quad flat package; 48 leads; body 7 × 7 × 1.4 mm | SOT313-2 |
| LPC1115FBD48/303 | LQFP48 | LQFP48: plastic low profile quad flat package; 48 leads; body 7 × 7 × 1.4 mm | SOT313-2 |
| LPC1115JBD48/303 | LQFP48 | LQFP48: plastic low profile quad flat package; 48 leads; body 7 × 7 × 1.4 mm | SOT313-2 |
| LPC1115FET48/303 | TFBGA48 | plastic thin fine-pitch ball grid array package; 48 balls; body 4.5 × 4.5 × 0.7 mm | SOT1155-2 |
| LPC1115JET48/303 | TFBGA48 | plastic thin fine-pitch ball grid array package; 48 balls; body 4.5 × 4.5 × 0.7 mm | SOT1155-2 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 3. Ordering options**

| Type number | Series | Flash | Total SRAM | UART RS-485 | I²C/ Fm+ | SPI | Power profiles | ADC channels | GPIO | C_CAN | Operating temperature[1] | Package |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **LPC1110** | | | | | | | | | | | | |
| LPC1110FD20 | LPC1100L | 4 kB | 1 kB | 1 | 1 | 1 | yes | 5 | 16 | - | F | SO20 |
| **LPC1111** | | | | | | | | | | | | |
| LPC1111FDH20/002 | LPC1100L | 8 kB | 2 kB | 1 | 1 | 1 | yes | 5 | 16 | - | F | TSSOP20 |
| LPC1111FHN33/101 | LPC1100 | 8 kB | 2 kB | 1 | 1 | 1 | no | 8 | 28 | - | F | HVQFN33 |
| LPC1111FHN33/102 | LPC1100L | 8 kB | 2 kB | 1 | 1 | 1 | yes | 8 | 28 | - | F | HVQFN33 |
| LPC1111FHN33/103 | LPC1100XL | 8 kB | 2 kB | 1 | 1 | 2 | yes | 8 | 28 | - | F | HVQFN33 |
| LPC1111JHN33/103 | LPC1100XL | 8 kB | 2 kB | 1 | 1 | 2 | yes | 8 | 28 | - | J | HVQFN33 |
| LPC1111FHN33/201 | LPC1100 | 8 kB | 4 kB | 1 | 1 | 1 | no | 8 | 28 | - | F | HVQFN33 |
| LPC1111FHN33/202 | LPC1100L | 8 kB | 4 kB | 1 | 1 | 1 | yes | 8 | 28 | - | F | HVQFN33 |
| LPC1111FHN33/203 | LPC1100XL | 8 kB | 4 kB | 1 | 1 | 2 | yes | 8 | 28 | - | F | HVQFN33 |
| LPC1111JHN33/203 | LPC1100XL | 8 kB | 4 kB | 1 | 1 | 2 | yes | 8 | 28 | - | J | HVQFN33 |
| **LPC1112** | | | | | | | | | | | | |
| LPC1112FD20/102 | LPC1100L | 16 kB | 4 kB | 1 | 1 | 1 | yes | 5 | 16 | - | F | SO20 |
| LPC1112FDH20/102 | LPC1100L | 16 kB | 4 kB | 1 | - | 1 | yes | 5 | 14 | - | F | TSSOP20 |
| LPC1112FDH28/102 | LPC1100L | 16 kB | 4 kB | 1 | 1 | 1 | yes | 6 | 22 | - | F | TSSOP28 |
| LPC1112FHN33/101 | LPC1100 | 16 kB | 2 kB | 1 | 1 | 1 | no | 8 | 28 | - | F | HVQFN33 |
| LPC1112FHN33/102 | LPC1100L | 16 kB | 2 kB | 1 | 1 | 1 | yes | 8 | 28 | - | F | HVQFN33 |
| LPC1112FHI33/102 | LPC1100L | 16 kB | 2 kB | 1 | 1 | 1 | yes | 8 | 28 | - | F | HVQFN33 |
| LPC1112FHN33/103 | LPC1100XL | 16 kB | 2 kB | 1 | 1 | 2 | yes | 8 | 28 | - | F | HVQFN33 |
| LPC1112JHN33/103 | LPC1100XL | 16 kB | 2 kB | 1 | 1 | 2 | yes | 8 | 28 | - | J | HVQFN33 |
| LPC1112FHN33/201 | LPC1100 | 16 kB | 4 kB | 1 | 1 | 1 | no | 8 | 28 | - | F | HVQFN33 |
| LPC1112FHN24/202 | LPC1100L | 16 kB | 4 kB | 1 | 1 | 1 | yes | 6 | 19 | - | F | HVQFN24 |
| LPC1112FHN33/202 | LPC1100L | 16 kB | 4 kB | 1 | 1 | 1 | yes | 8 | 28 | - | F | HVQFN33 |
| LPC1112FHN33/203 | LPC1100XL | 16 kB | 4 kB | 1 | 1 | 2 | yes | 8 | 28 | - | F | HVQFN33 |
| LPC1112JHN33/203 | LPC1100XL | 16 kB | 4 kB | 1 | 1 | 2 | yes | 8 | 28 | - | J | HVQFN33 |
| LPC1112FHI33/202 | LPC1100L | 16 kB | 4 kB | 1 | 1 | 1 | yes | 8 | 28 | - | F | HVQFN33 |
| LPC1112FHI33/203 | LPC1100XL | 16 kB | 4 kB | 1 | 1 | 2 | yes | 8 | 28 | - | F | HVQFN33 |
| LPC1112JHI33/203 | LPC1100XL | 16 kB | 4 kB | 1 | 1 | 2 | yes | 8 | 28 | - | J | HVQFN33 |
| **LPC1113** | | | | | | | | | | | | |
| LPC1113FHN33/201 | LPC1100 | 24 kB | 4 kB | 1 | 1 | 1 | no | 8 | 28 | - | F | HVQFN33 |
| LPC1113FHN33/202 | LPC1100L | 24 kB | 4 kB | 1 | 1 | 1 | yes | 8 | 28 | - | F | HVQFN33 |
| LPC1113FHN33/203 | LPC1100XL | 24 kB | 4 kB | 1 | 1 | 2 | yes | 8 | 28 | - | F | HVQFN33 |
| LPC1113JHN33/203 | LPC1100XL | 24 kB | 4 kB | 1 | 1 | 2 | yes | 8 | 28 | - | J | HVQFN33 |
| LPC1113FHN33/301 | LPC1100 | 24 kB | 8 kB | 1 | 1 | 1 | no | 8 | 28 | - | F | HVQFN33 |
| LPC1113FHN33/302 | LPC1100L | 24 kB | 8 kB | 1 | 1 | 1 | yes | 8 | 28 | - | F | HVQFN33 |
| LPC1113FHN33/303 | LPC1100XL | 24 kB | 8 kB | 1 | 1 | 2 | yes | 8 | 28 | - | F | HVQFN33 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 3. Ordering options** *…continued*

| Type number | Series | Flash | Total SRAM | UART RS-485 | I²C/ Fm+ | SPI | Power profiles | ADC channels | GPIO | C_CAN | Operating temperature[1] | Package |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| LPC1113JHN33/303 | LPC1100XL | 24 kB | 8 kB | 1 | 1 | 2 | yes | 8 | 28 | - | J | HVQFN33 |
| LPC1113FBD48/301 | LPC1100 | 24 kB | 8 kB | 1 | 1 | 2 | no | 8 | 42 | - | F | LQFP48 |
| LPC1113FBD48/302 | LPC1100L | 24 kB | 8 kB | 1 | 1 | 2 | yes | 8 | 42 | - | F | LQFP48 |
| LPC1113FBD48/303 | LPC1100XL | 24 kB | 8 kB | 1 | 1 | 2 | yes | 8 | 42 | - | F | LQFP48 |
| LPC1113JBD48/303 | LPC1100XL | 24 kB | 8 kB | 1 | 1 | 2 | yes | 8 | 42 | - | J | LQFP48 |
| **LPC1114** | | | | | | | | | | | | |
| LPC1114FDH28/102 | LPC1100L | 32 kB | 4 kB | 1 | 1 | 1 | yes | 6 | 22 | | F | TSSOP28 |
| LPC1114FN28/102 | LPC1100L | 32 kB | 4 kB | 1 | 1 | 1 | yes | 6 | 22 | | F | DIP28 |
| LPC1114FHN33/201 | LPC1100 | 32 kB | 4 kB | 1 | 1 | 1 | no | 8 | 28 | - | F | HVQFN33 |
| LPC1114FHN33/202 | LPC1100L | 32 kB | 4 kB | 1 | 1 | 1 | yes | 8 | 28 | - | F | HVQFN33 |
| LPC1114FHN33/203 | LPC1100XL | 32 kB | 4 kB | 1 | 1 | 2 | yes | 8 | 28 | - | F | HVQFN33 |
| LPC1114JHN33/203 | LPC1100XL | 32 kB | 4 kB | 1 | 1 | 2 | yes | 8 | 28 | - | J | HVQFN33 |
| LPC1114FHN33/301 | LPC1100 | 32 kB | 8 kB | 1 | 1 | 1 | no | 8 | 28 | - | F | HVQFN33 |
| LPC1114FHN33/302 | LPC1100L | 32 kB | 8 kB | 1 | 1 | 1 | yes | 8 | 28 | - | F | HVQFN33 |
| LPC1114FHN33/303 | LPC1100XL | 32 kB | 8 kB | 1 | 1 | 2 | yes | 8 | 28 | - | F | HVQFN33 |
| LPC1114JHN33/303 | LPC1100XL | 32 kB | 8 kB | 1 | 1 | 2 | yes | 8 | 28 | - | J | HVQFN33 |
| LPC1114FHN33/333 | LPC1100XL | 56 kB | 8 kB | 1 | 1 | 2 | yes | 8 | 28 | - | F | HVQFN33 |
| LPC1114JHN33/333 | LPC1100XL | 56 kB | 8 kB | 1 | 1 | 2 | yes | 8 | 28 | - | J | HVQFN33 |
| LPC1114FHI33/302 | LPC1100L | 32 kB | 8 kB | 1 | 1 | 1 | yes | 8 | 28 | - | F | HVQFN33 |
| LPC1114FHI33/303 | LPC1100XL | 32 kB | 8 kB | 1 | 1 | 2 | yes | 8 | 28 | - | F | HVQFN33 |
| LPC1114JHI33/303 | LPC1100XL | 32 kB | 8 kB | 1 | 1 | 2 | yes | 8 | 28 | - | J | HVQFN33 |
| LPC1114FBD48/301 | LPC1100 | 32 kB | 8 kB | 1 | 1 | 2 | no | 8 | 42 | - | F | LQFP48 |
| LPC1114FBD48/302 | LPC1100L | 32 kB | 8 kB | 1 | 1 | 2 | yes | 8 | 42 | - | F | LQFP48 |
| LPC1114FBD48/303 | LPC1100XL | 32 kB | 8 kB | 1 | 1 | 2 | yes | 8 | 42 | - | F | LQFP48 |
| LPC1114JBD48/303 | LPC1100XL | 32 kB | 8 kB | 1 | 1 | 2 | yes | 8 | 42 | - | J | LQFP48 |
| LPC1114FBD48/323 | LPC1100XL | 48 kB | 8 kB | 1 | 1 | 2 | yes | 8 | 42 | - | F | LQFP48 |
| LPC1114JBD48/323 | LPC1100XL | 48 kB | 8 kB | 1 | 1 | 2 | yes | 8 | 42 | - | J | LQFP48 |
| LPC1114FBD48/333 | LPC1100XL | 56 kB | 8 kB | 1 | 1 | 2 | yes | 8 | 42 | - | F | LQFP48 |
| LPC1114JBD48/333 | LPC1100XL | 56 kB | 8 kB | 1 | 1 | 2 | yes | 8 | 42 | - | J | LQFP48 |
| **LPC1115** | | | | | | | | | | | | |
| LPC1115FET48/303 | LPC1100XL | 64 kB | 8 kB | 1 | 1 | 2 | yes | 8 | 42 | - | F | TFBGA48 |
| LPC1115JET48/303 | LPC1100XL | 64 kB | 8 kB | 1 | 1 | 2 | yes | 8 | 42 | - | J | TFBGA48 |
| LPC1115FBD48/303 | LPC1100XL | 64 kB | 8 kB | 1 | 1 | 2 | yes | 8 | 42 | - | F | LQFP48 |
| LPC1115JBD48/303 | LPC1100XL | 64 kB | 8 kB | 1 | 1 | 2 | yes | 8 | 42 | - | J | LQFP48 |
| **LPC11C12/LPC11C14** | | | | | | | | | | | | |
| LPC11C12FBD48/301 | LPC11C00 | 16 kB | 8 kB | 1 | 1 | 2 | no | 8 | 40 | 1 | F | LQFP48 |
| LPC11C14FBD48/301 | LPC11C00 | 32 kB | 8 kB | 1 | 1 | 2 | no | 8 | 40 | 1 | F | LQFP48 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 3. Ordering options** *…continued*

| Type number | Series | Flash | Total SRAM | UART RS-485 | I²C/ Fm+ | SPI | Power profiles | ADC channels | GPIO | C_CAN | Operating temperature[1] | Package |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **LPC11C22/LPC11C24 with on-chip, high-speed CAN transceiver** | | | | | | | | | | | | |
| LPC11C22FBD48/301 | LPC11C00 | 16 kB | 8 kB | 1 | 1 | 2 | no | 8 | 36 | 1 | F | LQFP48 |
| LPC11C24FBD48/301 | LPC11C00 | 32 kB | 8 kB | 1 | 1 | 2 | no | 8 | 36 | 1 | F | LQFP48 |
| **LPC11D14 dual-chip module with PCF8576D LCD driver** | | | | | | | | | | | | |
| LPC11D14FBD100/302 | LPC1100L | 32 kB | 8 kB | 1 | 1 | 2 | yes | 8 | 42 | - | F | LQFP100 |

[1] F = –40 °C to +85 °C, J = –40 °C to +105 °C.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 1.4 Block diagram

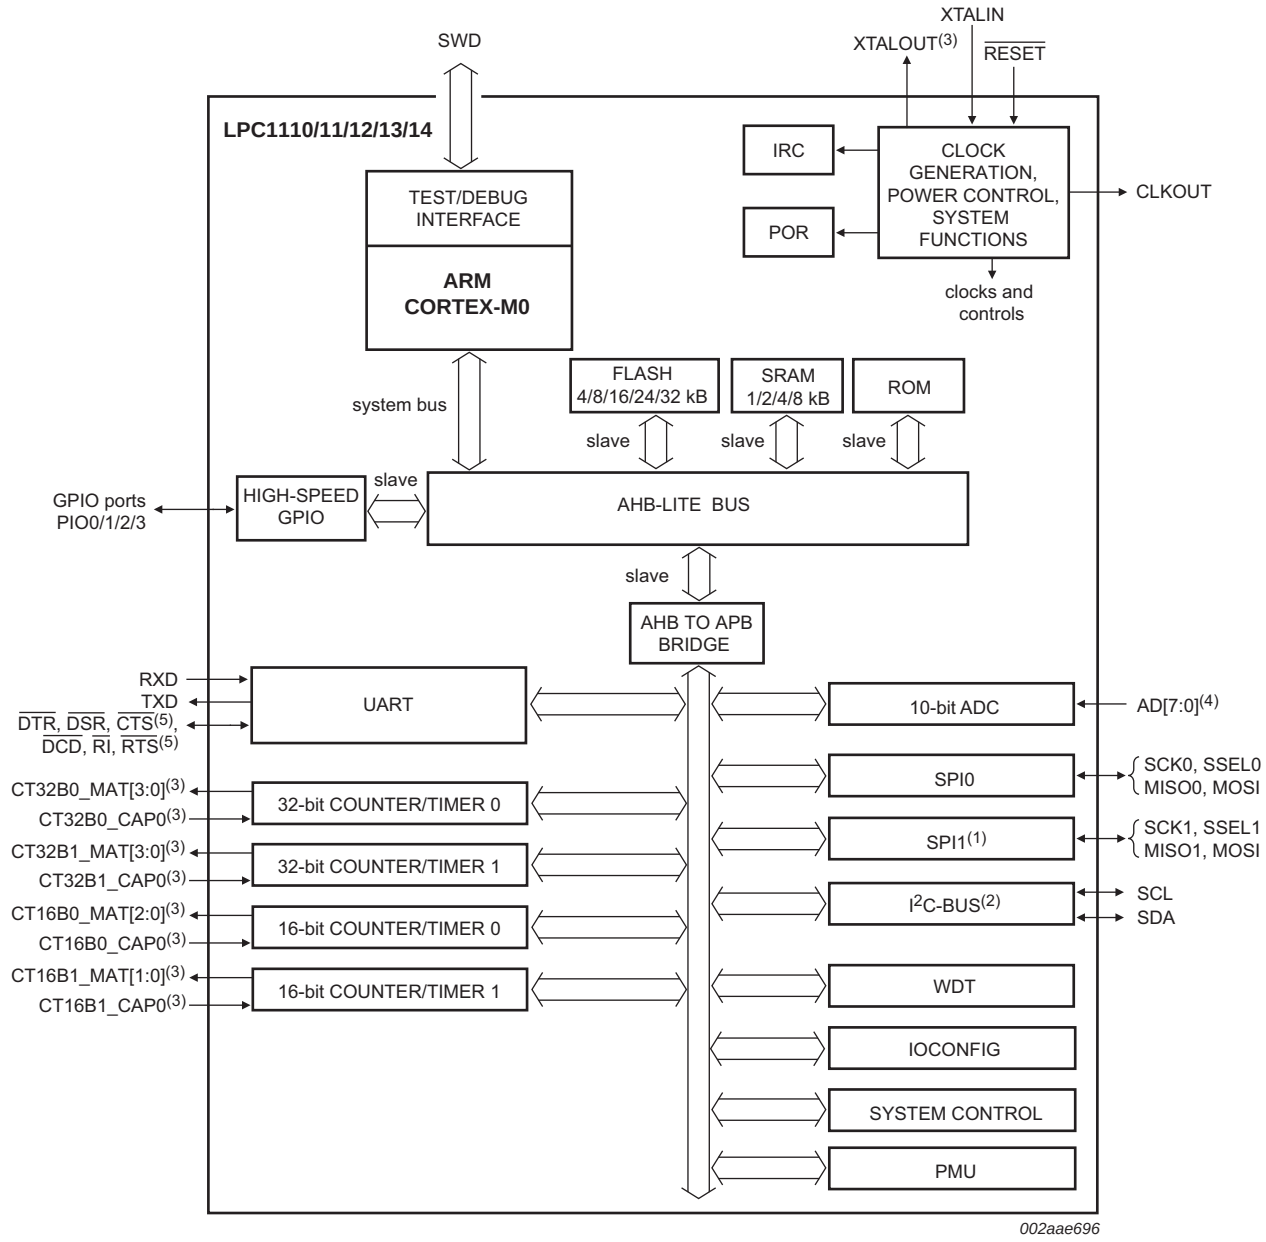


(1) LQFP48 packages only.

(2) Not on LPC1112FDH20/102.

(3) All pins available on LQFP48 and HVQFN33 packages. CT16B1_MAT1 not available on TSSOP28/DIP28 packages. CT32B1_MAT3, CT16B1_CAP0, CT16B1_MAT[1:0], CT32B0_CAP0 not available on TSSOP20/SO20 packages. CT16B1_MAT[1:0], CT32B0_CAP0 not available on the HVQFN24 package. XTALOUT not available on LPC1112FHN24.

(4) AD[7:0] available on LQFP48 and HVQFN33 packages. AD[5:0] available on TSSOP28/DIP28/HVQFN24packages. AD[4:0] available on TSSOP20/SO20 packages.

(5) All pins available on LQFP48 packages. RXD, TXD, $\overline{\text{DTR}}$, $\overline{\text{CTS}}$, $\overline{\text{RTS}}$ available on HVQFN 33 packages. RXD, TXD, $\overline{\text{CTS}}$, $\overline{\text{RTS}}$ available on TSSOP28/DIP28 packages. RXD, TXD available on TSSOP20/SO20 packages.

**Fig 1. LPC111x block diagram (LPC1100 and LPC1100L series)**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

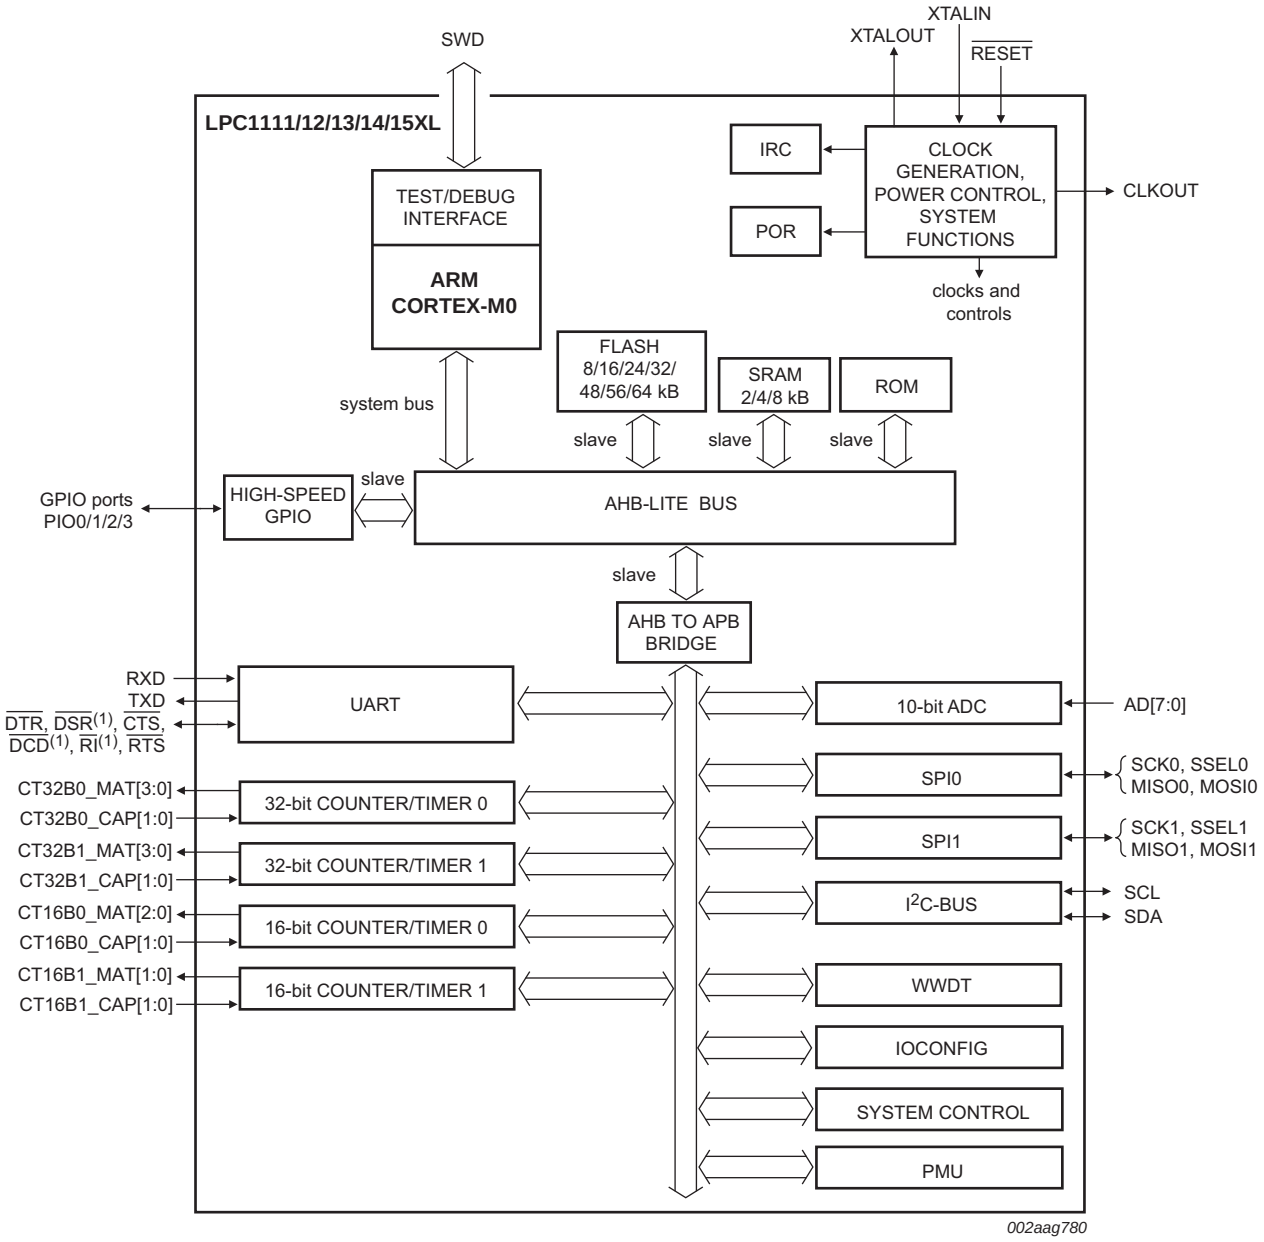


(1) Available on LQFP packages only.

**Fig 2. LPC111x block diagram (LPC1100XL series)**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

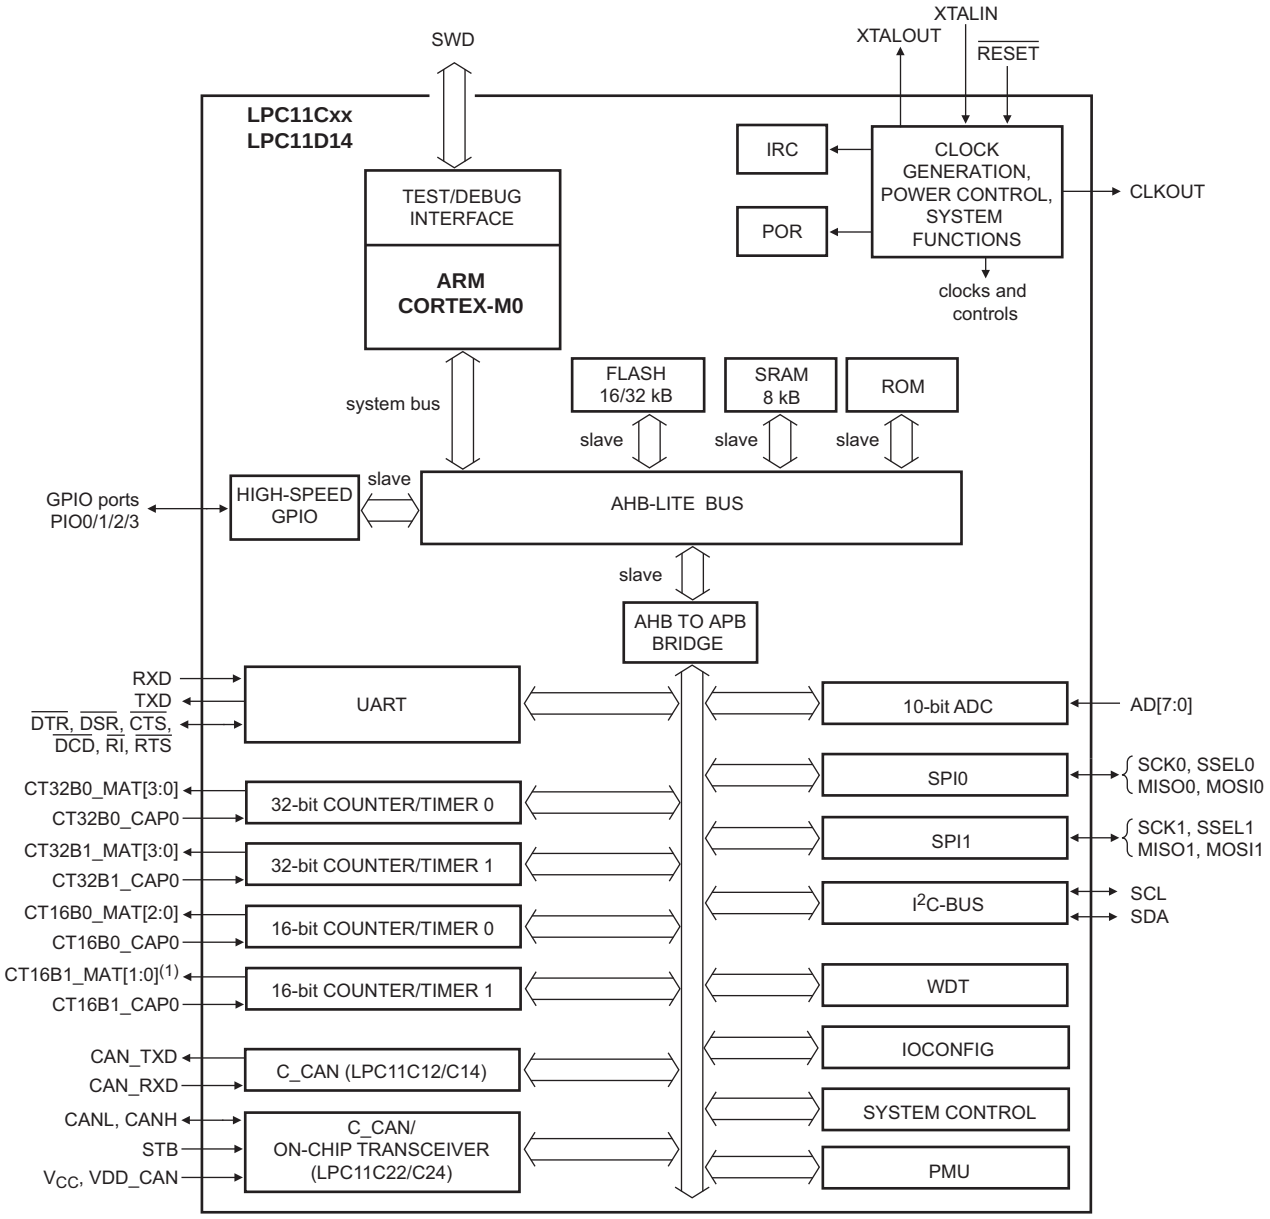


(1) Not available on LPC11C22/C24.

**Fig 3. LPC11Cxx/LPC11D14 block diagram (LPC1100C series and LPC11D14)**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

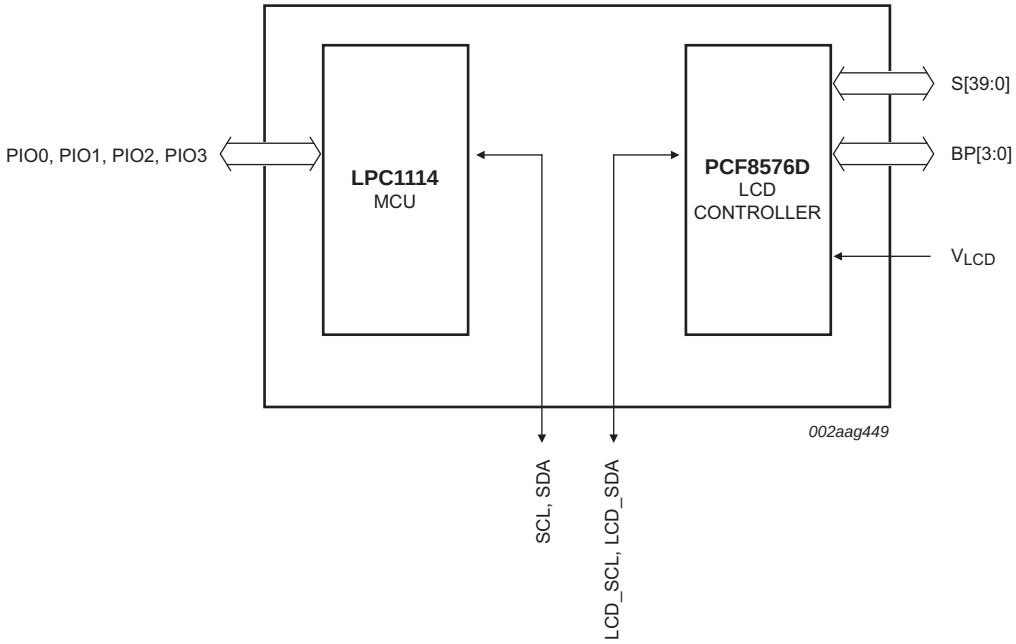


**Fig 4. LPC11D14 block diagram**

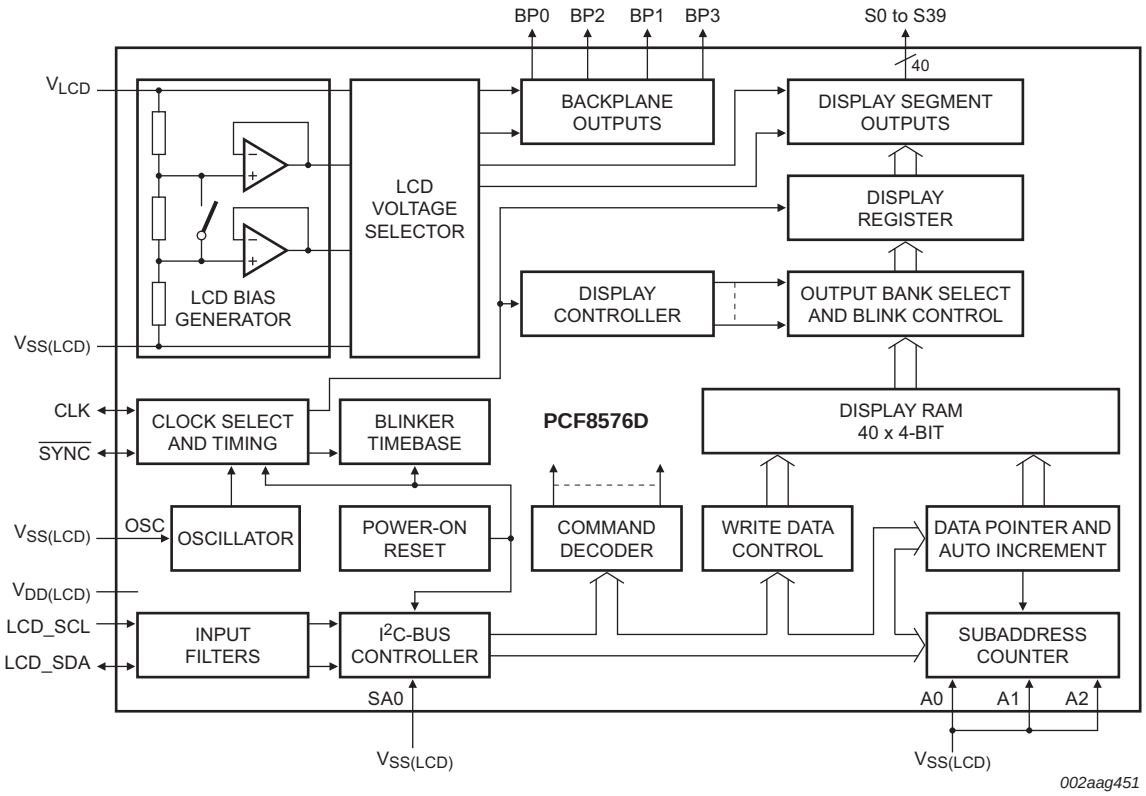


**Fig 5. PCF8576D block diagram**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 1.5 ARM Cortex-M0 processor

The ARM Cortex-M0 processor is described in detail in Section 28.3 “About the Cortex-M0 processor and core peripherals”. For the LPC111x/LPC11Cxx, the ARM Cortex-M0 processor core is configured as follows:

- System options:
  - The Nested Vectored Interrupt Controller (NVIC) is included and supports up to 32 interrupts.
  - The system tick timer is included.
- Debug options: Serial Wire Debug is included with two watchpoints and four breakpoints.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 2.1 How to read this chapter

Table 4 and Table 5 show the memory configurations for different LPC111x/LPC11Cxx parts.

**Table 4. LPC111x memory configuration**

| Part | Flash | SRAM | | |
|---|---|---|---|---|
| Suffix | | /101; /102; /103 | /201; /202; /203 | /301; /302; /303; /323; /333 |
| LPC1111 | 8 kB | 2 kB | 4 KB | - |
| LPC1112 | 16 kB | 2 kB | 4 KB | - |
| LPC1113 | 24 kB | - | 4 KB | 8 kB |
| LPC1114/LPC11D14 | 32 kB | - | 4 KB | 8 kB |
| LPC1114/323 | 48 kB | - | - | 8 kB |
| LPC1114/333 | 56 kB | - | - | 8 kB |
| LPC1115 | 64 kB | - | - | 8 kB |

**Table 5. LPC11Cxx memory configuration**

| Part | Flash | SRAM |
|---|---|---|
| LPC11C12/301 | 16 kB | 8 kB |
| LPC11C14/301 | 32 kB | 8 kB |
| LPC11C22/301 | 16 kB | 8 kB |
| LPC11C24/301 | 32 kB | 8 kB |

## 2.2 Memory map

Figure 6 and Figure 7 show the memory and peripheral address space of the LPC111x/LPC11Cxx.

The AHB peripheral area is 2 MB in size and is divided to allow for up to 128 peripherals. On the LPC111x/LPC11Cxx, the GPIO ports are the only AHB peripherals. The APB peripheral area is 512 kB in size and is divided to allow for up to 32 peripherals. Each peripheral of either type is allocated 16 kB of space. This allows simplifying the address decoding for each peripheral.

All peripheral register addresses are 32-bit word aligned regardless of their size. An implication of this is that word and half-word registers must be accessed all at once. For example, it is not possible to read or write the upper byte of a word register separately.


All information provided in this document is subject to legal disclaimers.
© NXP B.V. 2016. All rights reserved.

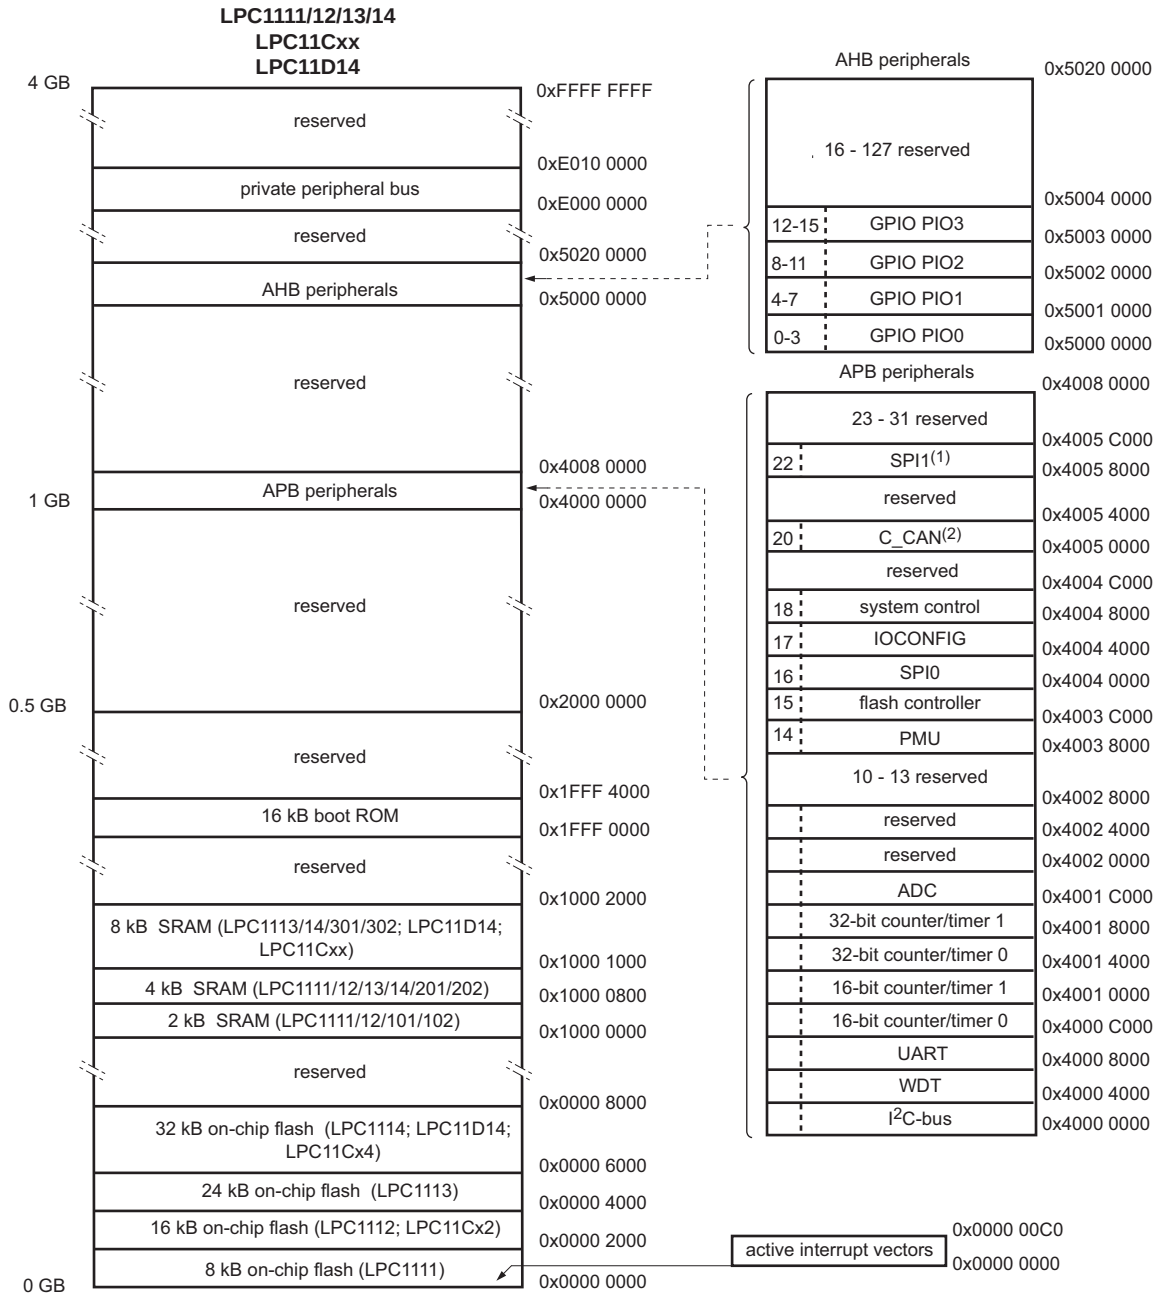


(1) LQFP100/LQFP48 packages only.

(2) LPC11Cxxonly.

**Fig 6. LPC111x/LPC11Cxx memory map (LPC1100 and LPC1100L series)**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

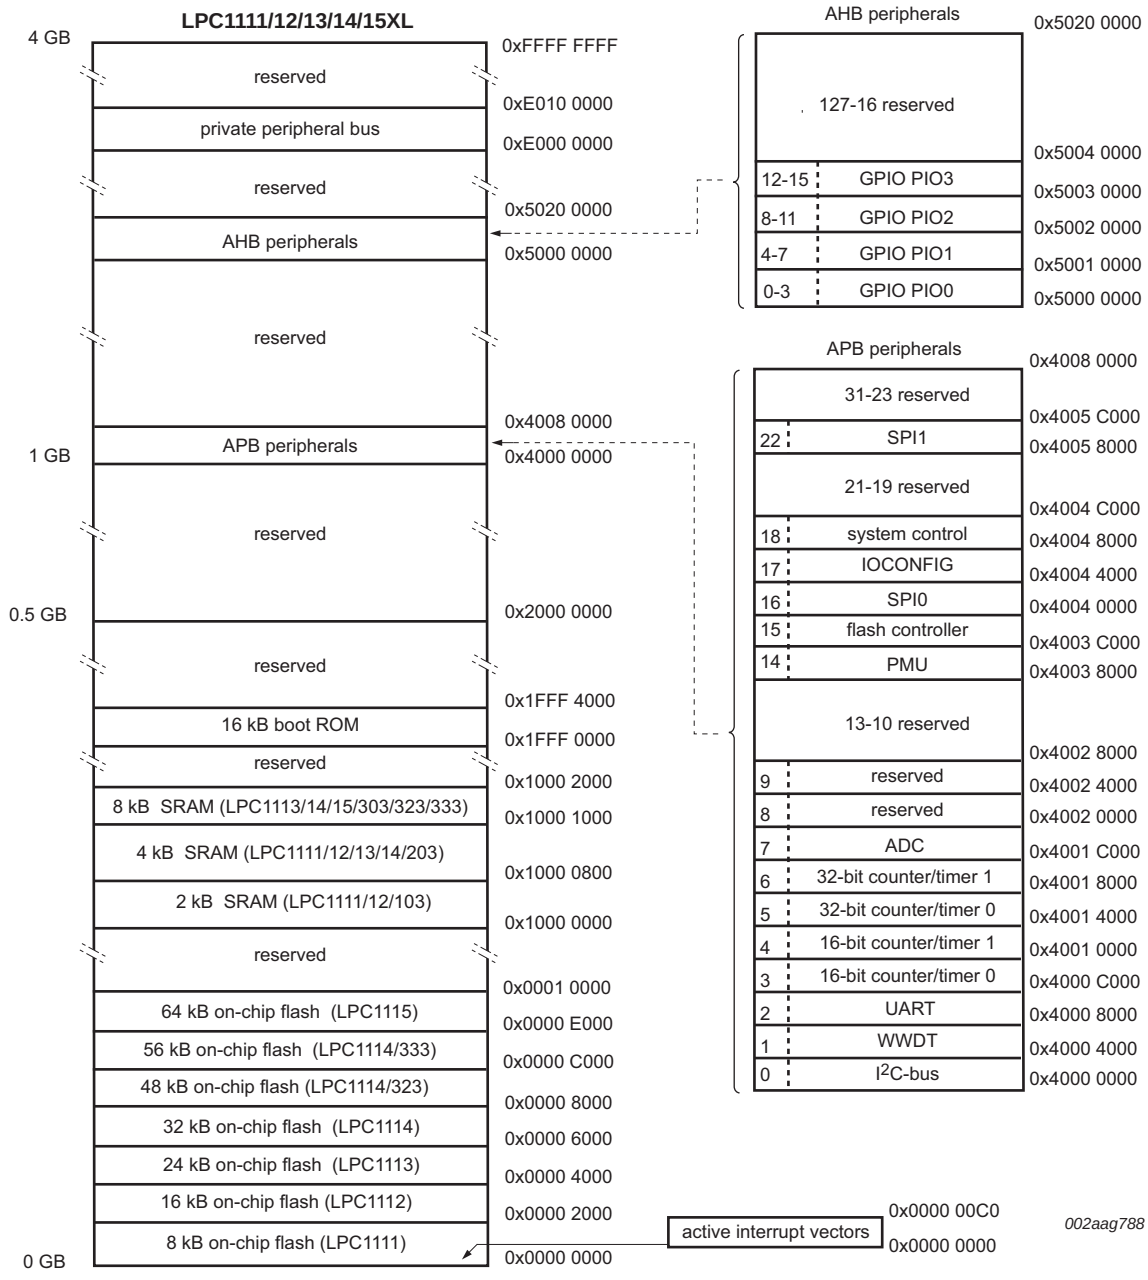


**Fig 7. LPC111x memory map (LPC1100XL series)**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 3.1 How to read this chapter

The following functions of the system configuration block depend on the specific part number:

### DEVICE_ID register

The DEVICE_ID register is valid 0x4004 83F4 for parts of the LPC1100, LPC1100C, and LPC1100L series only.

The device ID cannot be read through the SYSCON block for the LPC1100XL series. Use the ISP part ID command (Table 400) to obtain the device ID for the LPC1100XL parts.

### C_CAN controller

The C_CAN clock control bit 17 in the SYSAHBCLKCTRL register (Table 21) and the C_CAN reset control bit 3 in the PRESETCTRL register (Table 9) are only functional for parts LPC11Cxx/101/201/301.

### Entering Deep power-down mode

Status of the IRC before entering Deep power-down mode (see Section 3.9.4.2):

- IRC must be enabled for parts LPC111x/101/201/301 and parts LPC11Cxx/101/201/301.
- IRC status has no effect for parts in the LPC1100L and LPC1100XL series.

### Enabling sequence for UART clock

Requirements for enabling the UART peripheral clock:

- The UART pins must be configured in the IOCON block before the UART clock can be enabled in the in the SYSAHBCLKCTRL register (Table 21) for parts LPC111x/101/201/301.
- The sequence of configuring the UART pins and the UART clock has no effect for parts in the LPC1100L and LPC1100XL series and parts LPC1100C series.

### NMI source selection register

The NMI source selection register is only available on parts in the LPC1100XL series.

## 3.2 General description

The system configuration block controls oscillators, start logic, and clock generation of the LPC111x/LPC11Cxx. Also included in this block is a register for remapping flash, SRAM, and ROM memory areas.

## 3.3 Pin description

Table 6 shows pins that are associated with system control block functions.


All information provided in this document is subject to legal disclaimers.
© NXP B.V. 2016. All rights reserved.

**Table 6. Pin summary**

| Pin name | Pin direction | Pin description |
|---|---|---|
| CLKOUT | O | Clockout pin |
| PIO0_0 to PIO0_11 | I | Start logic wake-up pins port 0 |
| PIO1_0 | I | Start logic wake-up pin port 1 |

## 3.4 Clock generation

See Figure 8 for an overview of the LPC111x/LPC11Cxx Clock Generation Unit (CGU).

The LPC111x/LPC11Cxx include three independent oscillators. These are the system oscillator, the Internal RC oscillator (IRC), and the watchdog oscillator. Each oscillator can be used for more than one purpose as required in a particular application.

Following reset, the LPC111x/LPC11Cxx will operate from the Internal RC oscillator until switched by software. This allows systems to operate without any external crystal and the bootloader code to operate at a known frequency.

The SYSAHBCLKCTRL register gates the system clock to the various peripherals and memories. UART, the WDT, and SPI0/1 have individual clock dividers to derive peripheral clocks from the main clock.

The main clock and the clock outputs from the IRC, the system oscillator, and the watchdog oscillator can be observed directly on the CLKOUT pin.

For details on power control see Section 3.9.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

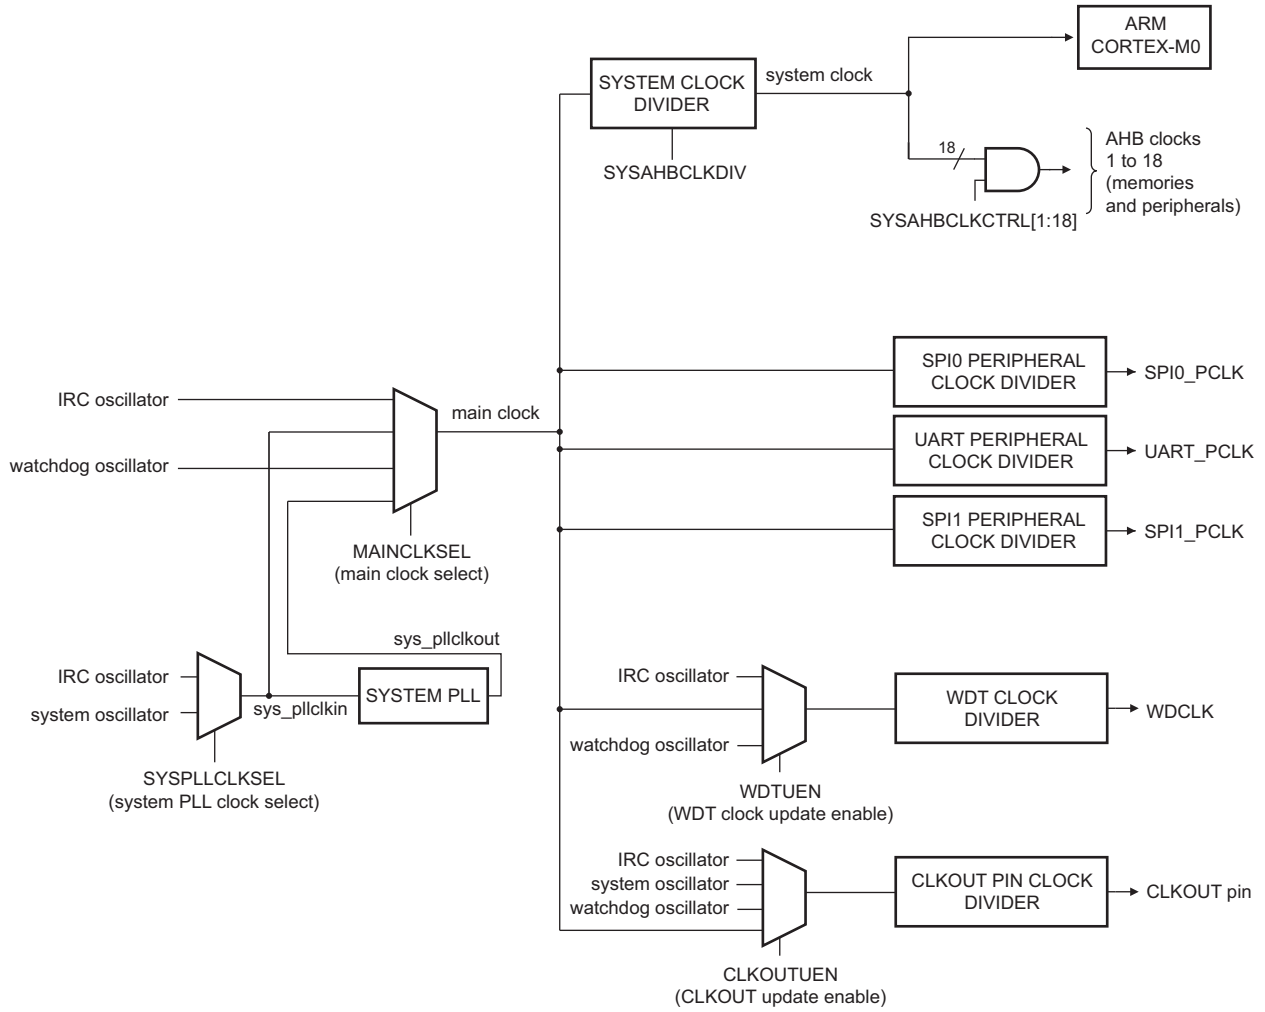


**Fig 8. LPC111x/LPC11Cxx CGU block diagram**

## 3.5 Register description

All registers, regardless of size, are on word address boundaries. Details of the registers appear in the description of each function.

See Section 3.12 for the flash access timing register, which can be re-configured as part the system setup. This register is not part of the system configuration block.

**Table 7. Register overview: system control block (base address 0x4004 8000)**

| Name | Access | Address offset | Description | Reset value | Reference |
|---|---|---|---|---|---|
| SYSMEMREMAP | R/W | 0x000 | System memory remap | 0x002 | Table 8 |
| PRESETCTRL | R/W | 0x004 | Peripheral reset control | 0x000 | Table 9 |
| SYSPLLCTRL | R/W | 0x008 | System PLL control | 0x000 | Table 10 |
| SYSPLLSTAT | R | 0x00C | System PLL status | 0x000 | Table 11 |
| - | - | 0x010 - 0x01C | Reserved | - | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 7. Register overview: system control block (base address 0x4004 8000)** *…continued*

| Name | Access | Address offset | Description | Reset value | Reference |
|---|---|---|---|---|---|
| SYSOSCCTRL | R/W | 0x020 | System oscillator control | 0x000 | Table 12 |
| WDTOSCCTRL | R/W | 0x024 | Watchdog oscillator control | 0x000 | Table 13 |
| IRCCTRL | R/W | 0x028 | IRC control | 0x080 | Table 14 |
| - | - | 0x02C | Reserved | - | - |
| SYSRSTSTAT | R/W | 0x030 | System reset status register | 0x000 | Table 15 |
| - | - | 0x034 - 0x03C | Reserved | - | - |
| SYSPLLCLKSEL | R/W | 0x040 | System PLL clock source select | 0x000 | Table 16 |
| SYSPLLCLKUEN | R/W | 0x044 | System PLL clock source update enable | 0x000 | Table 17 |
| - | - | 0x048 - 0x06C | Reserved | - | - |
| MAINCLKSEL | R/W | 0x070 | Main clock source select | 0x000 | Table 18 |
| MAINCLKUEN | R/W | 0x074 | Main clock source update enable | 0x000 | Table 19 |
| SYSAHBCLKDIV | R/W | 0x078 | System AHB clock divider | 0x001 | Table 20 |
| - | - | 0x07C | Reserved | - | - |
| SYSAHBCLKCTRL | R/W | 0x080 | System AHB clock control | 0x85F | Table 21 |
| - | - | 0x084 - 0x090 | Reserved | - | - |
| SSP0CLKDIV | R/W | 0x094 | SPI0 clock divider | 0x000 | Table 22 |
| UARTCLKDIV | R/W | 0x098 | UART clock divider | 0x000 | Table 23 |
| SSP1CLKDIV | R/W | 0x09C | SPI1 clock divider | 0x000 | Table 24 |
| - | - | 0x0A0-0x0CC | Reserved | - | - |
| WDTCLKSEL | R/W | 0x0D0 | WDT clock source select | 0x000 | Table 25 |
| WDTCLKUEN | R/W | 0x0D4 | WDT clock source update enable | 0x000 | Table 26 |
| WDTCLKDIV | R/W | 0x0D8 | WDT clock divider | 0x000 | Table 27 |
| - | - | 0x0DC | Reserved | - | - |
| CLKOUTCLKSEL | R/W | 0x0E0 | CLKOUT clock source select | 0x000 | Table 28 |
| CLKOUTUEN | R/W | 0x0E4 | CLKOUT clock source update enable | 0x000 | Table 29 |
| CLKOUTCLKDIV | R/W | 0x0E8 | CLKOUT clock divider | 0x000 | Table 30 |
| - | - | 0x0EC - 0x0FC | Reserved | - | - |
| PIOPORCAP0 | R | 0x100 | POR captured PIO status 0 | user dependent | Table 31 |
| PIOPORCAP1 | R | 0x104 | POR captured PIO status 1 | user dependent | Table 32 |
| - | R | 0x108 - 0x14C | Reserved | - | - |
| BODCTRL | R/W | 0x150 | BOD control | 0x000 | Table 33 |
| SYSTCKCAL | R/W | 0x154 | System tick counter calibration | 0x004 | Table 34 |
| - | - | 0x158 - 0x16C | Reserved | - | - |
| IRQLATENCY | R/W | 0x170 | IQR delay. Allows trade-off between interrupt latency and determinism. | 0x10 | Table 35 |
| NMISRC | R/W | 0x174 | NMI source selection | 0x000 | Table 36 |
| - | - | 0x178 - 0x1FC | Reserved | - | - |
| STARTAPRP0 | R/W | 0x200 | Start logic edge control register 0 | | Table 37 |
| STARTERP0 | R/W | 0x204 | Start logic signal enable register 0 | | Table 38 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 7. Register overview: system control block (base address 0x4004 8000)** *…continued*

| Name | Access | Address offset | Description | Reset value | Reference |
|---|---|---|---|---|---|
| STARTRSRP0CLR | W | 0x208 | Start logic reset register 0 | n/a | Table 39 |
| STARTSRP0 | R | 0x20C | Start logic status register 0 | n/a | Table 40 |
| - | - | 0x210 - 0x22C | Reserved | - | - |
| PDSLEEPCFG | R/W | 0x230 | Power-down states in Deep-sleep mode | 0x0000 0000 | Table 42 |
| PDAWAKECFG | R/W | 0x234 | Power-down states after wake-up from Deep-sleep mode | 0x0000 EDF0 | Table 43 |
| PDRUNCFG | R/W | 0x238 | Power-down configuration register | 0x0000 EDF0 | Table 44 |
| - | - | 0x23C - 0x3F0 | Reserved | - | - |
| DEVICE_ID | R | 0x3F4 | Device ID register 0 for parts LPC1100, LPC1100C, LPC1100L. | part dependent | Table 45 |

### 3.5.1 System memory remap register

The system memory remap register selects whether the ARM interrupt vectors are read from the boot ROM, the flash, or the SRAM. By default, the flash memory is mapped to address 0x0000 0000. When the MAP bits in the SYSMEMREMAP register are set to 0x0 or 0x1, the boot ROM or RAM respectively are mapped to the bottom 512 bytes of the memory map (addresses 0x0000 0000 to 0x0000 0200).

**Table 8. System memory remap register (SYSMEMREMAP, address 0x4004 8000) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 1:0 | MAP | | System memory remap | 10 |
| | | 0x0 | Boot Loader Mode. Interrupt vectors are re-mapped to Boot ROM. | |
| | | 0x1 | User RAM Mode. Interrupt vectors are re-mapped to Static RAM. | |
| | | 0x2 | User Flash Mode. Interrupt vectors are not re-mapped and reside in Flash. | |
| 31:2 | - | - | Reserved | 0x00 |

### 3.5.2 Peripheral reset control register

This register allows software to reset the SPI and I2C peripherals. Writing a zero to the SSP0/1_RST_N or I2C_RST_N bits resets the SPI0/1 or I2C peripheral. Writing a one de-asserts the reset.

**Remark:** Before accessing the SPI and I2C peripherals, write a one to this register to ensure that the reset signals to the SPI and I2C are de-asserted.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 9. Peripheral reset control register (PRESETCTRL, address 0x4004 8004) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 0 | SSP0_RST_N | | SPI0 reset control | 0 |
| | | 0 | Resets the SPI0 peripheral. | |
| | | 1 | SPI0 reset de-asserted. | |
| 1 | I2C_RST_N | | I2C reset control | 0 |
| | | 0 | Resets the I2C peripheral. | |
| | | 1 | I2C reset de-asserted. | |
| 2 | SSP1_RST_N | | SPI1 reset control | 0 |
| | | 0 | Resets the SPI1 peripheral. | |
| | | 1 | SPI1 reset de-asserted. | |
| 3 | CAN_RST_N | | C_CAN reset control. See Section 3.1 for part specific details. | 0 |
| | | 0 | Resets the C_CAN peripheral. | |
| | | 1 | C_CAN reset de-asserted. | |
| 31:4 | - | - | Reserved | 0x00 |

### 3.5.3 System PLL control register

This register connects and enables the system PLL and configures the PLL multiplier and divider values. The PLL accepts an input frequency from 10 MHz to 25 MHz from various clock sources. The input frequency is multiplied up to a high frequency, then divided down to provide the actual clock used by the CPU, peripherals, and memories. The PLL can produce a clock up to the maximum allowed for the CPU.

**Table 10. System PLL control register (SYSPLLCTRL, address 0x4004 8008) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 4:0 | MSEL | | Feedback divider value. The division value M is the programmed MSEL value + 1.<br>00000: Division ratio M = 1<br>to<br>11111: Division ratio M = 32. | 0x000 |
| 6:5 | PSEL | | Post divider ratio P. The division ratio is 2 × P. | 0x00 |
| | | 0x0 | P = 1 | |
| | | 0x1 | P = 2 | |
| | | 0x2 | P = 4 | |
| | | 0x3 | P = 8 | |
| 31:7 | - | - | Reserved. Do not write ones to reserved bits. | 0x0 |

### 3.5.4 System PLL status register

This register is a Read-only register and supplies the PLL lock status (see Section 3.11.1).


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 11. System PLL status register (SYSPLLSTAT, address 0x4004 800C) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 0 | LOCK | | PLL lock status | 0x0 |
| | | 0 | PLL not locked | |
| | | 1 | PLL locked | |
| 31:1 | - | - | Reserved | 0x00 |

### 3.5.5 System oscillator control register

This register configures the frequency range for the system oscillator.

**Table 12. System oscillator control register (SYSOSCCTRL, address 0x4004 8020) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 0 | BYPASS | | Bypass system oscillator | 0x0 |
| | | 0 | Oscillator is not bypassed. | |
| | | 1 | Bypass enabled. PLL input (sys_osc_clk) is fed directly from the XTALIN pin bypassing the oscillator. Use this mode when using an external clock source instead of the crystal oscillator. | |
| 1 | FREQRANGE | | Determines frequency range for Low-power oscillator. | 0x0 |
| | | 0 | 1 - 20 MHz frequency range. | |
| | | 1 | 15 - 25 MHz frequency range | |
| 31:2 | - | - | Reserved | 0x00 |

### 3.5.6 Watchdog oscillator control register

This register configures the watchdog oscillator. The oscillator consists of an analog and a digital part. The analog part contains the oscillator function and generates an analog clock (Fclkana). With the digital part, the analog output clock (Fclkana) can be divided to the required output clock frequency wdt_osc_clk. The analog output frequency (Fclkana) can be adjusted with the FREQSEL bits between 600 kHz and 4.6 MHz. With the digital part Fclkana will be divided (divider ratios = 2, 4,...,64) to wdt_osc_clk using the DIVSEL bits.

The output clock frequency of the watchdog oscillator can be calculated as wdt_osc_clk = Fclkana/(2 × (1 + DIVSEL)) = 9.4 kHz to 2.3 MHz (nominal values).

**Remark:** Any setting of the FREQSEL bits will yield a Fclkana value within ±40% of the listed frequency value. The watchdog oscillator is the clock source with the lowest power consumption. If accurate timing is required, use the IRC or system oscillator.

**Remark:** The frequency of the watchdog oscillator is undefined after reset. The watchdog oscillator frequency must be programmed by writing to the WDTOSCCTRL register before using the watchdog oscillator.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 13. Watchdog oscillator control register (WDTOSCCTRL, address 0x4004 8024) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 4:0 | DIVSEL | | Select divider for Fclkana.<br>wdt_osc_clk = Fclkana/ (2 × (1 + DIVSEL))<br>00000: 2 × (1 + DIVSEL) = 2<br>00001: 2 × (1 + DIVSEL) = 4<br>to<br>11111: 2 × (1 + DIVSEL) = 64 | 0 |
| 8:5 | FREQSEL | | Select watchdog oscillator analog output frequency (Fclkana). | 0x00 |
| | | 0x1 | 0.6 MHz | |
| | | 0x2 | 1.05 MHz | |
| | | 0x3 | 1.4 MHz | |
| | | 0x4 | 1.75 MHz | |
| | | 0x5 | 2.1 MHz | |
| | | 0x6 | 2.4 MHz | |
| | | 0x7 | 2.7 MHz | |
| | | 0x8 | 3.0 MHz | |
| | | 0x9 | 3.25 MHz | |
| | | 0xA | 3.5 MHz | |
| | | 0xB | 3.75 MHz | |
| | | 0xC | 4.0 MHz | |
| | | 0xD | 4.2 MHz | |
| | | 0xE | 4.4 MHz | |
| | | 0xF | 4.6 MHz | |
| 31:9 | - | - | Reserved | 0x00 |

## 3.5.7 Internal resonant crystal control register

This register is used to trim the on-chip 12 MHz oscillator. The trim value is factory-preset and written by the boot code on start-up.

**Table 14. Internal resonant crystal control register (IRCCTRL, address 0x4004 8028) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 7:0 | TRIM | Trim value | 0x1000 0000, then flash will reprogram |
| 31:8 | - | Reserved | 0x00 |

## 3.5.8 System reset status register

The SYSRSTSTAT register shows the source of the latest reset event. Write a one to clear the reset.

The POR event clears all other bits in this register. If any reset signal - for example EXTRST - remains asserted after the POR signal is negated, then its bit is set to detected in this register.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

The reset value given in Table 15 applies to the POR reset.

**Table 15. System reset status register (SYSRSTSTAT, address 0x4004 8030) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 0 | POR | | POR reset status | 0x0 |
| | | 0 | No POR detected. | |
| | | 1 | POR detected. Writing a one clears this reset. | |
| 1 | EXTRST | | Status of the external $\overline{\text{RESET}}$ pin. | 0x0 |
| | | 0 | No $\overline{\text{RESET}}$ event detected. | |
| | | 1 | $\overline{\text{RESET}}$ detected. Writing a one clears this reset. | |
| 2 | WDT | | Status of the Watchdog reset | 0x0 |
| | | 0 | No WDT reset detected. | |
| | | 1 | WDT reset detected. Writing a one clears this reset. | |
| 3 | BOD | | Status of the Brown-out detect reset | 0x0 |
| | | 0 | No BOD reset detected. | |
| | | 1 | BOD reset detected. Writing a one clears this reset. | |
| 4 | SYSRST | | Status of the software system reset | 0x0 |
| | | 0 | No System reset detected. | |
| | | 1 | System reset detected. Writing a one clears this reset. | |
| 31:5 | - | - | Reserved | 0x0 |

### 3.5.9 System PLL clock source select register

This register selects the clock source for the system PLL. The SYSPLLCLKUEN register (see Section 3.5.10) must be toggled from LOW to HIGH for the update to take effect.

**Remark:** When switching clock sources, both clocks must be running before the clock source is updated.

**Remark:** When using the C_CAN controller with baudrates above 100 kbit/s, the system oscillator must be selected.

**Table 16. System PLL clock source select register (SYSPLLCLKSEL, address 0x4004 8040) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 1:0 | SEL | | System PLL clock source | 0x00 |
| | | 0x0 | IRC oscillator | |
| | | 0x1 | System oscillator | |
| | | 0x2 | Reserved | |
| | | 0x3 | Reserved | |
| 31:2 | - | - | Reserved | 0x00 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 3.5.10 System PLL clock source update enable register

This register updates the clock source of the system PLL with the new input clock after the SYSPLLCLKSEL register has been written to. In order for the update to take effect, first write a zero to the SYSPLLUEN register and then write a one to SYSPLLUEN.

**Remark:** When switching clock sources, both clocks must be running before the clock source is updated.

**Table 17. System PLL clock source update enable register (SYSPLLCLKUEN, address 0x4004 8044) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 0 | ENA | | Enable system PLL clock source update | 0x0 |
| | | 0 | No change | |
| | | 1 | Update clock source | |
| 31:1 | - | - | Reserved | 0x00 |

### 3.5.11 Main clock source select register

This register selects the main system clock which can be either any input to the system PLL, the output from the system PLL (sys_pllclkout), or the watchdog or IRC oscillators directly. The main system clock clocks the core, the peripherals, and the memories.

The MAINCLKUEN register (see Section 3.5.12) must be toggled from LOW to HIGH for the update to take effect.

**Remark:** When switching clock sources, both clocks must be running before the clock source is updated.

**Remark:** When using the C_CAN controller with baudrates above 100 kbit/s, the system oscillator must be selected.

**Table 18. Main clock source select register (MAINCLKSEL, address 0x4004 8070) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 1:0 | SEL | | Clock source for main clock | 0x00 |
| | | 0x0 | IRC oscillator | |
| | | 0x1 | Input clock to system PLL | |
| | | 0x2 | WDT oscillator | |
| | | 0x3 | System PLL clock out | |
| 31:2 | - | - | Reserved | 0x00 |

### 3.5.12 Main clock source update enable register

This register updates the clock source of the main clock with the new input clock after the MAINCLKSEL register has been written to. In order for the update to take effect, first write a zero to the MAINCLKUEN register and then write a one to MAINCLKUEN.

**Remark:** When switching clock sources, both clocks must be running before the clock source is updated.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 19. Main clock source update enable register (MAINCLKUEN, address 0x4004 8074) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 0 | ENA | | Enable main clock source update | 0x0 |
| | | 0 | No change | |
| | | 1 | Update clock source | |
| 31:1 | - | - | Reserved | 0x00 |

## 3.5.13 System AHB clock divider register

This register divides the main clock to provide the system clock to the core, memories, and the peripherals. The system clock can be shut down completely by setting the DIV bits to 0x0.

**Table 20. System AHB clock divider register (SYSAHBCLKDIV, address 0x4004 8078) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 7:0 | DIV | System AHB clock divider values<br>0: System clock disabled.<br>1: Divide by 1.<br>to<br>255: Divide by 255. | 0x01 |
| 31:8 | - | Reserved | 0x00 |

## 3.5.14 System AHB clock control register

The AHBCLKCTRL register enables the clocks to individual system and peripheral blocks. The system clock (sys_ahb_clk[0], bit 0 in the AHBCLKCTRL register) provides the clock for the AHB to APB bridge, the AHB matrix, the ARM Cortex-M0, the Syscon block, and the PMU. This clock cannot be disabled.

**Table 21. System AHB clock control register (SYSAHBCLKCTRL, address 0x4004 8080) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 0 | SYS | | Enables clock for AHB to APB bridge, to the AHB matrix, to the Cortex-M0 FCLK and HCLK, to the SysCon, and to the PMU. This bit is read only. | 1 |
| | | 0 | Reserved | |
| | | 1 | Enable | |
| 1 | ROM | | Enables clock for ROM. | 1 |
| | | 0 | Disable | |
| | | 1 | Enable | |
| 2 | RAM | | Enables clock for RAM. | 1 |
| | | 0 | Disable | |
| | | 1 | Enable | |
| 3 | FLASHREG | | Enables clock for flash register interface. | 1 |
| | | 0 | Disabled | |
| | | 1 | Enabled | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 21. System AHB clock control register (SYSAHBCLKCTRL, address 0x4004 8080) bit description** *…continued*

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 4 | FLASHARRAY | | Enables clock for flash array access. | 1 |
| | | 0 | Disabled | |
| | | 1 | Enabled | |
| 5 | I2C | | Enables clock for I2C. | 0 |
| | | 0 | Disable | |
| | | 1 | Enable | |
| 6 | GPIO | | Enables clock for GPIO. | 1 |
| | | 0 | Disable | |
| | | 1 | Enable | |
| 7 | CT16B0 | | Enables clock for 16-bit counter/timer 0. | 0 |
| | | 0 | Disable | |
| | | 1 | Enable | |
| 8 | CT16B1 | | Enables clock for 16-bit counter/timer 1. | 0 |
| | | 0 | Disable | |
| | | 1 | Enable | |
| 9 | CT32B0 | | Enables clock for 32-bit counter/timer 0. | 0 |
| | | 0 | Disable | |
| | | 1 | Enable | |
| 10 | CT32B1 | | Enables clock for 32-bit counter/timer 1. | 0 |
| | | 0 | Disable | |
| | | 1 | Enable | |
| 11 | SSP0 | | Enables clock for SPI0. | 1 |
| | | 0 | Disable | |
| | | 1 | Enable | |
| 12 | UART | | Enables clock for UART. See Section 3.1 for part specific details. | 0 |
| | | 0 | Disable | |
| | | 1 | Enable | |
| 13 | ADC | | Enables clock for ADC. | 0 |
| | | 0 | Disable | |
| | | 1 | Enable | |
| 14 | - | | Reserved | 0 |
| 15 | WDT | | Enables clock for WDT. | 0 |
| | | 0 | Disable | |
| | | 1 | Enable | |
| 16 | IOCON | | Enables clock for I/O configuration block. | 0 |
| | | 0 | Disable | |
| | | 1 | Enable | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 21. System AHB clock control register (SYSAHBCLKCTRL, address 0x4004 8080) bit description** *…continued*

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 17 | CAN | | Enables clock for C_CAN. See Section 3.1 for part specific details. | 0 |
| | | 0 | Disable | |
| | | 1 | Enable | |
| 18 | SSP1 | | Enables clock for SPI1. | 0 |
| | | 0 | Disable | |
| | | 1 | Enable | |
| 31:19 | - | - | Reserved | 0x00 |

### 3.5.15 SPI0 clock divider register

This register configures the SPI0 peripheral clock SPI0_PCLK. The SPI0_PCLK can be shut down by setting the DIV bits to 0x0.

**Table 22. SPI0 clock divider register (SSP0CLKDIV, address 0x4004 8094) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 7:0 | DIV | SPI0_PCLK clock divider values<br>0: Disable SPI0_PCLK.<br>1: Divide by 1.<br>to<br>255: Divide by 255. | 0x00 |
| 31:8 | - | Reserved | 0x00 |

### 3.5.16 UART clock divider register

This register configures the UART peripheral clock UART_PCLK. The UART_PCLK can be shut down by setting the DIV bits to 0x0.

**Remark:** Note that for some parts the UART pins must be configured in the IOCON block before the UART clock can be enabled. See Section 3.1 for part specific details.

**Table 23. UART clock divider register (UARTCLKDIV, address 0x4004 8098) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 7:0 | DIV | UART_PCLK clock divider values<br>0: Disable UART_PCLK.<br>1: Divide by 1.<br>to<br>255: Divide by 255. | 0x00 |
| 31:8 | - | Reserved | 0x00 |

### 3.5.17 SPI1 clock divider register

This register configures the SPI1 peripheral clock SPI1_PCLK. The SPI1_PCLK can be shut down by setting the DIV bits to 0x0.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 24. SPI1 clock divider register (SSP1CLKDIV, address 0x4004 809C) bit description

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 7:0 | DIV | SPI1_PCLK clock divider values<br>0: Disable SPI1_PCLK.<br>1: Divide by 1.<br>to<br>255: Divide by 255. | 0x00 |
| 31:8 | - | Reserved | 0x00 |

## 3.5.18 WDT clock source select register

This register selects the clock source for the watchdog timer. The WDTCLKUEN register (see Section 3.5.19) must be toggled from LOW to HIGH for the update to take effect.

**Remark:** When switching clock sources, both clocks must be running before the clock source is updated.

Table 25. WDT clock source select register (WDTCLKSEL, address 0x4004 80D0) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 1:0 | SEL | | WDT clock source | 0x00 |
| | | 0x0 | IRC oscillator | |
| | | 0x1 | Main clock | |
| | | 0x2 | Watchdog oscillator | |
| | | 0x3 | Reserved | |
| 31:2 | - | - | Reserved | 0x00 |

## 3.5.19 WDT clock source update enable register

This register updates the clock source of the watchdog timer with the new input clock after the WDTCLKSEL register has been written to. In order for the update to take effect at the input of the watchdog timer, first write a zero to the WDTCLKUEN register and then write a one to WDTCLKUEN.

**Remark:** When switching clock sources, both clocks must be running before the clock source is updated.

Table 26. WDT clock source update enable register (WDTCLKUEN, address 0x4004 80D4) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 0 | ENA | | Enable WDT clock source update | 0x0 |
| | | 0 | No change | |
| | | 1 | Update clock source | |
| 31:1 | - | - | Reserved | 0x00 |

## 3.5.20 WDT clock divider register

This register determines the divider values for the watchdog clock wdt_clk.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 27. WDT clock divider register (WDTCLKDIV, address 0x4004 80D8) bit description

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 7:0 | DIV | WDT clock divider values<br>0: Disable WDCLK.<br>1: Divide by 1.<br>to<br>255: Divide by 255. | 0x00 |
| 31:8 | - | Reserved | 0x00 |

### 3.5.21 CLKOUT clock source select register

This register configures the clkout_clk signal to be output on the CLKOUT pin. All three oscillators and the main clock can be selected for the clkout_clk clock.

The CLKOUTCLKUEN register (see Section 3.5.22) must be toggled from LOW to HIGH for the update to take effect.

**Remark:** When switching clock sources, both clocks must be running before the clock source is updated.

Table 28. CLKOUT clock source select register (CLKOUTCLKSEL, address 0x4004 80E0) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 1:0 | SEL | | CLKOUT clock source | 0x00 |
| | | 0x0 | IRC oscillator | |
| | | 0x1 | System oscillator | |
| | | 0x2 | Watchdog oscillator | |
| | | 0x3 | Main clock | |
| 31:2 | - | - | Reserved | 0x00 |

### 3.5.22 CLKOUT clock source update enable register

This register updates the clock source of the CLKOUT pin with the new clock after the CLKOUTCLKSEL register has been written to. In order for the update to take effect at the input of the CLKOUT pin, first write a zero to the CLKCLKUEN register and then write a one to CLKCLKUEN.

**Remark:** When switching clock sources, both clocks must be running before the clock source is updated.

Table 29. CLKOUT clock source update enable register (CLKOUTUEN, address 0x4004 80E4) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 0 | ENA | | Enable CLKOUT clock source update | 0x0 |
| | | 0 | No change | |
| | | 1 | Update clock source | |
| 31:1 | - | - | Reserved | 0x00 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 3.5.23 CLKOUT clock divider register

This register determines the divider value for the clock output signal on the CLKOUT pin.

**Table 30. CLKOUT clock divider registers (CLKOUTCLKDIV, address 0x4004 80E8) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 7:0 | DIV | Clock output divider values<br>0: Disable CLKOUT.<br>1: Divide by 1.<br>to<br>255: Divide by 255. | 0x00 |
| 31:8 | - | Reserved | 0x00 |

### 3.5.24 POR captured PIO status register 0

The PIOPORCAP0 register captures the state (HIGH or LOW) of the PIO pins of ports 0,1, and 2 (pins PIO2_0 to PIO2_7) at power-on-reset. Each bit represents the reset state of one GPIO pin. This register is a read-only status register.

**Table 31. POR captured PIO status registers 0 (PIOPORCAP0, address 0x4004 8100) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 11:0 | CAPPIO0_n | Raw reset status input PIO0_n: PIO0_11 to PIO0_0 | User implementation dependent |
| 23:12 | CAPPIO1_n | Raw reset status input PIO1_n: PIO1_11 to PIO1_0 | User implementation dependent |
| 31:24 | CAPPIO2_n | Raw reset status input PIO2_n: PIO2_7 to PIO2_0 | User implementation dependent |

### 3.5.25 POR captured PIO status register 1

The PIOPORCAP1 register captures the state (HIGH or LOW) of the PIO pins of port 2 (PIO2_8 to PIO2_11) and port 3 at power-on-reset. Each bit represents the reset state of one PIO pin. This register is a read-only status register.

**Table 32. POR captured PIO status registers 1 (PIOPORCAP1, address 0x4004 8104) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 0 | CAPPIO2_8 | Raw reset status input PIO2_8 | User implementation dependent |
| 1 | CAPPIO2_9 | Raw reset status input PIO2_9 | User implementation dependent |
| 2 | CAPPIO2_10 | Raw reset status input PIO2_10 | User implementation dependent |
| 3 | CAPPIO2_11 | Raw reset status input PIO2_11 | User implementation dependent |
| 4 | CAPPIO3_0 | Raw reset status input PIO3_0 | User implementation dependent |
| 5 | CAPPIO3_1 | Raw reset status input PIO3_1 | User implementation dependent |
| 6 | CAPPIO3_2 | Raw reset status input PIO3_2 | User implementation dependent |
| 7 | CAPPIO3_3 | Raw reset status input PIO3_3 | User implementation dependent |
| 8 | CAPPIO3_4 | Raw reset status input PIO3_4 | User implementation dependent |
| 9 | CAPPIO3_5 | Raw reset status input PIO3_5 | User implementation dependent |
| 31:10 | - | Reserved | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 3.5.26 BOD control register

The BOD control register selects up to four separate threshold values for sending a BOD interrupt to the NVIC and for forced reset. Reset and interrupt threshold values listed are typical values.

**Table 33. BOD control register (BODCTRL, address 0x4004 8150) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 1:0 | BODRSTLEV | | BOD reset level | 00 |
| | | 0x0 | Level 0: The reset assertion threshold voltage is 1.46 V; the reset de-assertion threshold voltage is 1.63 V. | |
| | | 0x1 | Level 1: The reset assertion threshold voltage is 2.06 V; the reset de-assertion threshold voltage is 2.15 V. | |
| | | 0x2 | Level 2: The reset assertion threshold voltage is 2.35 V; the reset de-assertion threshold voltage is 2.43 V. | |
| | | 0x3 | Level 3: The reset assertion threshold voltage is 2.63 V; the reset de-assertion threshold voltage is 2.71 V. | |
| 3:2 | BODINTVAL | | BOD interrupt level | 00 |
| | | 0x0 | Level 0: Reserved. | |
| | | 0x1 | Level 1:The interrupt assertion threshold voltage is 2.22 V; the interrupt de-assertion threshold voltage is 2.35 V. | |
| | | 0x2 | Level 2: The interrupt assertion threshold voltage is 2.52 V; the interrupt de-assertion threshold voltage is 2.66 V. | |
| | | 0x3 | Level 3: The interrupt assertion threshold voltage is 2.80 V; the interrupt de-assertion threshold voltage is 2.90 V. | |
| 4 | BODRSTENA | | BOD reset enable | 0 |
| | | 0 | Disable reset function. | |
| | | 1 | Enable reset function. | |
| 31:5 | - | - | Reserved | 0x00 |

### 3.5.27 System tick counter calibration register

This register determines the value of the SYST_CALIB register (see Table 361).

**Table 34. System tick timer calibration register (SYSTCKCAL, address 0x4004 8154) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 25:0 | CAL | System tick timer calibration value | 0x04 |
| 31:26 | - | Reserved | 0x00 |

### 3.5.28 IRQ latency register

The IRQLATENCY register is an eight-bit register which specifies the minimum number of cycles (0-255) permitted for the system to respond to an interrupt request. The intent of this register is to allow the user to select a trade-off between interrupt response time and determinism.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Setting this parameter to a very low value (e.g. zero) will guarantee the best possible interrupt performance but will also introduce a significant degree of uncertainty and jitter. Requiring the system to always take a larger number of cycles (whether it needs it or not) will reduce the amount of uncertainty but may not necessarily eliminate it.

Theoretically, the ARM Cortex-M0 core should always be able to service an interrupt request within 15 cycles. System factors external to the cpu, however, bus latencies, peripheral response times, etc. can increase the time required to complete a previous instruction before an interrupt can be serviced. Therefore, accurately specifying a minimum number of cycles that will ensure determinism will depend on the application.

The default setting for this register is 0x010.

**Table 35. IRQ latency register (IRQLATENCY, address 0x4004 8170) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 7:0 | LATENCY | 8-bit latency value | 0x010 |
| 31:8 | - | Reserved | - |

### 3.5.29 NMI source selection register

The NMI source selection register selects a peripheral interrupts as source for the NMI interrupt of the ARM Cortex-M0 core. For a list of all peripheral interrupts and their IRQ numbers see Table 55. For a description of the NMI functionality, see Section 28.4.3.2.

**Remark:** See Section 3.1 for LPC111x parts using this register.

**Table 36. NMI source selection register (NMISRC, address 0x4004 8174) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 4:0 | IRQNO | The IRQ number of the interrupt that acts as the Non-Maskable Interrupt (NMI) if bit 31 in this register is 1. See Table 55 for the list of interrupt sources and their IRQ numbers. | 0 |
| 30:5 | - | Reserved | - |
| 31 | NMIEN | Write a 1 to this bit to enable the Non-Maskable Interrupt (NMI) source selected by bits 4:0. | 0 |

**Note:** If the NMISRC register is used to select an interrupt as the source of Non-Maskable interrupts, and the selected interrupt is enabled, one interrupt request can result in both a Non-Maskable and a normal interrupt. Avoid this situation by disabling the normal interrupt in the NVIC, as described in Section 28.6.2.

### 3.5.30 Start logic edge control register 0

The STARTAPRP0 register controls the start logic inputs of ports 0 (PIO0_0 to PIO0_11) and 1 (PIO1_0). This register selects a falling or rising edge on the corresponding PIO input to produce a falling or rising clock edge, respectively, for the start logic (see Section 3.10.2).

Every bit in the STARTAPRP0 register controls one port input and is connected to one wake-up interrupt in the NVIC. Bit 0 in the STARTAPRP0 register corresponds to interrupt 0, bit 1 to interrupt 1, etc. (see Table 55), up to a total of 13 interrupts.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Remark:** Each interrupt connected to a start logic input must be enabled in the NVIC if the corresponding PIO pin is used to wake up the chip from Deep-sleep mode.

**Table 37. Start logic edge control register 0 (STARTAPRP0, address 0x4004 8200) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 11:0 | APRPIO0_n | Edge select for start logic input PIO0_n: PIO0_11 to PIO0_0<br>0 = Falling edge<br>1 = Rising edge | 0x0 |
| 12 | APRPIO1_0 | Edge select for start logic input PIO1_0<br>0 = Falling edge<br>1 = Rising edge | 0x0 |
| 31:13 | - | Reserved. Do not write a 1 to reserved bits in this register. | 0x0 |

### 3.5.31 Start logic signal enable register 0

This STARTERP0 register enables or disables the start signal bits in the start logic. The bit assignment is identical to Table 37.

**Table 38. Start logic signal enable register 0 (STARTERP0, address 0x4004 8204) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 11:0 | ERPIO0_n | Enable start signal for start logic input PIO0_n: PIO0_11 to PIO0_0<br>0 = Disabled<br>1 = Enabled | 0x0 |
| 12 | ERPIO1_0 | Enable start signal for start logic input PIO1_0<br>0 = Disabled<br>1 = Enabled | 0x0 |
| 31:13 | - | Reserved. Do not write a 1 to reserved bits in this register. | 0x0 |

### 3.5.32 Start logic reset register 0

Writing a one to a bit in the STARTRSRP0CLR register resets the start logic state. The bit assignment is identical to Table 37. The start-up logic uses the input signals to generate a clock edge for registering a start signal. This clock edge (falling or rising) sets the interrupt for waking up from Deep-sleep mode. Therefore, the start-up logic states must be cleared before being used.

**Table 39. Start logic reset register 0 (STARTRSRP0CLR, address 0x4004 8208) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 11:0 | RSRPIO0_n | Start signal reset for start logic input PIO0_n:PIO0_11 to PIO0_0<br>0 = Do nothing.<br>1 = Writing 1 resets the start signal. | n/a |
| 12 | RSRPIO1_0 | Start signal reset for start logic input PIO1_0<br>0 = Do nothing.<br>1 = Writing 1 resets the start signal. | n/a |
| 31:13 | - | Reserved. Do not write a 1 to reserved bits in this register. | n/a |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 3.5.33 Start logic status register 0

This register reflects the status of the enabled start signal bits. The bit assignment is identical to Table 37. Each bit (if enabled) reflects the state of the start logic, i.e. whether or not a wake-up signal has been received for a given pin.

**Table 40. Start logic status register 0 (STARTSRP0, address 0x4004 820C) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 11:0 | SRPIO0_n | Start signal status for start logic input PIO0_n: PIO0_11 to PIO0_0<br>0 = No start signal received.<br>1 = Start signal pending. | n/a |
| 12 | SRPIO1_0 | Start signal status for start logic input PIO1_0<br>0 = No start signal received.<br>1 = Start signal pending. | n/a |
| 31:13 | - | Reserved | n/a |

### 3.5.34 Deep-sleep mode configuration register

This register controls the behavior of the WatchDog (WD) oscillator and the BOD circuit when the device enters Deep-sleep mode.

This register **must be initialized at least once before entering Deep-sleep mode** with one of the four values shown in Table 41:

**Table 41. Allowed values for PDSLEEPCFG register**

| Configuration | WD oscillator on | WD oscillator off |
|---|---|---|
| **BOD on** | PDSLEEPCFG = 0x0000 18B7 | PDSLEEPCFG = 0x0000 18F7 |
| **BOD off** | PDSLEEPCFG = 0x0000 18BF | PDSLEEPCFG = 0x0000 18FF |

**Remark:** Failure to initialize and program this register correctly may result in undefined behavior of the microcontroller. The values listed in Table 41 are the only values allowed for PDSLEEPCFG register.

To select the appropriate power configuration for Deep-sleep mode, consider the following:

- BOD: Leaving the BOD circuit enabled will protect the part from a low voltage event occurring while the part is in Deep-sleep mode. However, the BOD circuit causes an additional current drain in Deep-sleep mode.
- WD oscillator: The watchdog oscillator can be left running in Deep-sleep mode to provide a clock for the watchdog timer or a general purpose timer if they are needed for timing a wake-up event (see Section 3.10.3 for details). In this case, the watchdog oscillator analog output frequency must be set to its lowest value (bits FREQSEL in the WDTOSCCTRL = 0001, see Table 13) and all peripheral clocks other than the timer clock must be disabled in the SYSAHBCLKCTRL register (see Table 21) before entering Deep-sleep mode.

  The watchdog oscillator, if running, contributes an additional current drain in Deep-sleep mode.

**Remark:** Reserved bits in this register must always be written as indicated. This register must be initialized correctly before entering Deep-sleep mode.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 42. Deep-sleep configuration register (PDSLEEPCFG, address 0x4004 8230) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | NOTUSED | | Reserved. **Always write these bits as 111.** | 0 |
| 3 | BOD_PD | | BOD power-down control in Deep-sleep mode, see Table 41. | 0 |
| | | 0 | Powered | |
| | | 1 | Powered down | |
| 5:4 | NOTUSED | | Reserved. **Always write these bits as 11.** | 0 |
| 6 | WDTOSC_PD | | Watchdog oscillator power control in Deep-sleep mode, see Table 41. | 0 |
| | | 0 | Powered | |
| | | 1 | Powered down | |
| 7 | NOTUSED | | Reserved. **Always write this bit as 1.** | 0 |
| 10:8 | NOTUSED | | Reserved. **Always write these bits as 000.** | 0 |
| 12:11 | NOTUSED | | Reserved. **Always write these bits as 11.** | 0 |
| 31:13 | - | 0 | Reserved | 0 |

### 3.5.35 Wake-up configuration register

The bits in this register determine the state the chip enters when it is waking up from Deep-sleep mode.

By default, the IRC and flash memory are powered and running and the BOD circuit is enabled when the chip wakes up from Deep-sleep mode.

**Remark:** Reserved bits must be always written as indicated.

**Table 43. Wake-up configuration register (PDAWAKECFG, address 0x4004 8234) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 0 | IRCOUT_PD | | IRC oscillator output wake-up configuration | 0 |
| | | 0 | Powered | |
| | | 1 | Powered down | |
| 1 | IRC_PD | | IRC oscillator power-down wake-up configuration | 0 |
| | | 0 | Powered | |
| | | 1 | Powered down | |
| 2 | FLASH_PD | | Flash wake-up configuration | 0 |
| | | 0 | Powered | |
| | | 1 | Powered down | |
| 3 | BOD_PD | | BOD wake-up configuration | 0 |
| | | 0 | Powered | |
| | | 1 | Powered down | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 43. Wake-up configuration register (PDAWAKECFG, address 0x4004 8234) bit description** *…continued*

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 4 | ADC_PD | | ADC wake-up configuration | 1 |
| | | 0 | Powered | |
| | | 1 | Powered down | |
| 5 | SYSOSC_PD | | System oscillator wake-up configuration | 1 |
| | | 0 | Powered | |
| | | 1 | Powered down | |
| 6 | WDTOSC_PD | | Watchdog oscillator wake-up configuration | 1 |
| | | 0 | Powered | |
| | | 1 | Powered down | |
| 7 | SYSPLL_PD | | System PLL wake-up configuration | 1 |
| | | 0 | Powered | |
| | | 1 | Powered down | |
| 8 | - | | Reserved. **Always write this bit as 1.** | 1 |
| 9 | - | | Reserved. **Always write this bit as 0.** | 0 |
| 10 | - | | Reserved. **Always write this bit as 1.** | 1 |
| 11 | - | | Reserved. **Always write this bit as 1.** | 1 |
| 12 | - | | Reserved. **Always write this bit as 0.** | 0 |
| 15:13 | - | | Reserved. **Always write these bits as 111.** | 111 |
| 31:16 | - | - | Reserved | - |

## 3.5.36 Power-down configuration register

The bits in the PDRUNCFG register control the power to the various analog blocks. This register can be written to at any time while the chip is running, and a write will take effect immediately with the exception of the power-down signal to the IRC.

To avoid glitches when powering down the IRC, the IRC clock is automatically switched off at a clean point. Therefore, for the IRC a delay is possible before the power-down state takes effect.

By default, the IRC and flash memory are powered and running and the BOD circuit is enabled.

**Remark:** Reserved bits must be always written as indicated.

**Table 44. Power-down configuration register (PDRUNCFG, address 0x4004 8238) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 0 | IRCOUT_PD | | IRC oscillator output power-down | 0 |
| | | 0 | Powered | |
| | | 1 | Powered down | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 44. Power-down configuration register (PDRUNCFG, address 0x4004 8238) bit description** *…continued*

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 1 | IRC_PD | | IRC oscillator power-down | 0 |
| | | 0 | Powered | |
| | | 1 | Powered down | |
| 2 | FLASH_PD | | Flash power-down | 0 |
| | | 0 | Powered | |
| | | 1 | Powered down | |
| 3 | BOD_PD | | BOD power-down | 0 |
| | | 0 | Powered | |
| | | 1 | Powered down | |
| 4 | ADC_PD | | ADC power-down | 1 |
| | | 0 | Powered | |
| | | 1 | Powered down | |
| 5 | SYSOSC_PD | | System oscillator power-down | 1 |
| | | 0 | Powered | |
| | | 1 | Powered down | |
| 6 | WDTOSC_PD | | Watchdog oscillator power-down | 1 |
| | | 0 | Powered | |
| | | 1 | Powered down | |
| 7 | SYSPLL_PD | | System PLL power-down | 1 |
| | | 0 | Powered | |
| | | 1 | Powered down | |
| 8 | - | | Reserved. **Always write this bit as 1.** | 1 |
| 9 | - | | Reserved. **Always write this bit as 0.** | 0 |
| 10 | - | | Reserved. **Always write this bit as 1.** | 1 |
| 11 | - | | Reserved. **Always write this bit as 1.** | 1 |
| 12 | - | | Reserved. **Always write this bit as 0.** | 0 |
| 15:13 | - | | Reserved. **Always write these bits as 111.** | 111 |
| 31:16 | - | - | Reserved | - |

### 3.5.37 Device ID register

This device ID register is a read-only register and contains the part ID for each LPC111x/LPC11Cxx part. This register is also read by the ISP/IAP commands (Section 26.5.11).

**Remark:** This register returns the part ID for parts of the LPC1100, LPC1100C, and LPC1100L series only. Use ISP/IAP to obtain the part ID for the LPC1100XL series.

The part IDs for the various parts are shown in the following list. Some parts have two valid part IDs.

- LPC1110
  - 0x0A07 102B = LPC1110FD20


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

- 0x1A07 102B = LPC1110FD20

- LPC1111
  - 0x0A16 D02B = LPC1111FDH20/002
  - 0x1A16 D02B = LPC1111FDH20/002
  - 0x041E 502B = LPC1111FHN33/101
  - 0x2516 D02B = LPC1111FHN33/101; LPC1111FHN33/102
  - 0x0416 502B = LPC1111FHN33/201
  - 0x2516 902B = LPC1111FHN33/201; LPC1111FHN33/202
- LPC1112
  - 0x0A24 902B = LPC1112FD20/102; LPC1112FDH20/102; LPC1112FDH28/102
  - 0x1A24 902B = LPC1112FD20/102; LPC1112FDH20/102; LPC1112FDH28/102
  - 0x042D 502B = LPC1112FHN33/101
  - 0x2524 D02B = LPC1112FHN33/101; LPC1112FHN33/102
  - 0x0425 502B = LPC1112FHN33/201
  - 0x2524 902B = LPC1112FHN33/201; LPC1112FHN33/202; LPC1112FHI33/202; LPC1112FHN24/202
- LPC1113
  - 0x0434 502B = LPC1113FHN33/201
  - 0x2532 902B = LPC1113FHN33/201; LPC1113FHN33/202
  - 0x0434 102B = LPC1113FHN33/301; LPC1113FBD48/301
  - 0x2532 102B = LPC1113FHN33/301; LPC1113FHN33/302; LPC1113FBD48/301; LPC1113FBD48/302
- LPC1114
  - 0x0A40 902B = LPC1114FDH28/102; LPC1114FN28/102
  - 0x1A40 902B = LPC1114FDH28/102; LPC1114FN28/102
  - 0x0444 502B = LPC1114FHN33/201
  - 0x2540 902B = LPC1114FHN33/201; LPC1114FHN33/202
  - 0x0444 102B = LPC1114FHN33/301; LPC1114FBD48/301
  - 0x2540 102B = LPC1114FHN33/301; LPC1114FHN33/302; LPC1114FHI33/302; LPC1114FBD48/301; LPC1114FBD48/302; LPC11D14FBD100/302
- LPC11Cxx
  - 0x1440 102B = LPC11C14/FBD48/301
  - 0x1431 102B = LPC11C22/FBD48/301
  - 0x1430 102B = LPC11C24/FBD48/301

**Table 45. Device ID register (DEVICE_ID, address 0x4004 83F4) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 31:0 | DEVICEID | Part ID numbers for LPC111x/LPC11Cxx parts | part-dependent |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 3.6 Reset

Reset has four sources on the LPC111x/LPC11Cxx: the $\overline{\text{RESET}}$ pin, Watchdog Reset, Power-On Reset (POR), and Brown Out Detect (BOD). In addition, there is an ARM software reset.

The $\overline{\text{RESET}}$ pin is a Schmitt trigger input pin. Assertion of chip Reset by any source, once the operating voltage attains a usable level, starts the IRC causing reset to remain asserted until the external Reset is de-asserted, the oscillator is running, and the flash controller has completed its initialization.

On the assertion of any reset source (ARM software reset, POR, BOD reset, External reset, and Watchdog reset), the following processes are initiated:

1. The IRC starts up. After the IRC-start-up time (maximum of 6 μs on power-up), the IRC provides a stable clock output.
2. The flash is powered up. This takes approximately 100 μs. Then the flash initialization sequence is started.
3. The boot code in the ROM starts. The boot code performs the boot tasks and may jump to the flash.

When the internal Reset is removed, the processor begins executing at address 0, which is initially the Reset vector mapped from the boot block. At that point, all of the processor and peripheral registers have been initialized to predetermined values.

## 3.7 Start-up behavior

See Figure 9 for the start-up timing after reset. The IRC is the default clock at Reset and provides a clean system clock shortly after the supply voltage reaches the threshold value of 1.8 V.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

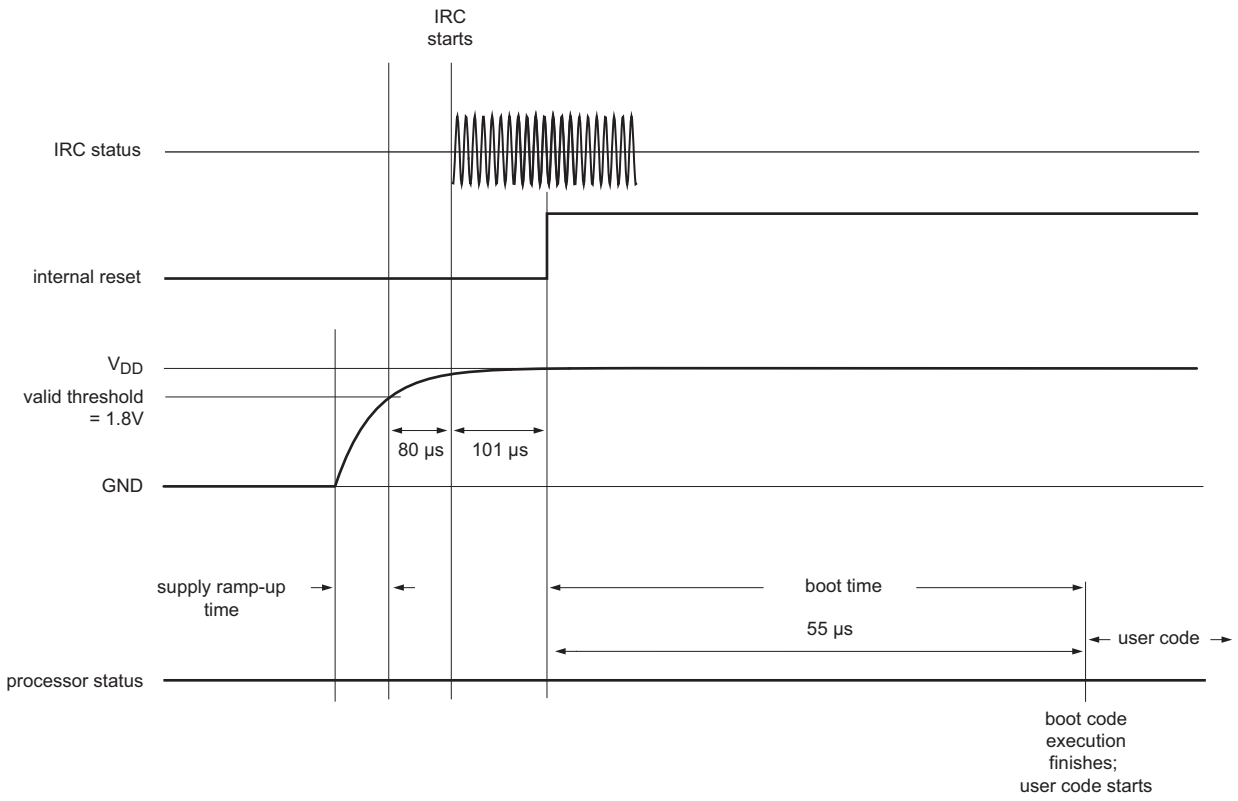


**Fig 9. Start-up timing**

## 3.8 Brown-out detection

The LPC111x/LPC11Cxx includes up to four levels for monitoring the voltage on the $V_{DD}$ pin. If this voltage falls below one of the selected levels, the BOD asserts an interrupt signal to the NVIC. This signal can be enabled for interrupt in the Interrupt Enable Register in the NVIC in order to cause a CPU interrupt; if not, software can monitor the signal by reading the NVIC status register (see Table 55). Four threshold levels can be selected to cause a forced reset of the chip (see Table 33).

## 3.9 Power management

The LPC111x/LPC11Cxx support a variety of power control features. In Active mode, when the chip is running, power and clocks to selected peripherals can be optimized for power consumption. In addition, there are three special modes of processor power reduction: Sleep mode, Deep-sleep mode, and Deep power-down mode.

**Remark:** The Debug mode is not supported in Sleep, Deep-sleep, or Deep power-down modes.

### 3.9.1 Active mode

In Active mode, the ARM Cortex-M0 core and memories are clocked by the system clock, and peripherals are clocked by the system clock or a dedicated peripheral clock.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

The chip is in Active mode after reset and the default power configuration is determined by the reset values of the PDRUNCFG and SYSAHBCLKCTRL registers. The power configuration can be changed during run time.

#### 3.9.1.1 Power configuration in Active mode

Power consumption in Active mode is determined by the following configuration choices:

- The SYSAHBCLKCTRL register controls which memories and peripherals are running (Table 21).
- The power to various analog blocks (PLL, oscillators, the ADC, the BOD circuit, and the flash block) can be controlled at any time individually through the PDRUNCFG register (Table 44).
- The clock source for the system clock can be selected from the IRC (default), the system oscillator, or the watchdog oscillator (see Figure 8 and related registers).
- The system clock frequency can be selected by the SYSPLLCTRL (Table 10) and the SYSAHBCLKDIV register (Table 20).
- Selected peripherals (UART, SPI0/1, WDT) use individual peripheral clocks with their own clock dividers. The peripheral clocks can be shut down through the corresponding clock divider registers (Table 22 to Table 24).

### 3.9.2 Sleep mode

In Sleep mode, the system clock to the ARM Cortex-M0 core is stopped, and execution of instructions is suspended until either a reset or an enabled interrupt occurs.

Peripheral functions, if selected to be clocked in the SYSAHBCLKCTRL register, continue operation during Sleep mode and may generate interrupts to cause the processor to resume execution. Sleep mode eliminates dynamic power used by the processor itself, memory systems and their related controllers, and internal buses. The processor state and registers, peripheral registers, and internal SRAM values are maintained, and the logic levels of the pins remain static.

#### 3.9.2.1 Power configuration in Sleep mode

Power consumption in Sleep mode is configured by the same settings as in Active mode:

- The clock remains running.
- The system clock frequency remains the same as in Active mode, but the processor is not clocked.
- Analog and digital peripherals are selected as in Active mode.

#### 3.9.2.2 Programming Sleep mode

The following steps must be performed to enter Sleep mode:

1. The DPDEN bit in the PCON register must be set to zero (Table 50).
2. The SLEEPDEEP bit in the ARM Cortex-M0 SCR register must be set to zero, see (Table 453).
3. Use the ARM Cortex-M0 Wait-For-Interrupt (WFI) instruction.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

#### 3.9.2.3 Wake-up from Sleep mode

Sleep mode is exited automatically when an interrupt enabled by the NVIC arrives at the processor or a reset occurs. After wake-up due to an interrupt, the microcontroller returns to its original power configuration defined by the contents of the PDRUNCFG and the SYSAHBCLKDIV registers. If a reset occurs, the microcontroller enters the default configuration in Active mode.

### 3.9.3 Deep-sleep mode

In Deep-sleep mode, the system clock to the processor is disabled as in Sleep mode. All analog blocks are powered down, except for the BOD circuit and the watchdog oscillator, which must be selected or deselected during Deep-sleep mode in the PDSLEEPCFG register.

Deep-sleep mode eliminates all power used by the flash and analog peripherals and all dynamic power used by the processor itself, memory systems and their related controllers, and internal buses. The processor state and registers, peripheral registers, and internal SRAM values are maintained, and the logic levels of the pins remain static.

#### 3.9.3.1 Power configuration in Deep-sleep mode

Power consumption in Deep-sleep mode is determined by the Deep-sleep power configuration setting in the PDSLEEPCFG (Table 42) register:

- The only clock source available in Deep-sleep mode is the watchdog oscillator. The watchdog oscillator can be left running in Deep-sleep mode if required for timer-controlled wake-up (see Section 3.10.3). All other clock sources (the IRC and system oscillator) and the system PLL are shut down. The watchdog oscillator analog output frequency must be set to the lowest value of its analog clock output (bits FREQSEL in the WDTOSCCTRL = 0001, see Table 13).
- The BOD circuit can be left running in Deep-sleep mode if required by the application.
- If the watchdog oscillator is running in Deep-sleep mode, only the watchdog timer or one of the general-purpose timers should be enabled in SYSAHBCLKCTRL register to minimize power consumption.

#### 3.9.3.2 Programming Deep-sleep mode

The following steps must be performed to enter Deep-sleep mode:

1. The DPDEN bit in the PCON register must be set to zero (Table 50).
2. Select the power configuration in Deep-sleep mode in the PDSLEEPCFG (Table 42) register.
   a. If a timer-controlled wake-up is needed, ensure that the watchdog oscillator is powered in the PDRUNCFG register and switch the clock source to WD oscillator in the MAINCLKSEL register (Table 18).
   b. If no timer-controlled wake-up is needed and the watchdog oscillator is shut down, ensure that the IRC is powered in the PDRUNCFG register and switch the clock source to IRC in the MAINCLKSEL register (Table 18). This ensures that the system clock is shut down glitch-free.
3. Select the power configuration after wake-up in the PDAWAKECFG (Table 43) register.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

4. If an external pin is used for wake-up, enable and clear the wake-up pin in the start logic registers (Table 37 to Table 40), and enable the start logic interrupt in the NVIC.
5. In the SYSAHBCLKCTRL register (Table 21), disable all peripherals except counter/timer or WDT if needed.
6. Write one to the SLEEPDEEP bit in the ARM Cortex-M0 SCR register (Table 453).
7. Use the ARM WFI instruction.

#### 3.9.3.3 Wake-up from Deep-sleep mode

The microcontroller can wake up from Deep-sleep mode in the following ways:

- Signal on an external pin. For this purpose, pins PIO0_0 to PIO0_11 and PIO1_0 can be enabled as inputs to the start logic. The start logic does not require any clocks and generates the interrupt if enabled in the NVIC to wake up from Deep-sleep mode.
- Input signal to the start logic created by a match event on one of the general purpose timer external match outputs. The pin holding the timer match function must be enabled as start logic input in the NVIC, the corresponding timer must be enabled in the SYSAHBCLKCTRL register, and the watchdog oscillator must be running in Deep-sleep mode (for details see Section 3.10.3).
- Reset from the BOD circuit. In this case, the BOD circuit must be enabled in the PDSLEEPCFG register, and the BOD reset must be enabled in the BODCTRL register (Table 33).
- Reset from the watchdog timer. In this case, the watchdog oscillator must be running in Deep-sleep mode (see PDSLEEPCFG register), and the WDT must be enabled in the SYSAHBCLKCTRL register.
- A reset signal from the external $\overline{\text{RESET}}$ pin.

**Remark:** If the watchdog oscillator is running in Deep-sleep mode, its frequency determines the wake-up time causing the wake-up time to be longer than waking up with the IRC.

**Remark:** After wake-up, reprogram the clock source for the main clock.

### 3.9.4 Deep power-down mode

In Deep power-down mode, power and clocks are shut off to the entire chip with the exception of the WAKEUP pin.

During Deep power-down mode, the contents of the SRAM and registers are not retained except for a small amount of data which can be stored in the five 32-bit general purpose registers of the PMU block.

All functional pins are tri-stated in Deep power-down mode except for the WAKEUP pin.

#### 3.9.4.1 Power configuration in Deep power-down mode

Deep power-down mode has no configuration options. All clocks, the core, and all peripherals are powered down. Only the WAKEUP pin is powered.

#### 3.9.4.2 Programming Deep power-down mode

The following steps must be performed to enter Deep power-down mode:


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

1. Write one to the DPDEN bit in the PCON register (see Table 50).
2. Store data to be retained in the general purpose registers (Table 51).
3. Write one to the SLEEPDEEP bit in the ARM Cortex-M0 SCR register (Table 453).
4. Ensure that the IRC is powered by setting bits IRCOUT_PD and IRC_PD to zero in the PDRUNCFG register before entering Deep power-down mode.

   **Remark:** This step is part dependent. See Section 3.1 for part specific details.
5. Use the ARM WFI instruction.

**Remark:** The WAKEUP pin must be pulled HIGH externally before entering Deep power-down mode.

#### 3.9.4.3 Wake-up from Deep power-down mode

Pulling the WAKEUP pin LOW wakes up the LPC111x/LPC11Cxx from Deep power-down, and the chip goes through the entire reset process (Section 3.6). The minimum pulse width for the HIGH-to-LOW transition on the WAKEUP pin is 50 ns.

Follow these steps to wake up the chip from Deep power-down mode:

1. A wake-up signal is generated when a HIGH-to-LOW transition occurs externally on the WAKEUP pin with a pulse length of at least 50 ns while the part is in Deep power-down mode.
   - The PMU will turn on the on-chip voltage regulator. When the core voltage reaches the power-on-reset (POR) trip point, a system reset will be triggered and the chip re-boots.
   - All registers except the GPREG0 to GPREG4and PCON will be in their reset state.
2. Once the chip has booted, read the deep power-down flag in the PCON register (Table 50) to verify that the reset was caused by a wake-up event from Deep power-down.
3. Clear the deep power-down flag in the PCON register (Table 50).
4. (Optional) Read the stored data in the general purpose registers (Table 51 and Table 52).
5. Set up the PMU for the next Deep power-down cycle.

**Remark:** The $\overline{\text{RESET}}$ pin has no functionality in Deep power-down mode.

## 3.10 Deep-sleep mode details

### 3.10.1 IRC oscillator

The IRC is the only oscillator on the LPC111x/LPC11Cxx that can always shut down glitch-free. Therefore it is recommended that the user switches the clock source to IRC before the chip enters Deep-sleep mode.

### 3.10.2 Start logic

The Deep-sleep mode is exited when the start logic indicates an interrupt to the ARM core. The port pins PIO0_0 to PIO0_11 and PIO1_0 are connected to the start logic and serve as wake-up pins. The user must program the start logic registers for each input to


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

set the appropriate edge polarity for the corresponding wake-up event. Furthermore, the interrupts corresponding to each input must be enabled in the NVIC. Interrupts 0 to 12 in the NVIC correspond to 13 PIO pins (see Section 3.5.30).

The start logic does not require a clock to run because it uses the input signals on the enabled pins to generate a clock edge when enabled. Therefore, the start logic signals should be cleared (see Table 39) before use.

The start logic can also be used in Active mode to provide a vectored interrupt using the LPC111x/LPC11Cxx's input pins.

### 3.10.3 Using the general purpose counter/timers to create a self-wake-up event

If enabled in Deep-sleep mode through the SYSAHBCLKCFG register, the counter/timers can count clock cycles of the watchdog oscillator and create a match event when the number of cycles equals a preset match value. The match event causes the corresponding match output pin to go HIGH, LOW, or toggle. The state of the match output pin is also monitored by the start logic and can trigger a wake-up interrupt if that pin is enabled in the NVIC and the start logic trigger is configured accordingly in the start logic edge control register (see Table 37).

The following steps must be performed to configure the counter/timer and create a timed Deep-sleep self-wake-up event:

1. Configure the port pin as match output in the IOCONFIG block. Select from pins PIO0_1 or PIO0_8 to PIO0_11, which are inputs to the start logic and also hold a match output function.
2. In the corresponding counter/timer, set the match value, and configure the match output for the selected pin.
3. Select the watchdog oscillator to run in Deep-sleep mode in the PDSLEEPCFG register.
4. Switch the clock source to the watchdog oscillator in the MAINCLKSEL register (Table 18) and ensure the watchdog oscillator is powered in the PDRUNCFG register.
5. Enable the pin, configure its edge detect function, and reset the start logic in the start logic registers (Table 37 to Table 40), and enable the interrupt in the NVIC.
6. Disable all other peripherals in the SYSAHBCLKCTRL register.
7. Ensure that the DPDEN bit in the PCON register is set to zero (Table 50).
8. Write one to the SLEEPDEEP bit in the ARM Cortex-M0 SCR register (Table 453).
9. Start the counter/timer.
10. Use the ARM WFI instruction to enter Deep-sleep mode.

## 3.11 System PLL functional description

The LPC111x/LPC11Cxx uses the system PLL to create the clocks for the core and peripherals.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

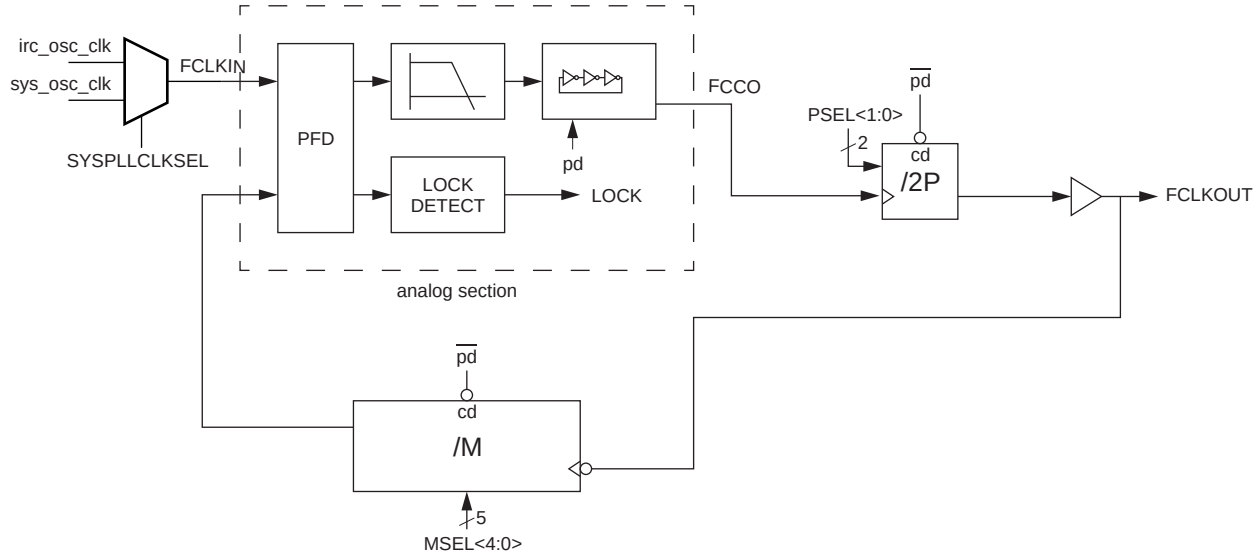


**Fig 10. System PLL block diagram**

The block diagram of this PLL is shown in Figure 10. The input frequency range is 10 MHz to 25 MHz. The input clock is fed directly to the Phase-Frequency Detector (PFD). This block compares the phase and frequency of its inputs, and generates a control signal when phase and/ or frequency do not match. The loop filter filters these control signals and drives the current controlled oscillator (CCO), which generates the main clock and optionally two additional phases. The CCO frequency range is 156 MHz to 320 MHz.These clocks are either divided by 2×P by the programmable post divider to create the output clock(s), or are sent directly to the output(s). The main output clock is then divided by M by the programmable feedback divider to generate the feedback clock. The output signal of the phase-frequency detector is also monitored by the lock detector, to signal when the PLL has locked on to the input clock.

**Remark:** The divider values for P and M must be selected so that the PLL output clock frequency FCLKOUT is lower than 100 MHz.

### 3.11.1 Lock detector

The lock detector measures the phase difference between the rising edges of the input and feedback clocks. Only when this difference is smaller than the so called “lock criterion” for more than eight consecutive input clock periods, the lock output switches from low to high. A single too large phase difference immediately resets the counter and causes the lock signal to drop (if it was high). Requiring eight phase measurements in a row to be below a certain figure ensures that the lock detector will not indicate lock until both the phase and frequency of the input and feedback clocks are very well aligned. This effectively prevents false lock indications, and thus ensures a glitch free lock signal.

### 3.11.2 Power-down control

To reduce the power consumption when the PLL clock is not needed, a Power-down mode has been incorporated. This mode is enabled by setting the SYSPLL_PD bits to one in the Power-down configuration register (Table 44). In this mode, the internal current reference will be turned off, the oscillator and the phase-frequency detector will be


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

stopped and the dividers will enter a reset state. While in Power-down mode, the lock output will be low to indicate that the PLL is not in lock. When the Power-down mode is terminated by setting the SYSPLL_PD bits to zero, the PLL will resume its normal operation and will make the lock signal high once it has regained lock on the input clock.

### 3.11.3 Divider ratio programming

#### Post divider

The division ratio of the post divider is controlled by the PSEL bits. The division ratio is two times the value of P selected by PSEL bits as shown in Table 10. This guarantees an output clock with a 50% duty cycle.

#### Feedback divider

The feedback divider's division ratio is controlled by the MSEL bits. The division ratio between the PLL's output clock and the input clock is the decimal value on MSEL bits plus one, as specified in Table 10.

#### Changing the divider values

Changing the divider ratio while the PLL is running is not recommended. As there is no way to synchronize the change of the MSEL and PSEL values with the dividers, the risk exists that the counter will read in an undefined value, which could lead to unwanted spikes or drops in the frequency of the output clock. The recommended way of changing between divider settings is to power down the PLL, adjust the divider settings and then let the PLL start up again.

### 3.11.4 Frequency selection

The PLL frequency equations use the following parameters (also see Figure 8):

**Table 46. PLL frequency parameters**

| Parameter | System PLL |
|---|---|
| FCLKIN | Frequency of sys_pllclkin (input clock to the system PLL) from the SYSPLLCLKSEL multiplexer (see Section 3.5.9). |
| FCCO | Frequency of the Current Controlled Oscillator (CCO); 156 to 320 MHz. |
| FCLKOUT | Frequency of sys_pllclkout. FCLKOUT must be < 100 MHz. |
| P | System PLL post divider ratio; PSEL bits in SYSPLLCTRL (see Section 3.5.3). |
| M | System PLL feedback divider register; MSEL bits in SYSPLLCTRL (see Section 3.5.3). |

#### 3.11.4.1 Normal mode

In normal mode the post divider is enabled, giving a 50% duty cycle clock with the following frequency relations:

$$FCLKOUT = M \times FCLKIN = (FCCO)/(2 \times P) \quad (1)$$

To select the appropriate values for M and P, it is recommended to follow these steps:


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

1. Specify the input clock frequency FCLKIN.
2. Calculate M to obtain the desired output frequency FCLKOUT with M = FCLKOUT / FCLKIN.
3. Find a value so that FCCO = 2 × P × FCLKOUT.
4. Verify that all frequencies and divider values conform to the limits specified in Table 10.
5. Ensure that FCLKOUT < 100 MHz.

Table 47 shows how to configure the PLL for a 12 MHz crystal oscillator using the SYSPLLCTRL register (Table 10). The main clock is equivalent to the system clock if the system clock divider SYSAHBCLKDIV is set to one (see Table 20).

**Table 47. PLL configuration examples**

| PLL input clock sys_pllclkin (FCLKIN) | Main clock (FCLKOUT) | MSEL bits Table 10 | M divider value | PSEL bits Table 10 | P divider value | FCCO frequency |
|---|---|---|---|---|---|---|
| 12 MHz | 48 MHz | 00011 | 4 | 01 | 2 | 192 MHz |
| 12 MHz | 36 MHz | 00010 | 3 | 10 | 4 | 288 MHz |
| 12 MHz | 24 MHz | 00001 | 2 | 10 | 4 | 192 MHz |

### 3.11.4.2 Power-down mode

In this mode, the internal current reference is turned off, the oscillator and the phase-frequency detector are stopped, and the dividers enter a reset state. While in Power-down mode, the lock output is be LOW to indicate that the PLL is not in lock. When the Power-down mode is terminated by setting the SYSPLL_PD bit to zero in the Power-down configuration register (Table 44), the PLL resumes its normal operation and asserts the lock signal HIGH once it has regained lock on the input clock.

## 3.12 Flash memory access

Depending on the system clock frequency, access to the flash memory can be configured with various access times by writing to the FLASHCFG register at address 0x4003 C010. This register is part of the flash configuration block (see Figure 6).

**Remark:** Improper setting of this register may result in incorrect operation of the LPC111x/LPC11Cxx flash memory. Do not manipulate the FLASHCFG register when using power profiles (set_power() and/or set_pll() API's).


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 48. Flash configuration register (FLASHCFG, address 0x4003 C010) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 1:0 | FLASHTIM | | Flash memory access time. FLASHTIM +1 is equal to the number of system clocks used for flash access. | 10 |
| | | 00 | 1 system clock flash access time (for system clock frequencies of up to 20 MHz). | |
| | | 01 | 2 system clocks flash access time (for system clock frequencies of up to 40 MHz). | |
| | | 10 | 3 system clocks flash access time (for system clock frequencies of up to 50 MHz). | |
| | | 11 | Reserved. | |
| 31:2 | - | - | Reserved. **User software must not change the value of these bits. Bits 31:2 must be written back exactly as read**. | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 4.1 How to read this chapter

**Remark:** For parts LPC11(D)1x/102/202/302, also refer to Chapter 5 for power control.

## 4.2 Introduction

The PMU controls the Deep power-down mode. Four general purpose register in the PMU can be used to retain data during Deep power-down mode.

## 4.3 Register description

**Table 49. Register overview: PMU (base address 0x4003 8000)**

| Name | Access | Address offset | Description | Reset value |
|---|---|---|---|---|
| PCON | R/W | 0x000 | Power control register | 0x0 |
| GPREG0 | R/W | 0x004 | General purpose register 0 | 0x0 |
| GPREG1 | R/W | 0x008 | General purpose register 1 | 0x0 |
| GPREG2 | R/W | 0x00C | General purpose register 2 | 0x0 |
| GPREG3 | R/W | 0x010 | General purpose register 3 | 0x0 |
| GPREG4 | R/W | 0x014 | General purpose register 4 | 0x0 |

### 4.3.1 Power control register

The power control register selects whether one of the ARM Cortex-M0 controlled power-down modes (Sleep mode or Deep-sleep mode) or the Deep power-down mode is entered and provides the flags for Sleep or Deep-sleep modes and Deep power-down modes respectively. See Section 3.9 for details on how to enter the power-down modes.

**Table 50. Power control register (PCON, address 0x4003 8000) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 0 | - | - | Reserved. Do not write 1 to this bit. | 0x0 |
| 1 | DPDEN | | Deep power-down mode enable | 0 |
| | | 0 | ARM WFI will enter Sleep or Deep-sleep mode (clock to ARM Cortex-M0 core turned off). | |
| | | 1 | ARM WFI will enter Deep-power down mode (ARM Cortex-M0 core powered-down). | |
| 7:2 | - | - | Reserved. Do not write ones to this bit. | 0x0 |


All information provided in this document is subject to legal disclaimers.
© NXP B.V. 2016. All rights reserved.

**Table 50. Power control register (PCON, address 0x4003 8000) bit description** *…continued*

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 8 | SLEEPFLAG | | Sleep mode flag | 0 |
| | | 0 | Read: No power-down mode entered. LPC111x/LPC11Cxx is in Active mode. Write: No effect. | |
| | | 1 | Read: Sleep/Deep-sleep or Deep power-down mode entered. Write: Writing a 1 clears the SLEEPFLAG bit to 0. | |
| 10:9 | - | - | Reserved. Do not write ones to this bit. | 0x0 |
| 11 | DPDFLAG | | Deep power-down flag | 0x0 |
| | | 0 | Read: Deep power-down mode **not** entered. Write: No effect. | 0x0 |
| | | 1 | Read: Deep power-down mode entered. Write: Clear the Deep power-down flag. | 0x0 |
| 31:12 | - | - | Reserved. Do not write ones to this bit. | 0x0 |

### 4.3.2 General purpose registers 0 to 3

The general purpose registers retain data through the Deep power-down mode when power is still applied to the $V_{DD}$ pin but the chip has entered Deep power-down mode. Only a “cold” boot when all power has been completely removed from the chip will reset the general purpose registers.

**Table 51. General purpose registers 0 to 3 (GPREG0 - GPREG3, address 0x4003 8004 to 0x4003 8010) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 31:0 | GPDATA | Data retained during Deep power-down mode. | 0x0 |

### 4.3.3 General purpose register 4

The general purpose register 4 retains data through the Deep power-down mode when power is still applied to the $V_{DD}$ pin but the chip has entered Deep power-down mode. Only a “cold” boot, when all power has been completely removed from the chip, will reset the general purpose registers.

**Remark:** If there is a possibility that the external voltage applied on pin $V_{DD}$ drops below 2.2 V during Deep power-down, the hysteresis of the WAKEUP input pin has to be disabled in this register before entering Deep power-down mode in order for the chip to wake up.

**Table 52. General purpose register 4 (GPREG4, address 0x4003 8014) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 9:0 | - | - | Reserved. Do not write ones to this bit. | 0x0 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 52. General purpose register 4 (GPREG4, address 0x4003 8014) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 10 | WAKEUPHYS | | WAKEUP pin hysteresis enable | 0x0 |
| | | 1 | Hysteresis for WAKEUP pin enabled. | |
| | | 0 | Hysteresis for WAKUP pin disabled. | |
| 31:11 | GPDATA | | Data retained during Deep power-down mode. | 0x0 |

## 4.4 Functional description

For details of entering and exiting Deep power-down mode, see Section 3.9.4.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 5.1 How to read this chapter

The power profiles are available for parts LPC11(D)1x/102/202/302 only (LPC1100L series).

## 5.2 Basic configuration

Specific power profile settings are required in the following situation: When using IAP commands, configure the power profiles in Default mode.

Disable all interrupts before making calls to the power profile API. You can re-enable the interrupts after the power profile API calls have completed.

## 5.3 Features

- Includes ROM-based application services
- Power Management services
- Clocking services

## 5.4 Description

The API calls to the ROM are performed by executing functions which are pointed by a pointer within the ROM Driver Table. Figure 11 shows the pointer structure used to call the Power Profiles API.


All information provided in this document is subject to legal disclaimers.
© NXP B.V. 2016. All rights reserved.

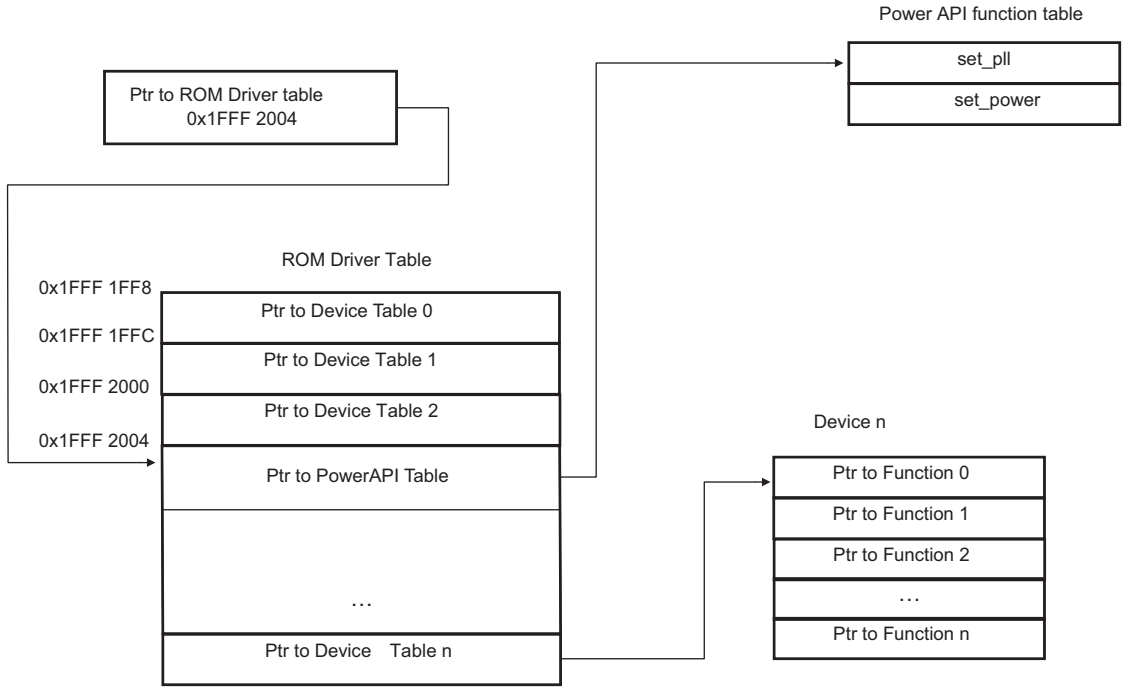


**Fig 11. Power profiles pointer structure**

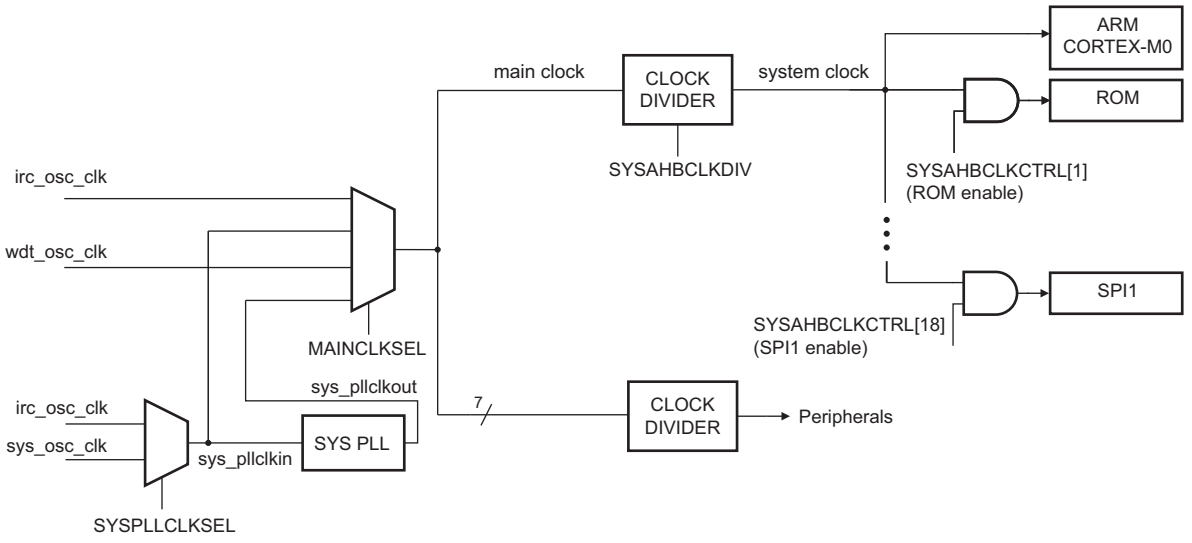


**Fig 12. LPC111x/102/202/302 clock configuration for power API use**

## 5.5 Definitions

The following elements have to be defined in an application that uses the power profiles:


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

```
typedef struct _PWRD {
        void (*set_pll)(unsigned int cmd[], unsigned int resp[]);
        void (*set_power)(unsigned int cmd[], unsigned int resp[]);
} PWRD;
typedef struct _ROM {
        const PWRD * pWRD;
} ROM;
ROM ** rom = (ROM **) (0x1FFF1FF8 + 3 * sizeof(ROM**));
unsigned int command[4], result[2];
```

## 5.6 Clocking routine

### 5.6.1 set_pll

This routine sets up the system PLL according to the calling arguments. If the expected clock can be obtained by simply dividing the system PLL input, *set_pll* bypasses the PLL to lower system power consumption.

**Remark:** Before this routine is invoked, the PLL clock source (IRC/system oscillator) must be selected (Table 16), the main clock source must be set to the input clock to the system PLL (Table 18) and the system/AHB clock divider must be set to 1 (Table 20).

*set_pll* attempts to find a PLL setup that matches the calling parameters. Once a combination of a feedback divider value (SYSPLLCTRL, M), a post divider ratio (SYSPLLCTRL, P) and the system/AHB clock divider (SYSAHBCLKDIV) is found, *set_pll* applies the selected values and switches the main clock source selection to the system PLL clock out (if necessary).

The routine returns a result code that indicates if the system PLL was successfully set (PLL_CMD_SUCCESS) or not (in which case the result code identifies what went wrong). The current system frequency value is also returned. The application should use this information to adjust other clocks in the device (the SSP, UART, and WDT clocks, and/or clockout).

**Table 53. set_pll routine**

| Routine | set_pll |
|---|---|
| Input | **Param0:** system PLL input frequency (in kHz) |
| | **Param1:** expected system clock (in kHz) |
| | **Param2:** mode (CPU_FREQ_EQU, CPU_FREQ_LTE, CPU_FREQ_GTE, CPU_FREQ_APPROX) |
| | **Param3:** system PLL lock time-out |
| Result | **Result0:** PLL_CMD_SUCCESS \| PLL_INVALID_FREQ \| PLL_INVALID_MODE \| PLL_FREQ_NOT_FOUND \| PLL_NOT_LOCKED |
| | **Result1:** system clock (in kHz) |

The following definitions are needed when making set_pll power routine calls:

```
/* set_pll mode options */
#define     CPU_FREQ_EQU        0
#define     CPU_FREQ_LTE        1
#define     CPU_FREQ_GTE        2
#define     CPU_FREQ_APPROX     3
```


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

```
/* set_pll result0 options */
#define     PLL_CMD_SUCCESS      0
#define     PLL_INVALID_FREQ     1
#define     PLL_INVALID_MODE     2
#define     PLL_FREQ_NOT_FOUND   3
#define     PLL_NOT_LOCKED       4
```

For a simplified clock configuration scheme see Figure 12. For more details see Figure 8.

#### 5.6.1.1 Param0: system PLL input frequency and Param1: expected system clock

*set_pll* looks for a setup in which the system PLL clock does not exceed 50 MHz. It easily finds a solution when the ratio between the expected system clock and the system PLL input frequency is an integer value, but it can also find solutions in other cases.

The system PLL input frequency (*Param0*) must be between 10000 to 25000 kHz (10 MHz to 25 MHz) inclusive. The expected system clock (*Param1*) must be between 1 and 50000 kHz inclusive. If either of these requirements is not met, *set_pll* returns PLL_INVALID_FREQ and returns *Param0* as *Result1* since the PLL setting is unchanged.

#### 5.6.1.2 Param2: mode

The first priority of *set_pll* is to find a setup that generates the system clock at exactly the rate specified in *Param1*. If it is unlikely that an exact match can be found, input parameter mode (*Param2*) should be used to specify if the actual system clock can be less than or equal, greater than or equal or approximately the value specified as the expected system clock (*Param1*).

A call specifying CPU_FREQ_EQU will only succeed if the PLL can output exactly the frequency requested in *Param1*.

CPU_FREQ_LTE can be used if the requested frequency should not be exceeded (such as overall current consumption and/or power budget reasons).

CPU_FREQ_GTE helps applications that need a minimum level of CPU processing capabilities.

CPU_FREQ_APPROX results in a system clock that is as close as possible to the requested value (it may be greater than or less than the requested value).

If an illegal mode is specified, *set_pll* returns PLL_INVALID_MODE. If the expected system clock is out of the range supported by this routine, *set_pll* returns PLL_FREQ_NOT_FOUND. In these cases the current PLL setting is not changed and *Param0* is returned as *Result1*.

#### 5.6.1.3 Param3: system PLL lock time-out

It should take no more than 100 μs for the system PLL to lock if a valid configuration is selected. If *Param3* is zero, *set_pll* will wait indefinitely for the PLL to lock. A non-zero value indicates how many times the code will check for a successful PLL lock event before it returns PLL_NOT_LOCKED. In this case the PLL settings are unchanged and *Param0* is returned as *Result1*.

**Remark:** The time it takes the PLL to lock depends on the selected PLL input clock source (IRC/system oscillator) and its characteristics. The selected source can experience more or less jitter depending on the operating conditions such as power


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

supply and/or ambient temperature. This is why it is suggested that when a good known clock source is used and a PLL_NOT_LOCKED response is received, the set_pll routine should be invoked several times before declaring the selected PLL clock source invalid.

**Hint:** setting *Param3* equal to the system PLL frequency [Hz] divided by 10000 will provide more than enough PLL lock-polling cycles.

#### 5.6.1.4 Code examples

The following examples illustrate some of the features of *set_pll* discussed above.

##### 5.6.1.4.1 Invalid frequency (device maximum clock rate exceeded)

```
command[0] = 12000;
command[1] = 60000;
command[2] = CPU_FREQ_EQU;
command[3] = 0;
(*rom)->pWRD->set_pll(command, result);
```

The above code specifies a 12 MHz PLL input clock and a system clock of exactly 60 MHz. The application was ready to infinitely wait for the PLL to lock. But the expected system clock of 60 MHz exceeds the maximum of 50 MHz. Therefore *set_pll* returns PLL_INVALID_FREQ in *result[0]* and 12000 in *result[1]* without changing the PLL settings.

##### 5.6.1.4.2 Invalid frequency selection (system clock divider restrictions)

```
command[0] = 12000;
command[1] = 40;
command[2] = CPU_FREQ_LTE;
command[3] = 0;
(*rom)->pWRD->set_pll(command, result);
```

The above code specifies a 12 MHz PLL input clock, a system clock of no more than 40 kHz and no time-out while waiting for the PLL to lock. Since the maximum divider value for the system clock is 255 and running at 40 kHz would need a divide by value of 300, *set_pll* returns PLL_INVALID_FREQ in *result[0]* and 12000 in *result[1]* without changing the PLL settings.

##### 5.6.1.4.3 Exact solution cannot be found (PLL)

```
command[0] = 12000;
command[1] = 25000;
command[2] = CPU_FREQ_EQU;
command[3] = 0;
(*rom)->pWRD->set_pll(command, result);
```

The above code specifies a 12 MHz PLL input clock and a system clock of exactly 25 MHz. The application was ready to infinitely wait for the PLL to lock. Since there is no valid PLL setup within earlier mentioned restrictions, *set_pll* returns PLL_FREQ_NOT_FOUND in *result[0]* and 12000 in *result[1]* without changing the PLL settings.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

#### 5.6.1.4.4 System clock less than or equal to the expected value

```
command[0] = 12000;
command[1] = 25000;
command[2] = CPU_FREQ_LTE;
command[3] = 0;
(*rom)->pWRD->set_pll(command, result);
```

The above code specifies a 12 MHz PLL input clock, a system clock of no more than 25 MHz and no locking time-out. *set_pll* returns PLL_CMD_SUCCESS in *result[0]* and 24000 in *result[1]*. The new system clock is 24 MHz.

#### 5.6.1.4.5 System clock greater than or equal to the expected value

```
command[0] = 12000;
command[1] = 25000;
command[2] = CPU_FREQ_GTE;
command[3] = 0;
(*rom)->pWRD->set_pll(command, result);
```

The above code specifies a 12 MHz PLL input clock, a system clock of at least 25 MHz and no locking time-out. *set_pll* returns PLL_CMD_SUCCESS in *result[0]* and 36000 in *result[1]*. The new system clock is 36 MHz.

#### 5.6.1.4.6 System clock approximately equal to the expected value

```
command[0] = 12000;
command[1] = 16500;
command[2] = CPU_FREQ_APPROX;
command[3] = 0;
(*rom)->pWRD->set_pll(command, result);
```

The above code specifies a 12 MHz PLL input clock, a system clock of approximately 16.5 MHz and no locking time-out. *set_pll* returns PLL_CMD_SUCCESS in *result[0]* and 16000 in *result[1]*. The new system clock is 16 MHz.

## 5.7 Power routine

### 5.7.1 set_power

This routine configures the device's internal power control settings according to the calling arguments. The goal is to reduce active power consumption while maintaining the feature of interest to the application close to its optimum.

**Remark:** The set_power routine was designed for systems employing the configuration of SYSAHBCLKDIV = 1 (System clock divider register, see Table 20 and Figure 12). Using this routine in an application with the system clock divider not equal to 1 might not improve microcontroller's performance as much as in setups when the main clock and the system clock are running at the same rate.

*set_power* returns a result code that reports whether the power setting was successfully changed or not.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

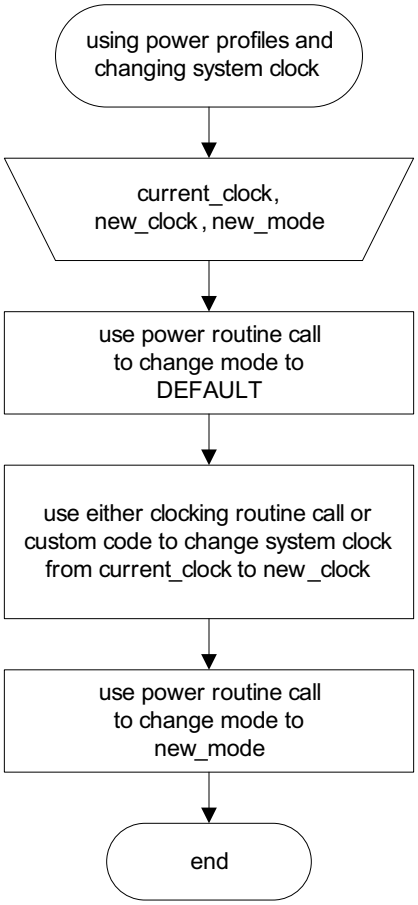


**Fig 13. Power profiles usage**

**Table 54. set_power routine**

| Routine | set_power |
|---|---|
| Input | **Param0:** main clock (in MHz) |
| | **Param1:** mode (PWR_DEFAULT, PWR_CPU_PERFORMANCE, PWR_ EFFICIENCY, PWR_LOW_CURRENT) |
| | **Param2:** system clock (in MHz) |
| Result | **Result0:** PWR_CMD_SUCCESS \| PWR_INVALID_FREQ \| PWR_INVALID_MODE |

The following definitions are needed for set_power routine calls:

```
/* set_power mode options */
#define     PWR_DEFAULT             0
#define     PWR_CPU_PERFORMANCE     1
#define     PWR_EFFICIENCY          2
#define     PWR_LOW_CURRENT         3
/* set_power result0 options */
#define     PWR_CMD_SUCCESS         0
#define     PWR_INVALID_FREQ        1
#define     PWR_INVALID_MODE        2
```


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

For a simplified clock configuration scheme see Figure 12. For more details see Figure 8.

#### 5.7.1.1 Param0: main clock

The main clock is the clock rate the microcontroller uses to source the system's and the peripherals' clock. It is configured by either a successful execution of the clocking routine call or a similar code provided by the user. This operand must be an integer between 1 to 50 MHz inclusive. If a value out of this range is supplied, *set_power* returns PWR_INVALID_FREQ and does not change the power control system.

#### 5.7.1.2 Param1: mode

The input parameter mode (*Param1*) specifies one of four available power settings. If an illegal selection is provided, *set_power* returns PWR_INVALID_MODE and does not change the power control system.

PWR_DEFAULT keeps the device in a baseline power setting similar to its reset state.

PWR_CPU_PERFORMANCE configures the microcontroller so that it can provide more processing capability to the application. CPU performance is 30% better than the default option.

PWR_EFFICIENCY setting was designed to find a balance between active current and the CPU's ability to execute code and process data. In this mode the device outperforms the default mode both in terms of providing higher CPU performance and lowering active current.

PWR_LOW_CURRENT is intended for those solutions that focus on lowering power consumption rather than CPU performance.

#### 5.7.1.3 Param2: system clock

The system clock is the clock rate at which the microcontroller core is running when *set_power* is called. This parameter is an integer between from 1 and 50 MHz inclusive.

#### 5.7.1.4 Code examples

The following examples illustrate some of the *set_power* features discussed above.

##### 5.7.1.4.1 Invalid frequency (device maximum clock rate exceeded)

```
command[0] = 60;
command[1] = PWR_CPU_PERFORMANCE;
command[2] = 60;
(*rom)->pWRD->set_power(command, result);
```

The above setup would be used in a system running at the main and system clock of 60 MHz, with a need for maximum CPU processing power. Since the specified 60 MHz clock is above the 50 MHz maximum, *set_power* returns PWR_INVALID_FREQ in *result[0]* without changing anything in the existing power setup.

##### 5.7.1.4.2 An applicable power setup

```
command[0] = 24;
command[1] = PWR_CPU_EFFICIENCY;
command[2] = 24;
```


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

```
(*rom)->pWRD->set_power(command, result);
```

The above code specifies that an application is running at the main and system clock of 24 MHz with emphasis on efficiency. *set_power* returns PWR_CMD_SUCCESS in *result[0]* after configuring the microcontroller's internal power control features.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 6.1 How to read this chapter

The C_CAN controller interrupt is available on parts LPC11Cxx only.

## 6.2 Introduction

The Nested Vectored Interrupt Controller (NVIC) is an integral part of the Cortex-M0. The tight coupling to the CPU allows for low interrupt latency and efficient processing of late arriving interrupts.

## 6.3 Features

- Nested Vectored Interrupt Controller that is an integral part of the ARM Cortex-M0
- Tightly coupled interrupt controller provides low interrupt latency
- Controls system exceptions and peripheral interrupts
- The NVIC supports 32 vectored interrupts
- 4 programmable interrupt priority levels with hardware priority level masking
- Software interrupt generation

## 6.4 Interrupt sources

Table 55 lists the interrupt sources for each peripheral function. Each peripheral device may have one or more interrupt lines to the Vectored Interrupt Controller. Each line may represent more than one interrupt source. There is no significance or priority about what line is connected where, except for certain standards from ARM.

See Section 28.6.2 for the NVIC register bit descriptions.

**Table 55. Connection of interrupt sources to the Vectored Interrupt Controller**

| Exception Number | Vector Offset | Function | Flag(s) |
|---|---|---|---|
| 12 to 0 | | start logic wake-up interrupts | Each interrupt is connected to a PIO input pin serving as wake-up pin from Deep-sleep mode; Interrupt 0 to 11 correspond to PIO0_0 to PIO0_11 and interrupt 12 corresponds to PIO1_0; see Section 3.5.30. |
| 13 | | C_CAN | C_CAN interrupt |
| 14 | | SPI/SSP1 | Tx FIFO half empty<br>Rx FIFO half full<br>Rx Timeout<br>Rx Overrun |
| 15 | | $I^2C$ | SI (state change) |


All information provided in this document is subject to legal disclaimers.
© NXP B.V. 2016. All rights reserved.

**Table 55. Connection of interrupt sources to the Vectored Interrupt Controller**

| Exception Number | Vector Offset | Function | Flag(s) |
|---|---|---|---|
| 16 | | CT16B0 | Match 0 - 2<br>Capture 0 |
| 17 | | CT16B1 | Match 0 - 1<br>Capture 0 |
| 18 | | CT32B0 | Match 0 - 3<br>Capture 0 |
| 19 | | CT32B1 | Match 0 - 3<br>Capture 0 |
| 20 | | SPI/SSP0 | Tx FIFO half empty<br>Rx FIFO half full<br>Rx Timeout<br>Rx Overrun |
| 21 | | UART | Rx Line Status (RLS)<br>Transmit Holding Register Empty (THRE)<br>Rx Data Available (RDA)<br>Character Time-out Indicator (CTI)<br>End of Auto-Baud (ABEO)<br>Auto-Baud Time-Out (ABTO) |
| 22 | | - | Reserved |
| 23 | | - | Reserved |
| 24 | | ADC | A/D Converter end of conversion |
| 25 | | WDT | Watchdog interrupt (WDINT) |
| 26 | | BOD | Brown-out detect |
| 27 | | - | Reserved |
| 28 | | PIO_3 | GPIO interrupt status of port 3 |
| 29 | | PIO_2 | GPIO interrupt status of port 2 |
| 30 | | PIO_1 | GPIO interrupt status of port 1 |
| 31 | | PIO_0 | GPIO interrupt status of port 0 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 7.1 How to read this chapter

**Remark:** This chapter applies to parts in the following series (see Table 1):

- LPC1100
- LPC1100L
- LPC1100C
- LPC11D14

### Pin configuration

The implementation of the I/O configuration registers varies for different LPC111x/LPC11Cxx parts and packages. Table 57 shows which IOCON registers are used on the different packages.

### C_CAN pins

- For the LPC11C12/C14, functions PIO3_4 and PIO3_5 are not available. Instead, two pins are dedicated to the C_CAN receive and transmit functions (see Table 57) without pull-up or pull-down resistors. The C_CAN pins have no programmable pin configuration.
- For the LPC11C22/C24, pins PIO1_9, PIO2_4, PIO2_5, and PIO2_9 are not available and are replaced by the on-chip CAN transceiver pins. The CAN transceiver pins have no programmable pin configuration.

### Pseudo open-drain function

For the LPC11(D)1x/102/202/302, a pseudo open-drain mode can be selected in the IOCON registers for each digital pin except the I2C pins (see Figure 14). The open-drain mode is not available for the LPC111x/101/201/301 parts.

### Pull-up level

If the pull-up resistor is enabled (default), all non-I2C pins are pulled up to 2.6 V for LPC111x/101/201/301 parts and pulled up to 3.3 V for LPC11Cxx parts and LPC111x/102/202/302 ($V_{DD}$ = 3.3 V).

## 7.2 Features

The I/O configuration registers control the electrical characteristics of the pads. The following features are programmable:

- Pin function.
- Internal pull-up/pull-down resistor or bus keeper function.
- Hysteresis.
- Analog input or digital mode for pads hosting the ADC inputs.
- $I^2C$ mode for pads hosting the $I^2C$-bus function.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

- Pseudo open-drain mode for non-I2C pins (see Section 7.1 for part specific details).

## 7.3 General description

The IOCON registers control the function (GPIO or peripheral function), the input mode, and the hysteresis of all PIOn_m pins. In addition, the $I^2C$-bus pins can be configured for different $I^2C$-bus modes. If a pin is used as input pin for the ADC, an analog input mode can be selected.

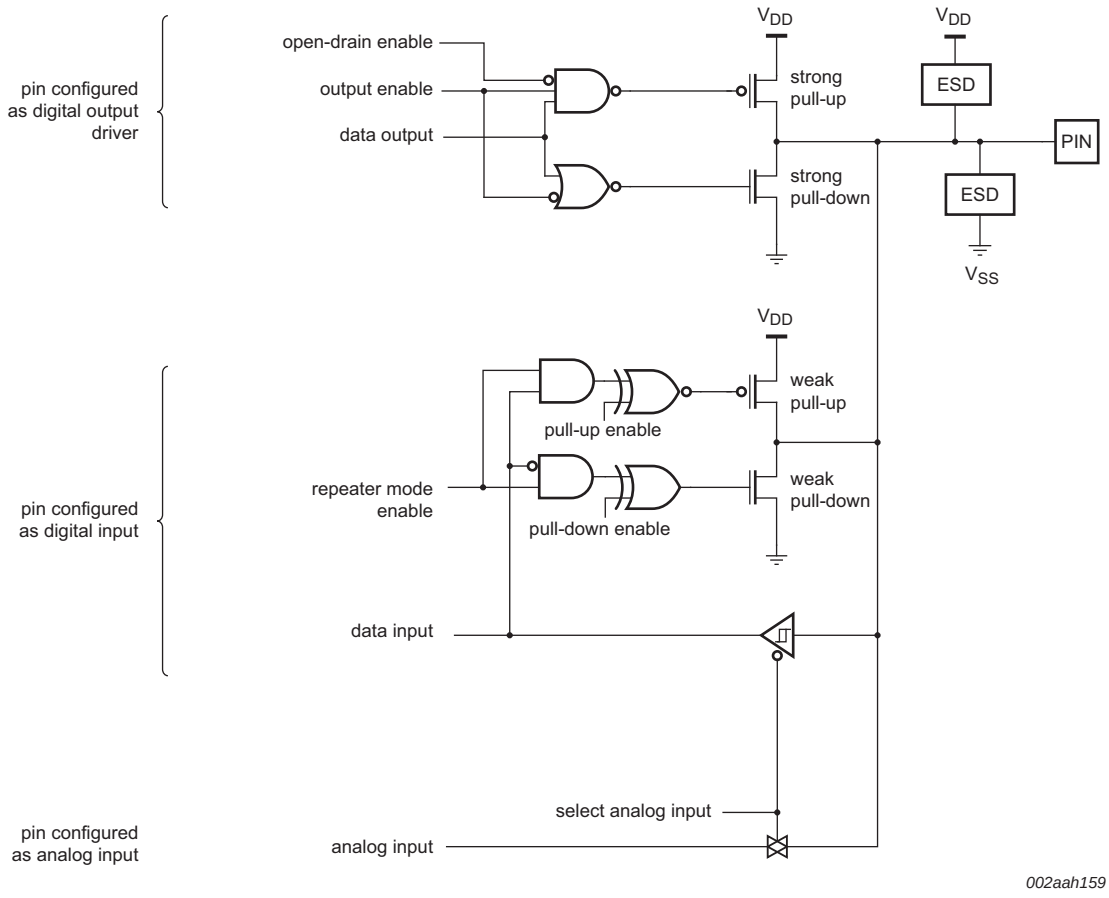


For open-drain mode, see Section 7.1.

**Fig 14. Standard I/O pin configuration**

### 7.3.1 Pin function

The FUNC bits in the IOCON registers can be set to GPIO (FUNC = 000) or to a peripheral function. If the pins are GPIO pins, the GPIOnDIR registers determine whether the pin is configured as an input or output (see Section 12.3.2). For any peripheral function, the pin direction is controlled automatically depending on the pin's functionality. The GPIOnDIR registers have no effect for peripheral functions.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 7.3.2 Pin mode

The MODE bits in the IOCON register allow the selection of on-chip pull-up or pull-down resistors for each pin or select the repeater mode.

The possible on-chip resistor configurations are pull-up enabled, pull-down enabled, or no pull-up/pull-down. The default value is pull-up enabled. See Section 7.1 for part specific details.

The repeater mode enables the pull-up resistor if the pin is at a logic HIGH and enables the pull-down resistor if the pin is at a logic LOW. This causes the pin to retain its last known state if it is configured as an input and is not driven externally. The state retention is not applicable to the Deep power-down mode. Repeater mode may typically be used to prevent a pin from floating (and potentially using significant power if it floats to an indeterminate state) if it is temporarily not driven.

### 7.3.3 Hysteresis

The input buffer for digital functions can be configured with hysteresis or as plain buffer through the IOCON registers (see the *LPC111x and LPC11Cx data sheets* for details).

If the external pad supply voltage $V_{DD}$ is between 2.5 V and 3.6 V, the hysteresis buffer can be enabled or disabled. If $V_{DD}$ is below 2.5 V, the hysteresis buffer must be **disabled** to use the pin in input mode.

### 7.3.4 A/D-mode

In A/D-mode, the digital receiver is disconnected to obtain an accurate input voltage for analog-to-digital conversions. This mode can be selected in those IOCON registers that control pins with an analog function. HYS and MODE should be zero when AD mode is used.

For pins without analog functions, the A/D-mode setting has no effect.

### 7.3.5 $I^2C$ mode

If the $I^2C$ function is selected by the FUNC bits of registers IOCON_PIO0_4 (Table 68) and IOCON_PIO0_5 (Table 69), then the $I^2C$-bus pins can be configured for different $I^2C$-modes:

- Standard mode/Fast-mode $I^2C$ with input glitch filter (this includes an open-drain output according to the $I^2C$-bus specification).
- Fast-mode Plus with input glitch filter (this includes an open-drain output according to the $I^2C$-bus specification). In this mode, the pins function as high-current sinks.
- Standard open-drain I/O functionality without input filter.

**Remark:** Either Standard mode/Fast-mode $I^2C$ or Standard I/O functionality should be selected if the pin is used as GPIO pin.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 7.3.6 Open-drain Mode

When output is selected, either by selecting a special function in the FUNC field, or by selecting GPIO function for a pin having a 1 in its GPIODIR register, a 1 in the OD bit selects open-drain operation, that is, a 1 disables the high-drive transistor. This option has no effect on the primary $I^2C$ pins.

**Remark:** The open-drain mode is not available on all parts (see Section 7.1).

## 7.4 Register description

The I/O configuration registers control the PIO port pins, the inputs and outputs of all peripherals and functional blocks, the $I^2C$-bus pins, and the ADC input pins.

Each port pin PIOn_m has one IOCON register assigned to control the pin's function and electrical characteristics.

Some input functions (SCK0, $\overline{DSR}$, $\overline{DCD}$, and $\overline{RI}$) are multiplexed to several physical pins. The IOCON_LOC registers select the pin location for each of these functions.

**Remark:** The IOCON registers are listed in order of their memory locations in Table 56, which correspond to the order of their physical pin numbers in the LQFP48 package starting at the upper left corner with pin 1 (PIO2_6). See Table 57 for a listing of IOCON registers ordered by port number.

The IOCON location registers are used to select a physical pin for multiplexed functions.

**Remark:** Note that once the pin location has been selected, the function still must be configured in the corresponding IOCON registers for the function to be usable on that pin.

**Table 56. Register overview: I/O configuration (base address 0x4004 4000)**

| Name | Access | Address offset | Description | Reset value | Reference |
|---|---|---|---|---|---|
| IOCON_PIO2_6 | R/W | 0x000 | I/O configuration for pin PIO2_6 | 0xD0 | Table 58 |
| - | R/W | 0x004 | Reserved | - | - |
| IOCON_PIO2_0 | R/W | 0x008 | I/O configuration for pin PIO2_0/$\overline{DTR}$/SSEL1 | 0xD0 | Table 59 |
| IOCON_RESET_PIO0_0 | R/W | 0x00C | I/O configuration for pin $\overline{RESET}$/PIO0_0 | 0xD0 | Table 60 |
| IOCON_PIO0_1 | R/W | 0x010 | I/O configuration for pin PIO0_1/CLKOUT/CT32B0_MAT2 | 0xD0 | Table 61 |
| IOCON_PIO1_8 | R/W | 0x014 | I/O configuration for pin PIO1_8/CT16B1_CAP0 | 0xD0 | Table 62 |
| - | R/W | 0x018 | Reserved | - | - |
| IOCON_PIO0_2 | R/W | 0x01C | I/O configuration for pin PIO0_2/SSEL0/CT16B0_CAP0 | 0xD0 | Table 63 |
| IOCON_PIO2_7 | R/W | 0x020 | I/O configuration for pin PIO2_7 | 0xD0 | Table 64 |
| IOCON_PIO2_8 | R/W | 0x024 | I/O configuration for pin PIO2_8 | 0xD0 | Table 65 |
| IOCON_PIO2_1 | R/W | 0x028 | I/O configuration for pin PIO2_1/$\overline{DSR}$/SCK1 | 0xD0 | Table 66 |
| IOCON_PIO0_3 | R/W | 0x02C | I/O configuration for pin PIO0_3 | 0xD0 | Table 67 |
| IOCON_PIO0_4 | R/W | 0x030 | I/O configuration for pin PIO0_4/SCL | 0x00 | Table 68 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 56. Register overview: I/O configuration (base address 0x4004 4000)**

| Name | Access | Address offset | Description | Reset value | Reference |
|---|---|---|---|---|---|
| IOCON_PIO0_5 | R/W | 0x034 | I/O configuration for pin PIO0_5/SDA | 0x00 | Table 69 |
| IOCON_PIO1_9 | R/W | 0x038 | I/O configuration for pin PIO1_9/CT16B1_MAT0 | 0xD0 | Table 70 |
| IOCON_PIO3_4 | R/W | 0x03C | I/O configuration for pin PIO3_4 | 0xD0 | Table 71 |
| IOCON_PIO2_4 | R/W | 0x040 | I/O configuration for pin PIO2_4 | 0xD0 | Table 72 |
| IOCON_PIO2_5 | R/W | 0x044 | I/O configuration for pin PIO2_5 | 0xD0 | Table 73 |
| IOCON_PIO3_5 | R/W | 0x048 | I/O configuration for pin PIO3_5 | 0xD0 | Table 74 |
| IOCON_PIO0_6 | R/W | 0x04C | I/O configuration for pin PIO0_6/SCK0 | 0xD0 | Table 75 |
| IOCON_PIO0_7 | R/W | 0x050 | I/O configuration for pin PIO0_7/$\overline{\text{CTS}}$ | 0xD0 | Table 76 |
| IOCON_PIO2_9 | R/W | 0x054 | I/O configuration for pin PIO2_9 | 0xD0 | Table 77 |
| IOCON_PIO2_10 | R/W | 0x058 | I/O configuration for pin PIO2_10 | 0xD0 | Table 78 |
| IOCON_PIO2_2 | R/W | 0x05C | I/O configuration for pin PIO2_2/$\overline{\text{DCD}}$/MISO1 | 0xD0 | Table 79 |
| IOCON_PIO0_8 | R/W | 0x060 | I/O configuration for pin PIO0_8/MISO0/CT16B0_MAT0 | 0xD0 | Table 80 |
| IOCON_PIO0_9 | R/W | 0x064 | I/O configuration for pin PIO0_9/MOSI0/CT16B0_MAT1 | 0xD0 | Table 81 |
| IOCON_SWCLK_PIO0_10 | R/W | 0x068 | I/O configuration for pin SWCLK/PIO0_10/ SCK0/CT16B0_MAT2 | 0xD0 | Table 82 |
| IOCON_PIO1_10 | R/W | 0x06C | I/O configuration for pin PIO1_10/AD6/CT16B1_MAT1 | 0xD0 | Table 83 |
| IOCON_PIO2_11 | R/W | 0x070 | I/O configuration for pin PIO2_11/SCK0 | 0xD0 | Table 84 |
| IOCON_R_PIO0_11 | R/W | 0x074 | I/O configuration for pin R/PIO0_11/AD0/CT32B0_MAT3 | 0xD0 | Table 85 |
| IOCON_R_PIO1_0 | R/W | 0x078 | I/O configuration for pin R/PIO1_0/AD1/CT32B1_CAP0 | 0xD0 | Table 86 |
| IOCON_R_PIO1_1 | R/W | 0x07C | I/O configuration for pin R/PIO1_1/AD2/CT32B1_MAT0 | 0xD0 | Table 87 |
| IOCON_R_PIO1_2 | R/W | 0x080 | I/O configuration for pin R/PIO1_2/AD3/CT32B1_MAT1 | 0xD0 | Table 88 |
| IOCON_PIO3_0 | R/W | 0x084 | I/O configuration for pin PIO3_0/$\overline{\text{DTR}}$ | 0xD0 | Table 89 |
| IOCON_PIO3_1 | R/W | 0x088 | I/O configuration for pin PIO3_1/$\overline{\text{DSR}}$ | 0xD0 | Table 90 |
| IOCON_PIO2_3 | R/W | 0x08C | I/O configuration for pin PIO2_3/$\overline{\text{RI}}$/MOSI1 | 0xD0 | Table 91 |
| IOCON_SWDIO_PIO1_3 | R/W | 0x090 | I/O configuration for pin SWDIO/PIO1_3/AD4/CT32B1_MAT2 | 0xD0 | Table 92 |
| IOCON_PIO1_4 | R/W | 0x094 | I/O configuration for pin PIO1_4/AD5/CT32B1_MAT3 | 0xD0 | Table 93 |
| IOCON_PIO1_11 | R/W | 0x098 | I/O configuration for pin PIO1_11/AD7 | 0xD0 | Table 94 |
| IOCON_PIO3_2 | R/W | 0x09C | I/O configuration for pin PIO3_2/$\overline{\text{DCD}}$ | 0xD0 | Table 95 |
| IOCON_PIO1_5 | R/W | 0x0A0 | I/O configuration for pin PIO1_5/$\overline{\text{RTS}}$/CT32B0_CAP0 | 0xD0 | Table 96 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 56. Register overview: I/O configuration (base address 0x4004 4000)**

| Name | Access | Address offset | Description | Reset value | Reference |
|---|---|---|---|---|---|
| IOCON_PIO1_6 | R/W | 0x0A4 | I/O configuration for pin PIO1_6/RXD/CT32B0_MAT0 | 0xD0 | Table 97 |
| IOCON_PIO1_7 | R/W | 0x0A8 | I/O configuration for pin PIO1_7/TXD/CT32B0_MAT1 | 0xD0 | Table 98 |
| IOCON_PIO3_3 | R/W | 0x0AC | I/O configuration for pin PIO3_3/$\overline{\text{RI}}$ | 0xD0 | Table 99 |
| IOCON_SCK_LOC | R/W | 0x0B0 | SCK pin location select register | 0x00 | Table 100 |
| IOCON_DSR_LOC | R/W | 0x0B4 | $\overline{\text{DSR}}$ pin location select register | 0x00 | Table 101 |
| IOCON_DCD_LOC | R/W | 0x0B8 | $\overline{\text{DCD}}$ pin location select register | 0x00 | Table 102 |
| IOCON_RI_LOC | R/W | 0x0BC | $\overline{\text{RI}}$ pin location register | 0x00 | Table 103 |

**Table 57. I/O configuration registers ordered by port number**

| Port pin | Register name | LPC1112 | LPC1111/12/13/14 | LPC1113/14 | LPC11C12/C14 | LPC11C22/C24 | Reference |
|---|---|---|---|---|---|---|---|
| | | HVQFN24 | HVQFN33 | LQFP48 | LQFP48 | LQFP48 | |
| PIO0_0 | IOCON_RESET_PIO0_0 | yes | yes | yes | yes | yes | Table 60 |
| PIO0_1 | IOCON_PIO0_1 | yes | yes | yes | yes | yes | Table 58 |
| PIO0_2 | IOCON_PIO0_2 | yes | yes | yes | yes | yes | Table 63 |
| PIO0_3 | IOCON_PIO0_3 | no | yes | yes | yes | yes | Table 67 |
| PIO0_4 | IOCON_PIO0_4 | yes | yes | yes | yes | yes | Table 68 |
| PIO0_5 | IOCON_PIO0_5 | yes | yes | yes | yes | yes | Table 69 |
| PIO0_6 | IOCON_PIO0_6 | yes | yes | yes | yes | yes | Table 75 |
| PIO0_7 | IOCON_PIO0_7 | yes | yes | yes | yes | yes | Table 76 |
| PIO0_8 | IOCON_PIO0_8 | yes | yes | yes | yes | yes | Table 80 |
| PIO0_9 | IOCON_PIO0_9 | yes | yes | yes | yes | yes | Table 81 |
| PIO0_10 | IOCON_SWCLK_PIO0_10 | yes | yes | yes | yes | yes | Table 82 |
| PIO0_11 | IOCON_R_PIO0_11 | yes | yes | yes | yes | yes | Table 85 |
| PIO1_0 | IOCON_R_PIO1_0 | yes | yes | yes | yes | yes | Table 86 |
| PIO1_1 | IOCON_R_PIO1_1 | yes | yes | yes | yes | yes | Table 87 |
| PIO1_2 | IOCON_R_PIO1_2 | yes | yes | yes | yes | yes | Table 88 |
| PIO1_3 | IOCON_SWDIO_PIO1_3 | yes | yes | yes | yes | yes | Table 92 |
| PIO1_4 | IOCON_PIO1_4 | yes | yes | yes | yes | yes | Table 93 |
| PIO1_5 | IOCON_PIO1_5 | no | yes | yes | yes | yes | Table 96 |
| PIO1_6 | IOCON_PIO1_6 | yes | yes | yes | yes | yes | Table 97 |
| PIO1_7 | IOCON_PIO1_7 | yes | yes | yes | yes | yes | Table 98 |
| PIO1_8 | IOCON_PIO1_8 | yes | yes | yes | yes | yes | Table 62 |
| PIO1_9 | IOCON_PIO1_9 | no | yes | yes | yes | no | Table 70 |
| PIO1_10 | IOCON_PIO1_10 | no | yes | yes | yes | yes | Table 83 |
| PIO1_11 | IOCON_PIO1_11 | no | yes | yes | yes | yes | Table 94 |
| PIO2_0 | IOCON_PIO2_0 | no | yes | yes | yes | yes | Table 59 |
| PIO2_1 | IOCON_PIO2_1 | no | no | yes | yes | yes | Table 66 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 57. I/O configuration registers ordered by port number**

| Port pin | Register name | LPC1112 | LPC1111/ 12/13/14 | LPC1113/ 14 | LPC11C12 / C14 | LPC11C22/ C24 | Reference |
|---|---|---|---|---|---|---|---|
| | | HVQFN24 | HVQFN33 | LQFP48 | LQFP48 | LQFP48 | |
| PIO2_2 | IOCON_PIO2_2 | no | no | yes | yes | yes | Table 79 |
| PIO2_3 | IOCON_PIO2_3 | no | no | yes | yes | yes | Table 91 |
| PIO2_4 | IOCON_PIO2_4 | no | no | yes | yes | no | Table 72 |
| PIO2_5 | IOCON_PIO2_5 | no | no | yes | yes | no | Table 73 |
| PIO2_6 | IOCON_PIO2_6 | no | no | yes | yes | yes | Table 58 |
| PIO2_7 | IOCON_PIO2_7 | no | no | yes | yes | yes | Table 64 |
| PIO2_8 | IOCON_PIO2_8 | no | no | yes | yes | yes | Table 65 |
| PIO2_9 | IOCON_PIO2_9 | no | no | yes | yes | no | Table 77 |
| PIO2_10 | IOCON_PIO2_10 | no | no | yes | yes | yes | Table 78 |
| PIO2_11 | IOCON_PIO2_11 | no | no | yes | yes | yes | Table 84 |
| PIO3_0 | IOCON_PIO3_0 | no | no | yes | yes | yes | Table 89 |
| PIO3_1 | IOCON_PIO3_1 | no | no | yes | yes | yes | Table 90 |
| PIO3_2 | IOCON_PIO3_2 | no | yes | yes | yes | yes | Table 95 |
| PIO3_3 | IOCON_PIO3_3 | no | no | yes | yes | yes | Table 99 |
| PIO3_4 | IOCON_PIO3_4 | no | yes | yes | no | no | Table 71 |
| PIO3_5 | IOCON_PIO3_5 | no | yes | yes | no | no | Table 74 |
| - | IOCON_SCK_LOC | no | yes (SCKLOC = 01 reserved) | yes | yes | yes | Table 100 |
| - | IOCON_DSR_LOC | no | no | yes | yes | yes | Table 101 |
| - | IOCON_DCD_LOC | no | no | yes | yes | yes | Table 102 |
| - | IOCON_RI_LOC | no | no | yes | yes | yes | Table 103 |

### 7.4.1 IOCON_PIO2_6

**Table 58. IOCON_PIO2_6 register (IOCON_PIO2_6, address 0x4004 4000) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO2_6. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 58. IOCON_PIO2_6 register (IOCON_PIO2_6, address 0x4004 4000) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 10 | OD | | Selects pseudo open-drain mode. See Section 7.1 for part specific details. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 7.4.2 IOCON_PIO2_0

Table 59. IOCON_PIO2_0 register (IOCON_PIO2_0, address 0x4004 4008) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO2_0. | |
| | | 0x1 | Select function $\overline{\text{DTR}}$. | |
| | | 0x2 | Select function SSEL1. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. See Section 7.1 for part specific details. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 7.4.3 IOCON_PIO_RESET_PIO0_0

Table 60. IOCON_RESET_PIO0_0 register (IOCON_RESET_PIO0_0, address 0x4004 400C) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function $\overline{\text{RESET}}$. | |
| | | 0x1 | Selects function PIO0_0. | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 60. IOCON_RESET_PIO0_0 register (IOCON_RESET_PIO0_0, address 0x4004 400C) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. See Section 7.1 for part specific details. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

### 7.4.4 IOCON_PIO0_1

Table 61. IOCON_PIO0_1 register (IOCON_PIO0_1, address 0x4004 4010) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO0_1. | |
| | | 0x1 | Selects function CLKOUT. | |
| | | 0x2 | Selects function CT32B0_MAT2. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. See Section 7.1 for part specific details. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 7.4.5 IOCON_PIO1_8

Table 62. IOCON_PIO1_8 register (IOCON_PIO1_8, address 0x4004 4014) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO1_8. | |
| | | 0x1 | Selects function CT16B1_CAP0. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. See Section 7.1 for part specific details. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

### 7.4.6 IOCON_PIO0_2

Table 63. IOCON_PIO0_2 register (IOCON_PIO0_2, address 0x4004 401C) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO0_2. | |
| | | 0x1 | Selects function SSEL0. | |
| | | 0x2 | Selects function CT16B0_CAP0. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 63. IOCON_PIO0_2 register (IOCON_PIO0_2, address 0x4004 401C) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 10 | OD | | Selects pseudo open-drain mode. See Section 7.1 for part specific details. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 7.4.7 IOCON_PIO2_7

Table 64. IOCON_PIO2_7 register (IOCON_PIO2_7, address 0x4004 4020) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO2_7. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. See Section 7.1 for part specific details. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 7.4.8 IOCON_PIO2_8

Table 65. IOCON_PIO2_8 register (IOCON_PIO2_8, address 0x4004 4024) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO2_8. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 65. IOCON_PIO2_8 register (IOCON_PIO2_8, address 0x4004 4024) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. See Section 7.1 for part specific details. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 7.4.9 IOCON_PIO2_1

Table 66. IOCON_PIO2_1 register (IOCON_PIO2_1, address 0x4004 4028) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO2_1. | |
| | | 0x1 | Select function $\overline{\text{DSR}}$. | |
| | | 0x2 | Select function SCK1. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. See Section 7.1 for part specific details. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 7.4.10 IOCON_PIO0_3

Table 67. IOCON_PIO0_3 register (IOCON_PIO0_3, address 0x4004 402C) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO0_3. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

### 7.4.11 IOCON_PIO0_4

Table 68. IOCON_PIO0_4 register (IOCON_PIO0_4, address 0x4004 4030) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO0_4 (open-drain pin). | |
| | | 0x1 | Selects I2C function SCL (open-drain pin). | |
| 7:3 | | - | Reserved. | 00000 |
| 9:8 | I2CMODE | | Selects I2C mode. Select Standard mode (I2CMODE = 00, default) or Standard I/O functionality (I2CMODE = 01) if the pin function is GPIO (FUNC = 000). | 00 |
| | | 0x0 | Standard mode/ Fast-mode I2C. | |
| | | 0x1 | Standard I/O functionality | |
| | | 0x2 | Fast-mode Plus I2C | |
| | | 0x3 | Reserved. | |
| 31:10 | - | - | Reserved. | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 7.4.12 IOCON_PIO0_5

Table 69. IOCON_PIO0_5 register (IOCON_PIO0_5, address 0x4004 4034) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO0_5 (open-drain pin). | |
| | | 0x1 | Selects I2C function SDA (open-drain pin). | |
| 7:3 | | - | Reserved. | 00000 |
| 9:8 | I2CMODE | | Selects I2C mode. Select Standard mode (I2CMODE = 00, default) or Standard I/O functionality (I2CMODE = 01) if the pin function is GPIO (FUNC = 000). | 00 |
| | | 0x0 | Standard mode/ Fast-mode I2C. | |
| | | 0x1 | Standard I/O functionality | |
| | | 0x2 | Fast-mode Plus I2C | |
| | | 0x3 | Reserved. | |
| 31:10 | - | - | Reserved. | - |

### 7.4.13 IOCON_PIO1_9

**Remark:** See Section 7.1 for part specific details.

Table 70. IOCON_PIO1_9 register (IOCON_PIO1_9, address 0x4004 4038) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO1_9. | |
| | | 0x1 | Selects function CT16B1_MAT0. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. See Section 7.1 for part specific details. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

### 7.4.14 IOCON_PIO3_4

**Remark:** See Section 7.1 for part specific details.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 71. IOCON_PIO3_4 register (IOCON_PIO3_4, address 0x4004 403C) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO3_4. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. See Section 7.1 for part specific details. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

### 7.4.15 IOCON_PIO2_4

**Remark:** See Section 7.1 for part specific details.

Table 72. IOCON_PIO2_4 register (IOCON_PIO2_4, address 0x4004 4040) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO2_4. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. See Section 7.1 for part specific details. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 7.4.16 IOCON_PIO2_5

**Remark:** See Section 7.1 for part specific details.

**Table 73. IOCON_PIO2_5 register (IOCON_PIO2_5, address 0x4004 4044) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO2_5. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

### 7.4.17 IOCON_PIO3_5

**Remark:** See Section 7.1 for part specific details.

**Table 74. IOCON_PIO3_5 register (IOCON_PIO3_5, address 0x4004 4048) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO3_5. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 74. IOCON_PIO3_5 register (IOCON_PIO3_5, address 0x4004 4048) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 10 | OD | | Selects pseudo open-drain mode. See Section 7.1 for part specific details. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 7.4.18 IOCON_PIO0_6

Table 75. IOCON_PIO0_6 register (IOCON_PIO0_6, address 0x4004 404C) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO0_6. | |
| | | 0x1 | Reserved. | |
| | | 0x2 | Selects function SCK0 (only if pin PIO0_6/SCK0 selected in Table 100). | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. See Section 7.1 for part specific details. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 7.4.19 IOCON_PIO0_7

Table 76. IOCON_PIO0_7 register (IOCON_PIO0_7, address 0x4004 4050) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO0_7. | |
| | | 0x1 | Select function $\overline{\text{CTS}}$. | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 76. IOCON_PIO0_7 register (IOCON_PIO0_7, address 0x4004 4050) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. See Section 7.1 for part specific details. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 7.4.20 IOCON_PIO2_9

**Remark:** See Section 7.1 for part specific details.

Table 77. IOCON_PIO2_9 register (IOCON_PIO2_9, address 0x4004 4054) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO2_9. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. See Section 7.1 for part specific details. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 7.4.21 IOCON_PIO2_10

Table 78. IOCON_PIO2_10 register (IOCON_PIO2_10, address 0x4004 4058) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO2_10. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. See Section 7.1 for part specific details. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

### 7.4.22 IOCON_PIO2_2

Table 79. IOCON_PIO2_2 register (IOCON_PIO2_2, address 0x4004 405C) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO2_2. | |
| | | 0x1 | Select function $\overline{\text{DCD}}$. | |
| | | 0x2 | Select function MISO1. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 79. IOCON_PIO2_2 register (IOCON_PIO2_2, address 0x4004 405C) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 7.4.23 IOCON_PIO0_8

Table 80. IOCON_PIO0_8 register (IOCON_PIO0_8, address 0x4004 4060) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO0_8. | |
| | | 0x1 | Selects function MISO0. | |
| | | 0x2 | Selects function CT16B0_MAT0. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. See Section 7.1 for part specific details. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 7.4.24 IOCON_PIO0_9

Table 81. IOCON_PIO0_9 register (IOCON_PIO0_9, address 0x4004 4064) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO0_9. | |
| | | 0x1 | Selects function MOSI0. | |
| | | 0x2 | Selects function CT16B0_MAT1. | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 81. IOCON_PIO0_9 register (IOCON_PIO0_9, address 0x4004 4064) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. See Section 7.1 for part specific details. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 7.4.25 IOCON_SWCLK_PIO0_10

Table 82. IOCON_SWCLK_PIO0_10 register (IOCON_SWCLK_PIO0_10, address 0x4004 4068) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function SWCLK. | |
| | | 0x1 | Selects function PIO0_10. | |
| | | 0x2 | Selects function SCK0 (only if pin SWCLK/PIO0_10/SCK0/CT16B0_MAT2 selected in Table 100). | |
| | | 0x3 | Selects function CT16B0_MAT2. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 82. IOCON_SWCLK_PIO0_10 register (IOCON_SWCLK_PIO0_10, address 0x4004 4068) bit description *...continued*

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 7.4.26 IOCON_PIO1_10

Table 83. IOCON_PIO1_10 register (IOCON_PIO1_10, address 0x4004 406C) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO1_10. | |
| | | 0x1 | Selects function AD6. | |
| | | 0x2 | Selects function CT16B1_MAT1. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 6 | - | - | Reserved | 1 |
| 7 | ADMODE | | Selects Analog/Digital mode | 1 |
| | | 0 | Analog input mode | |
| | | 1 | Digital functional mode | |
| 9:8 | - | - | Reserved | 00 |
| 10 | OD | | Selects pseudo open-drain mode. See Section 7.1 for part specific details. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 7.4.27 IOCON_PIO2_11

Table 84. IOCON_PIO2_11 register (IOCON_PIO2_11, address 0x4004 4070) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO2_11. | |
| | | 0x1 | Select function SCK0 (only if pin PIO2_11/SCK0 selected in Table 100). | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. See Section 7.1 for part specific details. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

### 7.4.28 IOCON_R_PIO0_11

Table 85. IOCON_R_PIO0_11 register (IOCON_R_PIO0_11, address 0x4004 4074) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function R. This function is reserved. Select one of the alternate functions below. | |
| | | 0x1 | Selects function PIO0_11. | |
| | | 0x2 | Selects function AD0. | |
| | | 0x3 | Selects function CT32B0_MAT3. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 85. IOCON_R_PIO0_11 register (IOCON_R_PIO0_11, address 0x4004 4074) bit description** *…continued*

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 6 | - | - | Reserved | 1 |
| 7 | ADMODE | | Selects Analog/Digital mode | 1 |
| | | 0 | Analog input mode | |
| | | 1 | Digital functional mode | |
| 9:8 | - | - | Reserved | 00 |
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 7.4.29 IOCON_R_PIO1_0

**Table 86. IOCON_R_PIO1_0 register (IOCON_R_PIO1_0, address 0x4004 4078) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function R. This function is reserved. Select one of the alternate functions below. | |
| | | 0x1 | Selects function PIO1_0. | |
| | | 0x2 | Selects function AD1. | |
| | | 0x3 | Selects function CT32B1_CAP0. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 6 | - | - | Reserved | 1 |
| 7 | ADMODE | | Selects Analog/Digital mode | 1 |
| | | 0 | Analog input mode | |
| | | 1 | Digital functional mode | |
| 9:8 | - | - | Reserved | 00 |
| 10 | OD | | Selects pseudo open-drain mode. See Section 7.1 for part specific details. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 7.4.30 IOCON_R_PIO1_1

Table 87. IOCON_R_PIO1_1 register (IOCON_R_PIO1_1, address 0x4004 407C) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function R. This function is reserved. Select one of the alternate functions below. | |
| | | 0x1 | Selects function PIO1_1. | |
| | | 0x2 | Selects function AD2. | |
| | | 0x3 | Selects function CT32B1_MAT0. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 6 | - | - | Reserved | 1 |
| 7 | ADMODE | | Selects Analog/Digital mode | 1 |
| | | 0 | Analog input mode | |
| | | 1 | Digital functional mode | |
| 9:8 | - | - | Reserved | 00 |
| 10 | OD | | Selects pseudo open-drain mode. See Section 7.1 for part specific details. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

### 7.4.31 IOCON_R_PIO1_2

Table 88. IOCON_R_PIO1_2 register (IOCON_R_PIO1_2, address 0x4004 4080) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function R. This function is reserved. Select one of the alternate functions below. | |
| | | 0x1 | Selects function PIO1_2. | |
| | | 0x2 | Selects function AD3. | |
| | | 0x3 | Selects function CT32B1_MAT1. | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 88. IOCON_R_PIO1_2 register (IOCON_R_PIO1_2, address 0x4004 4080) bit description** *…continued*

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 6 | - | - | Reserved | 1 |
| 7 | ADMODE | | Selects Analog/Digital mode | 1 |
| | | 0 | Analog input mode | |
| | | 1 | Digital functional mode | |
| 9:8 | - | - | Reserved | 00 |
| 10 | OD | | Selects pseudo open-drain mode. See Section 7.1 for part specific details. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 7.4.32 IOCON_PIO3_0

**Table 89. IOCON_PIO3_0 register (IOCON_PIO3_0, address 0x4004 4084) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO3_0. | |
| | | 0x1 | Selects function $\overline{\text{DTR}}$. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 89. IOCON_PIO3_0 register (IOCON_PIO3_0, address 0x4004 4084) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 7.4.33 IOCON_PIO3_1

Table 90. IOCON_PIO3_1 register (IOCON_PIO3_1, address 0x4004 4088) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO3_1. | |
| | | 0x1 | Selects function $\overline{\text{DSR}}$. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. See Section 7.1 for part specific details. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 7.4.34 IOCON_PIO2_3

Table 91. IOCON_PIO2_3 register (IOCON_PIO2_3, address 0x4004 408C) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO2_3. | |
| | | 0x1 | Selects function $\overline{\text{RI}}$. | |
| | | 0x2 | Selects function MOSI1. | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 91. IOCON_PIO2_3 register (IOCON_PIO2_3, address 0x4004 408C) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. See Section 7.1 for part specific details. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 7.4.35 IOCON_SWDIO_PIO1_3

Table 92. IOCON_SWDIO_PIO1_3 register (IOCON_SWDIO_PIO1_3, address 0x4004 4090) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function SWDIO. | |
| | | 0x1 | Selects function PIO1_3. | |
| | | 0x2 | Selects function AD4. | |
| | | 0x3 | Selects function CT32B1_MAT2. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 6 | - | - | Reserved | 1 |
| 7 | ADMODE | | Selects Analog/Digital mode | 1 |
| | | 0 | Analog input mode | |
| | | 1 | Digital functional mode | |
| 9:8 | - | - | Reserved | 00 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 92. IOCON_SWDIO_PIO1_3 register (IOCON_SWDIO_PIO1_3, address 0x4004 4090) bit description** *…continued*

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 7.4.36 IOCON_PIO1_4

**Table 93. IOCON_PIO1_4 register (IOCON_PIO1_4, address 0x4004 4094) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. This pin functions as WAKEUP pin if the LPC111x/LPC11Cxx is in Deep power-down mode regardless of the value of FUNC. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO1_4. | |
| | | 0x1 | Selects function AD5. | |
| | | 0x2 | Selects function CT32B1_MAT3. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 6 | - | - | Reserved | 1 |
| 7 | ADMODE | | Selects Analog/Digital mode | 1 |
| | | 0 | Analog input mode | |
| | | 1 | Digital functional mode | |
| 9:8 | - | - | Reserved | 00 |
| 10 | OD | | Selects pseudo open-drain mode. See Section 7.1 for part specific details. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 7.4.37 IOCON_PIO1_11

Table 94. IOCON_PIO1_11 register (IOCON_PIO1_11, address 0x4004 4098) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO1_11. | |
| | | 0x1 | Selects function AD7. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 6 | - | - | Reserved | 1 |
| 7 | ADMODE | | Selects Analog/Digital mode | 1 |
| | | 0 | Analog input mode | |
| | | 1 | Digital functional mode | |
| 9:8 | - | - | Reserved | 00 |
| 10 | OD | | Selects pseudo open-drain mode. See Section 7.1 for part specific details. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

### 7.4.38 IOCON_PIO3_2

Table 95. IOCON_PIO3_2 register (IOCON_PIO3_2, address 0x4004 409C) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO3_2. | |
| | | 0x1 | Selects function $\overline{\text{DCD}}$. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 95. IOCON_PIO3_2 register (IOCON_PIO3_2, address 0x4004 409C) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 7.4.39 IOCON_PIO1_5

Table 96. IOCON_PIO1_5 register (IOCON_PIO1_5, address 0x4004 40A0) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO1_5. | |
| | | 0x1 | Selects function $\overline{\text{RTS}}$. | |
| | | 0x2 | Selects function CT32B0_CAP0. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. See Section 7.1 for part specific details. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 7.4.40 IOCON_PIO1_6

Table 97. IOCON_PIO1_6 register (IOCON_PIO1_6, address 0x4004 40A4) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO1_6. | |
| | | 0x1 | Selects function RXD. | |
| | | 0x2 | Selects function CT32B0_MAT0. | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 97. IOCON_PIO1_6 register (IOCON_PIO1_6, address 0x4004 40A4) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. See Section 7.1 for part specific details. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 7.4.41 IOCON_PIO1_7

Table 98. IOCON_PIO1_7 register (IOCON_PIO1_7, address 0x4004 40A8) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO1_7. | |
| | | 0x1 | Selects function TXD. | |
| | | 0x2 | Selects function CT32B0_MAT1. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. See Section 7.1 for part specific details. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 7.4.42 IOCON_PIO3_3

Table 99. IOCON_PIO3_3 register (IOCON_PIO3_3, address 0x4004 40AC) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO3_3. | |
| | | 0x1 | Selects function $\overline{RI}$. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. See Section 7.1 for part specific details. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

### 7.4.43 IOCON_SCK_LOC

Table 100. IOCON SCK location register (IOCON_SCK_LOC, address 0x4004 40B0) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 1:0 | SCKLOC | | Selects pin location for SCK0 function. | 00 |
| | | 0x0 | Selects SCK0 function in pin location SWCLK/PIO0_10/SCK0/CT16B0_MAT2 (see Table 82). | |
| | | 0x1 | Selects SCK0 function in pin location PIO2_11/SCK0 (see Table 84. | |
| | | 0x2 | Selects SCK0 function in pin location PIO0_6/SCK0 (see Table 75). | |
| | | 0x3 | Reserved. | |
| 31:2 | - | - | Reserved. | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 7.4.44 IOCON_DSR_LOC

Table 101. IOCON $\overline{\text{DSR}}$ location register (IOCON_DSR_LOC, address 0x4004 40B4) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 1:0 | DSRLOC | | Selects pin location for DSR function. | 00 |
| | | 0x0 | Selects $\overline{\text{DSR}}$ function in pin location PIO2_1/$\overline{\text{DSR}}$/SCK1. | |
| | | 0x1 | Selects $\overline{\text{DSR}}$ function in pin location PIO3_1/$\overline{\text{DSR}}$. | |
| | | 0x2 | Reserved. | |
| | | 0x3 | Reserved. | |
| 31:2 | - | - | Reserved. | - |

### 7.4.45 IOCON_DCD_LOC

Table 102. IOCON $\overline{\text{DCD}}$ location register (IOCON_DCD_LOC, address 0x4004 40B8) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 1:0 | DCDLOC | | Selects pin location for DCD function. | 00 |
| | | 0x0 | Selects $\overline{\text{DCD}}$ function in pin location PIO2_2/$\overline{\text{DCD}}$/MISO1. | |
| | | 0x1 | Selects $\overline{\text{DCD}}$ function in pin location PIO3_2/$\overline{\text{DCD}}$. | |
| | | 0x2 | Reserved. | |
| | | 0x3 | Reserved. | |
| 31:2 | - | - | Reserved. | - |

### 7.4.46 IOCON_RI_LOC

Table 103. IOCON $\overline{\text{RI}}$ location register (IOCON_RI_LOC, address 0x4004 40BC) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 1:0 | RILOC | | Selects pin location for RI function. | 00 |
| | | 0x0 | Selects $\overline{\text{RI}}$ function in pin location PIO2_3/$\overline{\text{RI}}$/MOSI1. | |
| | | 0x1 | Selects $\overline{\text{RI}}$ function in pin location PIO3_3/$\overline{\text{RI}}$. | |
| | | 0x2 | Reserved. | |
| | | 0x3 | Reserved. | |
| 31:2 | - | - | Reserved. | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 8.1 How to read this chapter

**Remark:** This chapter applies to parts in the following series (see Table 1):

- LPC1100XL

The implementation of the I/O configuration registers varies for different LPC1100XL parts and packages. Table 105 shows which IOCON registers are used on the different packages.

## 8.2 Features

The I/O configuration registers control the electrical characteristics of the pads. The following features are programmable:

- Pin function.
- Internal pull-up/pull-down resistor or bus keeper function.
- Hysteresis.
- Analog input or digital mode for pads hosting the ADC inputs.
- $I^2C$ mode for pads hosting the $I^2C$-bus function.
- Pseudo open-drain mode for non-I2C pins.

## 8.3 General description

The IOCON registers control the function (GPIO or peripheral function), the input mode, and the hysteresis of all PIOn_m pins. In addition, the $I^2C$-bus pins can be configured for different $I^2C$-bus modes. An analog input mode can be selected for the input pins to the ADC.


All information provided in this document is subject to legal disclaimers.
© NXP B.V. 2016. All rights reserved.

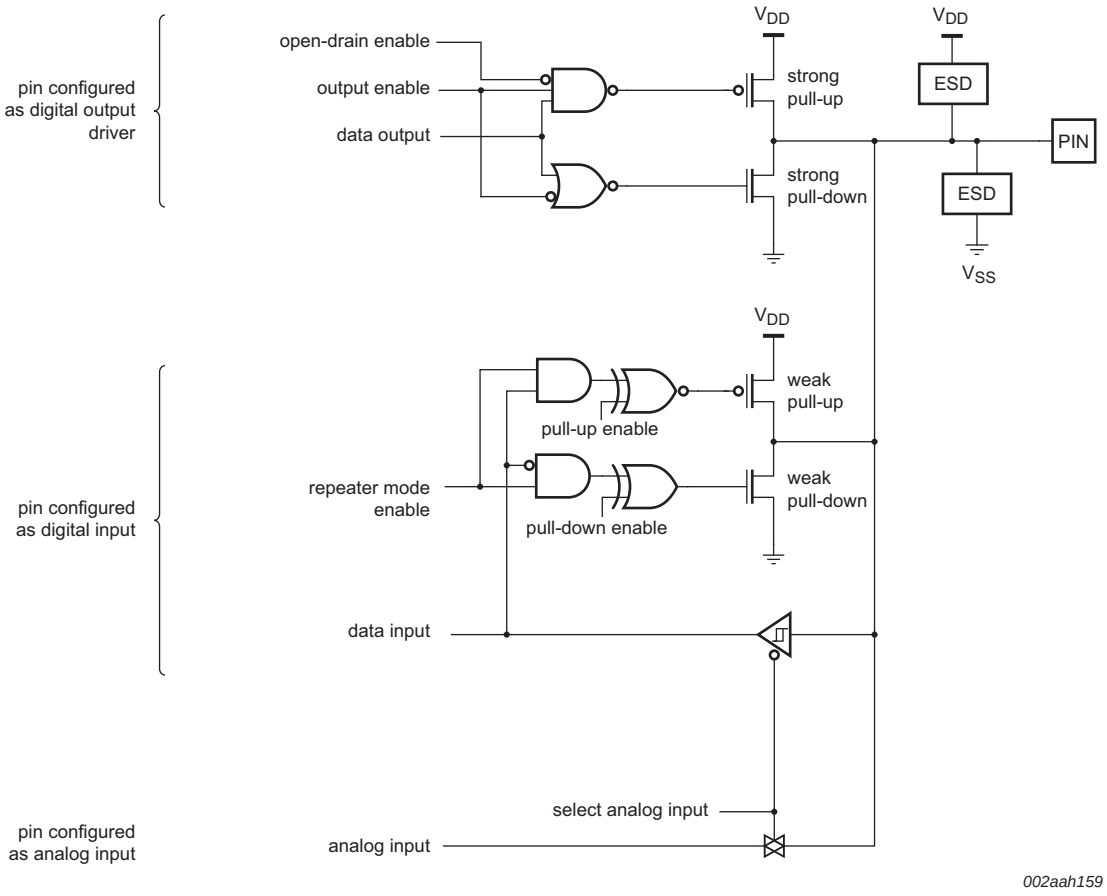


**Fig 15. Standard I/O pin configuration**

### 8.3.1 Pin function

The FUNC bits in the IOCON registers can be set to GPIO (FUNC = 000) or to a peripheral function. If the pins are GPIO pins, the GPIOnDIR registers determine whether the pin is configured as an input or output (see Section 12.3.2). For any peripheral function, the pin direction is controlled automatically depending on the pin's functionality. The GPIOnDIR registers have no effect for peripheral functions.

### 8.3.2 Pin mode

The MODE bits in the IOCON register allow the selection of on-chip pull-up or pull-down resistors for each pin or select the repeater mode.

The possible on-chip resistor configurations are pull-up enabled, pull-down enabled, or no pull-up/pull-down. The default value is pull-up enabled. If the pull-up resistor is enabled (default), all non-I2C pins are pulled up to 3.3 V ($V_{DD}$ = 3.3 V).

The repeater mode enables the pull-up resistor if the pin is at a logic HIGH and enables the pull-down resistor if the pin is at a logic LOW. This causes the pin to retain its last known state if it is configured as an input and is not driven externally. The state retention is


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

not applicable to the Deep power-down mode. Repeater mode may typically be used to prevent a pin from floating (and potentially using significant power if it floats to an indeterminate state) if it is temporarily not driven.

### 8.3.3 Hysteresis

The input buffer for digital functions can be configured with hysteresis or as plain buffer through the IOCON registers (see the *LPC1100XL data sheet* for details).

If the external pad supply voltage $V_{DD}$ is between 2.5 V and 3.6 V, the hysteresis buffer can be enabled or disabled. If $V_{DD}$ is below 2.5 V, the hysteresis buffer must be **disabled** to use the pin in input mode.

### 8.3.4 A/D-mode

In A/D-mode, the digital receiver is disconnected to obtain an accurate input voltage for analog-to-digital conversions. This mode can be selected in those IOCON registers that control pins with an analog function. If A/D mode is selected, Hysteresis and Pin mode settings have no effect.

For pins without analog functions, the A/D-mode setting has no effect.

### 8.3.5 $I^2C$ mode

If the $I^2C$ function is selected by the FUNC bits of registers IOCON_PIO0_4 (Table 116) and IOCON_PIO0_5 (Table 117), then the $I^2C$-bus pins can be configured for different $I^2C$-modes:

- Standard mode/Fast-mode $I^2C$ with input glitch filter (this includes an open-drain output according to the $I^2C$-bus specification).
- Fast-mode Plus with input glitch filter (this includes an open-drain output according to the $I^2C$-bus specification). In this mode, the pins function as high-current sinks.
- Standard open-drain I/O functionality without input filter.

**Remark:** Either Standard mode/Fast-mode $I^2C$ or Standard I/O functionality should be selected if the pin is used as GPIO pin.

### 8.3.6 Open-drain Mode

When output is selected, either by selecting a special function in the FUNC field, or by selecting GPIO function for a pin having a 1 in its GPIODIR register, a 1 in the OD bit selects open-drain operation, that is, a 1 disables the high-drive transistor. This option has no effect on the primary $I^2C$ pins.

## 8.4 Register description

The I/O configuration registers control the PIO port pins, the inputs and outputs of all peripherals and functional blocks, the $I^2C$-bus pins, and the ADC input pins.

Each port pin PIOn_m has one IOCON register assigned to control the pin's function and electrical characteristics.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Some input functions (SCK0, $\overline{\text{DSR}}$, $\overline{\text{DCD}}$, $\overline{\text{RI}}$, SSEL1, CT16B0_CAP0, SCK1, MISO1, MOSI1, CT32B0_CAP0, and RXD) are multiplexed to several physical pins. The IOCON_LOC registers select the pin location for each of these functions.

**Remark:** The IOCON registers are listed in order of their memory locations in Table 104, which correspond to the order of their physical pin numbers in the LQFP48 package starting at the upper left corner with pin 1 (PIO2_6). See Table 105 for a listing of IOCON registers ordered by port number.

The IOCON location registers are used to select a physical pin for multiplexed functions.

**Remark:** Note that once the pin location has been selected, the function still must be configured in the corresponding IOCON registers for the function to be usable on that pin.

**Table 104. Register overview: I/O configuration (base address 0x4004 4000)**

| Name | Access | Address offset | Description | Reset value | Reference |
|---|---|---|---|---|---|
| IOCON_PIO2_6 | R/W | 0x000 | I/O configuration for pin PIO2_6/ CT32B0_MAT1 | 0xD0 | Table 106 |
| - | R/W | 0x004 | Reserved | - | - |
| IOCON_PIO2_0 | R/W | 0x008 | I/O configuration for pin PIO2_0/$\overline{\text{DTR}}$/SSEL1 | 0xD0 | Table 107 |
| IOCON_RESET_PIO0_0 | R/W | 0x00C | I/O configuration for pin $\overline{\text{RESET}}$/PIO0_0 | 0xD0 | Table 108 |
| IOCON_PIO0_1 | R/W | 0x010 | I/O configuration for pin PIO0_1/CLKOUT/CT32B0_MAT2 | 0xD0 | Table 106 |
| IOCON_PIO1_8 | R/W | 0x014 | I/O configuration for pin PIO1_8/CT16B1_CAP0 | 0xD0 | Table 110 |
| IOCON_SSEL1_LOC | R/W | 0x018 | SSEL1 pin location select register | 0x0 | Table 152 |
| IOCON_PIO0_2 | R/W | 0x01C | I/O configuration for pin PIO0_2/SSEL0/CT16B0_CAP0 | 0xD0 | Table 111 |
| IOCON_PIO2_7 | R/W | 0x020 | I/O configuration for pin PIO2_7/ CT32B0_MAT2/RXD | 0xD0 | Table 112 |
| IOCON_PIO2_8 | R/W | 0x024 | I/O configuration for pin PIO2_8/ CT32B0_MAT3/TXD | 0xD0 | Table 113 |
| IOCON_PIO2_1 | R/W | 0x028 | I/O configuration for pin PIO2_1/$\overline{\text{DSR}}$/SCK1 | 0xD0 | Table 114 |
| IOCON_PIO0_3 | R/W | 0x02C | I/O configuration for pin PIO0_3 | 0xD0 | Table 115 |
| IOCON_PIO0_4 | R/W | 0x030 | I/O configuration for pin PIO0_4/SCL | 0x00 | Table 116 |
| IOCON_PIO0_5 | R/W | 0x034 | I/O configuration for pin PIO0_5/SDA | 0x00 | Table 117 |
| IOCON_PIO1_9 | R/W | 0x038 | I/O configuration for pin PIO1_9/CT16B1_MAT0/ MOSI1 | 0xD0 | Table 118 |
| IOCON_PIO3_4 | R/W | 0x03C | I/O configuration for pin PIO3_4/ CT16B0_CAP1/RXD | 0xD0 | Table 119 |
| IOCON_PIO2_4 | R/W | 0x040 | I/O configuration for pin PIO2_4/ CT16B1_MAT1/ SSEL1 | 0xD0 | Table 120 |
| IOCON_PIO2_5 | R/W | 0x044 | I/O configuration for pin PIO2_5/ CT32B0_MAT0 | 0xD0 | Table 121 |
| IOCON_PIO3_5 | R/W | 0x048 | I/O configuration for pin PIO3_5/ CT16B1_CAP1/TXD | 0xD0 | Table 122 |
| IOCON_PIO0_6 | R/W | 0x04C | I/O configuration for pin PIO0_6/SCK0 | 0xD0 | Table 123 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 104. Register overview: I/O configuration (base address 0x4004 4000)**

| Name | Access | Address offset | Description | Reset value | Reference |
|---|---|---|---|---|---|
| IOCON_PIO0_7 | R/W | 0x050 | I/O configuration for pin PIO0_7/$\overline{\text{CTS}}$ | 0xD0 | Table 124 |
| IOCON_PIO2_9 | R/W | 0x054 | I/O configuration for pin PIO2_9/ CT32B0_CAP0 | 0xD0 | Table 125 |
| IOCON_PIO2_10 | R/W | 0x058 | I/O configuration for pin PIO2_10 | 0xD0 | Table 126 |
| IOCON_PIO2_2 | R/W | 0x05C | I/O configuration for pin PIO2_2/$\overline{\text{DCD}}$/MISO1 | 0xD0 | Table 127 |
| IOCON_PIO0_8 | R/W | 0x060 | I/O configuration for pin PIO0_8/MISO0/CT16B0_MAT0 | 0xD0 | Table 128 |
| IOCON_PIO0_9 | R/W | 0x064 | I/O configuration for pin PIO0_9/MOSI0/CT16B0_MAT1 | 0xD0 | Table 129 |
| IOCON_SWCLK_PIO0_10 | R/W | 0x068 | I/O configuration for pin SWCLK/PIO0_10/ SCK0/CT16B0_MAT2 | 0xD0 | Table 130 |
| IOCON_PIO1_10 | R/W | 0x06C | I/O configuration for pin PIO1_10/AD6/CT16B1_MAT1/ MISO1 | 0xD0 | Table 131 |
| IOCON_PIO2_11 | R/W | 0x070 | I/O configuration for pin PIO2_11/SCK0/ CT32B0_CAP1 | 0xD0 | Table 132 |
| IOCON_R_PIO0_11 | R/W | 0x074 | I/O configuration for pin R/PIO0_11/AD0/CT32B0_MAT3 | 0xD0 | Table 133 |
| IOCON_R_PIO1_0 | R/W | 0x078 | I/O configuration for pin R/PIO1_0/AD1/CT32B1_CAP0 | 0xD0 | Table 134 |
| IOCON_R_PIO1_1 | R/W | 0x07C | I/O configuration for pin R/PIO1_1/AD2/CT32B1_MAT0 | 0xD0 | Table 135 |
| IOCON_R_PIO1_2 | R/W | 0x080 | I/O configuration for pin R/PIO1_2/AD3/CT32B1_MAT1 | 0xD0 | Table 136 |
| IOCON_PIO3_0 | R/W | 0x084 | I/O configuration for pin PIO3_0/$\overline{\text{DTR}}$/CT16B0_MAT0/TXD | 0xD0 | Table 137 |
| IOCON_PIO3_1 | R/W | 0x088 | I/O configuration for pin PIO3_1/$\overline{\text{DSR}}$/CT16B0_MAT1/RXD | 0xD0 | Table 138 |
| IOCON_PIO2_3 | R/W | 0x08C | I/O configuration for pin PIO2_3/$\overline{\text{RI}}$/MOSI1 | 0xD0 | Table 139 |
| IOCON_SWDIO_PIO1_3 | R/W | 0x090 | I/O configuration for pin SWDIO/PIO1_3/AD4/CT32B1_MAT2 | 0xD0 | Table 140 |
| IOCON_PIO1_4 | R/W | 0x094 | I/O configuration for pin PIO1_4/AD5/CT32B1_MAT3 | 0xD0 | Table 141 |
| IOCON_PIO1_11 | R/W | 0x098 | I/O configuration for pin PIO1_11/AD7/CT32B1_CAP1 | 0xD0 | Table 142 |
| IOCON_PIO3_2 | R/W | 0x09C | I/O configuration for pin PIO3_2/$\overline{\text{DCD}}$/ CT16B0_MAT2/SCK1 | 0xD0 | Table 143 |
| IOCON_PIO1_5 | R/W | 0x0A0 | I/O configuration for pin PIO1_5/$\overline{\text{RTS}}$/CT32B0_CAP0 | 0xD0 | Table 144 |
| IOCON_PIO1_6 | R/W | 0x0A4 | I/O configuration for pin PIO1_6/RXD/CT32B0_MAT0 | 0xD0 | Table 145 |
| IOCON_PIO1_7 | R/W | 0x0A8 | I/O configuration for pin PIO1_7/TXD/CT32B0_MAT1 | 0xD0 | Table 146 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 104. Register overview: I/O configuration (base address 0x4004 4000)**

| Name | Access | Address offset | Description | Reset value | Reference |
|---|---|---|---|---|---|
| IOCON_PIO3_3 | R/W | 0x0AC | I/O configuration for pin PIO3_3/$\overline{RI}$/ CT16B0_CAP0 | 0xD0 | Table 147 |
| IOCON_SCK0_LOC | R/W | 0x0B0 | SCK0 pin location select register | 0x00 | Table 148 |
| IOCON_DSR_LOC | R/W | 0x0B4 | $\overline{DSR}$ pin location select register | 0x00 | Table 149 |
| IOCON_DCD_LOC | R/W | 0x0B8 | $\overline{DCD}$ pin location select register | 0x00 | Table 150 |
| IOCON_RI_LOC | R/W | 0x0BC | $\overline{RI}$ pin location select register | 0x00 | Table 151 |
| IOCON_CT16B0_CAP0_LOC | R/W | 0x0C0 | CT16B0_CAP0 pin location select register | 0x00 | Table 153 |
| IOCON_SCK1_LOC | R/W | 0x0C4 | SCK1 pin location select register | 0x00 | Table 154 |
| IOCON_MISO1_LOC | R/W | 0x0C8 | MISO1 pin location select register | 0x00 | Table 155 |
| IOCON_MOSI1_LOC | R/W | 0x0CC | MOSI1 pin location select register | 0x00 | Table 156 |
| IOCON_CT32B0_CAP0_LOC | R/W | 0x0D0 | CT32B0_CAP0 pin location select register | 0x00 | Table 157 |
| IOCON_RXD_LOC | R/W | 0x0D4 | RXD pin location select register | 0x00 | Table 158 |

**Table 105. I/O configuration registers ordered by port number**

| Port pin | Register name | LPC1111/ 12/13/14 HVQFN33 | LPC1113/14/15 LQFP48 | Reference |
|---|---|---|---|---|
| PIO0_0 | IOCON_RESET_PIO0_0 | yes | yes | Table 108 |
| PIO0_1 | IOCON_PIO0_1 | yes | yes | Table 106 |
| PIO0_2 | IOCON_PIO0_2 | yes | yes | Table 111 |
| PIO0_3 | IOCON_PIO0_3 | yes | yes | Table 115 |
| PIO0_4 | IOCON_PIO0_4 | yes | yes | Table 116 |
| PIO0_5 | IOCON_PIO0_5 | yes | yes | Table 117 |
| PIO0_6 | IOCON_PIO0_6 | yes | yes | Table 123 |
| PIO0_7 | IOCON_PIO0_7 | yes | yes | Table 124 |
| PIO0_8 | IOCON_PIO0_8 | yes | yes | Table 128 |
| PIO0_9 | IOCON_PIO0_9 | yes | yes | Table 129 |
| PIO0_10 | IOCON_SWCLK_PIO0_10 | yes | yes | Table 130 |
| PIO0_11 | IOCON_R_PIO0_11 | yes | yes | Table 133 |
| PIO1_0 | IOCON_R_PIO1_0 | yes | yes | Table 134 |
| PIO1_1 | IOCON_R_PIO1_1 | yes | yes | Table 135 |
| PIO1_2 | IOCON_R_PIO1_2 | yes | yes | Table 136 |
| PIO1_3 | IOCON_SWDIO_PIO1_3 | yes | yes | Table 140 |
| PIO1_4 | IOCON_PIO1_4 | yes | yes | Table 141 |
| PIO1_5 | IOCON_PIO1_5 | yes | yes | Table 144 |
| PIO1_6 | IOCON_PIO1_6 | yes | yes | Table 145 |
| PIO1_7 | IOCON_PIO1_7 | yes | yes | Table 146 |
| PIO1_8 | IOCON_PIO1_8 | yes | yes | Table 110 |
| PIO1_9 | IOCON_PIO1_9 | yes | yes | Table 118 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 105. I/O configuration registers ordered by port number

| Port pin | Register name | LPC1111/12/13/14 HVQFN33 | LPC1113/14/15 LQFP48 | Reference |
|---|---|---|---|---|
| PIO1_10 | IOCON_PIO1_10 | yes | yes | Table 131 |
| PIO1_11 | IOCON_PIO1_11 | yes | yes | Table 142 |
| PIO2_0 | IOCON_PIO2_0 | yes | yes | Table 107 |
| PIO2_1 | IOCON_PIO2_1 | no | yes | Table 114 |
| PIO2_2 | IOCON_PIO2_2 | no | yes | Table 127 |
| PIO2_3 | IOCON_PIO2_3 | no | yes | Table 139 |
| PIO2_4 | IOCON_PIO2_4 | no | yes | Table 120 |
| PIO2_5 | IOCON_PIO2_5 | no | yes | Table 121 |
| PIO2_6 | IOCON_PIO2_6 | no | yes | Table 106 |
| PIO2_7 | IOCON_PIO2_7 | no | yes | Table 112 |
| PIO2_8 | IOCON_PIO2_8 | no | yes | Table 113 |
| PIO2_9 | IOCON_PIO2_9 | no | yes | Table 125 |
| PIO2_10 | IOCON_PIO2_10 | no | yes | Table 126 |
| PIO2_11 | IOCON_PIO2_11 | no | yes | Table 132 |
| PIO3_0 | IOCON_PIO3_0 | no | yes | Table 137 |
| PIO3_1 | IOCON_PIO3_1 | no | yes | Table 138 |
| PIO3_2 | IOCON_PIO3_2 | yes | yes | Table 143 |
| PIO3_3 | IOCON_PIO3_3 | no | yes | Table 147 |
| PIO3_4 | IOCON_PIO3_4 | yes | yes | Table 119 |
| PIO3_5 | IOCON_PIO3_5 | yes | yes | Table 122 |

### 8.4.1 IOCON_PIO2_6

Table 106. IOCON_PIO2_6 register (IOCON_PIO2_6, address 0x4004 4000) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO2_6. | |
| | | 0x1 | Selects function CT32B0_MAT1. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 106. IOCON_PIO2_6 register (IOCON_PIO2_6, address 0x4004 4000) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 8.4.2 IOCON_PIO2_0

Table 107. IOCON_PIO2_0 register (IOCON_PIO2_0, address 0x4004 4008) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO2_0. | |
| | | 0x1 | Select function $\overline{\text{DTR}}$. | |
| | | 0x2 | Select function SSEL1. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 8.4.3 IOCON_PIO_RESET_PIO0_0

Table 108. IOCON_RESET_PIO0_0 register (IOCON_RESET_PIO0_0, address 0x4004 400C) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function $\overline{\text{RESET}}$. | |
| | | 0x1 | Selects function PIO0_0. | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 108. IOCON_RESET_PIO0_0 register (IOCON_RESET_PIO0_0, address 0x4004 400C) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 8.4.4 IOCON_PIO0_1

**Table 109. IOCON_PIO0_1 register (IOCON_PIO0_1, address 0x4004 4010) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO0_1. | |
| | | 0x1 | Selects function CLKOUT. | |
| | | 0x2 | Selects function CT32B0_MAT2. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 8.4.5 IOCON_PIO1_8

Table 110. IOCON_PIO1_8 register (IOCON_PIO1_8, address 0x4004 4014) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO1_8. | |
| | | 0x1 | Selects function CT16B1_CAP0. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

### 8.4.6 IOCON_PIO0_2

Table 111. IOCON_PIO0_2 register (IOCON_PIO0_2, address 0x4004 401C) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO0_2. | |
| | | 0x1 | Selects function SSEL0. | |
| | | 0x2 | Selects function CT16B0_CAP0. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 111. IOCON_PIO0_2 register (IOCON_PIO0_2, address 0x4004 401C) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 8.4.7 IOCON_PIO2_7

Table 112. IOCON_PIO2_7 register (IOCON_PIO2_7, address 0x4004 4020) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO2_7. | |
| | | 0x1 | Selects function CT32B0_MAT2. | |
| | | 0x2 | Selects function RXD. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 8.4.8 IOCON_PIO2_8

Table 113. IOCON_PIO2_8 register (IOCON_PIO2_8, address 0x4004 4024) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO2_8. | |
| | | 0x1 | Selects function CT32B0_MAT3. | |
| | | 0x2 | Selects function TXD. | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 113. IOCON_PIO2_8 register (IOCON_PIO2_8, address 0x4004 4024) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 8.4.9 IOCON_PIO2_1

**Table 114. IOCON_PIO2_1 register (IOCON_PIO2_1, address 0x4004 4028) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO2_1. | |
| | | 0x1 | Select function $\overline{\text{DSR}}$. | |
| | | 0x2 | Select function SCK1. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 8.4.10 IOCON_PIO0_3

Table 115. IOCON_PIO0_3 register (IOCON_PIO0_3, address 0x4004 402C) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO0_3. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

### 8.4.11 IOCON_PIO0_4

Table 116. IOCON_PIO0_4 register (IOCON_PIO0_4, address 0x4004 4030) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO0_4 (open-drain pin). | |
| | | 0x1 | Selects I2C function SCL (open-drain pin). | |
| 7:3 | | - | Reserved. | 00000 |
| 9:8 | I2CMODE | | Selects I2C mode. Select Standard mode (I2CMODE = 00, default) or Standard I/O functionality (I2CMODE = 01) if the pin function is GPIO (FUNC = 000). | 00 |
| | | 0x0 | Standard mode/ Fast-mode I2C. | |
| | | 0x1 | Standard I/O functionality | |
| | | 0x2 | Fast-mode Plus I2C | |
| | | 0x3 | Reserved. | |
| 31:10 | - | - | Reserved. | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 8.4.12 IOCON_PIO0_5

Table 117. IOCON_PIO0_5 register (IOCON_PIO0_5, address 0x4004 4034) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO0_5 (open-drain pin). | |
| | | 0x1 | Selects I2C function SDA (open-drain pin). | |
| 7:3 | | - | Reserved. | 00000 |
| 9:8 | I2CMODE | | Selects I2C mode. Select Standard mode (I2CMODE = 00, default) or Standard I/O functionality (I2CMODE = 01) if the pin function is GPIO (FUNC = 000). | 00 |
| | | 0x0 | Standard mode/ Fast-mode I2C. | |
| | | 0x1 | Standard I/O functionality | |
| | | 0x2 | Fast-mode Plus I2C | |
| | | 0x3 | Reserved. | |
| 31:10 | - | - | Reserved. | - |

### 8.4.13 IOCON_PIO1_9

**Remark:** See Section 8.1 for part specific details.

Table 118. IOCON_PIO1_9 register (IOCON_PIO1_9, address 0x4004 4038) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO1_9. | |
| | | 0x1 | Selects function CT16B1_MAT0. | |
| | | 0x2 | Selects function MOSI1. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

### 8.4.14 IOCON_PIO3_4

**Remark:** See Section 8.1 for part specific details.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 119. IOCON_PIO3_4 register (IOCON_PIO3_4, address 0x4004 403C) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO3_4. | |
| | | 0x1 | Selects function CT16B0_CAP1. | |
| | | 0x2 | Selects function RXD. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 8.4.15 IOCON_PIO2_4

**Remark:** See Section 8.1 for part specific details.

Table 120. IOCON_PIO2_4 register (IOCON_PIO2_4, address 0x4004 4040) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO2_4. | |
| | | 0x1 | Selects function CT16B1_MAT1. | |
| | | 0x2 | Selects function SSEL1. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 120. IOCON_PIO2_4 register (IOCON_PIO2_4, address 0x4004 4040) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

### 8.4.16 IOCON_PIO2_5

**Remark:** See Section 8.1 for part specific details.

Table 121. IOCON_PIO2_5 register (IOCON_PIO2_5, address 0x4004 4044) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO2_5. | |
| | | 0x1 | Selects function CT32B0_MAT0. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

### 8.4.17 IOCON_PIO3_5

**Remark:** See Section 8.1 for part specific details.

Table 122. IOCON_PIO3_5 register (IOCON_PIO3_5, address 0x4004 4048) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO3_5. | |
| | | 0x1 | Selects function CT16B1_CAP1. | |
| | | 0x2 | Selects function TXD. | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 122. IOCON_PIO3_5 register (IOCON_PIO3_5, address 0x4004 4048) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 8.4.18 IOCON_PIO0_6

Table 123. IOCON_PIO0_6 register (IOCON_PIO0_6, address 0x4004 404C) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO0_6. | |
| | | 0x1 | Reserved. | |
| | | 0x2 | Selects function SCK0 (only if pin PIO0_6/SCK0 selected in Table 148). | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 8.4.19 IOCON_PIO0_7

Table 124. IOCON_PIO0_7 register (IOCON_PIO0_7, address 0x4004 4050) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO0_7. | |
| | | 0x1 | Select function $\overline{\text{CTS}}$. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

### 8.4.20 IOCON_PIO2_9

**Remark:** See Section 8.1 for part specific details.

Table 125. IOCON_PIO2_9 register (IOCON_PIO2_9, address 0x4004 4054) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO2_9. | |
| | | 0x1 | Selects function CT32B0_CAP0. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 125. IOCON_PIO2_9 register (IOCON_PIO2_9, address 0x4004 4054) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 8.4.21 IOCON_PIO2_10

Table 126. IOCON_PIO2_10 register (IOCON_PIO2_10, address 0x4004 4058) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO2_10. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 8.4.22 IOCON_PIO2_2

Table 127. IOCON_PIO2_2 register (IOCON_PIO2_2, address 0x4004 405C) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO2_2. | |
| | | 0x1 | Select function $\overline{\text{DCD}}$. | |
| | | 0x2 | Select function MISO1. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 127. IOCON_PIO2_2 register (IOCON_PIO2_2, address 0x4004 405C) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 8.4.23 IOCON_PIO0_8

Table 128. IOCON_PIO0_8 register (IOCON_PIO0_8, address 0x4004 4060) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO0_8. | |
| | | 0x1 | Selects function MISO0. | |
| | | 0x2 | Selects function CT16B0_MAT0. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 8.4.24 IOCON_PIO0_9

Table 129. IOCON_PIO0_9 register (IOCON_PIO0_9, address 0x4004 4064) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO0_9. | |
| | | 0x1 | Selects function MOSI0. | |
| | | 0x2 | Selects function CT16B0_MAT1. | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 129. IOCON_PIO0_9 register (IOCON_PIO0_9, address 0x4004 4064) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 8.4.25 IOCON_SWCLK_PIO0_10

Table 130. IOCON_SWCLK_PIO0_10 register (IOCON_SWCLK_PIO0_10, address 0x4004 4068) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function SWCLK. | |
| | | 0x1 | Selects function PIO0_10. | |
| | | 0x2 | Selects function SCK0 (only if pin SWCLK/PIO0_10/SCK0/CT16B0_MAT2 selected in Table 148). | |
| | | 0x3 | Selects function CT16B0_MAT2. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 8.4.26 IOCON_PIO1_10

Table 131. IOCON_PIO1_10 register (IOCON_PIO1_10, address 0x4004 406C) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO1_10. | |
| | | 0x1 | Selects function AD6. | |
| | | 0x2 | Selects function CT16B1_MAT1. | |
| | | 0x3 | Selects function MISO1. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 6 | - | - | Reserved | 1 |
| 7 | ADMODE | | Selects Analog/Digital mode | 1 |
| | | 0 | Analog input mode | |
| | | 1 | Digital functional mode | |
| 9:8 | - | - | Reserved | 00 |
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

### 8.4.27 IOCON_PIO2_11

Table 132. IOCON_PIO2_11 register (IOCON_PIO2_11, address 0x4004 4070) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO2_11. | |
| | | 0x1 | Select function SCK0 (only if pin PIO2_11/SCK0 selected in Table 148). | |
| | | 0x2 | Select function CT32B0_CAP1. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 132. IOCON_PIO2_11 register (IOCON_PIO2_11, address 0x4004 4070) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 8.4.28 IOCON_R_PIO0_11

Table 133. IOCON_R_PIO0_11 register (IOCON_R_PIO0_11, address 0x4004 4074) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function R. This function is reserved. Select one of the alternate functions below. | |
| | | 0x1 | Selects function PIO0_11. | |
| | | 0x2 | Selects function AD0. | |
| | | 0x3 | Selects function CT32B0_MAT3. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 6 | - | - | Reserved | 1 |
| 7 | ADMODE | | Selects Analog/Digital mode | 1 |
| | | 0 | Analog input mode | |
| | | 1 | Digital functional mode | |
| 9:8 | - | - | Reserved | 00 |
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 8.4.29 IOCON_R_PIO1_0

**Table 134. IOCON_R_PIO1_0 register (IOCON_R_PIO1_0, address 0x4004 4078) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function R. This function is reserved. Select one of the alternate functions below. | |
| | | 0x1 | Selects function PIO1_0. | |
| | | 0x2 | Selects function AD1. | |
| | | 0x3 | Selects function CT32B1_CAP0. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 6 | - | - | Reserved | 1 |
| 7 | ADMODE | | Selects Analog/Digital mode | 1 |
| | | 0 | Analog input mode | |
| | | 1 | Digital functional mode | |
| 9:8 | - | - | Reserved | 00 |
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

### 8.4.30 IOCON_R_PIO1_1

**Table 135. IOCON_R_PIO1_1 register (IOCON_R_PIO1_1, address 0x4004 407C) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function R. This function is reserved. Select one of the alternate functions below. | |
| | | 0x1 | Selects function PIO1_1. | |
| | | 0x2 | Selects function AD2. | |
| | | 0x3 | Selects function CT32B1_MAT0. | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 135. IOCON_R_PIO1_1 register (IOCON_R_PIO1_1, address 0x4004 407C) bit description** *…continued*

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 6 | - | - | Reserved | 1 |
| 7 | ADMODE | | Selects Analog/Digital mode | 1 |
| | | 0 | Analog input mode | |
| | | 1 | Digital functional mode | |
| 9:8 | - | - | Reserved | 00 |
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 8.4.31 IOCON_R_PIO1_2

**Table 136. IOCON_R_PIO1_2 register (IOCON_R_PIO1_2, address 0x4004 4080) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function R. This function is reserved. Select one of the alternate functions below. | |
| | | 0x1 | Selects function PIO1_2. | |
| | | 0x2 | Selects function AD3. | |
| | | 0x3 | Selects function CT32B1_MAT1. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 6 | - | - | Reserved | 1 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 136. IOCON_R_PIO1_2 register (IOCON_R_PIO1_2, address 0x4004 4080) bit description** *…continued*

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 7 | ADMODE | | Selects Analog/Digital mode | 1 |
| | | 0 | Analog input mode | |
| | | 1 | Digital functional mode | |
| 9:8 | - | - | Reserved | 00 |
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 8.4.32 IOCON_PIO3_0

**Table 137. IOCON_PIO3_0 register (IOCON_PIO3_0, address 0x4004 4084) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO3_0. | |
| | | 0x1 | Selects function $\overline{\text{DTR}}$. | |
| | | 0x2 | Selects function CT16B0_MAT0. | |
| | | 0x3 | Selects function TXD. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 8.4.33 IOCON_PIO3_1

Table 138. IOCON_PIO3_1 register (IOCON_PIO3_1, address 0x4004 4088) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO3_1. | |
| | | 0x1 | Selects function $\overline{\text{DSR}}$. | |
| | | 0x2 | Selects function CT16B0_MAT1. | |
| | | 0x3 | Selects function $\overline{\text{RXD}}$. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

### 8.4.34 IOCON_PIO2_3

Table 139. IOCON_PIO2_3 register (IOCON_PIO2_3, address 0x4004 408C) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO2_3. | |
| | | 0x1 | Selects function $\overline{\text{RI}}$. | |
| | | 0x2 | Selects function MOSI1. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 139. IOCON_PIO2_3 register (IOCON_PIO2_3, address 0x4004 408C) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 8.4.35 IOCON_SWDIO_PIO1_3

Table 140. IOCON_SWDIO_PIO1_3 register (IOCON_SWDIO_PIO1_3, address 0x4004 4090) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function SWDIO. | |
| | | 0x1 | Selects function PIO1_3. | |
| | | 0x2 | Selects function AD4. | |
| | | 0x3 | Selects function CT32B1_MAT2. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 6 | - | - | Reserved | 1 |
| 7 | ADMODE | | Selects Analog/Digital mode | 1 |
| | | 0 | Analog input mode | |
| | | 1 | Digital functional mode | |
| 9:8 | - | - | Reserved | 00 |
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 8.4.36 IOCON_PIO1_4

**Table 141. IOCON_PIO1_4 register (IOCON_PIO1_4, address 0x4004 4094) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. This pin functions as WAKEUP pin if the LPC111x/LPC11Cxx is in Deep power-down mode regardless of the value of FUNC. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO1_4. | |
| | | 0x1 | Selects function AD5. | |
| | | 0x2 | Selects function CT32B1_MAT3. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 6 | - | - | Reserved | 1 |
| 7 | ADMODE | | Selects Analog/Digital mode | 1 |
| | | 0 | Analog input mode | |
| | | 1 | Digital functional mode | |
| 9:8 | - | - | Reserved | 00 |
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

### 8.4.37 IOCON_PIO1_11

**Table 142. IOCON_PIO1_11 register (IOCON_PIO1_11, address 0x4004 4098) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO1_11. | |
| | | 0x1 | Selects function AD7. | |
| | | 0x2 | Selects function CT32B1_CAP1. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 142. IOCON_PIO1_11 register (IOCON_PIO1_11, address 0x4004 4098) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 6 | - | - | Reserved | 1 |
| 7 | ADMODE | | Selects Analog/Digital mode | 1 |
| | | 0 | Analog input mode | |
| | | 1 | Digital functional mode | |
| 9:8 | - | - | Reserved | 00 |
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 8.4.38 IOCON_PIO3_2

Table 143. IOCON_PIO3_2 register (IOCON_PIO3_2, address 0x4004 409C) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO3_2. | |
| | | 0x1 | Selects function $\overline{\text{DCD}}$. | |
| | | 0x2 | Selects function CT16B0_MAT2. | |
| | | 0x3 | Selects function SCK1. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 8.4.39 IOCON_PIO1_5

Table 144. IOCON_PIO1_5 register (IOCON_PIO1_5, address 0x4004 40A0) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO1_5. | |
| | | 0x1 | Selects function $\overline{\text{RTS}}$. | |
| | | 0x2 | Selects function CT32B0_CAP0. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

### 8.4.40 IOCON_PIO1_6

Table 145. IOCON_PIO1_6 register (IOCON_PIO1_6, address 0x4004 40A4) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO1_6. | |
| | | 0x1 | Selects function RXD. | |
| | | 0x2 | Selects function CT32B0_MAT0. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 145. IOCON_PIO1_6 register (IOCON_PIO1_6, address 0x4004 40A4) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 8.4.41 IOCON_PIO1_7

Table 146. IOCON_PIO1_7 register (IOCON_PIO1_7, address 0x4004 40A8) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO1_7. | |
| | | 0x1 | Selects function TXD. | |
| | | 0x2 | Selects function CT32B0_MAT1. | |
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 8.4.42 IOCON_PIO3_3

Table 147. IOCON_PIO3_3 register (IOCON_PIO3_3, address 0x4004 40AC) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 2:0 | FUNC | | Selects pin function. All other values are reserved. | 000 |
| | | 0x0 | Selects function PIO3_3. | |
| | | 0x1 | Selects function $\overline{\text{RI}}$. | |
| | | 0x2 | Selects function CT16B0_CAP0. | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 147. IOCON_PIO3_3 register (IOCON_PIO3_3, address 0x4004 40AC) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 4:3 | MODE | | Selects function mode (on-chip pull-up/pull-down resistor control). | 10 |
| | | 0x0 | Inactive (no pull-down/pull-up resistor enabled). | |
| | | 0x1 | Pull-down resistor enabled. | |
| | | 0x2 | Pull-up resistor enabled. | |
| | | 0x3 | Repeater mode. | |
| 5 | HYS | | Hysteresis. | 0 |
| | | 0 | Disable. | |
| | | 1 | Enable. | |
| 9:6 | - | - | Reserved | 0011 |
| 10 | OD | | Selects pseudo open-drain mode. | 0 |
| | | 0 | Standard GPIO output | |
| | | 1 | Open-drain output | |
| 31:11 | - | - | Reserved | - |

## 8.4.43 IOCON_SCK0_LOC

Table 148. IOCON SCK0 location register (IOCON_SCK0_LOC, address 0x4004 40B0) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 1:0 | SCKLOC | | Selects pin location for SCK0 function. | 00 |
| | | 0x0 | Selects SCK0 function in pin location SWCLK/PIO0_10/SCK0/CT16B0_MAT2 (see Table 130). | |
| | | 0x1 | Selects SCK0 function in pin location PIO2_11/SCK0 (see Table 132). | |
| | | 0x2 | Selects SCK0 function in pin location PIO0_6/SCK0 (see Table 123). | |
| | | 0x3 | Reserved. | |
| 31:2 | - | - | Reserved. | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 8.4.44 IOCON_DSR_LOC

**Table 149. IOCON DSR location register (IOCON_DSR_LOC, address 0x4004 40B4) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 1:0 | DSRLOC | | Selects pin location for DSR function. | 00 |
| | | 0x0 | Selects DSR function in pin location PIO2_1/DSR/SCK1 (see Table 114). | |
| | | 0x1 | Selects DSR function in pin location PIO3_1/DSR (see Table 138). | |
| | | 0x2 | Reserved. | |
| | | 0x3 | Reserved. | |
| 31:2 | - | - | Reserved. | - |

### 8.4.45 IOCON_DCD_LOC

**Table 150. IOCON DCD location register (IOCON_DCD_LOC, address 0x4004 40B8) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 1:0 | DCDLOC | | Selects pin location for DCD function. | 00 |
| | | 0x0 | Selects DCD function in pin location PIO2_2/DCD/MISO1 (see Table 127). | |
| | | 0x1 | Selects DCD function in pin location PIO3_2/DCD (see Table 143). | |
| | | 0x2 | Reserved. | |
| | | 0x3 | Reserved. | |
| 31:2 | - | - | Reserved. | - |

### 8.4.46 IOCON_RI_LOC

**Table 151. IOCON RI location register (IOCON_RI_LOC, address 0x4004 40BC) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 1:0 | RILOC | | Selects pin location for RI function. | 00 |
| | | 0x0 | Selects RI function in pin location PIO2_3/RI/MOSI1 (see Table 139). | |
| | | 0x1 | Selects RI function in pin location PIO3_3/RI (see Table 147). | |
| | | 0x2 | Reserved. | |
| | | 0x3 | Reserved. | |
| 31:2 | - | - | Reserved. | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 8.4.47 IOCON_SSEL1_LOC

**Table 152. IOCON SSEL1 location register (IOCON_SSEL1_LOC, address 0x4004 4018) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 1:0 | SSEL1LOC | | Selects pin location for SSEL1 function. | 00 |
| | | 0x0 | Selects SSEL1 function in pin location PIO2_0/DTR/SSEL1 (see Table 107). | |
| | | 0x1 | Selects SSEL1 function in pin location PIO2_4/CT16B1_MAT1/SSEL1 (see Table 120). | |
| | | 0x2 | Reserved. | |
| | | 0x3 | Reserved. | |
| 31:2 | - | - | Reserved. | - |

### 8.4.48 IOCON_CT16B0_CAP0_LOC

**Table 153. IOCON CT16B0_CAP0 location register (IOCON_CT16B0_CAP0_LOC, address 0x4004 40C0) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 1:0 | CT16B0_CAP0LOC | | Selects pin location for CT16B0_CAP0 function. | 00 |
| | | 0x0 | Selects CT16B0_CAP0 function in pin location PIO0_2/SSEL0/CT16B0_CAP0 (see Table 111). | |
| | | 0x1 | Selects CT16B0_CAP0 function in pin location PIO3_3/RI/CT16B0 (see Table 147). | |
| | | 0x2 | Reserved. | |
| | | 0x3 | Reserved. | |
| 31:2 | - | - | Reserved. | - |

### 8.4.49 IOCON_SCK1_LOC

**Table 154. IOCON SCK1 location register (IOCON_SCK1_LOC, address 0x4004 40C4) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 1:0 | SCK1LOC | | Selects pin location for SCK1 function. | 00 |
| | | 0x0 | Selects SCK1 function in pin location PIO2_1/DSR/SCK1 (see Table 114). | |
| | | 0x1 | Selects SCK1 function in pin location PIO3_2/DCD/CT16B0_MAT2/SCK1 (see Table 143). | |
| | | 0x2 | Reserved. | |
| | | 0x3 | Reserved. | |
| 31:2 | - | - | Reserved. | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 8.4.50 IOCON_MISO1_LOC

**Table 155. IOCON MISO1 location register (IOCON_MISO1_LOC, address 0x4004 40C8) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 1:0 | MISO1LOC | | Selects pin location for the MISO1 function. | 00 |
| | | 0x0 | Selects MISO1 function in pin location PIO2_2/DCD/MISO1 (see Table 127). | |
| | | 0x1 | Selects MISO1 function in pin location PIO1_10/AD6/CT16B1_MAT1/MISO1 (see Table 131). | |
| | | 0x2 | Reserved. | |
| | | 0x3 | Reserved. | |
| 31:2 | - | - | Reserved. | - |

### 8.4.51 IOCON_MOSI1_LOC

**Table 156. IOCON MOSI1 location register (IOCON_MOSI1_LOC, address 0x4004 40CC) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 1:0 | MOSI1LOC | | Selects pin location for the MOSI1 function. | 00 |
| | | 0x0 | Selects MOSI1 function in pin location PIO2_3/RI/MOSI1 (see Table 139). | |
| | | 0x1 | Selects MOSI1 function in pin location PIO1_9/CT16B1_MAT0/MOSI1 (see Table 118). | |
| | | 0x2 | Reserved. | |
| | | 0x3 | Reserved. | |
| 31:2 | - | - | Reserved. | - |

### 8.4.52 IOCON_CT32B0_CAP0_LOC

**Table 157. IOCON CT32B0_CAP0 location register (IOCON_CT32B0_CAP0_LOC, address 0x4004 40D0) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 1:0 | CT32B0_CAP0LOC | | Selects pin location for the CT32B0_CAP0 function. | 00 |
| | | 0x0 | Selects CT32B0_CAP0 function in pin location PIO1_5/RTS/CT32B0_CAP0 (see Table 144). | |
| | | 0x1 | Selects CT32B0_CAP0 function in pin location PIO2_9/CT32B0_CAP0 (Table 125). | |
| | | 0x2 | Reserved. | |
| | | 0x3 | Reserved. | |
| 31:2 | - | - | Reserved. | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 8.4.53 IOCON_RXD_LOC

Table 158. IOCON RXD location register (IOCON_RXD_LOC, address 0x4004 40D4) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 1:0 | RXDLOC | | Selects pin location for the RXD function. | 00 |
| | | 0x0 | Selects RXD function in pin location PIO1_6/RXD/CT32B0_MAT0 (see Table 145). | |
| | | 0x1 | Selects RXD function in pin location PIO2_7/CT32B0_MAT2/RXD (see Table 112). | |
| | | 0x2 | Selects RXD function in pin location PIO3_1/DSR/CT16B0_MAT1/RXD (see Table 138). | |
| | | 0x3 | Selects RXD function in pin location PIO3_4/CT16B0_CAP1/RXD (see Table 119). | |
| 31:2 | - | - | Reserved. | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 9.1 How to read this chapter

**Remark:** This chapter applies to parts in the LPC1100, LPC1100C, and LPC1100L series for LQFP and HVQFN packages.

The LPC111x are available in three packages: LQFP48 (LPC1113, LPC1114), and HVQFN33 (LPC1111, LPC1112, LPC1113, LPC1114).

The LPC11Cxx parts are available in a LQFP48 package.

The LPC11D14 part is available as a dual-chip module in a LQFP100 package.

**Table 159. LPC11(D)1x/LPC11Cxx pin configurations**

| Part | | LQFP48 | HVQFN24 | HVQFN33 | LQFP100 |
|---|---|---|---|---|---|
| LPC1111 | Pin configuration | - | - | Figure 17 | - |
| | Pin description | - | - | Table 161 | - |
| LPC1112 | Pin configuration | - | Figure 18 | Figure 17 | - |
| | Pin description | - | Table 162 | Table 161 | - |
| LPC1113 | Pin configuration | Figure 16 | - | Figure 17 | - |
| | Pin description | Table 160 | - | Table 161 | - |
| LPC1114 | Pin configuration | Figure 16 | - | Figure 17 | - |
| | Pin description | Table 160 | - | Table 161 | - |
| LPC11C12 | Pin configuration | Figure 19 | - | - | - |
| | Pin description | Table 160 | - | - | - |
| LPC11C14 | Pin configuration | Figure 19 | - | - | - |
| | Pin description | Table 160 | - | - | - |
| LPC11C22 | Pin configuration | Figure 20 | - | - | - |
| | Pin description | Table 163 | - | - | - |
| LPC11C24 | Pin configuration | Figure 20 | - | - | - |
| | Pin description | Table 163 | - | - | - |
| LPC11D14 | Pin configuration | - | - | - | Figure 21 |
| | Pin description | - | - | - | Table 164 |



All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 9.2 LPC111x Pin configuration

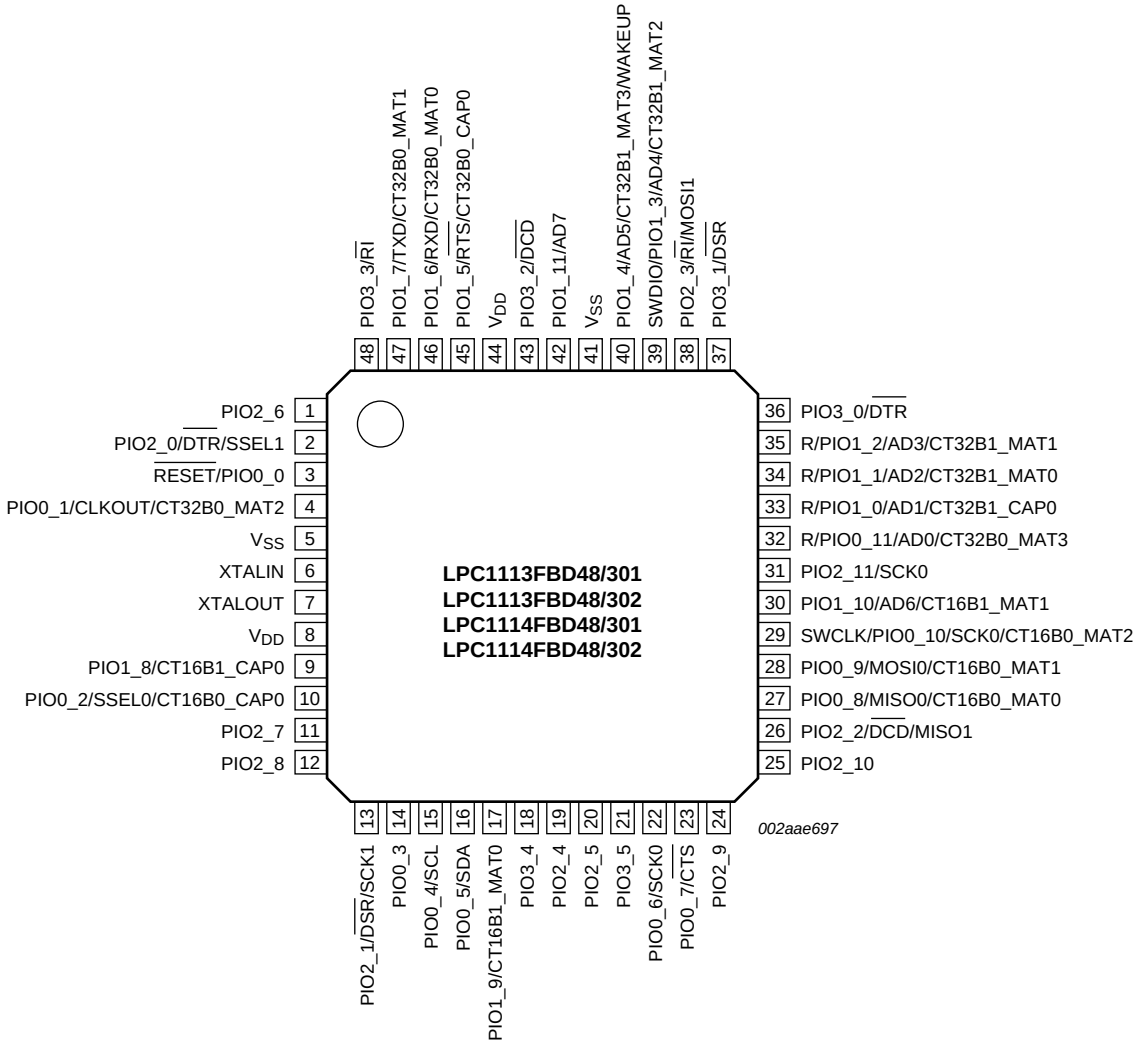


**Fig 16. Pin configuration LQFP48 package**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

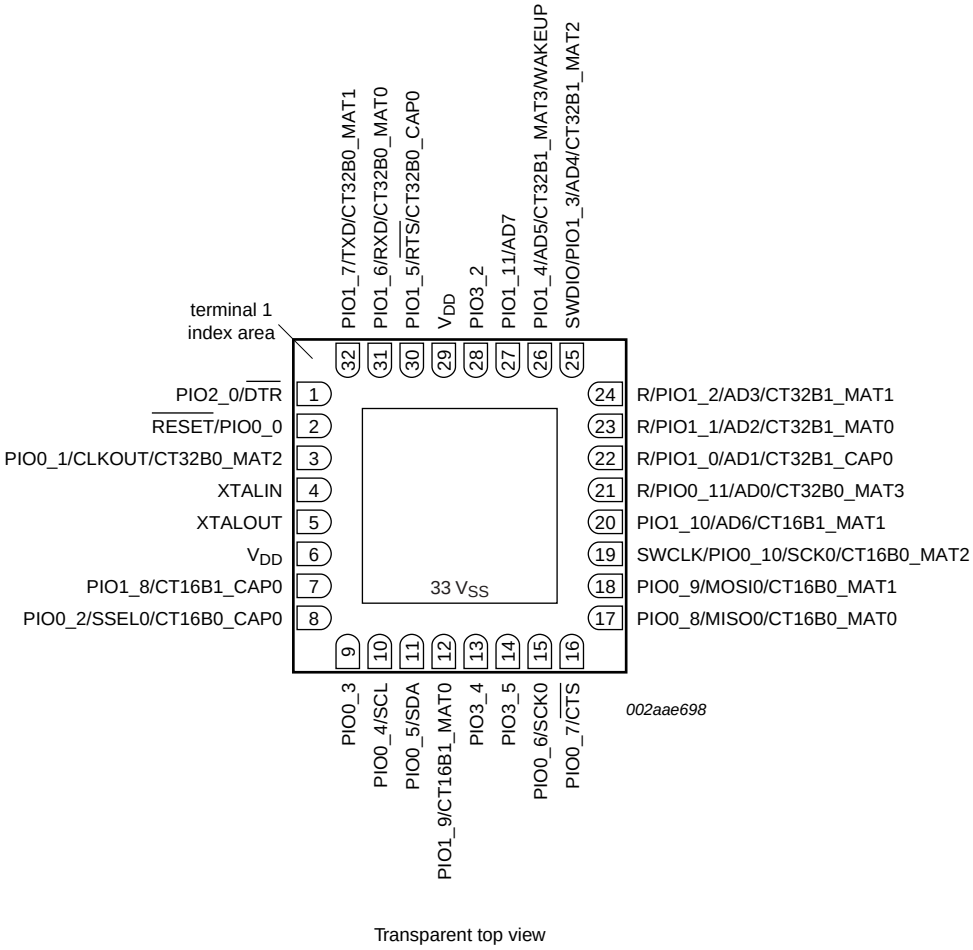


Transparent top view

**Fig 17. Pin configuration HVQFN33 package**

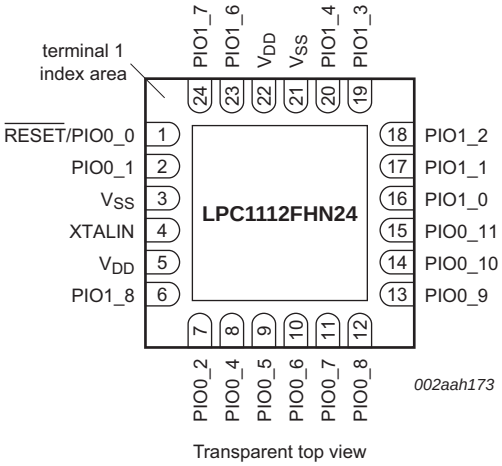


Transparent top view

**Fig 18. Pin configuration HVQFN24 package**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 9.3 LPC11Cxx Pin configuration

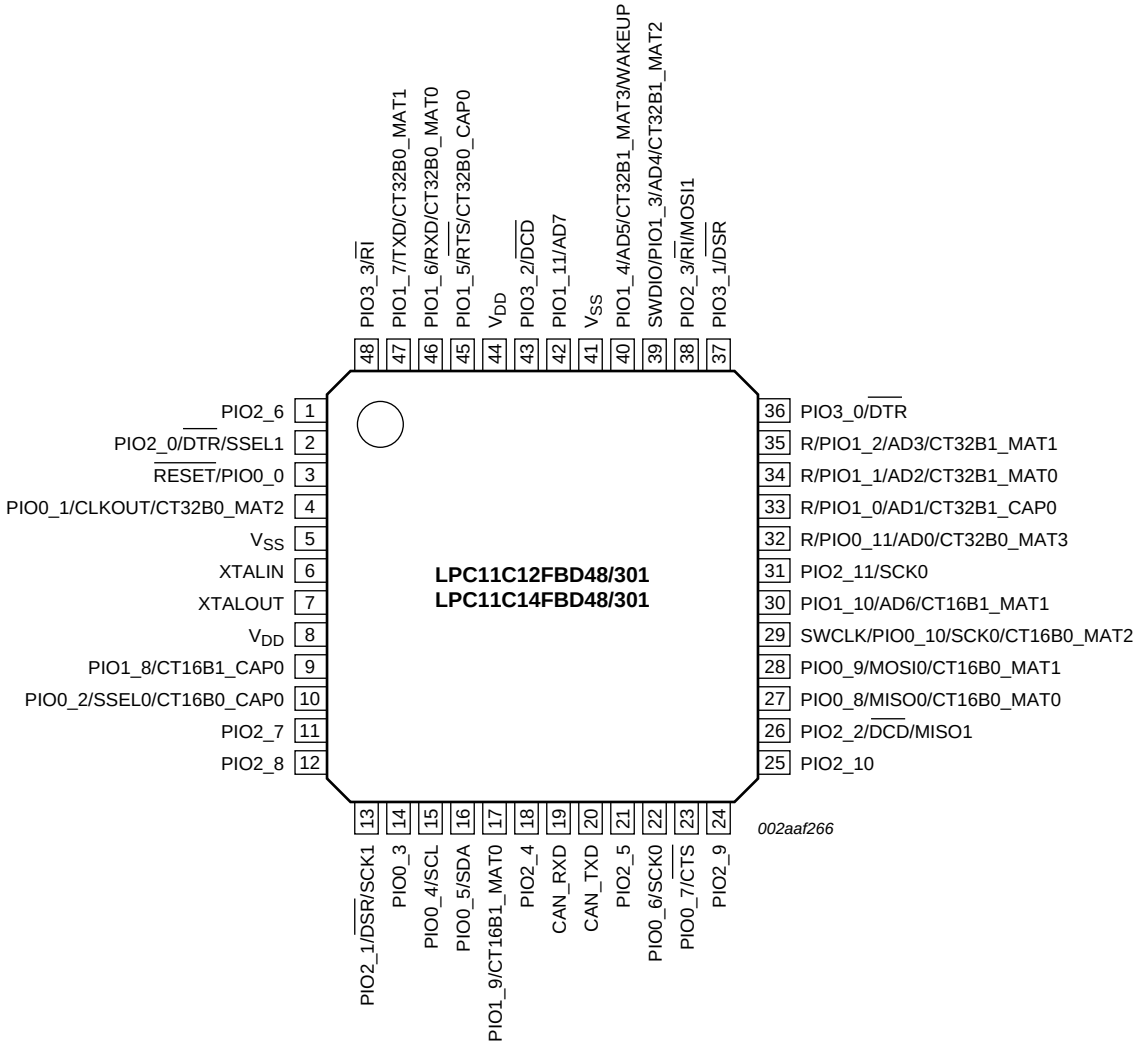


**Fig 19. Pin configuration LQFP48 package**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

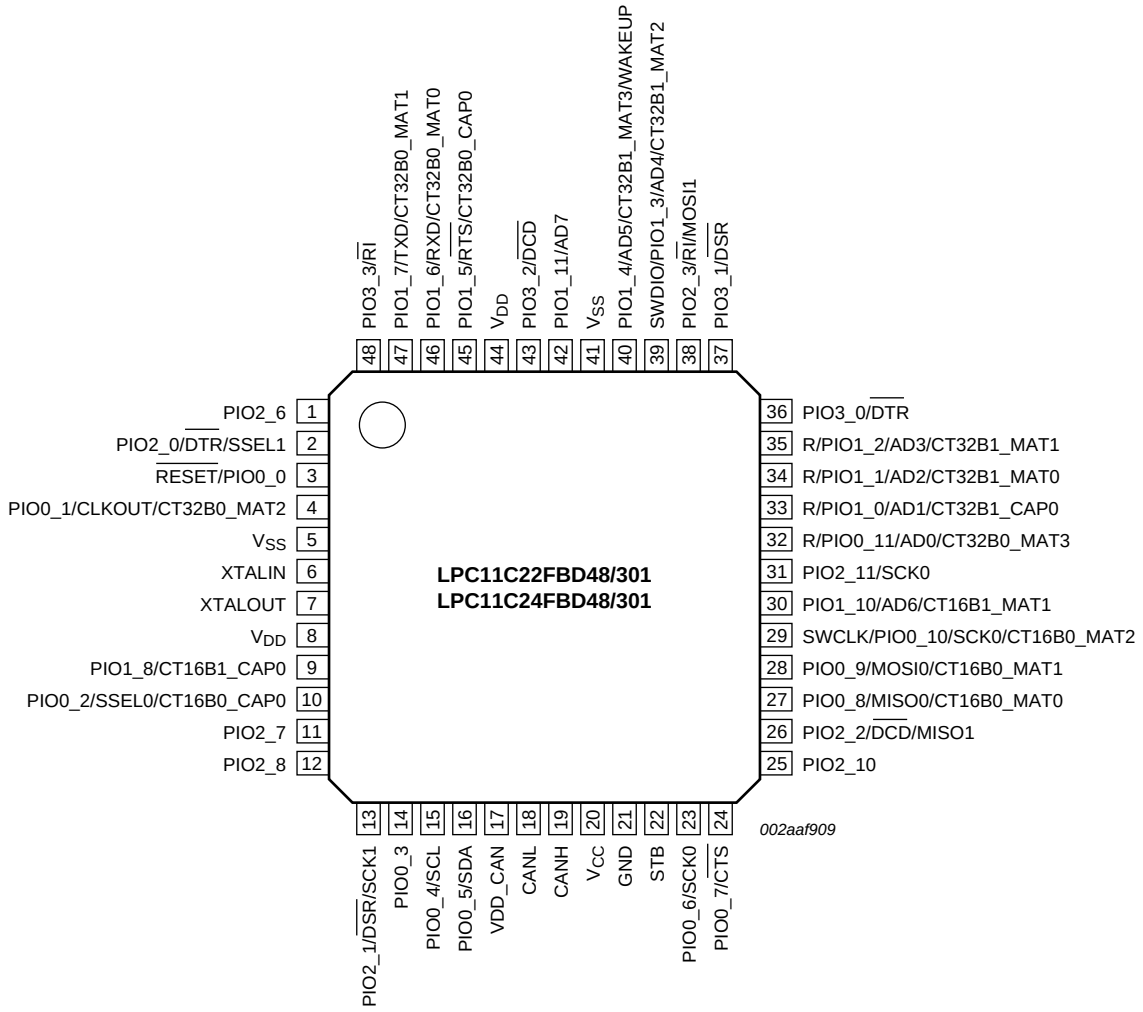


**Fig 20. Pin configuration (LPC11C22/C24)**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 9.4 LPC11D14 Pin configuration

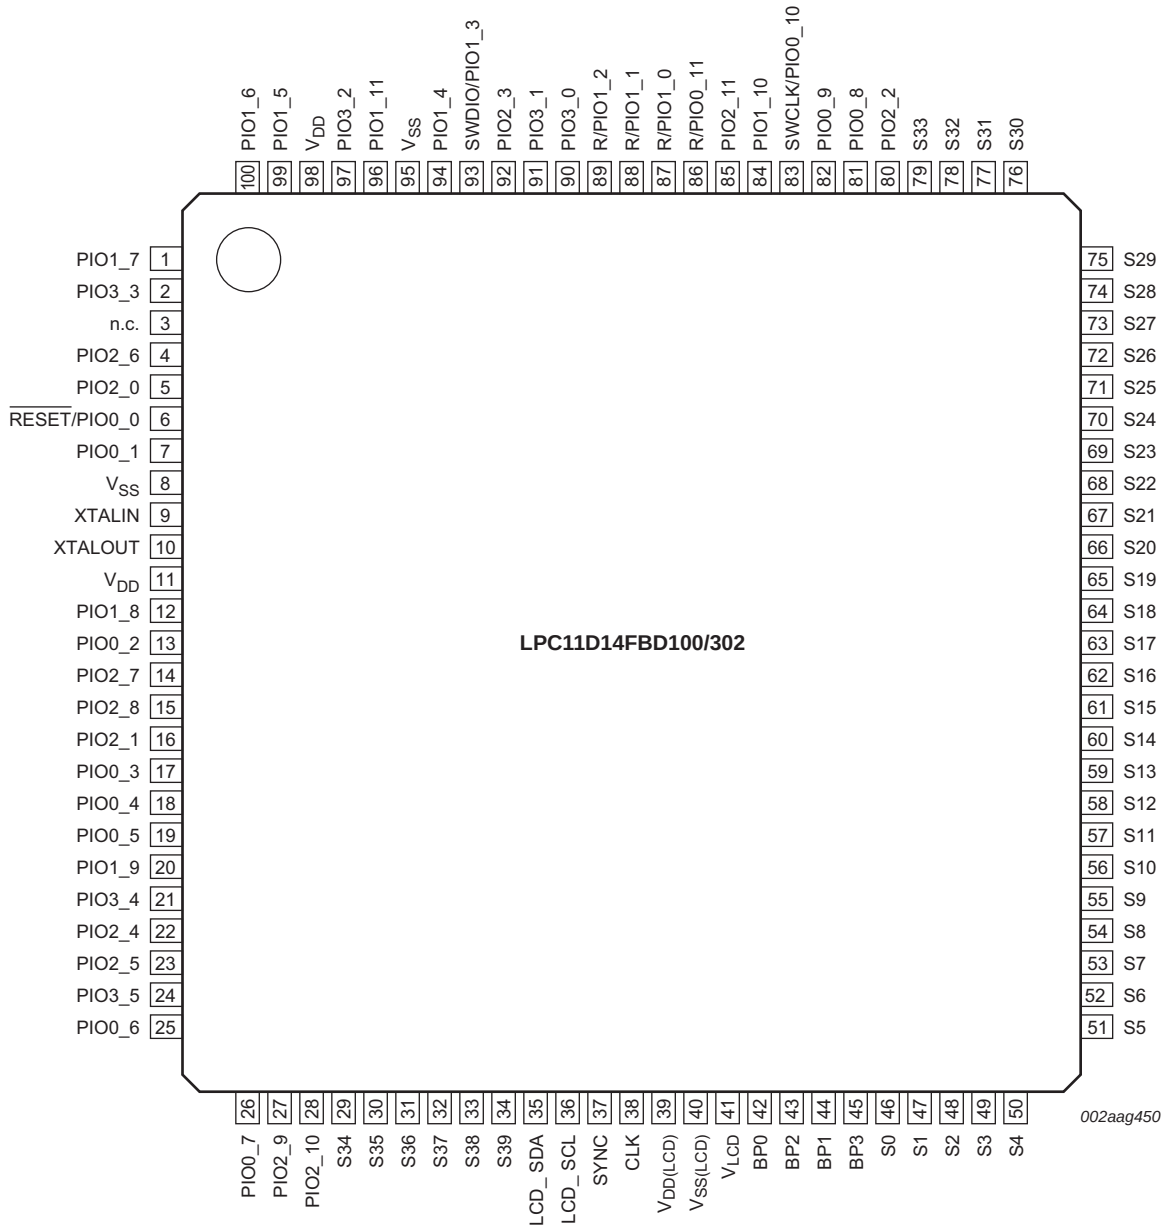


**Fig 21. Pin configuration LQFP100 package**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 9.5 LPC111x/LPC11Cxx Pin description

**Table 160. LPC1113/14 and LPC11C12/C14 pin description table (LQFP48 package)**

| Symbol | Pin | Type | Description |
|---|---|---|---|
| PIO0_0 to PIO0_11 | | I/O | **Port 0 —** Port 0 is a 12-bit I/O port with individual direction and function controls for each bit. The operation of port 0 pins depends on the function selected through the IOCONFIG register block. |
| $\overline{\text{RESET}}$/PIO0_0 | 3[1][2] | I | **$\overline{\text{RESET}}$ —** External reset input: A LOW on this pin resets the device, causing I/O ports and peripherals to take on their default states, and processor execution to begin at address 0.<br>In deep power-down mode, this pin must be pulled HIGH externally. The $\overline{\text{RESET}}$ pin can be left unconnected or be used as a GPIO pin if an external $\overline{\text{RESET}}$ function is not needed. |
| | | I/O | **PIO0_0 —** General purpose digital input/output pin. |
| PIO0_1/CLKOUT/ CT32B0_MAT2 | 4[3][2] | I/O | **PIO0_1 —** General purpose digital input/output pin. A LOW level on this pin during reset starts the flash ISP command handler via UART (if PIO0_3 is HIGH) or via C_CAN (if PIO0_3 is LOW). |
| | | O | **CLKOUT —** Clockout pin. |
| | | O | **CT32B0_MAT2 —** Match output 2 for 32-bit timer 0. |
| PIO0_2/SSEL0/ CT16B0_CAP0 | 10[3][2] | I/O | **PIO0_2 —** General purpose digital input/output pin. |
| | | O | **SSEL0 —** Slave Select for SPI0. |
| | | I | **CT16B0_CAP0 —** Capture input 0 for 16-bit timer 0. |
| PIO0_3 | 14[3][2] | I/O | **PIO0_3 —** General purpose digital input/output pin. This pin is monitored during reset: Together with a LOW level on pin PIO0_1, a LOW level starts the flash ISP command handler via C_CAN and a HIGH level starts the flash ISP command handler via UART. |
| PIO0_4/SCL | 15[4][2] | I/O | **PIO0_4 —** General purpose digital input/output pin (open-drain). |
| | | I/O | **SCL —** $I^2C$-bus, open-drain clock input/output. High-current sink only if $I^2C$ Fast-mode Plus is selected in the I/O configuration register. |
| PIO0_5/SDA | 16[4][2] | I/O | **PIO0_5 —** General purpose digital input/output pin (open-drain). |
| | | I/O | **SDA —** $I^2C$-bus, open-drain data input/output. High-current sink only if $I^2C$ Fast-mode Plus is selected in the I/O configuration register. |
| PIO0_6/SCK0 | 22[3][2] | I/O | **PIO0_6 —** General purpose digital input/output pin. |
| | | I/O | **SCK0 —** Serial clock for SPI0. |
| PIO0_7/$\overline{\text{CTS}}$ | 23[3][2] | I/O | **PIO0_7 —** General purpose digital input/output pin (high-current output driver). |
| | | I | **$\overline{\text{CTS}}$ —** Clear To Send input for UART. |
| PIO0_8/MISO0/ CT16B0_MAT0 | 27[3][2] | I/O | **PIO0_8 —** General purpose digital input/output pin. |
| | | I/O | **MISO0 —** Master In Slave Out for SPI0. |
| | | O | **CT16B0_MAT0 —** Match output 0 for 16-bit timer 0. |
| PIO0_9/MOSI0/ CT16B0_MAT1 | 28[3][2] | I/O | **PIO0_9 —** General purpose digital input/output pin. |
| | | I/O | **MOSI0 —** Master Out Slave In for SPI0. |
| | | O | **CT16B0_MAT1 —** Match output 1 for 16-bit timer 0. |
| SWCLK/PIO0_10/ SCK0/CT16B0_MAT2 | 29[3][2] | I | **SWCLK —** Serial wire clock. |
| | | I/O | **PIO0_10 —** General purpose digital input/output pin. |
| | | I/O | **SCK0 —** Serial clock for SPI0. |
| | | O | **CT16B0_MAT2 —** Match output 2 for 16-bit timer 0. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 160. LPC1113/14 and LPC11C12/C14 pin description table (LQFP48 package)** *...continued*

| Symbol | Pin | Type | Description |
|---|---|---|---|
| R/PIO0_11/ AD0/CT32B0_MAT3 | 32[5][2] | I | **R —** Reserved. Configure for an alternate function in the IOCONFIG block. |
| | | I/O | **PIO0_11 —** General purpose digital input/output pin. |
| | | I | **AD0 —** A/D converter, input 0. |
| | | O | **CT32B0_MAT3 —** Match output 3 for 32-bit timer 0. |
| PIO1_0 to PIO1_11 | | I/O | **Port 1 —** Port 1 is a 12-bit I/O port with individual direction and function controls for each bit. The operation of port 1 pins depends on the function selected through the IOCONFIG register block. |
| R/PIO1_0/ AD1/CT32B1_CAP0 | 33[5][2] | I | **R —** Reserved. Configure for an alternate function in the IOCONFIG block. |
| | | I/O | **PIO1_0 —** General purpose digital input/output pin. |
| | | I | **AD1 —** A/D converter, input 1. |
| | | I | **CT32B1_CAP0 —** Capture input 0 for 32-bit timer 1. |
| R/PIO1_1/ AD2/CT32B1_MAT0 | 34[5] | O | **R —** Reserved. Configure for an alternate function in the IOCONFIG block. |
| | | I/O | **PIO1_1 —** General purpose digital input/output pin. |
| | | I | **AD2 —** A/D converter, input 2. |
| | | O | **CT32B1_MAT0 —** Match output 0 for 32-bit timer 1. |
| R/PIO1_2/ AD3/CT32B1_MAT1 | 35[5] | I | **R —** Reserved. Configure for an alternate function in the IOCONFIG block. |
| | | I/O | **PIO1_2 —** General purpose digital input/output pin. |
| | | I | **AD3 —** A/D converter, input 3. |
| | | O | **CT32B1_MAT1 —** Match output 1 for 32-bit timer 1. |
| SWDIO/PIO1_3/AD4/ CT32B1_MAT2 | 39[5] | I/O | **SWDIO —** Serial wire debug input/output. |
| | | I/O | **PIO1_3 —** General purpose digital input/output pin. |
| | | I | **AD4 —** A/D converter, input 4. |
| | | O | **CT32B1_MAT2 —** Match output 2 for 32-bit timer 1. |
| PIO1_4/AD5/ CT32B1_MAT3/WAKEUP | 40[5] | I/O | **PIO1_4 —** General purpose digital input/output pin. In Deep power-down mode, this pin serves as the Deep power-down mode wake-up pin with 20 ns glitch filter. Pull this pin HIGH externally before entering Deep power-down mode. Pull this pin LOW to exit Deep power-down mode. A LOW-going pulse as short as 50 ns wakes up the part. |
| | | I | **AD5 —** A/D converter, input 5. |
| | | O | **CT32B1_MAT3 —** Match output 3 for 32-bit timer 1. |
| PIO1_5/$\overline{\text{RTS}}$/ CT32B0_CAP0 | 45[3] | I/O | **PIO1_5 —** General purpose digital input/output pin. |
| | | O | **$\overline{\text{RTS}}$ —** Request To Send output for UART. |
| | | I | **CT32B0_CAP0 —** Capture input 0 for 32-bit timer 0. |
| PIO1_6/RXD/ CT32B0_MAT0 | 46[3] | I/O | **PIO1_6 —** General purpose digital input/output pin. |
| | | I | **RXD —** Receiver input for UART. |
| | | O | **CT32B0_MAT0 —** Match output 0 for 32-bit timer 0. |
| PIO1_7/TXD/ CT32B0_MAT1 | 47[3] | I/O | **PIO1_7 —** General purpose digital input/output pin. |
| | | O | **TXD —** Transmitter output for UART. |
| | | O | **CT32B0_MAT1 —** Match output 1 for 32-bit timer 0. |
| PIO1_8/CT16B1_CAP0 | 9[3] | I/O | **PIO1_8 —** General purpose digital input/output pin. |
| | | I | **CT16B1_CAP0 —** Capture input 0 for 16-bit timer 1. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 160. LPC1113/14 and LPC11C12/C14 pin description table (LQFP48 package)** *...continued*

| Symbol | Pin | Type | Description |
|---|---|---|---|
| PIO1_9/CT16B1_MAT0 | 17[3] | I/O | **PIO1_9 —** General purpose digital input/output pin. |
| | | O | **CT16B1_MAT0 —** Match output 0 for 16-bit timer 1. |
| PIO1_10/AD6/ CT16B1_MAT1 | 30[5] | I/O | **PIO1_10 —** General purpose digital input/output pin. |
| | | I | **AD6 —** A/D converter, input 6. |
| | | O | **CT16B1_MAT1 —** Match output 1 for 16-bit timer 1. |
| PIO1_11/AD7 | 42[5] | I/O | **PIO1_11 —** General purpose digital input/output pin. |
| | | I | **AD7 —** A/D converter, input 7. |
| PIO2_0 to PIO2_11 | | I/O | **Port 2 —** Port 2 is a 12-bit I/O port with individual direction and function controls for each bit. The operation of port 2 pins depends on the function selected through the IOCONFIG register block. |
| PIO2_0/$\overline{\text{DTR}}$/SSEL1 | 2[3] | I/O | **PIO2_0 —** General purpose digital input/output pin. |
| | | O | **$\overline{\text{DTR}}$ —** Data Terminal Ready output for UART. |
| | | O | **SSEL1 —** Slave Select for SPI1. |
| PIO2_1/$\overline{\text{DSR}}$/SCK1 | 13[3] | I/O | **PIO2_1 —** General purpose digital input/output pin. |
| | | I | **$\overline{\text{DSR}}$ —** Data Set Ready input for UART. |
| | | I/O | **SCK1 —** Serial clock for SPI1. |
| PIO2_2/$\overline{\text{DCD}}$/MISO1 | 26[3] | I/O | **PIO2_2 —** General purpose digital input/output pin. |
| | | I | **$\overline{\text{DCD}}$ —** Data Carrier Detect input for UART. |
| | | I/O | **MISO1 —** Master In Slave Out for SPI1. |
| PIO2_3/$\overline{\text{RI}}$/MOSI1 | 38[3] | I/O | **PIO2_3 —** General purpose digital input/output pin. |
| | | I | **$\overline{\text{RI}}$ —** Ring Indicator input for UART. |
| | | I/O | **MOSI1 —** Master Out Slave In for SPI1. |
| PIO2_4 | 19[3] | I/O | **PIO2_4 —** General purpose digital input/output pin. (LPC1113/14 only). |
| PIO2_4 | 18[3] | I/O | **PIO2_4 —** General purpose digital input/output pin. (LPC11C12/C14 only). |
| PIO2_5 | 20[3] | I/O | **PIO2_5 —** General purpose digital input/output pin. LPC1113/14 only). |
| PIO2_5 | 21[3] | I/O | **PIO2_5 —** General purpose digital input/output pin. (LPC11C12/C14 only). |
| PIO2_6 | 1[3] | I/O | **PIO2_6 —** General purpose digital input/output pin. |
| PIO2_7 | 11[3] | I/O | **PIO2_7 —** General purpose digital input/output pin. |
| PIO2_8 | 12[3] | I/O | **PIO2_8 —** General purpose digital input/output pin. |
| PIO2_9 | 24[3] | I/O | **PIO2_9 —** General purpose digital input/output pin. |
| PIO2_10 | 25[3] | I/O | **PIO2_10 —** General purpose digital input/output pin. |
| PIO2_11/SCK0 | 31[3] | I/O | **PIO2_11 —** General purpose digital input/output pin. |
| | | I/O | **SCK0 —** Serial clock for SPI0. |
| PIO3_0 to PIO3_5 | | I/O | **Port 3 —** Port 3 is a 12-bit I/O port with individual direction and function controls for each bit. The operation of port 3 pins depends on the function selected through the IOCONFIG register block. Pins PIO3_6 to PIO3_11 are not available. |
| PIO3_0/$\overline{\text{DTR}}$ | 36[3] | I/O | **PIO3_0 —** General purpose digital input/output pin. |
| | | O | **$\overline{\text{DTR}}$ —** Data Terminal Ready output for UART. |
| PIO3_1/$\overline{\text{DSR}}$ | 37[3] | I/O | **PIO3_1 —** General purpose digital input/output pin. |
| | | I | **$\overline{\text{DSR}}$ —** Data Set Ready input for UART. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 160. LPC1113/14 and LPC11C12/C14 pin description table (LQFP48 package)** *...continued*

| Symbol | Pin | Type | Description |
|---|---|---|---|
| PIO3_2/$\overline{\text{DCD}}$ | 43[3] | I/O | **PIO3_2 —** General purpose digital input/output pin. |
| | | I | **$\overline{\text{DCD}}$ —** Data Carrier Detect input for UART. |
| PIO3_3/$\overline{\text{RI}}$ | 48[3] | I/O | **PIO3_3 —** General purpose digital input/output pin. |
| | | I | **$\overline{\text{RI}}$ —** Ring Indicator input for UART. |
| PIO3_4 | 18[3] | I/O | **PIO3_4 —** General purpose digital input/output pin. (LPC1113/14 only). |
| PIO3_5 | 21[3] | I/O | **PIO3_5 —** General purpose digital input/output pin. (LPC1113/14 only). |
| CAN_RXD | 19[6] | I | **CAN_RXD —** C_CAN receive data input. (LPC11C12/14 only). |
| CAN_TXD | 20[6] | O | **CAN_TXD —** C_CAN transmit data output. (LPC11C12/14 only). |
| $V_{DD}$ | 8; 44 | I | 3.3 V supply voltage to the internal regulator, the external rail, and the ADC. Also used as the ADC reference voltage. |
| XTALIN | 6[7] | I | Input to the oscillator circuit and internal clock generator circuits. Input voltage must not exceed 1.8 V. |
| XTALOUT | 7[7] | O | Output from the oscillator amplifier. |
| $V_{SS}$ | 5; 41 | I | Ground. |

[1] 5 V tolerant pad. $\overline{\text{RESET}}$ functionality is not available in Deep power-down mode. Use the WAKEUP pin to reset the chip and wake up from Deep power-down mode.

[2] Serves as Deep-sleep wake-up input pin to the start logic independently of selected pin function (see the *LPC111x/11C1x user manual*).

[3] 5 V tolerant pad providing digital I/O functions with configurable pull-up/pull-down resistors and configurable hysteresis.

[4] $I^2C$-bus pads compliant with the $I^2C$-bus specification for $I^2C$ standard mode and $I^2C$ Fast-mode Plus. The pin requires an external pull-up to provide output functionality. When power is switched off, this pin is floating and does not disturb the I2C lines. Open-drain configuration applies to all functions on this pin.

[5] 5 V tolerant pad providing digital I/O functions with configurable pull-up/pull-down resistors, configurable hysteresis, and analog input. When configured as a ADC input, digital section of the pad is disabled and the pin is not 5 V tolerant.

[6] 5 V tolerant digital I/O pad without pull-up/pull-down resistors.

[7] When the system oscillator is not used, connect XTALIN and XTALOUT as follows: XTALIN can be left floating or can be grounded (grounding is preferred to reduce susceptibility to noise). XTALOUT should be left floating.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 161. LPC1111/12/13/14 pin description table (HVQFN33 package)**

| Symbol | Pin | Type | Description |
|---|---|---|---|
| PIO0_0 to PIO0_11 | | I/O | **Port 0 —** Port 0 is a 12-bit I/O port with individual direction and function controls for each bit. The operation of port 0 pins depends on the function selected through the IOCONFIG register block. |
| $\overline{\text{RESET}}$/PIO0_0 | 2[1][2] | I | **$\overline{\text{RESET}}$ —** External reset input: A LOW on this pin resets the device, causing I/O ports and peripherals to take on their default states, and processor execution to begin at address 0.<br>In deep power-down mode, this pin must be pulled HIGH externally. The $\overline{\text{RESET}}$ pin can be left unconnected or be used as a GPIO pin if an external $\overline{\text{RESET}}$ function is not needed. |
| | | I/O | **PIO0_0 —** General purpose digital input/output pin. |
| PIO0_1/CLKOUT/ CT32B0_MAT2 | 3[3][2] | I/O | **PIO0_1 —** General purpose digital input/output pin. A LOW level on this pin during reset starts the ISP command handler. |
| | | O | **CLKOUT —** Clock out pin. |
| | | O | **CT32B0_MAT2 —** Match output 2 for 32-bit timer 0. |
| PIO0_2/SSEL0/ CT16B0_CAP0 | 8[3][2] | I/O | **PIO0_2 —** General purpose digital input/output pin. |
| | | O | **SSEL0 —** Slave select for SPI0. |
| | | I | **CT16B0_CAP0 —** Capture input 0 for 16-bit timer 0. |
| PIO0_3 | 9[3][2] | I/O | **PIO0_3 —** General purpose digital input/output pin. |
| PIO0_4/SCL | 10[4][2] | I/O | **PIO0_4 —** General purpose digital input/output pin (open-drain). |
| | | I/O | **SCL —** $I^2C$-bus, open-drain clock input/output. High-current sink only if $I^2C$ Fast-mode Plus is selected in the I/O configuration register. |
| PIO0_5/SDA | 11[4][2] | I/O | **PIO0_5 —** General purpose digital input/output pin (open-drain). |
| | | I/O | **SDA —** $I^2C$-bus, open-drain data input/output. High-current sink only if $I^2C$ Fast-mode Plus is selected in the I/O configuration register. |
| PIO0_6/SCK0 | 15[3][2] | I/O | **PIO0_6 —** General purpose digital input/output pin. |
| | | I/O | **SCK0 —** Serial clock for SPI0. |
| PIO0_7/$\overline{\text{CTS}}$ | 16[3][2] | I/O | **PIO0_7 —** General purpose digital input/output pin (high-current output driver). |
| | | I | **$\overline{\text{CTS}}$ —** Clear To Send input for UART. |
| PIO0_8/MISO0/ CT16B0_MAT0 | 17[3][2] | I/O | **PIO0_8 —** General purpose digital input/output pin. |
| | | I/O | **MISO0 —** Master In Slave Out for SPI0. |
| | | O | **CT16B0_MAT0 —** Match output 0 for 16-bit timer 0. |
| PIO0_9/MOSI0/ CT16B0_MAT1 | 18[3][2] | I/O | **PIO0_9 —** General purpose digital input/output pin. |
| | | I/O | **MOSI0 —** Master Out Slave In for SPI0. |
| | | O | **CT16B0_MAT1 —** Match output 1 for 16-bit timer 0. |
| SWCLK/PIO0_10/SCK0/ CT16B0_MAT2 | 19[3][2] | I | **SWCLK —** Serial wire clock. |
| | | I/O | **PIO0_10 —** General purpose digital input/output pin. |
| | | I/O | **SCK0 —** Serial clock for SPI0. |
| | | O | **CT16B0_MAT2 —** Match output 2 for 16-bit timer 0. |
| R/PIO0_11/AD0/ CT32B0_MAT3 | 21[5][2] | I | **R —** Reserved. Configure for an alternate function in the IOCONFIG block. |
| | | I/O | **PIO0_11 —** General purpose digital input/output pin. |
| | | I | **AD0 —** A/D converter, input 0. |
| | | O | **CT32B0_MAT3 —** Match output 3 for 32-bit timer 0. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 161. LPC1111/12/13/14 pin description table (HVQFN33 package)** *…continued*

| Symbol | Pin | Type | Description |
|---|---|---|---|
| PIO1_0 to PIO1_11 | | I/O | **Port 1 —** Port 1 is a 12-bit I/O port with individual direction and function controls for each bit. The operation of port 1 pins depends on the function selected through the IOCONFIG register block. |
| R/PIO1_0/AD1/ CT32B1_CAP0 | 22[5][2] | I | **R —** Reserved. Configure for an alternate function in the IOCONFIG block. |
| | | I/O | **PIO1_0 —** General purpose digital input/output pin. |
| | | I | **AD1 —** A/D converter, input 1. |
| | | I | **CT32B1_CAP0 —** Capture input 0 for 32-bit timer 1. |
| R/PIO1_1/AD2/ CT32B1_MAT0 | 23[5] | O | **R —** Reserved. Configure for an alternate function in the IOCONFIG block. |
| | | I/O | **PIO1_1 —** General purpose digital input/output pin. |
| | | I | **AD2 —** A/D converter, input 2. |
| | | O | **CT32B1_MAT0 —** Match output 0 for 32-bit timer 1. |
| R/PIO1_2/AD3/ CT32B1_MAT1 | 24[5] | I | **R —** Reserved. Configure for an alternate function in the IOCONFIG block. |
| | | I/O | **PIO1_2 —** General purpose digital input/output pin. |
| | | I | **AD3 —** A/D converter, input 3. |
| | | O | **CT32B1_MAT1 —** Match output 1 for 32-bit timer 1. |
| SWDIO/PIO1_3/AD4/ CT32B1_MAT2 | 25[5] | I/O | **SWDIO —** Serial wire debug input/output. |
| | | I/O | **PIO1_3 —** General purpose digital input/output pin. |
| | | I | **AD4 —** A/D converter, input 4. |
| | | O | **CT32B1_MAT2 —** Match output 2 for 32-bit timer 1. |
| PIO1_4/AD5/ CT32B1_MAT3/WAKEUP | 26[5] | I/O | **PIO1_4 —** General purpose digital input/output pin. In Deep power-down mode, this pin serves as the Deep power-down mode wake-up pin with 20 ns glitch filter. Pull this pin HIGH externally before entering Deep power-down mode. Pull this pin LOW to exit Deep power-down mode. A LOW-going pulse as short as 50 ns wakes up the part. |
| | | I | **AD5 —** A/D converter, input 5. |
| | | O | **CT32B1_MAT3 —** Match output 3 for 32-bit timer 1. |
| PIO1_5/$\overline{\text{RTS}}$/ CT32B0_CAP0 | 30[3] | I/O | **PIO1_5 —** General purpose digital input/output pin. |
| | | O | **$\overline{\text{RTS}}$ —** Request To Send output for UART. |
| | | I | **CT32B0_CAP0 —** Capture input 0 for 32-bit timer 0. |
| PIO1_6/RXD/ CT32B0_MAT0 | 31[3] | I/O | **PIO1_6 —** General purpose digital input/output pin. |
| | | I | **RXD —** Receiver input for UART. |
| | | O | **CT32B0_MAT0 —** Match output 0 for 32-bit timer 0. |
| PIO1_7/TXD/ CT32B0_MAT1 | 32[3] | I/O | **PIO1_7 —** General purpose digital input/output pin. |
| | | O | **TXD —** Transmitter output for UART. |
| | | O | **CT32B0_MAT1 —** Match output 1 for 32-bit timer 0. |
| PIO1_8/CT16B1_CAP0 | 7[3] | I/O | **PIO1_8 —** General purpose digital input/output pin. |
| | | I | **CT16B1_CAP0 —** Capture input 0 for 16-bit timer 1. |
| PIO1_9/CT16B1_MAT0 | 12[3] | I/O | **PIO1_9 —** General purpose digital input/output pin. |
| | | O | **CT16B1_MAT0 —** Match output 0 for 16-bit timer 1. |
| PIO1_10/AD6/ CT16B1_MAT1 | 20[5] | I/O | **PIO1_10 —** General purpose digital input/output pin. |
| | | I | **AD6 —** A/D converter, input 6. |
| | | O | **CT16B1_MAT1 —** Match output 1 for 16-bit timer 1. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 161. LPC1111/12/13/14 pin description table (HVQFN33 package)** *…continued*

| Symbol | Pin | Type | Description |
|---|---|---|---|
| PIO1_11/AD7 | 27[5] | I/O | **PIO1_11 —** General purpose digital input/output pin. |
| | | I | **AD7 —** A/D converter, input 7. |
| PIO2_0 | | I/O | **Port 2 —** Port 2 is a 12-bit I/O port with individual direction and function controls for each bit. The operation of port 2 pins depends on the function selected through the IOCONFIG register block. Pins PIO2_1 to PIO2_11 are not available. |
| PIO2_0/$\overline{\text{DTR}}$ | 1[3] | I/O | **PIO2_0 —** General purpose digital input/output pin. |
| | | O | **$\overline{\text{DTR}}$ —** Data Terminal Ready output for UART. |
| PIO3_0 to PIO3_5 | | I/O | **Port 3 —** Port 3 is a 12-bit I/O port with individual direction and function controls for each bit. The operation of port 3 pins depends on the function selected through the IOCONFIG register block. Pins PIO3_0, PIO3_1, PIO3_3 and PIO3_6 to PIO3_11 are not available. |
| PIO3_2 | 28[3] | I/O | **PIO3_2 —** General purpose digital input/output pin. |
| PIO3_4 | 13[3] | I/O | **PIO3_4 —** General purpose digital input/output pin. |
| PIO3_5 | 14[3] | I/O | **PIO3_5 —** General purpose digital input/output pin. |
| $V_{DD}$ | 6; 29 | I | 3.3 V supply voltage to the internal regulator, the external rail, and the ADC. Also used as the ADC reference voltage. |
| XTALIN | 4[6] | I | Input to the oscillator circuit and internal clock generator circuits. Input voltage must not exceed 1.8 V. |
| XTALOUT | 5[6] | O | Output from the oscillator amplifier. |
| $V_{SS}$ | 33 | - | Thermal pad. Connect to ground. |

[1] 5 V tolerant pad. $\overline{\text{RESET}}$ functionality is not available in Deep power-down mode. Use the WAKEUP pin to reset the chip and wake up from Deep power-down mode.

[2] Serves as Deep-sleep wake-up input pin to the start logic independently of selected pin function (see the *LPC111x/11C1x user manual*).

[3] 5 V tolerant pad providing digital I/O functions with configurable pull-up/pull-down resistors and configurable hysteresis.

[4] $I^2C$-bus pads compliant with the $I^2C$-bus specification for $I^2C$ standard mode and $I^2C$ Fast-mode Plus. The pin requires an external pull-up to provide output functionality. When power is switched off, this pin is floating and does not disturb the I2C lines. Open-drain configuration applies to all functions on this pin.

[5] 5 V tolerant pad providing digital I/O functions with configurable pull-up/pull-down resistors, configurable hysteresis, and analog input. When configured as a ADC input, digital section of the pad is disabled, and the pin is not 5 V tolerant.

[6] When the system oscillator is not used, connect XTALIN and XTALOUT as follows: XTALIN can be left floating or can be grounded (grounding is preferred to reduce susceptibility to noise). XTALOUT should be left floating.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 162. LPC1112FHN24 Pin description table (HVQFN24 package)**

| Symbol | HVQFN pin | Start logic input | Type | Reset state [1] | Description |
|---|---|---|---|---|---|
| $\overline{\text{RESET}}$/PIO0_0 | 1[1] | yes | I | I; PU | **$\overline{\text{RESET}}$ —** External reset input with 20 ns glitch filter. A LOW-going pulse as short as 50 ns on this pin resets the device, causing I/O ports and peripherals to take on their default states, and processor execution to begin at address 0.<br>In deep power-down mode, this pin must be pulled HIGH externally. The $\overline{\text{RESET}}$ pin can be left unconnected or be used as a GPIO pin if an external $\overline{\text{RESET}}$ function is not needed. |
| | | | I/O | - | **PIO0_0 —** General purpose digital input/output pin with 10 ns glitch filter. |
| PIO0_1/CLKOUT/ CT32B0_MAT2 | 2[3] | yes | I/O | I; PU | **PIO0_1 —** General purpose digital input/output pin. A LOW level on this pin during reset starts the ISP command handler. |
| | | | O | - | **CLKOUT —** Clockout pin. |
| | | | O | - | **CT32B0_MAT2 —** Match output 2 for 32-bit timer 0. |
| PIO0_2/SSEL0/ CT16B0_CAP0 | 7[3] | yes | I/O | I; PU | **PIO0_2 —** General purpose digital input/output pin. |
| | | | I/O | - | **SSEL0 —** Slave Select for SPI0. |
| | | | I | - | **CT16B0_CAP0 —** Capture input 0 for 16-bit timer 0. |
| PIO0_4/SCL | 8[4] | yes | I/O | I; IA | **PIO0_4 —** General purpose digital input/output pin (open-drain). |
| | | | I/O | - | **SCL —** $I^2C$-bus, open-drain clock input/output. High-current sink only if $I^2C$ Fast-mode Plus is selected in the I/O configuration register. |
| PIO0_5/SDA | 9[4] | yes | I/O | I; IA | **PIO0_5 —** General purpose digital input/output pin (open-drain). |
| | | | I/O | - | **SDA —** $I^2C$-bus, open-drain data input/output. High-current sink only if $I^2C$ Fast-mode Plus is selected in the I/O configuration register. |
| PIO0_6/SCK0 | 10[3] | yes | I/O | I; PU | **PIO0_6 —** General purpose digital input/output pin. |
| | | | I/O | - | **SCK0 —** Serial clock for SPI0. |
| PIO0_7/$\overline{\text{CTS}}$ | 11[3] | yes | I/O | I; PU | **PIO0_7 —** General purpose digital input/output pin (high-current output driver). |
| | | | I | - | **$\overline{\text{CTS}}$ —** Clear To Send input for UART. |
| PIO0_8/MISO0/ CT16B0_MAT0 | 12[3] | yes | I/O | I; PU | **PIO0_8 —** General purpose digital input/output pin. |
| | | | I/O | - | **MISO0 —** Master In Slave Out for SPI0. |
| | | | O | - | **CT16B0_MAT0 —** Match output 0 for 16-bit timer 0. |
| PIO0_9/MOSI0/ CT16B0_MAT1 | 13[3] | yes | I/O | I; PU | **PIO0_9 —** General purpose digital input/output pin. |
| | | | I/O | - | **MOSI0 —** Master Out Slave In for SPI0. |
| | | | O | - | **CT16B0_MAT1 —** Match output 1 for 16-bit timer 0. |
| SWCLK/PIO0_10/ SCK0/ CT16B0_MAT2 | 14[3] | yes | I | I; PU | **SWCLK —** Serial wire clock. |
| | | | I/O | - | **PIO0_10 —** General purpose digital input/output pin. |
| | | | I/O | - | **SCK0 —** Serial clock for SPI0. |
| | | | O | - | **CT16B0_MAT2 —** Match output 2 for 16-bit timer 0. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 162. LPC1112FHN24 Pin description table (HVQFN24 package)**

| Symbol | HVQFN pin | Start logic input | Type | Reset state [1] | Description |
|---|---|---|---|---|---|
| R/PIO0_11/ AD0/CT32B0_MAT3 | 15[5] | yes | I | I; PU | **R —** Reserved. Configure for an alternate function in the IOCONFIG block. |
| | | | I/O | - | **PIO0_11 —** General purpose digital input/output pin. |
| | | | I | - | **AD0 —** A/D converter, input 0. |
| | | | O | - | **CT32B0_MAT3 —** Match output 3 for 32-bit timer 0. |
| R/PIO1_0/ AD1/CT32B1_CAP0 | 16[5] | yes | I | I; PU | **R —** Reserved. Configure for an alternate function in the IOCONFIG block. |
| | | | I/O | - | **PIO1_0 —** General purpose digital input/output pin. |
| | | | I | - | **AD1 —** A/D converter, input 1. |
| | | | I | - | **CT32B1_CAP0 —** Capture input 0 for 32-bit timer 1. |
| R/PIO1_1/ AD2/CT32B1_MAT0 | 17[5] | no | O | I; PU | **R —** Reserved. Configure for an alternate function in the IOCONFIG block. |
| | | | I/O | - | **PIO1_1 —** General purpose digital input/output pin. |
| | | | I | - | **AD2 —** A/D converter, input 2. |
| | | | O | - | **CT32B1_MAT0 —** Match output 0 for 32-bit timer 1. |
| R/PIO1_2/ AD3/CT32B1_MAT1 | 18[5] | no | I | I; PU | **R —** Reserved. Configure for an alternate function in the IOCONFIG block. |
| | | | I/O | - | **PIO1_2 —** General purpose digital input/output pin. |
| | | | I | - | **AD3 —** A/D converter, input 3. |
| | | | O | - | **CT32B1_MAT1 —** Match output 1 for 32-bit timer 1. |
| SWDIO/PIO1_3/ AD4/CT32B1_MAT2 | 19[5] | no | I/O | I; PU | **SWDIO —** Serial wire debug input/output. |
| | | | I/O | - | **PIO1_3 —** General purpose digital input/output pin. |
| | | | I | - | **AD4 —** A/D converter, input 4. |
| | | | O | - | **CT32B1_MAT2 —** Match output 2 for 32-bit timer 1. |
| PIO1_4/AD5/ CT32B1_MAT3/ WAKEUP | 20[5] | no | I/O | I; PU | **PIO1_4 —** General purpose digital input/output pin with 10 ns glitch filter. In Deep power-down mode, this pin serves as the Deep power-down mode wake-up pin with 20 ns glitch filter. Pull this pin HIGH externally before entering Deep power-down mode. Pull this pin LOW to exit Deep power-down mode. A LOW-going pulse as short as 50 ns wakes up the part. |
| | | | I | - | **AD5 —** A/D converter, input 5. |
| | | | O | - | **CT32B1_MAT3 —** Match output 3 for 32-bit timer 1. |
| PIO1_6/RXD/ CT32B0_MAT0 | 23[3] | no | I/O | I; PU | **PIO1_6 —** General purpose digital input/output pin. |
| | | | I | - | **RXD —** Receiver input for UART. |
| | | | O | - | **CT32B0_MAT0 —** Match output 0 for 32-bit timer 0. |
| PIO1_7/TXD/ CT32B0_MAT1 | 24[3] | no | I/O | I; PU | **PIO1_7 —** General purpose digital input/output pin. |
| | | | O | - | **TXD —** Transmitter output for UART. |
| | | | O | - | **CT32B0_MAT1 —** Match output 1 for 32-bit timer 0. |
| PIO1_8/ CT16B1_CAP0 | 6[3] | no | I/O | I; PU | **PIO1_8 —** General purpose digital input/output pin. |
| | | | I | - | **CT16B1_CAP0 —** Capture input 0 for 16-bit timer 1. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 162. LPC1112FHN24 Pin description table (HVQFN24 package)**

| Symbol | HVQFN pin | Start logic input | Type | Reset state [1] | Description |
|---|---|---|---|---|---|
| XTALIN | 4[7] | - | I | - | Input to the oscillator circuit and internal clock generator circuits. Input voltage must not exceed 1.8 V. |
| $V_{DD}$ | 5; 22 | - | I | - | 3.3 V supply voltage to the internal regulator, the external rail, and the ADC. Also used as the ADC reference voltage. |
| $V_{SS}$ | 3; 21 | - | I | - | Ground. |

[1] Pin state at reset for default function: I = Input; O = Output; PU = internal pull-up enabled (pins pulled up to full $V_{DD}$ level); IA = inactive, no pull-up/down enabled.

[2] $\overline{\text{RESET}}$ functionality is not available in Deep power-down mode. Use the WAKEUP pin to reset the chip and wake up from Deep power-down mode. An external pull-up resistor is required on this pin for the Deep power-down mode.

[3] Pad providing digital I/O functions with configurable pull-up/pull-down resistors and configurable hysteresis.

[4] $I^2C$-bus pads compliant with the $I^2C$-bus specification for $I^2C$ standard mode and $I^2C$ Fast-mode Plus. The pin requires an external pull-up to provide output functionality. When power is switched off, this pin is floating and does not disturb the I2C lines. Open-drain configuration applies to all functions on this pin.

[5] Pad providing digital I/O functions with configurable pull-up/pull-down resistors, configurable hysteresis, and analog input. When configured as a ADC input, digital section of the pad is disabled.

[6] When the system oscillator is not used, connect XTALIN and XTALOUT as follows: XTALIN can be left floating or can be grounded (grounding is preferred to reduce susceptibility to noise). XTALOUT should be left floating.

**Table 163. LPC11C24/C22 pin description table (LQFP48 package)**

| Symbol | Pin | Type | Description |
|---|---|---|---|
| PIO0_0 to PIO0_11 | | | **Port 0 —** Port 0 is a 12-bit I/O port with individual direction and function controls for each bit. The operation of port 0 pins depends on the function selected through the IOCONFIG register block. |
| $\overline{\text{RESET}}$/PIO0_0 | 3[1] | I | **$\overline{\text{RESET}}$ —** External reset input with 20 ns glitch filter. A LOW-going pulse as short as 50 ns on this pin resets the device, causing I/O ports and peripherals to take on their default states, and processor execution to begin at address 0.<br>In deep power-down mode, this pin must be pulled HIGH externally. The $\overline{\text{RESET}}$ pin can be left unconnected or be used as a GPIO pin if an external $\overline{\text{RESET}}$ function is not needed. |
| | | I/O | **PIO0_0 —** General purpose digital input/output pin with 10 ns glitch filter. |
| PIO0_1/CLKOUT/ CT32B0_MAT2 | 4[3] | I/O | **PIO0_1 —** General purpose digital input/output pin. A LOW level on this pin during reset starts the flash ISP command handler via UART (if PIO0_3 is HIGH) or via C_CAN (if PIO0_3 is LOW). |
| | | O | **CLKOUT —** Clockout pin. |
| | | O | **CT32B0_MAT2 —** Match output 2 for 32-bit timer 0. |
| PIO0_2/SSEL0/ CT16B0_CAP0 | 10[3] | I/O | **PIO0_2 —** General purpose digital input/output pin. |
| | | I/O | **SSEL0 —** Slave Select for SPI0. |
| | | I | **CT16B0_CAP0 —** Capture input 0 for 16-bit timer 0. |
| PIO0_3 | 14[3] | I/O | **PIO0_3 —** General purpose digital input/output pin. This pin is monitored during reset: Together with a LOW level on pin PIO0_1, a LOW level starts the flash ISP command handler via C_CAN and a HIGH level starts the flash ISP command handler via UART. |
| PIO0_4/SCL | 15[4] | I/O | **PIO0_4 —** General purpose digital input/output pin (open-drain). |
| | | I/O | **SCL —** $I^2C$-bus, open-drain clock input/output. High-current sink only if $I^2C$ Fast-mode Plus is selected in the I/O configuration register. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 163. LPC11C24/C22 pin description table (LQFP48 package)**

| Symbol | Pin | Type | Description |
|---|---|---|---|
| PIO0_5/SDA | 16[4] | I/O | **PIO0_5 —** General purpose digital input/output pin (open-drain). |
| | | I/O | **SDA —** $I^2C$-bus, open-drain data input/output. High-current sink only if $I^2C$ Fast-mode Plus is selected in the I/O configuration register. |
| PIO0_6/SCK0 | 23[3] | I/O | **PIO0_6 —** General purpose digital input/output pin. |
| | | I/O | **SCK0 —** Serial clock for SPI0. |
| PIO0_7/$\overline{\text{CTS}}$ | 24[3] | I/O | **PIO0_7 —** General purpose digital input/output pin (high-current output driver). |
| | | I | **$\overline{\text{CTS}}$ —** Clear To Send input for UART. |
| PIO0_8/MISO0/ CT16B0_MAT0 | 27[3] | I/O | **PIO0_8 —** General purpose digital input/output pin. |
| | | I/O | **MISO0 —** Master In Slave Out for SPI0. |
| | | O | **CT16B0_MAT0 —** Match output 0 for 16-bit timer 0. |
| PIO0_9/MOSI0/ CT16B0_MAT1 | 28[3] | I/O | **PIO0_9 —** General purpose digital input/output pin. |
| | | I/O | **MOSI0 —** Master Out Slave In for SPI0. |
| | | O | **CT16B0_MAT1 —** Match output 1 for 16-bit timer 0. |
| SWCLK/PIO0_10/ SCK0/ CT16B0_MAT2 | 29[3] | I | **SWCLK —** Serial wire clock. |
| | | I/O | **PIO0_10 —** General purpose digital input/output pin. |
| | | I/O | **SCK0 —** Serial clock for SPI0. |
| | | O | **CT16B0_MAT2 —** Match output 2 for 16-bit timer 0. |
| R/PIO0_11/ AD0/ CT32B0_MAT3 | 32[5] | - | **R —** Reserved. Configure for an alternate function in the IOCONFIG block. |
| | | I/O | **PIO0_11 —** General purpose digital input/output pin. |
| | | I | **AD0 —** A/D converter, input 0. |
| | | O | **CT32B0_MAT3 —** Match output 3 for 32-bit timer 0. |
| PIO1_0 to PIO1_11 | | | **Port 1 —** Port 1 is a 12-bit I/O port with individual direction and function controls for each bit. The operation of port 1 pins depends on the function selected through the IOCONFIG register block. |
| R/PIO1_0/AD1/ CT32B1_CAP0 | 33[5] | - | **R —** Reserved. Configure for an alternate function in the IOCONFIG block. |
| | | I/O | **PIO1_0 —** General purpose digital input/output pin. |
| | | I | **AD1 —** A/D converter, input 1. |
| | | I | **CT32B1_CAP0 —** Capture input 0 for 32-bit timer 1. |
| R/PIO1_1/AD2/ CT32B1_MAT0 | 34[5] | - | **R —** Reserved. Configure for an alternate function in the IOCONFIG block. |
| | | I/O | **PIO1_1 —** General purpose digital input/output pin. |
| | | I | **AD2 —** A/D converter, input 2. |
| | | O | **CT32B1_MAT0 —** Match output 0 for 32-bit timer 1. |
| R/PIO1_2/AD3/ CT32B1_MAT1 | 35[5] | - | **R —** Reserved. Configure for an alternate function in the IOCONFIG block. |
| | | I/O | **PIO1_2 —** General purpose digital input/output pin. |
| | | I | **AD3 —** A/D converter, input 3. |
| | | O | **CT32B1_MAT1 —** Match output 1 for 32-bit timer 1. |
| SWDIO/PIO1_3/ AD4/ CT32B1_MAT2 | 39[5] | I/O | **SWDIO —** Serial wire debug input/output. |
| | | I/O | **PIO1_3 —** General purpose digital input/output pin. |
| | | I | **AD4 —** A/D converter, input 4. |
| | | O | **CT32B1_MAT2 —** Match output 2 for 32-bit timer 1. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 163. LPC11C24/C22 pin description table (LQFP48 package)**

| Symbol | Pin | Type | Description |
|---|---|---|---|
| PIO1_4/AD5/ CT32B1_MAT3/ WAKEUP | 40[5] | I/O | **PIO1_4 —** General purpose digital input/output pin with 10 ns glitch filter. In Deep power-down mode, this pin serves as the Deep power-down mode wake-up pin with 20 ns glitch filter. Pull this pin HIGH externally before entering Deep power-down mode. Pull this pin LOW to exit Deep power-down mode. A LOW-going pulse as short as 50 ns wakes up the part. |
| | | I | **AD5 —** A/D converter, input 5. |
| | | O | **CT32B1_MAT3 —** Match output 3 for 32-bit timer 1. |
| PIO1_5/$\overline{\text{RTS}}$/ CT32B0_CAP0 | 45[3] | I/O | **PIO1_5 —** General purpose digital input/output pin. |
| | | O | **$\overline{\text{RTS}}$ —** Request To Send output for UART. |
| | | I | **CT32B0_CAP0 —** Capture input 0 for 32-bit timer 0. |
| PIO1_6/RXD/ CT32B0_MAT0 | 46[3] | I/O | **PIO1_6 —** General purpose digital input/output pin. |
| | | I | **RXD —** Receiver input for UART. |
| | | O | **CT32B0_MAT0 —** Match output 0 for 32-bit timer 0. |
| PIO1_7/TXD/ CT32B0_MAT1 | 47[3] | I/O | **PIO1_7 —** General purpose digital input/output pin. |
| | | O | **TXD —** Transmitter output for UART. |
| | | O | **CT32B0_MAT1 —** Match output 1 for 32-bit timer 0. |
| PIO1_8/ CT16B1_CAP0 | 9[3] | I/O | **PIO1_8 —** General purpose digital input/output pin. |
| | | I | **CT16B1_CAP0 —** Capture input 0 for 16-bit timer 1. |
| PIO1_10/AD6/ CT16B1_MAT1 | 30[5] | I/O | **PIO1_10 —** General purpose digital input/output pin. |
| | | I | **AD6 —** A/D converter, input 6. |
| | | O | **CT16B1_MAT1 —** Match output 1 for 16-bit timer 1. |
| PIO1_11/AD7 | 42[5] | I/O | **PIO1_11 —** General purpose digital input/output pin. |
| | | I | **AD7 —** A/D converter, input 7. |
| PIO2_0 to PIO2_11 | | | **Port 2 —** Port 2 is a 12-bit I/O port with individual direction and function controls for each bit. The operation of port 2 pins depends on the function selected through the IOCONFIG register block. |
| PIO2_0/$\overline{\text{DTR}}$/ SSEL1 | 2[3] | I/O | **PIO2_0 —** General purpose digital input/output pin. |
| | | I/O | **$\overline{\text{DTR}}$ —** Data Terminal Ready output for UART. |
| | | I/O | **SSEL1 —** Slave Select for SPI1. |
| PIO2_1/$\overline{\text{DSR}}$/SCK1 | 13[3] | I/O | **PIO2_1 —** General purpose digital input/output pin. |
| | | I | **$\overline{\text{DSR}}$ —** Data Set Ready input for UART. |
| | | I/O | **SCK1 —** Serial clock for SPI1. |
| PIO2_2/$\overline{\text{DCD}}$/ MISO1 | 26[3] | I/O | **PIO2_2 —** General purpose digital input/output pin. |
| | | I | **$\overline{\text{DCD}}$ —** Data Carrier Detect input for UART. |
| | | I/O | **MISO1 —** Master In Slave Out for SPI1. |
| PIO2_3/$\overline{\text{RI}}$/MOSI1 | 38[3] | I/O | **PIO2_3 —** General purpose digital input/output pin. |
| | | I | **$\overline{\text{RI}}$ —** Ring Indicator input for UART. |
| | | I/O | **MOSI1 —** Master Out Slave In for SPI1. |
| PIO2_6 | 1[3] | I/O | **PIO2_6 —** General purpose digital input/output pin. |
| PIO2_7 | 11[3] | I/O | **PIO2_7 —** General purpose digital input/output pin. |
| PIO2_8 | 12[3] | I/O | **PIO2_8 —** General purpose digital input/output pin. |
| PIO2_10 | 25[3] | I/O | **PIO2_10 —** General purpose digital input/output pin. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 163. LPC11C24/C22 pin description table (LQFP48 package)**

| Symbol | Pin | Type | Description |
|---|---|---|---|
| PIO2_11/SCK0 | 31[3] | I/O | **PIO2_11 —** General purpose digital input/output pin. |
| | | I/O | **SCK0 —** Serial clock for SPI0. |
| PIO3_0 to PIO3_3 | | | **Port 3 —** Port 3 is a 12-bit I/O port with individual direction and function controls for each bit. The operation of port 3 pins depends on the function selected through the IOCONFIG register block. Pins PIO3_4 to PIO3_11 are not available. |
| PIO3_0/$\overline{\text{DTR}}$ | 36[3] | I/O | **PIO3_0 —** General purpose digital input/output pin. |
| | | O | **$\overline{\text{DTR}}$ —** Data Terminal Ready output for UART. |
| PIO3_1/$\overline{\text{DSR}}$ | 37[3] | I/O | **PIO3_1 —** General purpose digital input/output pin. |
| | | I | **$\overline{\text{DSR}}$ —** Data Set Ready input for UART. |
| PIO3_2/$\overline{\text{DCD}}$ | 43[3] | I/O | **PIO3_2 —** General purpose digital input/output pin. |
| | | I | **$\overline{\text{DCD}}$ —** Data Carrier Detect input for UART. |
| PIO3_3/$\overline{\text{RI}}$ | 48[3] | I/O | **PIO3_3 —** General purpose digital input/output pin. |
| | | I | **$\overline{\text{RI}}$ —** Ring Indicator input for UART. |
| CANL | 18 | I/O | LOW-level CAN bus line. |
| CANH | 19 | I/O | HIGH-level CAN bus line. |
| STB | 22 | I | Silent mode control input for CAN transceiver (LOW = Normal mode, HIGH = silent mode). |
| VDD_CAN | 17 | - | Supply voltage for I/O level of CAN transceiver. |
| $V_{CC}$ | 20 | - | Supply voltage for CAN transceiver. |
| GND | 21 | - | Ground for CAN transceiver. |
| $V_{DD}$ | 8;44 | I | Supply voltage to the internal regulator, the external rail, and the ADC. Also used as the ADC reference voltage. |
| XTALIN | 6[7] | I | Input to the oscillator circuit and internal clock generator circuits. Input voltage must not exceed 1.8 V. |
| XTALOUT | 7[7] | O | Output from the oscillator amplifier. |
| $V_{SS}$ | 5; 41 | I | Ground. |

[1] 5 V tolerant pad. $\overline{\text{RESET}}$ functionality is not available in Deep power-down mode. Use the WAKEUP pin to reset the chip and wake up from Deep power-down mode. An external pull-up resistor is required on this pin for the Deep power-down mode.

[2] 5 V tolerant pad providing digital I/O functions with configurable pull-up/pull-down resistors and configurable hysteresis.

[3] $I^2C$-bus pads compliant with the $I^2C$-bus specification for $I^2C$ standard mode and $I^2C$ Fast-mode Plus. The pin requires an external pull-up to provide output functionality. When power is switched off, this pin is floating and does not disturb the I2C lines. Open-drain configuration applies to all functions on this pin.

[4] 5 V tolerant pad providing digital I/O functions with configurable pull-up/pull-down resistors, configurable hysteresis, and analog input. When configured as a ADC input, digital section of the pad is disabled and the pin is not 5 V tolerant.

[5] 5 V tolerant digital I/O pad without pull-up/pull-down resistors.

[6] When the system oscillator is not used, connect XTALIN and XTALOUT as follows: XTALIN can be left floating or can be grounded (grounding is preferred to reduce susceptibility to noise). XTALOUT should be left floating.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 164. LPC11D14 pin description table (LQFP100 package)**

| Symbol | Pin | Start logic input | Type | Reset state [1] | Description |
|---|---|---|---|---|---|
| **Microcontroller pins** | | | | | |
| PIO0_0 to PIO0_11 | | | I/O | | **Port 0 —** Port 0 is a 12-bit I/O port with individual direction and function controls for each bit. The operation of port 0 pins depends on the function selected through the IOCONFIG register block. |
| $\overline{\text{RESET}}$/PIO0_0 | 6[1] | yes | I | I; PU | **$\overline{\text{RESET}}$ —** External reset input with 20 ns glitch filter. A LOW-going pulse as short as 50 ns on this pin resets the device, causing I/O ports and peripherals to take on their default states, and processor execution to begin at address 0.<br>In deep power-down mode, this pin must be pulled HIGH externally. The $\overline{\text{RESET}}$ pin can be left unconnected or be used as a GPIO pin if an external $\overline{\text{RESET}}$ function is not needed. |
| | | | I/O | - | **PIO0_0 —** General purpose digital input/output pin with 10 ns glitch filter. |
| PIO0_1/CLKOUT/ CT32B0_MAT2 | 7[3] | yes | I/O | I; PU | **PIO0_1 —** General purpose digital input/output pin. A LOW level on this pin during reset starts the ISP command handler. |
| | | | O | - | **CLKOUT —** Clockout pin. |
| | | | O | - | **CT32B0_MAT2 —** Match output 2 for 32-bit timer 0. |
| PIO0_2/SSEL0/ CT16B0_CAP0 | 13[3] | yes | I/O | I; PU | **PIO0_2 —** General purpose digital input/output pin. |
| | | | I/O | - | **SSEL0 —** Slave Select for SPI0. |
| | | | I | - | **CT16B0_CAP0 —** Capture input 0 for 16-bit timer 0. |
| PIO0_3 | 17[3] | yes | I/O | I; PU | **PIO0_3 —** General purpose digital input/output pin. |
| PIO0_4/SCL | 18[4] | yes | I/O | I; IA | **PIO0_4 —** General purpose digital input/output pin (open-drain). |
| | | | I/O | - | **SCL —** $I^2C$-bus, open-drain clock input/output. High-current sink only if $I^2C$ Fast-mode Plus is selected in the I/O configuration register. |
| PIO0_5/SDA | 19[4] | yes | I/O | I; IA | **PIO0_5 —** General purpose digital input/output pin (open-drain). |
| | | | I/O | - | **SDA —** $I^2C$-bus, open-drain data input/output. High-current sink only if $I^2C$ Fast-mode Plus is selected in the I/O configuration register. |
| PIO0_6/SCK0 | 25[3] | yes | I/O | I; PU | **PIO0_6 —** General purpose digital input/output pin. |
| | | | I/O | - | **SCK0 —** Serial clock for SPI0. |
| PIO0_7/$\overline{\text{CTS}}$ | 26[3] | yes | I/O | I; PU | **PIO0_7 —** General purpose digital input/output pin (high-current output driver). |
| | | | I | - | **$\overline{\text{CTS}}$ —** Clear To Send input for UART. |
| PIO0_8/MISO0/ CT16B0_MAT0 | 81[3] | yes | I/O | I; PU | **PIO0_8 —** General purpose digital input/output pin. |
| | | | I/O | - | **MISO0 —** Master In Slave Out for SPI0. |
| | | | O | - | **CT16B0_MAT0 —** Match output 0 for 16-bit timer 0. |
| PIO0_9/MOSI0/ CT16B0_MAT1 | 82[3] | yes | I/O | I; PU | **PIO0_9 —** General purpose digital input/output pin. |
| | | | I/O | - | **MOSI0 —** Master Out Slave In for SPI0. |
| | | | O | - | **CT16B0_MAT1 —** Match output 1 for 16-bit timer 0. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 164. LPC11D14 pin description table (LQFP100 package)** *...continued*

| Symbol | Pin | Start logic input | Type | Reset state [1] | Description |
|---|---|---|---|---|---|
| SWCLK/PIO0_10/ SCK0/ CT16B0_MAT2 | 83[3] | yes | I | I; PU | **SWCLK —** Serial wire clock. |
| | | | I/O | - | **PIO0_10 —** General purpose digital input/output pin. |
| | | | I/O | - | **SCK0 —** Serial clock for SPI0. |
| | | | O | - | **CT16B0_MAT2 —** Match output 2 for 16-bit timer 0. |
| R/PIO0_11/ AD0/CT32B0_MAT3 | 86[5] | yes | I | I; PU | **R —** Reserved. Configure for an alternate function in the IOCONFIG block. |
| | | | I/O | - | **PIO0_11 —** General purpose digital input/output pin. |
| | | | I | - | **AD0 —** A/D converter, input 0. |
| | | | O | - | **CT32B0_MAT3 —** Match output 3 for 32-bit timer 0. |
| PIO1_0 to PIO1_11 | | | I/O | | **Port 1 —** Port 1 is a 12-bit I/O port with individual direction and function controls for each bit. The operation of port 1 pins depends on the function selected through the IOCONFIG register block. |
| R/PIO1_0/ AD1/CT32B1_CAP0 | 87[5] | yes | I | I; PU | **R —** Reserved. Configure for an alternate function in the IOCONFIG block. |
| | | | I/O | - | **PIO1_0 —** General purpose digital input/output pin. |
| | | | I | - | **AD1 —** A/D converter, input 1. |
| | | | I | - | **CT32B1_CAP0 —** Capture input 0 for 32-bit timer 1. |
| R/PIO1_1/ AD2/CT32B1_MAT0 | 88[5] | no | O | I; PU | **R —** Reserved. Configure for an alternate function in the IOCONFIG block. |
| | | | I/O | - | **PIO1_1 —** General purpose digital input/output pin. |
| | | | I | - | **AD2 —** A/D converter, input 2. |
| | | | O | - | **CT32B1_MAT0 —** Match output 0 for 32-bit timer 1. |
| R/PIO1_2/ AD3/CT32B1_MAT1 | 89[5] | no | I | I; PU | **R —** Reserved. Configure for an alternate function in the IOCONFIG block. |
| | | | I/O | - | **PIO1_2 —** General purpose digital input/output pin. |
| | | | I | - | **AD3 —** A/D converter, input 3. |
| | | | O | - | **CT32B1_MAT1 —** Match output 1 for 32-bit timer 1. |
| SWDIO/PIO1_3/ AD4/CT32B1_MAT2 | 93[5] | no | I/O | I; PU | **SWDIO —** Serial wire debug input/output. |
| | | | I/O | - | **PIO1_3 —** General purpose digital input/output pin. |
| | | | I | - | **AD4 —** A/D converter, input 4. |
| | | | O | - | **CT32B1_MAT2 —** Match output 2 for 32-bit timer 1. |
| PIO1_4/AD5/ CT32B1_MAT3/ WAKEUP | 94[5] | no | I/O | I; PU | **PIO1_4 —** General purpose digital input/output pin with 10 ns glitch filter. In Deep power-down mode, this pin serves as the Deep power-down mode wake-up pin with 20 ns glitch filter. Pull this pin HIGH externally before entering Deep power-down mode. Pull this pin LOW to exit Deep power-down mode. A LOW-going pulse as short as 50 ns wakes up the part. |
| | | | I | - | **AD5 —** A/D converter, input 5. |
| | | | O | - | **CT32B1_MAT3 —** Match output 3 for 32-bit timer 1. |
| PIO1_5/$\overline{\text{RTS}}$/ CT32B0_CAP0 | 99[3] | no | I/O | I; PU | **PIO1_5 —** General purpose digital input/output pin. |
| | | | O | - | **$\overline{\text{RTS}}$ —** Request To Send output for UART. |
| | | | I | - | **CT32B0_CAP0 —** Capture input 0 for 32-bit timer 0. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 164. LPC11D14 pin description table (LQFP100 package)** *...continued*

| Symbol | Pin | Start logic input | Type | Reset state [1] | Description |
|---|---|---|---|---|---|
| PIO1_6/RXD/ CT32B0_MAT0 | 100[3] | no | I/O | I; PU | **PIO1_6 —** General purpose digital input/output pin. |
| | | | I | - | **RXD —** Receiver input for UART. |
| | | | O | - | **CT32B0_MAT0 —** Match output 0 for 32-bit timer 0. |
| PIO1_7/TXD/ CT32B0_MAT1 | 1[3] | no | I/O | I; PU | **PIO1_7 —** General purpose digital input/output pin. |
| | | | O | - | **TXD —** Transmitter output for UART. |
| | | | O | - | **CT32B0_MAT1 —** Match output 1 for 32-bit timer 0. |
| PIO1_8/ CT16B1_CAP0 | 12[3] | no | I/O | I; PU | **PIO1_8 —** General purpose digital input/output pin. |
| | | | I | - | **CT16B1_CAP0 —** Capture input 0 for 16-bit timer 1. |
| PIO1_9/ CT16B1_MAT0 | 20[3] | no | I/O | I; PU | **PIO1_9 —** General purpose digital input/output pin. |
| | | | O | - | **CT16B1_MAT0 —** Match output 0 for 16-bit timer 1. |
| PIO1_10/AD6/ CT16B1_MAT1 | 84[5] | no | I/O | I; PU | **PIO1_10 —** General purpose digital input/output pin. |
| | | | I | - | **AD6 —** A/D converter, input 6. |
| | | | O | - | **CT16B1_MAT1 —** Match output 1 for 16-bit timer 1. |
| PIO1_11/AD7 | 96[5] | no | I/O | I; PU | **PIO1_11 —** General purpose digital input/output pin. |
| | | | I | - | **AD7 —** A/D converter, input 7. |
| PIO2_0 to PIO2_11 | | | I/O | | **Port 2 —** Port 2 is a 12-bit I/O port with individual direction and function controls for each bit. The operation of port 2 pins depends on the function selected through the IOCONFIG register block. |
| PIO2_0/$\overline{\text{DTR}}$/SSEL1 | 5[3] | no | I/O | I; PU | **PIO2_0 —** General purpose digital input/output pin. |
| | | | O | - | **$\overline{\text{DTR}}$ —** Data Terminal Ready output for UART. |
| | | | I/O | - | **SSEL1 —** Slave Select for SPI1. |
| PIO2_1/$\overline{\text{DSR}}$/SCK1 | 16[3] | no | I/O | I; PU | **PIO2_1 —** General purpose digital input/output pin. |
| | | | I | - | **$\overline{\text{DSR}}$ —** Data Set Ready input for UART. |
| | | | I/O | - | **SCK1 —** Serial clock for SPI1. |
| PIO2_2/$\overline{\text{DCD}}$/MISO1 | 80[3] | no | I/O | I; PU | **PIO2_2 —** General purpose digital input/output pin. |
| | | | I | - | **$\overline{\text{DCD}}$ —** Data Carrier Detect input for UART. |
| | | | I/O | - | **MISO1 —** Master In Slave Out for SPI1. |
| PIO2_3/$\overline{\text{RI}}$/MOSI1 | 92[3] | no | I/O | I; PU | **PIO2_3 —** General purpose digital input/output pin. |
| | | | I | - | **$\overline{\text{RI}}$ —** Ring Indicator input for UART. |
| | | | I/O | - | **MOSI1 —** Master Out Slave In for SPI1. |
| PIO2_4 | 22[3] | no | I/O | I; PU | **PIO2_4 —** General purpose digital input/output pin. |
| PIO2_5 | 23[3] | no | I/O | I; PU | **PIO2_5 —** General purpose digital input/output pin. |
| PIO2_6 | 4[3] | no | I/O | I; PU | **PIO2_6 —** General purpose digital input/output pin. |
| PIO2_7 | 14[3] | no | I/O | I; PU | **PIO2_7 —** General purpose digital input/output pin. |
| PIO2_8 | 15[3] | no | I/O | I; PU | **PIO2_8 —** General purpose digital input/output pin. |
| PIO2_9 | 27[3] | no | I/O | I; PU | **PIO2_9 —** General purpose digital input/output pin. |
| PIO2_10 | 28[3] | no | I/O | I; PU | **PIO2_10 —** General purpose digital input/output pin. |
| PIO2_11/SCK0 | 85[3] | no | I/O | I; PU | **PIO2_11 —** General purpose digital input/output pin. |
| | | | I/O | - | **SCK0 —** Serial clock for SPI0. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 164. LPC11D14 pin description table (LQFP100 package)** *...continued*

| Symbol | Pin | Start logic input | Type | Reset state [1] | Description |
|---|---|---|---|---|---|
| PIO3_0 to PIO3_5 | | | I/O | | **Port 3 —** Port 3 is a 12-bit I/O port with individual direction and function controls for each bit. The operation of port 3 pins depends on the function selected through the IOCONFIG register block. Pins PIO3_6 to PIO3_11 are not available. |
| PIO3_0/$\overline{\text{DTR}}$ | 90[3] | no | I/O | I; PU | **PIO3_0 —** General purpose digital input/output pin. |
| | | | O | - | **$\overline{\text{DTR}}$ —** Data Terminal Ready output for UART. |
| PIO3_1/$\overline{\text{DSR}}$ | 91[3] | no | I/O | I; PU | **PIO3_1 —** General purpose digital input/output pin. |
| | | | I | - | **$\overline{\text{DSR}}$ —** Data Set Ready input for UART. |
| PIO3_2/$\overline{\text{DCD}}$ | 97[3] | no | I/O | I; PU | **PIO3_2 —** General purpose digital input/output pin. |
| | | | I | - | **$\overline{\text{DCD}}$ —** Data Carrier Detect input for UART. |
| PIO3_3/$\overline{\text{RI}}$ | 2[3] | no | I/O | I; PU | **PIO3_3 —** General purpose digital input/output pin. |
| | | | I | - | **$\overline{\text{RI}}$ —** Ring Indicator input for UART. |
| PIO3_4 | 21[3] | no | I/O | I; PU | **PIO3_4 —** General purpose digital input/output pin. |
| PIO3_5 | 24[3] | no | I/O | I; PU | **PIO3_5 —** General purpose digital input/output pin. |
| $V_{DD}$ | 11; 98 | - | I | - | 3.3 V supply voltage to the internal regulator, the external rail, and the ADC. Also used as the ADC reference voltage. |
| XTALIN | 9[7] | - | I | - | Input to the oscillator circuit and internal clock generator circuits. Input voltage must not exceed 1.8 V. |
| XTALOUT | 10[7] | - | O | - | Output from the oscillator amplifier. |
| $V_{SS}$ | 8; 95 | - | I | - | Ground. |
| **LCD display pins** | | | | | |
| S0 | 46 | - | O | $V_{LCD}$[7] | LCD segment output. |
| S1 | 47 | - | O | $V_{LCD}$[7] | LCD segment output. |
| S2 | 48 | - | O | $V_{LCD}$[7] | LCD segment output. |
| S3 | 49 | - | O | $V_{LCD}$[7] | LCD segment output. |
| S4 | 50 | - | O | $V_{LCD}$[7] | LCD segment output. |
| S5 | 51 | - | O | $V_{LCD}$[7] | LCD segment output. |
| S6 | 52 | - | O | $V_{LCD}$[7] | LCD segment output. |
| S7 | 53 | - | O | $V_{LCD}$[7] | LCD segment output. |
| S8 | 54 | - | O | $V_{LCD}$[7] | LCD segment output. |
| S9 | 55 | - | O | $V_{LCD}$[7] | LCD segment output. |
| S10 | 56 | - | O | $V_{LCD}$[7] | LCD segment output. |
| S11 | 57 | - | O | $V_{LCD}$[7] | LCD segment output. |
| S12 | 58 | - | O | $V_{LCD}$[7] | LCD segment output. |
| S13 | 59 | - | O | $V_{LCD}$[7] | LCD segment output. |
| S14 | 60 | - | O | $V_{LCD}$[7] | LCD segment output. |
| S15 | 61 | - | O | $V_{LCD}$[7] | LCD segment output. |
| S16 | 62 | - | O | $V_{LCD}$[7] | LCD segment output. |
| S17 | 63 | - | O | $V_{LCD}$[7] | LCD segment output. |
| S18 | 64 | - | O | $V_{LCD}$[7] | LCD segment output. |
| S19 | 65 | - | O | $V_{LCD}$[7] | LCD segment output. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 164. LPC11D14 pin description table (LQFP100 package)** *...continued*

| Symbol | Pin | Start logic input | Type | Reset state [1] | Description |
|---|---|---|---|---|---|
| S20 | 66 | - | O | $V_{LCD}$[7] | LCD segment output. |
| S21 | 67 | - | O | $V_{LCD}$[7] | LCD segment output. |
| S22 | 68 | - | O | $V_{LCD}$[7] | LCD segment output. |
| S23 | 69 | - | O | $V_{LCD}$[7] | LCD segment output. |
| S24 | 70 | - | O | $V_{LCD}$[7] | LCD segment output. |
| S25 | 71 | - | O | $V_{LCD}$[7] | LCD segment output. |
| S26 | 72 | - | O | $V_{LCD}$[7] | LCD segment output. |
| S27 | 73 | - | O | $V_{LCD}$[7] | LCD segment output. |
| S28 | 74 | - | O | $V_{LCD}$[7] | LCD segment output. |
| S29 | 75 | - | O | $V_{LCD}$[7] | LCD segment output. |
| S30 | 76 | - | O | $V_{LCD}$[7] | LCD segment output. |
| S31 | 77 | - | O | $V_{LCD}$[7] | LCD segment output. |
| S32 | 78 | - | O | $V_{LCD}$[7] | LCD segment output. |
| S33 | 79 | - | O | $V_{LCD}$[7] | LCD segment output. |
| S34 | 29 | - | O | $V_{LCD}$[7] | LCD segment output. |
| S35 | 30 | - | O | $V_{LCD}$[7] | LCD segment output. |
| S36 | 31 | - | O | $V_{LCD}$[7] | LCD segment output. |
| S37 | 32 | - | O | $V_{LCD}$[7] | LCD segment output. |
| S38 | 33 | - | O | $V_{LCD}$[7] | LCD segment output. |
| S39 | 34 | - | O | $V_{LCD}$[7] | LCD segment output. |
| BP0 | 42 | - | O | $V_{LCD}$[7] | LCD backplane output. |
| BP1 | 44 | - | O | $V_{LCD}$[7] | LCD backplane output. |
| BP2 | 43 | - | O | $V_{LCD}$[7] | LCD backplane output. |
| BP3 | 45 | - | O | $V_{LCD}$[7] | LCD backplane output. |
| LCD_SDA | 35 | - | I/O | [7] | $I^2C$-bus serial data input/output. |
| LCD_SCL | 36 | - | I/O | [7] | $I^2C$-bus serial clock input. |
| SYNC | 37 | - | I/O | [7] | Cascade synchronization input/output. |
| CLK | 38 | - | I/O | [7] | External clock input/output. |
| $V_{DD(LCD)}$ | 39 | - | - | - | 1.8 V to 5.5 V power supply: Power supply voltage for the PCF8576D. |
| $V_{SS(LCD)}$ | 40 | - | - | - | LCD ground. |
| $V_{LCD}$ | 41 | - | - | - | LCD power supply; LCD voltage. |
| n.c. | 3 | - | - | - | Not connected. |

[1] Pin state at reset for default function: I = Input; O = Output; PU = internal pull-up enabled (pins pulled up to full $V_{DD}$ level ($V_{DD}$ = 3.3 V)); IA = inactive, no pull-up/down enabled.

[2] $\overline{\text{RESET}}$ functionality is not available in Deep power-down mode. Use the WAKEUP pin to reset the chip and wake up from Deep power-down mode. An external pull-up resistor is required on this pin for the Deep power-down mode.

[3] 5 V tolerant pad providing digital I/O functions with configurable pull-up/pull-down resistors and configurable hysteresis.

[4] $I^2C$-bus pads compliant with the $I^2C$-bus specification for $I^2C$ standard mode and $I^2C$ Fast-mode Plus. The pin requires an external pull-up to provide output functionality. When power is switched off, this pin is floating and does not disturb the I2C lines. Open-drain configuration applies to all functions on this pin.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

[5] 5 V tolerant pad providing digital I/O functions with configurable pull-up/pull-down resistors, configurable hysteresis, and analog input. When configured as a ADC input, digital section of the pad is disabled and the pin is not 5 V tolerant.

[6] When the system oscillator is not used, connect XTALIN and XTALOUT as follows: XTALIN can be left floating or can be grounded (grounding is preferred to reduce susceptibility to noise). XTALOUT should be left floating.

[7] See the *LPC11D4 data sheet*.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 10.1 How to read this chapter

This chapter describes the small pin packages for the LPC111x parts in TSSOP, DIP, and SO packages.

**Table 165. LPC11xx pin configurations for 20-pin and 28-pin packages**

| Part | | SO20 | TSSOP20 | TSSOP28 | DIP28 |
|---|---|---|---|---|---|
| LPC1110FD20 | Pin configuration | Figure 22 | - | - | - |
| | Pin description | Table 166 | - | - | - |
| LPC1111FDH20/002 | Pin configuration | - | Figure 23 | - | - |
| | Pin description | - | Table 166 | - | - |
| LPC1112FD20/102 | Pin configuration | Figure 22 | - | - | - |
| | Pin description | Table 166 | - | - | - |
| LPC1112FDH20/102 | Pin configuration | - | Figure 24 | - | - |
| | Pin description | - | Table 167 | - | - |
| LPC1112FDH28/102 | Pin configuration | - | - | Figure 25 | - |
| | Pin description | - | - | Table 168 | - |
| LPC1114FDH28/102 | Pin configuration | - | - | Figure 25 | - |
| | Pin description | - | - | Table 168 | - |
| LPC1114FN28/102 | Pin configuration | - | - | - | Figure 26 |
| | Pin description | - | - | - | Table 168 |

## 10.2 Pin configuration (LPC1110/11/12)

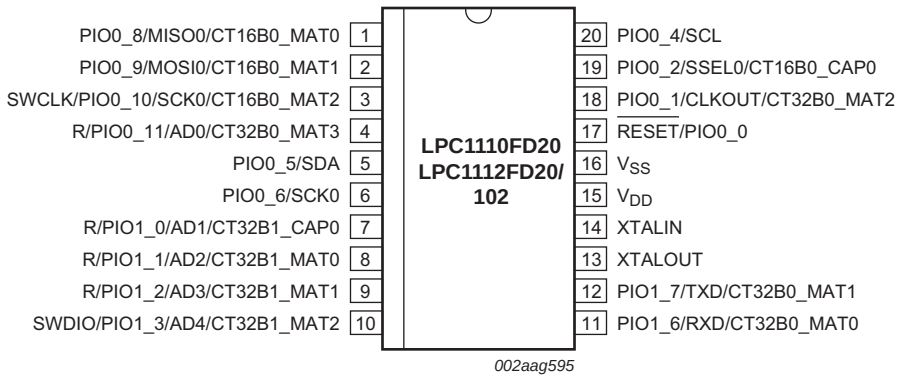


**Fig 22. Pin configuration SO20 package**



All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

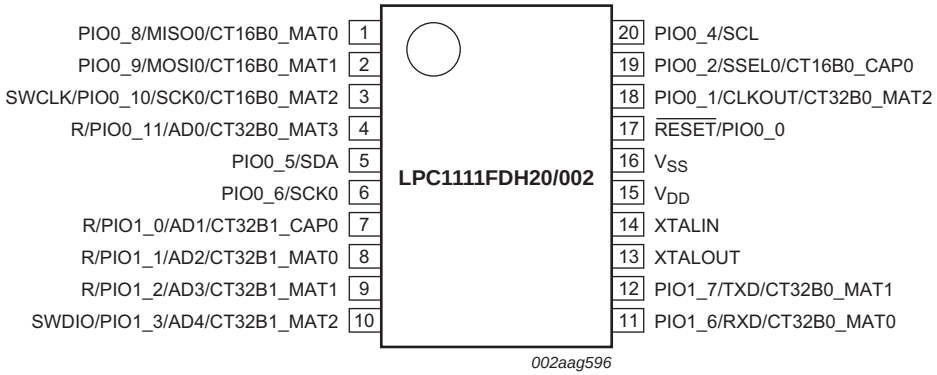


**Fig 23. Pin configuration TSSOP20 package with I²C-bus pins**

**Table 166. LPC1110/11/12 pin description table (SO20 and TSSOP20 package with I²C-bus pins)**

| Symbol | Pin SO20/ TSSOP20 | | Start logic input | Type | Reset state [1] | Description |
|---|---|---|---|---|---|---|
| PIO0_0 to PIO0_11 | | | | I/O | | **Port 0 —** Port 0 is a 12-bit I/O port with individual direction and function controls for each bit. The operation of port 0 pins depends on the function selected through the IOCONFIG register block. |
| RESET/PIO0_0 | 17 | [2] | yes | I | I; PU | **RESET —** External reset input with 20 ns glitch filter. A LOW-going pulse as short as 50 ns on this pin resets the device, causing I/O ports and peripherals to take on their default states, and processor execution to begin at address 0.<br>In deep power-down mode, this pin must be pulled HIGH externally. The RESET pin can be left unconnected or be used as a GPIO pin if an external RESET function is not needed. |
| | | | | I/O | - | **PIO0_0 —** General purpose digital input/output pin with 10 ns glitch filter. |
| PIO0_1/CLKOUT/ CT32B0_MAT2 | 18 | [3] | yes | I/O | I; PU | **PIO0_1 —** General purpose digital input/output pin. A LOW level on this pin during reset starts the ISP command handler. |
| | | | | O | - | **CLKOUT —** Clockout pin. |
| | | | | O | - | **CT32B0_MAT2 —** Match output 2 for 32-bit timer 0. |
| PIO0_2/SSEL0/ CT16B0_CAP0 | 19 | [3] | yes | I/O | I; PU | **PIO0_2 —** General purpose digital input/output pin. |
| | | | | I/O | - | **SSEL0 —** Slave Select for SPI0. |
| | | | | I | - | **CT16B0_CAP0 —** Capture input 0 for 16-bit timer 0. |
| PIO0_4/SCL | 20 | [4] | yes | I/O | I; IA | **PIO0_4 —** General purpose digital input/output pin (open-drain). |
| | | | | I/O | - | **SCL —** I²C-bus, open-drain clock input/output. High-current sink only if I²C Fast-mode Plus is selected in the I/O configuration register. |
| PIO0_5/SDA | 5 | [4] | yes | I/O | I; IA | **PIO0_5 —** General purpose digital input/output pin (open-drain). |
| | | | | I/O | - | **SDA —** I²C-bus, open-drain data input/output. High-current sink only if I²C Fast-mode Plus is selected in the I/O configuration register. |
| PIO0_6/SCK0 | 6 | [3] | yes | I/O | I; PU | **PIO0_6 —** General purpose digital input/output pin. |
| | | | | I/O | - | **SCK0 —** Serial clock for SPI0. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 166. LPC1110/11/12 pin description table (SO20 and TSSOP20 package with I²C-bus pins)** *…continued*

| Symbol | Pin SO20/ TSSOP20 | | Start logic input | Type | Reset state [1] | Description |
|---|---|---|---|---|---|---|
| PIO0_8/MISO0/ CT16B0_MAT0 | 1 | [3] | yes | I/O | I; PU | **PIO0_8 —** General purpose digital input/output pin. |
| | | | | I/O | - | **MISO0 —** Master In Slave Out for SPI0. |
| | | | | O | - | **CT16B0_MAT0 —** Match output 0 for 16-bit timer 0. |
| PIO0_9/MOSI0/ CT16B0_MAT1 | 2 | [3] | yes | I/O | I; PU | **PIO0_9 —** General purpose digital input/output pin. |
| | | | | I/O | - | **MOSI0 —** Master Out Slave In for SPI0. |
| | | | | O | - | **CT16B0_MAT1 —** Match output 1 for 16-bit timer 0. |
| SWCLK/PIO0_10/ SCK0/ CT16B0_MAT2 | 3 | [3] | yes | I | I; PU | **SWCLK —** Serial wire clock. |
| | | | | I/O | - | **PIO0_10 —** General purpose digital input/output pin. |
| | | | | I/O | - | **SCK0 —** Serial clock for SPI0. |
| | | | | O | - | **CT16B0_MAT2 —** Match output 2 for 16-bit timer 0. |
| R/PIO0_11/ AD0/CT32B0_MAT3 | 4 | [5] | yes | I | I; PU | **R —** Reserved. Configure for an alternate function in the IOCONFIG block. |
| | | | | I/O | - | **PIO0_11 —** General purpose digital input/output pin. |
| | | | | I | - | **AD0 —** A/D converter, input 0. |
| | | | | O | - | **CT32B0_MAT3 —** Match output 3 for 32-bit timer 0. |
| PIO1_0 to PIO1_7 | | | | I/O | | **Port 1 —** Port 1 is a 12-bit I/O port with individual direction and function controls for each bit. The operation of port 1 pins depends on the function selected through the IOCONFIG register block. |
| R/PIO1_0/ AD1/CT32B1_CAP0 | 7 | [5] | yes | I | I; PU | **R —** Reserved. Configure for an alternate function in the IOCONFIG block. |
| | | | | I/O | - | **PIO1_0 —** General purpose digital input/output pin. |
| | | | | I | - | **AD1 —** A/D converter, input 1. |
| | | | | I | - | **CT32B1_CAP0 —** Capture input 0 for 32-bit timer 1. |
| R/PIO1_1/ AD2/CT32B1_MAT0 | 8 | [5] | no | O | I; PU | **R —** Reserved. Configure for an alternate function in the IOCONFIG block. |
| | | | | I/O | - | **PIO1_1 —** General purpose digital input/output pin. |
| | | | | I | - | **AD2 —** A/D converter, input 2. |
| | | | | O | - | **CT32B1_MAT0 —** Match output 0 for 32-bit timer 1. |
| R/PIO1_2/ AD3/CT32B1_MAT1 | 9 | [5] | no | I | I; PU | **R —** Reserved. Configure for an alternate function in the IOCONFIG block. |
| | | | | I/O | - | **PIO1_2 —** General purpose digital input/output pin. |
| | | | | I | - | **AD3 —** A/D converter, input 3. |
| | | | | O | - | **CT32B1_MAT1 —** Match output 1 for 32-bit timer 1. |
| SWDIO/PIO1_3/ AD4/CT32B1_MAT2 | 10 | [5] | no | I/O | I; PU | **SWDIO —** Serial wire debug input/output. |
| | | | | I/O | - | **PIO1_3 —** General purpose digital input/output pin. |
| | | | | I | - | **AD4 —** A/D converter, input 4. |
| | | | | O | - | **CT32B1_MAT2 —** Match output 2 for 32-bit timer 1. |
| PIO1_6/RXD/ CT32B0_MAT0 | 11 | [3] | no | I/O | I; PU | **PIO1_6 —** General purpose digital input/output pin. |
| | | | | I | - | **RXD —** Receiver input for UART. |
| | | | | O | - | **CT32B0_MAT0 —** Match output 0 for 32-bit timer 0. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 166. LPC1110/11/12 pin description table (SO20 and TSSOP20 package with I²C-bus pins)** *…continued*

| Symbol | Pin SO20/ TSSOP20 | | Start logic input | Type | Reset state [1] | Description |
|---|---|---|---|---|---|---|
| PIO1_7/TXD/ CT32B0_MAT1 | 12 | [3] | no | I/O | I; PU | **PIO1_7 —** General purpose digital input/output pin. |
| | | | | O | - | **TXD —** Transmitter output for UART. |
| | | | | O | - | **CT32B0_MAT1 —** Match output 1 for 32-bit timer 0. |
| $V_{DD}$ | 15 | | - | | - | 3.3 V supply voltage to the internal regulator, the external rail, and the ADC. Also used as the ADC reference voltage. |
| XTALIN | 14 | [6] | - | I | - | Input to the oscillator circuit and internal clock generator circuits. Input voltage must not exceed 1.8 V. |
| XTALOUT | 13 | [6] | - | O | - | Output from the oscillator amplifier. |
| $V_{SS}$ | 16 | | - | | - | Ground. |

[1] Pin state at reset for default function: I = Input; O = Output; PU = internal pull-up enabled (pins pulled up to full $V_{DD}$ level); IA = inactive, no pull-up/down enabled.

[2] $\overline{\text{RESET}}$ functionality is not available in Deep power-down mode.

[3] 5 V tolerant pad providing digital I/O functions with configurable pull-up/pull-down resistors and configurable hysteresis.

[4] I²C-bus pads compliant with the I²C-bus specification for I²C standard mode and I²C Fast-mode Plus. The pin requires an external pull-up to provide output functionality. When power is switched off, this pin is floating and does not disturb the I2C lines. Open-drain configuration applies to all functions on this pin.

[5] 5 V tolerant pad providing digital I/O functions with configurable pull-up/pull-down resistors, configurable hysteresis, and analog input. When configured as a ADC input, digital section of the pad is disabled and the pin is not 5 V tolerant.

[6] When the system oscillator is not used, connect XTALIN and XTALOUT as follows: XTALIN can be left floating or can be grounded (grounding is preferred to reduce susceptibility to noise). XTALOUT should be left floating.

## 10.3 Pin configuration (LPC1112)

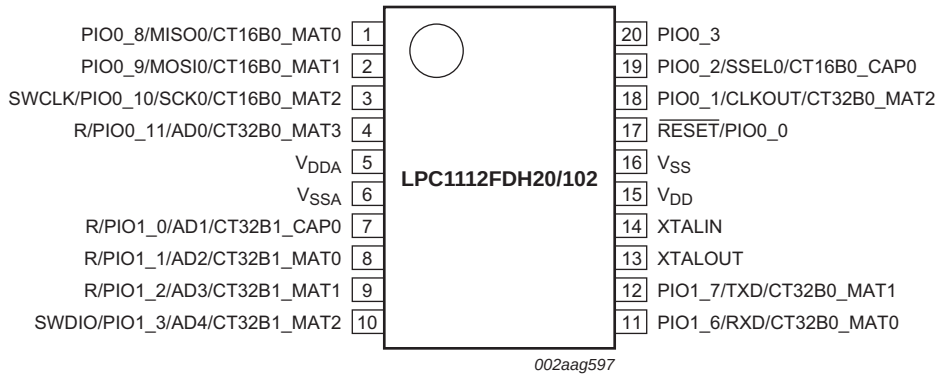


**Fig 24. Pin configuration TSSOP20 package with $V_{DDA}$ and $V_{SSA}$ pins**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 167. LPC1112 pin description table (TSSOP20 with $V_{DDA}$ and $V_{SSA}$ pins)**

| Symbol | Pin TSSOP20 | | Start logic input | Type | Reset state [1] | Description |
|---|---|---|---|---|---|---|
| PIO0_0 to PIO0_11 | | | | I/O | | **Port 0 —** Port 0 is a 12-bit I/O port with individual direction and function controls for each bit. The operation of port 0 pins depends on the function selected through the IOCONFIG register block. |
| RESET/PIO0_0 | 17 | [2] | yes | I | I; PU | **RESET —** External reset input with 20 ns glitch filter. A LOW-going pulse as short as 50 ns on this pin resets the device, causing I/O ports and peripherals to take on their default states, and processor execution to begin at address 0.<br>In deep power-down mode, this pin must be pulled HIGH externally. The RESET pin can be left unconnected or be used as a GPIO pin if an external RESET function is not needed. |
| | | | | I/O | - | **PIO0_0 —** General purpose digital input/output pin with 10 ns glitch filter. |
| PIO0_1/CLKOUT/ CT32B0_MAT2 | 18 | [3] | yes | I/O | I; PU | **PIO0_1 —** General purpose digital input/output pin. A LOW level on this pin during reset starts the ISP command handler. |
| | | | | O | - | **CLKOUT —** Clockout pin. |
| | | | | O | - | **CT32B0_MAT2 —** Match output 2 for 32-bit timer 0. |
| PIO0_2/SSEL0/ CT16B0_CAP0 | 19 | [3] | yes | I/O | I; PU | **PIO0_2 —** General purpose digital input/output pin. |
| | | | | I/O | - | **SSEL0 —** Slave Select for SPI0. |
| | | | | I | - | **CT16B0_CAP0 —** Capture input 0 for 16-bit timer 0. |
| PIO0_3 | 20 | [3] | yes | I/O | I; PU | **PIO0_3 —** General purpose digital input/output pin. |
| PIO0_8/MISO0/ CT16B0_MAT0 | 1 | [3] | yes | I/O | I; PU | **PIO0_8 —** General purpose digital input/output pin. |
| | | | | I/O | - | **MISO0 —** Master In Slave Out for SPI0. |
| | | | | O | - | **CT16B0_MAT0 —** Match output 0 for 16-bit timer 0. |
| PIO0_9/MOSI0/ CT16B0_MAT1 | 2 | [3] | yes | I/O | I; PU | **PIO0_9 —** General purpose digital input/output pin. |
| | | | | I/O | - | **MOSI0 —** Master Out Slave In for SPI0. |
| | | | | O | - | **CT16B0_MAT1 —** Match output 1 for 16-bit timer 0. |
| SWCLK/PIO0_10/ SCK0/ CT16B0_MAT2 | 3 | [3] | yes | I | I; PU | **SWCLK —** Serial wire clock. |
| | | | | I/O | - | **PIO0_10 —** General purpose digital input/output pin. |
| | | | | I/O | - | **SCK0 —** Serial clock for SPI0. |
| | | | | O | - | **CT16B0_MAT2 —** Match output 2 for 16-bit timer 0. |
| R/PIO0_11/ AD0/CT32B0_MAT3 | 4 | [4] | yes | I | I; PU | **R —** Reserved. Configure for an alternate function in the IOCONFIG block. |
| | | | | I/O | - | **PIO0_11 —** General purpose digital input/output pin. |
| | | | | I | - | **AD0 —** A/D converter, input 0. |
| | | | | O | - | **CT32B0_MAT3 —** Match output 3 for 32-bit timer 0. |
| PIO1_0 to PIO1_7 | | | | I/O | | **Port 1 —** Port 1 is a 12-bit I/O port with individual direction and function controls for each bit. The operation of port 1 pins depends on the function selected through the IOCONFIG register block. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 167. LPC1112 pin description table (TSSOP20 with $V_{DDA}$ and $V_{SSA}$ pins)** *…continued*

| Symbol | Pin TSSOP20 | | Start logic input | Type | Reset state [1] | Description |
|---|---|---|---|---|---|---|
| R/PIO1_0/ AD1/CT32B1_CAP0 | 7 | [4] | yes | I | I; PU | **R —** Reserved. Configure for an alternate function in the IOCONFIG block. |
| | | | | I/O | - | **PIO1_0 —** General purpose digital input/output pin. |
| | | | | I | - | **AD1 —** A/D converter, input 1. |
| | | | | I | - | **CT32B1_CAP0 —** Capture input 0 for 32-bit timer 1. |
| R/PIO1_1/ AD2/CT32B1_MAT0 | 8 | [4] | no | O | I; PU | **R —** Reserved. Configure for an alternate function in the IOCONFIG block. |
| | | | | I/O | - | **PIO1_1 —** General purpose digital input/output pin. |
| | | | | I | - | **AD2 —** A/D converter, input 2. |
| | | | | O | - | **CT32B1_MAT0 —** Match output 0 for 32-bit timer 1. |
| R/PIO1_2/ AD3/CT32B1_MAT1 | 9 | [4] | no | I | I; PU | **R —** Reserved. Configure for an alternate function in the IOCONFIG block. |
| | | | | I/O | - | **PIO1_2 —** General purpose digital input/output pin. |
| | | | | I | - | **AD3 —** A/D converter, input 3. |
| | | | | O | - | **CT32B1_MAT1 —** Match output 1 for 32-bit timer 1. |
| SWDIO/PIO1_3/ AD4/CT32B1_MAT2 | 10 | [4] | no | I/O | I; PU | **SWDIO —** Serial wire debug input/output. |
| | | | | I/O | - | **PIO1_3 —** General purpose digital input/output pin. |
| | | | | I | - | **AD4 —** A/D converter, input 4. |
| | | | | O | - | **CT32B1_MAT2 —** Match output 2 for 32-bit timer 1. |
| PIO1_6/RXD/ CT32B0_MAT0 | 11 | [3] | no | I/O | I; PU | **PIO1_6 —** General purpose digital input/output pin. |
| | | | | I | - | **RXD —** Receiver input for UART. |
| | | | | O | - | **CT32B0_MAT0 —** Match output 0 for 32-bit timer 0. |
| PIO1_7/TXD/ CT32B0_MAT1 | 12 | [3] | no | I/O | I; PU | **PIO1_7 —** General purpose digital input/output pin. |
| | | | | O | - | **TXD —** Transmitter output for UART. |
| | | | | O | - | **CT32B0_MAT1 —** Match output 1 for 32-bit timer 0. |
| $V_{DD}$ | 15 | | - | I | - | 3.3 V supply voltage to the internal regulator and the external rail. |
| $V_{DDA}$ | 5 | | - | I | - | 3.3 V supply voltage to the ADC. Also used as the ADC reference voltage. |
| XTALIN | 14 | [5] | - | I | - | Input to the oscillator circuit and internal clock generator circuits. Input voltage must not exceed 1.8 V. |
| XTALOUT | 13 | [5] | - | O | - | Output from the oscillator amplifier. |
| $V_{SS}$ | 16 | | - | I | - | Ground. |
| $V_{SSA}$ | 6 | | - | I | - | Analog ground. |

[1] Pin state at reset for default function: I = Input; O = Output; PU = internal pull-up enabled (pins pulled up to full $V_{DD}$ level); IA = inactive, no pull-up/down enabled.

[2] $\overline{\text{RESET}}$ functionality is not available in Deep power-down mode.

[3] 5 V tolerant pad providing digital I/O functions with configurable pull-up/pull-down resistors and configurable hysteresis.

[4] 5 V tolerant pad providing digital I/O functions with configurable pull-up/pull-down resistors, configurable hysteresis, and analog input. When configured as a ADC input, digital section of the pad is disabled and the pin is not 5 V tolerant.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

[5] When the system oscillator is not used, connect XTALIN and XTALOUT as follows: XTALIN can be left floating or can be grounded (grounding is preferred to reduce susceptibility to noise). XTALOUT should be left floating.

## 10.4 Pin configuration (LPC1112/14)

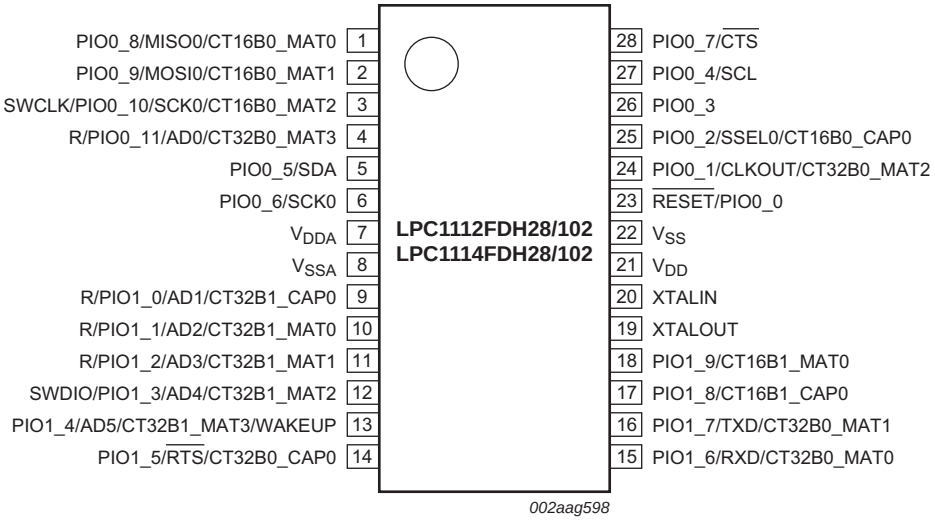


**Fig 25. Pin configuration TSSOP28 package**

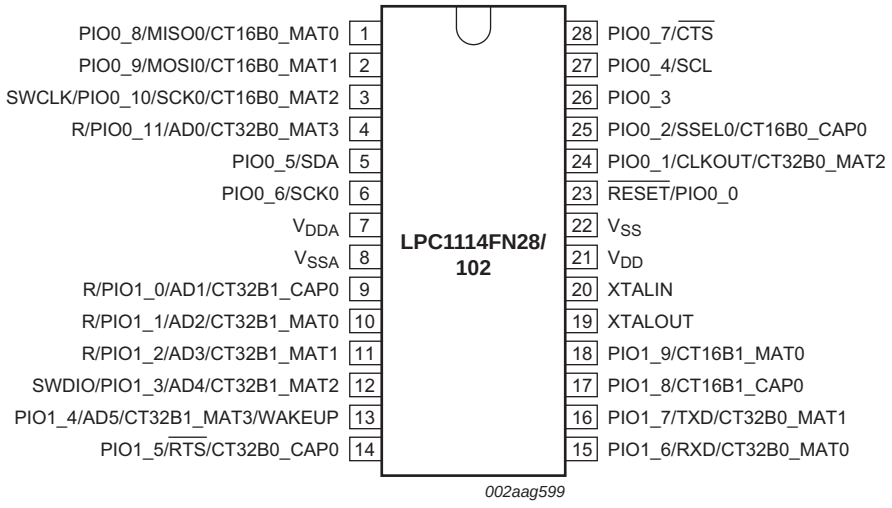


**Fig 26. Pin configuration DIP28 package**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 168. LPC1112/14 pin description table (TSSOP28 and DIP28 packages)**

| Symbol | Pin TSSOP28/ DIP28 | | Start logic input | Type | Reset state [1] | Description |
|---|---|---|---|---|---|---|
| PIO0_0 to PIO0_11 | | | | I/O | | **Port 0 —** Port 0 is a 12-bit I/O port with individual direction and function controls for each bit. The operation of port 0 pins depends on the function selected through the IOCONFIG register block. |
| $\overline{\text{RESET}}$/PIO0_0 | 23 | [2] | yes | I | I; PU | **$\overline{\text{RESET}}$ —** External reset input with 20 ns glitch filter. A LOW-going pulse as short as 50 ns on this pin resets the device, causing I/O ports and peripherals to take on their default states, and processor execution to begin at address 0.<br>In deep power-down mode, this pin must be pulled HIGH externally. The $\overline{\text{RESET}}$ pin can be left unconnected or be used as a GPIO pin if an external $\overline{\text{RESET}}$ function is not needed. |
| | | | | I/O | - | **PIO0_0 —** General purpose digital input/output pin with 10 ns glitch filter. |
| PIO0_1/CLKOUT/ CT32B0_MAT2 | 24 | [3] | yes | I/O | I; PU | **PIO0_1 —** General purpose digital input/output pin. A LOW level on this pin during reset starts the ISP command handler. |
| | | | | O | - | **CLKOUT —** Clockout pin. |
| | | | | O | - | **CT32B0_MAT2 —** Match output 2 for 32-bit timer 0. |
| PIO0_2/SSEL0/ CT16B0_CAP0 | 25 | [3] | yes | I/O | I; PU | **PIO0_2 —** General purpose digital input/output pin. |
| | | | | I/O | - | **SSEL0 —** Slave Select for SPI0. |
| | | | | I | - | **CT16B0_CAP0 —** Capture input 0 for 16-bit timer 0. |
| PIO0_3 | 26 | [3] | yes | I/O | I; PU | **PIO0_3 —** General purpose digital input/output pin. |
| PIO0_4/SCL | 27 | [4] | yes | I/O | I; IA | **PIO0_4 —** General purpose digital input/output pin (open-drain). |
| | | | | I/O | - | **SCL —** $I^2C$-bus, open-drain clock input/output. High-current sink only if $I^2C$ Fast-mode Plus is selected in the I/O configuration register. |
| PIO0_5/SDA | 5 | [4] | yes | I/O | I; IA | **PIO0_5 —** General purpose digital input/output pin (open-drain). |
| | | | | I/O | - | **SDA —** $I^2C$-bus, open-drain data input/output. High-current sink only if $I^2C$ Fast-mode Plus is selected in the I/O configuration register. |
| PIO0_6/SCK0 | 6 | [3] | yes | I/O | I; PU | **PIO0_6 —** General purpose digital input/output pin. |
| | | | | I/O | - | **SCK0 —** Serial clock for SPI0. |
| PIO0_7/$\overline{\text{CTS}}$ | 28 | [3] | yes | I/O | I; PU | **PIO0_7 —** General purpose digital input/output pin (high-current output driver). |
| | | | | I | - | **$\overline{\text{CTS}}$ —** Clear To Send input for UART. |
| PIO0_8/MISO0/ CT16B0_MAT0 | 1 | [3] | yes | I/O | I; PU | **PIO0_8 —** General purpose digital input/output pin. |
| | | | | I/O | - | **MISO0 —** Master In Slave Out for SPI0. |
| | | | | O | - | **CT16B0_MAT0 —** Match output 0 for 16-bit timer 0. |
| PIO0_9/MOSI0/ CT16B0_MAT1 | 2 | [3] | yes | I/O | I; PU | **PIO0_9 —** General purpose digital input/output pin. |
| | | | | I/O | - | **MOSI0 —** Master Out Slave In for SPI0. |
| | | | | O | - | **CT16B0_MAT1 —** Match output 1 for 16-bit timer 0. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 168. LPC1112/14 pin description table (TSSOP28 and DIP28 packages)** *...continued*

| Symbol | Pin TSSOP28/ DIP28 | | Start logic input | Type | Reset state [1] | Description |
|---|---|---|---|---|---|---|
| SWCLK/PIO0_10/ SCK0/ CT16B0_MAT2 | 3 | [3] | yes | I | I; PU | **SWCLK —** Serial wire clock. |
| | | | | I/O | - | **PIO0_10 —** General purpose digital input/output pin. |
| | | | | I/O | - | **SCK0 —** Serial clock for SPI0. |
| | | | | O | - | **CT16B0_MAT2 —** Match output 2 for 16-bit timer 0. |
| R/PIO0_11/ AD0/CT32B0_MAT3 | 4 | [5] | yes | I | I; PU | **R —** Reserved. Configure for an alternate function in the IOCONFIG block. |
| | | | | I/O | - | **PIO0_11 —** General purpose digital input/output pin. |
| | | | | I | - | **AD0 —** A/D converter, input 0. |
| | | | | O | - | **CT32B0_MAT3 —** Match output 3 for 32-bit timer 0. |
| PIO1_0 to PIO1_9 | | | | I/O | | **Port 1 —** Port 1 is a 12-bit I/O port with individual direction and function controls for each bit. The operation of port 1 pins depends on the function selected through the IOCONFIG register block. |
| R/PIO1_0/ AD1/CT32B1_CAP0 | 9 | [5] | yes | I | I; PU | **R —** Reserved. Configure for an alternate function in the IOCONFIG block. |
| | | | | I/O | - | **PIO1_0 —** General purpose digital input/output pin. |
| | | | | I | - | **AD1 —** A/D converter, input 1. |
| | | | | I | - | **CT32B1_CAP0 —** Capture input 0 for 32-bit timer 1. |
| R/PIO1_1/ AD2/CT32B1_MAT0 | 10 | [5] | no | O | I; PU | **R —** Reserved. Configure for an alternate function in the IOCONFIG block. |
| | | | | I/O | - | **PIO1_1 —** General purpose digital input/output pin. |
| | | | | I | - | **AD2 —** A/D converter, input 2. |
| | | | | O | - | **CT32B1_MAT0 —** Match output 0 for 32-bit timer 1. |
| R/PIO1_2/ AD3/CT32B1_MAT1 | 11 | [5] | no | I | I; PU | **R —** Reserved. Configure for an alternate function in the IOCONFIG block. |
| | | | | I/O | - | **PIO1_2 —** General purpose digital input/output pin. |
| | | | | I | - | **AD3 —** A/D converter, input 3. |
| | | | | O | - | **CT32B1_MAT1 —** Match output 1 for 32-bit timer 1. |
| SWDIO/PIO1_3/ AD4/CT32B1_MAT2 | 12 | [5] | no | I/O | I; PU | **SWDIO —** Serial wire debug input/output. |
| | | | | I/O | - | **PIO1_3 —** General purpose digital input/output pin. |
| | | | | I | - | **AD4 —** A/D converter, input 4. |
| | | | | O | - | **CT32B1_MAT2 —** Match output 2 for 32-bit timer 1. |
| PIO1_4/AD5/ CT32B1_MAT3/ WAKEUP | 13 | [5] | no | I/O | I; PU | **PIO1_4 —** General purpose digital input/output pin with 10 ns glitch filter. In Deep power-down mode, this pin serves as the Deep power-down mode wake-up pin with 20 ns glitch filter. Pull this pin HIGH externally before entering Deep power-down mode. Pull this pin LOW to exit Deep power-down mode. A LOW-going pulse as short as 50 ns wakes up the part. |
| | | | | I | - | **AD5 —** A/D converter, input 5. |
| | | | | O | - | **CT32B1_MAT3 —** Match output 3 for 32-bit timer 1. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 168. LPC1112/14 pin description table (TSSOP28 and DIP28 packages)** *…continued*

| Symbol | Pin TSSOP28/ DIP28 | | Start logic input | Type | Reset state [1] | Description |
|---|---|---|---|---|---|---|
| PIO1_5/$\overline{\text{RTS}}$/ CT32B0_CAP0 | 14 | [3] | no | I/O | I; PU | **PIO1_5 —** General purpose digital input/output pin. |
| | | | | O | - | **$\overline{\text{RTS}}$ —** Request To Send output for UART. |
| | | | | I | - | **CT32B0_CAP0 —** Capture input 0 for 32-bit timer 0. |
| PIO1_6/RXD/ CT32B0_MAT0 | 15 | [3] | no | I/O | I; PU | **PIO1_6 —** General purpose digital input/output pin. |
| | | | | I | - | **RXD —** Receiver input for UART. |
| | | | | O | - | **CT32B0_MAT0 —** Match output 0 for 32-bit timer 0. |
| PIO1_7/TXD/ CT32B0_MAT1 | 16 | [3] | no | I/O | I; PU | **PIO1_7 —** General purpose digital input/output pin. |
| | | | | O | - | **TXD —** Transmitter output for UART. |
| | | | | O | - | **CT32B0_MAT1 —** Match output 1 for 32-bit timer 0. |
| PIO1_8/ CT16B1_CAP0 | 17 | [3] | no | I/O | I; PU | **PIO1_8 —** General purpose digital input/output pin. |
| | | | | I | - | **CT16B1_CAP0 —** Capture input 0 for 16-bit timer 1. |
| PIO1_9/ CT16B1_MAT0 | 18 | [3] | no | I/O | I; PU | **PIO1_9 —** General purpose digital input/output pin. |
| | | | | O | - | **CT16B1_MAT0 —** Match output 0 for 16-bit timer 1. |
| $V_{DD}$ | 21 | | - | | - | 3.3 V supply voltage to the internal regulator and the external rail. |
| $V_{DDA}$ | 7 | | - | - | - | 3.3 V supply voltage to the ADC. Also used as the ADC reference voltage. |
| XTALIN | 20 | [6] | - | I | - | Input to the oscillator circuit and internal clock generator circuits. Input voltage must not exceed 1.8 V. |
| XTALOUT | 19 | [6] | - | O | - | Output from the oscillator amplifier. |
| $V_{SS}$ | 22 | | - | | - | Ground. |
| $V_{SSA}$ | 8 | | - | - | - | Analog ground. |

[1] Pin state at reset for default function: I = Input; O = Output; PU = internal pull-up enabled (pins pulled up to full $V_{DD}$ level); IA = inactive, no pull-up/down enabled.

[2] $\overline{\text{RESET}}$ functionality is not available in Deep power-down mode. Use the WAKEUP pin to reset the chip and wake up from Deep power-down mode. An external pull-up resistor is required on this pin for the Deep power-down mode.

[3] 5 V tolerant pad providing digital I/O functions with configurable pull-up/pull-down resistors and configurable hysteresis.

[4] $I^2C$-bus pads compliant with the $I^2C$-bus specification for $I^2C$ standard mode and $I^2C$ Fast-mode Plus. The pin requires an external pull-up to provide output functionality. When power is switched off, this pin is floating and does not disturb the I2C lines. Open-drain configuration applies to all functions on this pin.

[5] 5 V tolerant pad providing digital I/O functions with configurable pull-up/pull-down resistors, configurable hysteresis, and analog input. When configured as a ADC input, digital section of the pad is disabled and the pin is not 5 V tolerant.

[6] When the system oscillator is not used, connect XTALIN and XTALOUT as follows: XTALIN can be left floating or can be grounded (grounding is preferred to reduce susceptibility to noise). XTALOUT should be left floating.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 11.1 How to read this chapter

**Remark:** This chapter applies to parts in the LPC1100XL series for LQFP, HVQFN, and TFBGA48 packages.

The LPC111x are available in three packages: LQFP48 (LPC1113, LPC1114, LPC1115), HVQFN33 (LPC1111, LPC1112, LPC1113, LPC1114), and TFBGA48 (LPC1115).

**Table 169. LPC1100XL pin configurations**

| Part | | LQFP48 | HVQFN33 | TFBGA48 |
|---|---|---|---|---|
| LPC1111 | Pin configuration | - | Figure 29 | - |
| | Pin description | - | Table 171 | - |
| LPC1112 | Pin configuration | - | Figure 29 | - |
| | Pin description | - | Table 171 | - |
| LPC1113 | Pin configuration | Figure 27 | Figure 29 | - |
| | Pin description | Table 170 | Table 171 | - |
| LPC1114 | Pin configuration | Figure 27 | Figure 29 | - |
| | Pin description | Table 170 | Table 171 | - |
| LPC1115 | Pin configuration | Figure 27 | - | Figure 28 |
| | Pin description | Table 170 | - | Table 170 |



All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 11.2 LPC111x Pin configuration

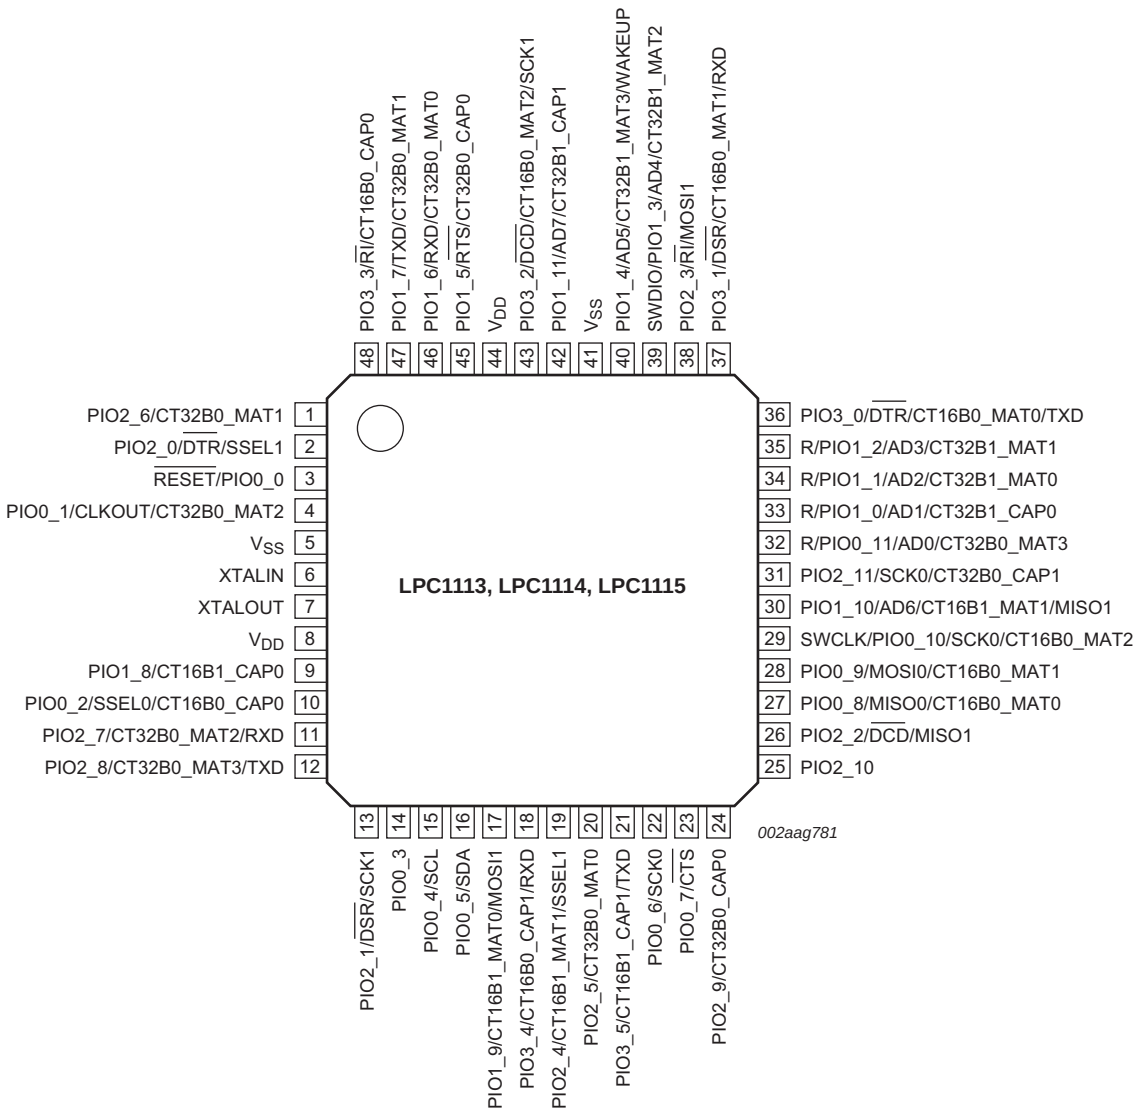


**Fig 27. Pin configuration LQFP48 package**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

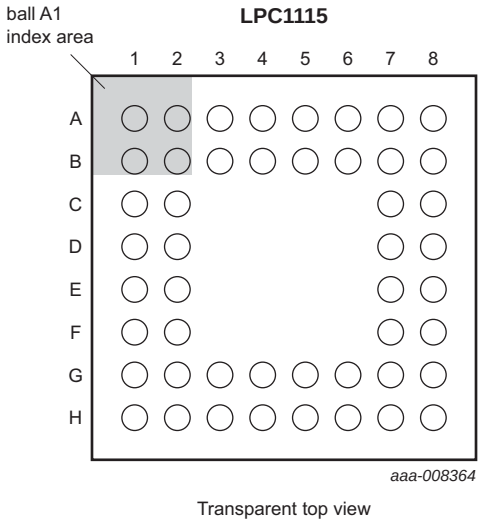


**Fig 28. LPC1100XL series pin configuration TFBGA48 package**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

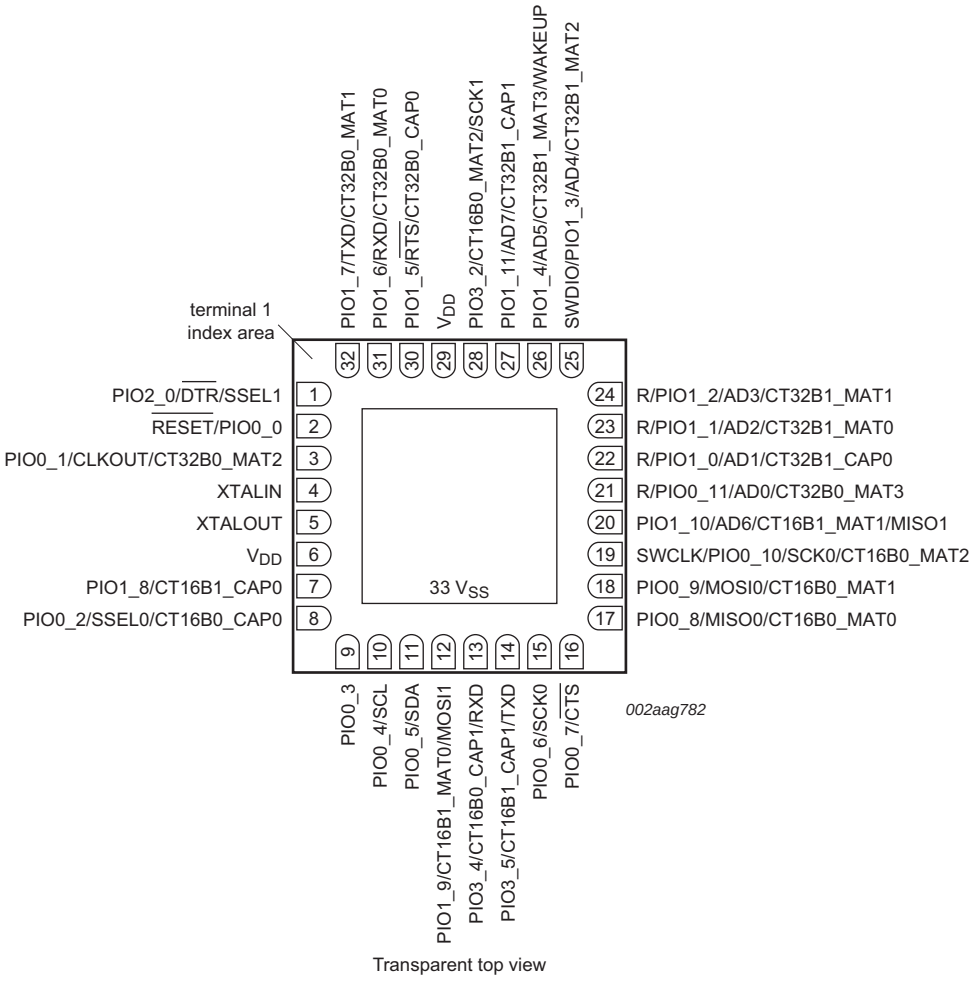


**Fig 29. Pin configuration HVQFN33 package**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 11.3 LPC1100XL Pin description

**Table 170. LPC1100XL series: LPC1113/14/15 pin description table (LQFP48 and TFBGA48 package)**

| Symbol | LQFP48 | TFBGA48 | Start logic input | Type | Reset state [1] | Description |
|---|---|---|---|---|---|---|
| PIO0_0 to PIO0_11 | | | | I/O | | **Port 0 —** Port 0 is a 12-bit I/O port with individual direction and function controls for each bit. The operation of port 0 pins depends on the function selected through the IOCONFIG register block. |
| $\overline{\text{RESET}}$/PIO0_0 | 3[2] | C1[2] | yes | I | I; PU | **$\overline{\text{RESET}}$ —** External reset input with 20 ns glitch filter. A LOW-going pulse as short as 50 ns on this pin resets the device, causing I/O ports and peripherals to take on their default states, and processor execution to begin at address 0.<br>In deep power-down mode, this pin must be pulled HIGH externally. The $\overline{\text{RESET}}$ pin can be left unconnected or be used as a GPIO pin if an external $\overline{\text{RESET}}$ function is not needed. |
| | | | | I/O | - | **PIO0_0 —** General purpose digital input/output pin with 10 ns glitch filter. |
| PIO0_1/CLKOUT/ CT32B0_MAT2 | 4[3] | C2[3] | yes | I/O | I; PU | **PIO0_1 —** General purpose digital input/output pin. A LOW level on this pin during reset starts the ISP command handler. |
| | | | | O | - | **CLKOUT —** Clockout pin. |
| | | | | O | - | **CT32B0_MAT2 —** Match output 2 for 32-bit timer 0. |
| PIO0_2/SSEL0/ CT16B0_CAP0 | 10[3] | F1[3] | yes | I/O | I; PU | **PIO0_2 —** General purpose digital input/output pin. |
| | | | | I/O | - | **SSEL0 —** Slave Select for SPI0. |
| | | | | I | - | **CT16B0_CAP0 —** Capture input 0 for 16-bit timer 0. |
| PIO0_3 | 14[3] | H2[3] | yes | I/O | I; PU | **PIO0_3 —** General purpose digital input/output pin. |
| PIO0_4/SCL | 15[4] | G3[4] | yes | I/O | I; IA | **PIO0_4 —** General purpose digital input/output pin (open-drain). |
| | | | | I/O | - | **SCL —** $I^2C$-bus, open-drain clock input/output. High-current sink only if $I^2C$ Fast-mode Plus is selected in the I/O configuration register. |
| PIO0_5/SDA | 16[4] | H3[4] | yes | I/O | I; IA | **PIO0_5 —** General purpose digital input/output pin (open-drain). |
| | | | | I/O | - | **SDA —** $I^2C$-bus, open-drain data input/output. High-current sink only if $I^2C$ Fast-mode Plus is selected in the I/O configuration register. |
| PIO0_6/SCK0 | 22[3] | H6[3] | yes | I/O | I; PU | **PIO0_6 —** General purpose digital input/output pin. |
| | | | | I/O | - | **SCK0 —** Serial clock for SPI0. |
| PIO0_7/$\overline{\text{CTS}}$ | 23[3] | G7[3] | yes | I/O | I; PU | **PIO0_7 —** General purpose digital input/output pin (high-current output driver). |
| | | | | I | - | **$\overline{\text{CTS}}$ —** Clear To Send input for UART. |
| PIO0_8/MISO0/ CT16B0_MAT0 | 27[3] | F8[3] | yes | I/O | I; PU | **PIO0_8 —** General purpose digital input/output pin. |
| | | | | I/O | - | **MISO0 —** Master In Slave Out for SPI0. |
| | | | | O | - | **CT16B0_MAT0 —** Match output 0 for 16-bit timer 0. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 170. LPC1100XL series: LPC1113/14/15 pin description table (LQFP48 and TFBGA48 package)** *...continued*

| Symbol | LQFP48 | TFBGA48 | Start logic input | Type | Reset state [1] | Description |
|---|---|---|---|---|---|---|
| PIO0_9/MOSI0/ CT16B0_MAT1 | 28[3] | F7[3] | yes | I/O | I; PU | **PIO0_9 —** General purpose digital input/output pin. |
| | | | | I/O | - | **MOSI0 —** Master Out Slave In for SPI0. |
| | | | | O | - | **CT16B0_MAT1 —** Match output 1 for 16-bit timer 0. |
| SWCLK/PIO0_10/ SCK0/ CT16B0_MAT2 | 29[3] | E7[3] | yes | I | I; PU | **SWCLK —** Serial wire clock. |
| | | | | I/O | - | **PIO0_10 —** General purpose digital input/output pin. |
| | | | | I/O | - | **SCK0 —** Serial clock for SPI0. |
| | | | | O | - | **CT16B0_MAT2 —** Match output 2 for 16-bit timer 0. |
| R/PIO0_11/ AD0/CT32B0_MAT3 | 32[5] | D8[5] | yes | I | I; PU | **R —** Reserved. Configure for an alternate function in the IOCONFIG block. |
| | | | | I/O | - | **PIO0_11 —** General purpose digital input/output pin. |
| | | | | I | - | **AD0 —** A/D converter, input 0. |
| | | | | O | - | **CT32B0_MAT3 —** Match output 3 for 32-bit timer 0. |
| PIO1_0 to PIO1_11 | | | | I/O | | **Port 1 —** Port 1 is a 12-bit I/O port with individual direction and function controls for each bit. The operation of port 1 pins depends on the function selected through the IOCONFIG register block. |
| R/PIO1_0/ AD1/CT32B1_CAP0 | 33[5] | C7[5] | yes | I | I; PU | **R —** Reserved. Configure for an alternate function in the IOCONFIG block. |
| | | | | I/O | - | **PIO1_0 —** General purpose digital input/output pin. |
| | | | | I | - | **AD1 —** A/D converter, input 1. |
| | | | | I | - | **CT32B1_CAP0 —** Capture input 0 for 32-bit timer 1. |
| R/PIO1_1/ AD2/CT32B1_MAT0 | 34[5] | C8[5] | no | O | I; PU | **R —** Reserved. Configure for an alternate function in the IOCONFIG block. |
| | | | | I/O | - | **PIO1_1 —** General purpose digital input/output pin. |
| | | | | I | - | **AD2 —** A/D converter, input 2. |
| | | | | O | - | **CT32B1_MAT0 —** Match output 0 for 32-bit timer 1. |
| R/PIO1_2/ AD3/CT32B1_MAT1 | 35[5] | B7[5] | no | I | I; PU | **R —** Reserved. Configure for an alternate function in the IOCONFIG block. |
| | | | | I/O | - | **PIO1_2 —** General purpose digital input/output pin. |
| | | | | I | - | **AD3 —** A/D converter, input 3. |
| | | | | O | - | **CT32B1_MAT1 —** Match output 1 for 32-bit timer 1. |
| SWDIO/PIO1_3/ AD4/CT32B1_MAT2 | 39[5] | B6[5] | no | I/O | I; PU | **SWDIO —** Serial wire debug input/output. |
| | | | | I/O | - | **PIO1_3 —** General purpose digital input/output pin. |
| | | | | I | - | **AD4 —** A/D converter, input 4. |
| | | | | O | - | **CT32B1_MAT2 —** Match output 2 for 32-bit timer 1. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 170. LPC1100XL series: LPC1113/14/15 pin description table (LQFP48 and TFBGA48 package)** *...continued*

| Symbol | LQFP48 | TFBGA48 | Start logic input | Type | Reset state [1] | Description |
|---|---|---|---|---|---|---|
| PIO1_4/AD5/ CT32B1_MAT3/ WAKEUP | 40[5] | A6[5] | no | I/O | I; PU | **PIO1_4 —** General purpose digital input/output pin with 10 ns glitch filter. In Deep power-down mode, this pin serves as the Deep power-down mode wake-up pin with 20 ns glitch filter. Pull this pin HIGH externally before entering Deep power-down mode. Pull this pin LOW to exit Deep power-down mode. A LOW-going pulse as short as 50 ns wakes up the part. |
| | | | | I | - | **AD5 —** A/D converter, input 5. |
| | | | | O | - | **CT32B1_MAT3 —** Match output 3 for 32-bit timer 1. |
| PIO1_5/$\overline{\text{RTS}}$/ CT32B0_CAP0 | 45[3] | A3[3] | no | I/O | I; PU | **PIO1_5 —** General purpose digital input/output pin. |
| | | | | O | - | **$\overline{\text{RTS}}$ —** Request To Send output for UART. |
| | | | | I | - | **CT32B0_CAP0 —** Capture input 0 for 32-bit timer 0. |
| PIO1_6/RXD/ CT32B0_MAT0 | 46[3] | B3[3] | no | I/O | I; PU | **PIO1_6 —** General purpose digital input/output pin. |
| | | | | I | - | **RXD —** Receiver input for UART. |
| | | | | O | - | **CT32B0_MAT0 —** Match output 0 for 32-bit timer 0. |
| PIO1_7/TXD/ CT32B0_MAT1 | 47[3] | B2[3] | no | I/O | I; PU | **PIO1_7 —** General purpose digital input/output pin. |
| | | | | O | - | **TXD —** Transmitter output for UART. |
| | | | | O | - | **CT32B0_MAT1 —** Match output 1 for 32-bit timer 0. |
| PIO1_8/ CT16B1_CAP0 | 9[3] | F2[3] | no | I/O | I; PU | **PIO1_8 —** General purpose digital input/output pin. |
| | | | | I | - | **CT16B1_CAP0 —** Capture input 0 for 16-bit timer 1. |
| PIO1_9/ CT16B1_MAT0/ MOSI1 | 17[3] | G4[3] | no | I/O | I; PU | **PIO1_9 —** General purpose digital input/output pin. |
| | | | | O | - | **CT16B1_MAT0 —** Match output 0 for 16-bit timer 1. |
| | | | | I/O | - | **MOSI1 —** Master Out Slave In for SPI1. |
| PIO1_10/AD6/ CT16B1_MAT1/ MISO1 | 30[5] | E8[5] | no | I/O | I; PU | **PIO1_10 —** General purpose digital input/output pin. |
| | | | | I | - | **AD6 —** A/D converter, input 6. |
| | | | | O | - | **CT16B1_MAT1 —** Match output 1 for 16-bit timer 1. |
| | | | | I/O | - | **MISO1 —** Master In Slave Out for SPI1. |
| PIO1_11/AD7/ CT32B1_CAP1 | 42[5] | A5[5] | no | I/O | I; PU | **PIO1_11 —** General purpose digital input/output pin. |
| | | | | I | - | **AD7 —** A/D converter, input 7. |
| | | | | I | - | **CT32B1_CAP1 —** Capture input 1 for 32-bit timer 1. |
| PIO2_0 to PIO2_11 | | | | I/O | | **Port 2 —** Port 2 is a 12-bit I/O port with individual direction and function controls for each bit. The operation of port 2 pins depends on the function selected through the IOCONFIG register block. |
| PIO2_0/$\overline{\text{DTR}}$/SSEL1 | 2[3] | B1[3] | no | I/O | I; PU | **PIO2_0 —** General purpose digital input/output pin. |
| | | | | O | - | **$\overline{\text{DTR}}$ —** Data Terminal Ready output for UART. |
| | | | | I/O | - | **SSEL1 —** Slave Select for SPI1. |
| PIO2_1/$\overline{\text{DSR}}$/SCK1 | 13[3] | H1[3] | no | I/O | I; PU | **PIO2_1 —** General purpose digital input/output pin. |
| | | | | I | - | **$\overline{\text{DSR}}$ —** Data Set Ready input for UART. |
| | | | | I/O | - | **SCK1 —** Serial clock for SPI1. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 170. LPC1100XL series: LPC1113/14/15 pin description table (LQFP48 and TFBGA48 package)** *...continued*

| Symbol | LQFP48 | TFBGA48 | Start logic input | Type | Reset state [1] | Description |
|---|---|---|---|---|---|---|
| PIO2_2/DCD/MISO1 | 26[3] | G8[3] | no | I/O | I; PU | **PIO2_2 —** General purpose digital input/output pin. |
| | | | | I | - | **DCD —** Data Carrier Detect input for UART. |
| | | | | I/O | - | **MISO1 —** Master In Slave Out for SPI1. |
| PIO2_3/RI/MOSI1 | 38[3] | A7[3] | no | I/O | I; PU | **PIO2_3 —** General purpose digital input/output pin. |
| | | | | I | - | **RI —** Ring Indicator input for UART. |
| | | | | I/O | - | **MOSI1 —** Master Out Slave In for SPI1. |
| PIO2_4/ CT16B1_MAT1/ SSEL1 | 19[3] | G5[3] | no | I/O | I; PU | **PIO2_4 —** General purpose digital input/output pin. |
| | | | | O | - | **CT16B1_MAT1 —** Match output 1 for 16-bit timer 1. |
| | | | | O | - | **SSEL1 —** Slave Select for SPI1. |
| PIO2_5/ CT32B0_MAT0 | 20[3] | H5[3] | no | I/O | I; PU | **PIO2_5 —** General purpose digital input/output pin. |
| | | | | O | - | **CT32B0_MAT0 —** Match output 0 for 32-bit timer 0. |
| PIO2_6/ CT32B0_MAT1 | 1[3] | A1[3] | no | I/O | I; PU | **PIO2_6 —** General purpose digital input/output pin. |
| | | | | O | - | **CT32B0_MAT1 —** Match output 1 for 32-bit timer 0. |
| PIO2_7/ CT32B0_MAT2/RXD | 11[3] | G2[3] | no | I/O | I; PU | **PIO2_7 —** General purpose digital input/output pin. |
| | | | | O | - | **CT32B0_MAT2 —** Match output 2 for 32-bit timer 0. |
| | | | | I | - | **RXD —** Receiver input for UART. |
| PIO2_8/ CT32B0_MAT3/TXD | 12[3] | G1[3] | no | I/O | I; PU | **PIO2_8 —** General purpose digital input/output pin. |
| | | | | O | - | **CT32B0_MAT3 —** Match output 3 for 32-bit timer 0. |
| | | | | O | - | **TXD —** Transmitter output for UART. |
| PIO2_9/ CT32B0_CAP0 | 24[3] | H7[3] | no | I/O | I; PU | **PIO2_9 —** General purpose digital input/output pin. |
| | | | | I | - | **CT32B0_CAP0 —** Capture input 0 for 32-bit timer 0. |
| PIO2_10 | 25[3] | H8[3] | no | I/O | I; PU | **PIO2_10 —** General purpose digital input/output pin. |
| PIO2_11/SCK0/ CT32B0_CAP1 | 31[3] | D7[3] | no | I/O | I; PU | **PIO2_11 —** General purpose digital input/output pin. |
| | | | | I/O | - | **SCK0 —** Serial clock for SPI0. |
| | | | | I | - | **CT32B0_CAP1 —** Capture input for 32-bit timer 0. |
| PIO3_0 to PIO3_5 | | | | I/O | | **Port 3 —** Port 3 is a 12-bit I/O port with individual direction and function controls for each bit. The operation of port 3 pins depends on the function selected through the IOCONFIG register block. Pins PIO3_6 to PIO3_11 are not available. |
| PIO3_0/DTR/ CT16B0_MAT0/TXD | 36[3] | B8[3] | no | I/O | I; PU | **PIO3_0 —** General purpose digital input/output pin. |
| | | | | O | - | **DTR —** Data Terminal Ready output for UART. |
| | | | | O | - | **CT16B0_MAT0 —** Match output 0 for 16-bit timer 0. |
| | | | | O | - | **TXD —** Transmitter Output for UART. |
| PIO3_1/DSR/ CT16B0_MAT1/RXD | 37[3] | A8[3] | no | I/O | I; PU | **PIO3_1 —** General purpose digital input/output pin. |
| | | | | I | - | **DSR —** Data Set Ready input for UART. |
| | | | | O | - | **CT16B0_MAT1 —** Match output 1 for 16-bit timer 0. |
| | | | | I | - | **RXD —** Receiver input for UART. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 170. LPC1100XL series: LPC1113/14/15 pin description table (LQFP48 and TFBGA48 package)** *...continued*

| Symbol | LQFP48 | TFBGA48 | Start logic input | Type | Reset state [1] | Description |
|---|---|---|---|---|---|---|
| PIO3_2/$\overline{\text{DCD}}$/ CT16B0_MAT2/ SCK1 | 43[3] | A4[3] | no | I/O | I; PU | **PIO3_2 —** General purpose digital input/output pin. |
| | | | | I | - | **$\overline{\text{DCD}}$ —** Data Carrier Detect input for UART. |
| | | | | O | - | **CT16B0_MAT2 —** Match output 2 for 16-bit timer 0. |
| | | | | I/O | - | **SCK1 —** Serial clock for SPI1. |
| PIO3_3/$\overline{\text{RI}}$/ CT16B0_CAP0 | 48[3] | A2[3] | no | I/O | I; PU | **PIO3_3 —** General purpose digital input/output pin. |
| | | | | I | - | **$\overline{\text{RI}}$ —** Ring Indicator input for UART. |
| | | | | I | - | **CT16B0_CAP0 —** Capture input 0 for 16-bit timer 0. |
| PIO3_4/ CT16B0_CAP1/RXD | 18[3] | H4[3] | no | I/O | I; PU | **PIO3_4 —** General purpose digital input/output pin. |
| | | | | I | - | **CT16B0_CAP1 —** Capture input 1 for 16-bit timer 0. |
| | | | | I | - | **RXD —** Receiver input for UART |
| PIO3_5/ CT16B1_CAP1/TXD | 21[3] | G6[3] | no | I/O | I; PU | **PIO3_5 —** General purpose digital input/output pin. |
| | | | | I | - | **CT16B1_CAP1 —** Capture input 1 for 16-bit timer 1. |
| | | | | O | - | **TXD —** Transmitter output for UART |
| $V_{DD}$ | 8; 44 | E2; B4 | - | I | - | 3.3 V supply voltage to the internal regulator, the external rail, and the ADC. Also used as the ADC reference voltage. |
| XTALIN | 6[6] | D1[6] | - | I | - | Input to the oscillator circuit and internal clock generator circuits. Input voltage must not exceed 1.8 V. |
| XTALOUT | 7[6] | E1[6] | - | O | - | Output from the oscillator amplifier. |
| $V_{SS}$ | 5; 41 | D2; B5 | - | I | - | Ground. |

[1] Pin state at reset for default function: I = Input; O = Output; PU = internal pull-up enabled (pins pulled up to full $V_{DD}$ level ($V_{DD}$ = 3.3 V)); IA = inactive, no pull-up/down enabled.

[2] 5 V tolerant pad. $\overline{\text{RESET}}$ functionality is not available in Deep power-down mode. Use the WAKEUP pin to reset the chip and wake up from Deep power-down mode. An external pull-up resistor is required on this pin for the Deep power-down mode.

[3] 5 V tolerant pad providing digital I/O functions with configurable pull-up/pull-down resistors and configurable hysteresis.

[4] $I^2C$-bus pads compliant with the $I^2C$-bus specification for $I^2C$ standard mode and $I^2C$ Fast-mode Plus. The pin requires an external pull-up to provide output functionality. When power is switched off, this pin is floating and does not disturb the I2C lines. Open-drain configuration applies to all functions on this pin.

[5] 5 V tolerant pad providing digital I/O functions with configurable pull-up/pull-down resistors, configurable hysteresis, and analog input. When configured as a ADC input, digital section of the pad is disabled and the pin is not 5 V tolerant.

[6] When the system oscillator is not used, connect XTALIN and XTALOUT as follows: XTALIN can be left floating or can be grounded (grounding is preferred to reduce susceptibility to noise). XTALOUT should be left floating.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 171. LPC1111/12/13/14XL pin description table (HVQFN33 package)**

| Symbol | Pin | Start logic input | Type | Reset state [1] | Description |
|---|---|---|---|---|---|
| PIO0_0 to PIO0_11 | | | | | **Port 0 —** Port 0 is a 12-bit I/O port with individual direction and function controls for each bit. The operation of port 0 pins depends on the function selected through the IOCONFIG register block. |
| RESET/PIO0_0 | 2[2] | yes | I | I;PU | **RESET —** External reset input with 20 ns glitch filter. A LOW-going pulse as short as 50 ns on this pin resets the device, causing I/O ports and peripherals to take on their default states and processor execution to begin at address 0.<br>In deep power-down mode, this pin must be pulled HIGH externally. The RESET pin can be left unconnected or be used as a GPIO pin if an external RESET function is not needed. |
| | | | I/O | - | **PIO0_0 —** General purpose digital input/output pin with 10 ns glitch filter. |
| PIO0_1/CLKOUT/ CT32B0_MAT2 | 3[3] | yes | I/O | I;PU | **PIO0_1 —** General purpose digital input/output pin. A LOW level on this pin during reset starts the ISP command handler. |
| | | | O | - | **CLKOUT —** Clock out pin. |
| | | | O | - | **CT32B0_MAT2 —** Match output 2 for 32-bit timer 0. |
| PIO0_2/SSEL0/ CT16B0_CAP0 | 8[3] | yes | I/O | I;PU | **PIO0_2 —** General purpose digital input/output pin. |
| | | | I/O | - | **SSEL0 —** Slave select for SPI0. |
| | | | I | - | **CT16B0_CAP0 —** Capture input 0 for 16-bit timer 0. |
| PIO0_3 | 9[3] | yes | I/O | I;PU | **PIO0_3 —** General purpose digital input/output pin. |
| PIO0_4/SCL | 10[4] | yes | I/O | I;PU | **PIO0_4 —** General purpose digital input/output pin (open-drain). |
| | | | I/O | - | **SCL —** $I^2C$-bus, open-drain clock input/output. High-current sink only if $I^2C$ Fast-mode Plus is selected in the I/O configuration register. |
| PIO0_5/SDA | 11[4] | yes | I/O | I;PU | **PIO0_5 —** General purpose digital input/output pin (open-drain). |
| | | | I/O | - | **SDA —** $I^2C$-bus, open-drain data input/output. High-current sink only if $I^2C$ Fast-mode Plus is selected in the I/O configuration register. |
| PIO0_6/SCK0 | 15[3] | yes | I/O | I;PU | **PIO0_6 —** General purpose digital input/output pin. |
| | | | I/O | - | **SCK0 —** Serial clock for SPI0. |
| PIO0_7/CTS | 16[3] | yes | I/O | I;PU | **PIO0_7 —** General purpose digital input/output pin (high-current output driver). |
| | | | I | - | **CTS —** Clear To Send input for UART. |
| PIO0_8/MISO0/ CT16B0_MAT0 | 17[3] | yes | I/O | I;PU | **PIO0_8 —** General purpose digital input/output pin. |
| | | | I/O | - | **MISO0 —** Master In Slave Out for SPI0. |
| | | | O | - | **CT16B0_MAT0 —** Match output 0 for 16-bit timer 0. |
| PIO0_9/MOSI0/ CT16B0_MAT1 | 18[3] | yes | I/O | I;PU | **PIO0_9 —** General purpose digital input/output pin. |
| | | | I/O | - | **MOSI0 —** Master Out Slave In for SPI0. |
| | | | O | - | **CT16B0_MAT1 —** Match output 1 for 16-bit timer 0. |
| SWCLK/PIO0_10/ SCK0/ CT16B0_MAT2 | 19[3] | yes | I | I;PU | **SWCLK —** Serial wire clock. |
| | | | I/O | - | **PIO0_10 —** General purpose digital input/output pin. |
| | | | I/O | - | **SCK0 —** Serial clock for SPI0. |
| | | | O | - | **CT16B0_MAT2 —** Match output 2 for 16-bit timer 0. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 171. LPC1111/12/13/14XL pin description table (HVQFN33 package)** *…continued*

| Symbol | Pin | Start logic input | Type | Reset state [1] | Description |
|---|---|---|---|---|---|
| R/PIO0_11/AD0/ CT32B0_MAT3 | 21[5] | yes | - | I;PU | **R —** Reserved. Configure for an alternate function in the IOCONFIG block. |
| | | | I/O | - | **PIO0_11 —** General purpose digital input/output pin. |
| | | | I | - | **AD0 —** A/D converter, input 0. |
| | | | O | - | **CT32B0_MAT3 —** Match output 3 for 32-bit timer 0. |
| PIO1_0 to PIO1_11 | | | | | **Port 1 —** Port 1 is a 12-bit I/O port with individual direction and function controls for each bit. The operation of port 1 pins depends on the function selected through the IOCONFIG register block. |
| R/PIO1_0/AD1/ CT32B1_CAP0 | 22[5] | yes | - | I;PU | **R —** Reserved. Configure for an alternate function in the IOCONFIG block. |
| | | | I/O | - | **PIO1_0 —** General purpose digital input/output pin. |
| | | | I | - | **AD1 —** A/D converter, input 1. |
| | | | I | - | **CT32B1_CAP0 —** Capture input 0 for 32-bit timer 1. |
| R/PIO1_1/AD2/ CT32B1_MAT0 | 23[5] | no | - | I;PU | **R —** Reserved. Configure for an alternate function in the IOCONFIG block. |
| | | | I/O | - | **PIO1_1 —** General purpose digital input/output pin. |
| | | | I | - | **AD2 —** A/D converter, input 2. |
| | | | O | - | **CT32B1_MAT0 —** Match output 0 for 32-bit timer 1. |
| R/PIO1_2/AD3/ CT32B1_MAT1 | 24[5] | no | - | I;PU | **R —** Reserved. Configure for an alternate function in the IOCONFIG block. |
| | | | I/O | - | **PIO1_2 —** General purpose digital input/output pin. |
| | | | I | - | **AD3 —** A/D converter, input 3. |
| | | | O | - | **CT32B1_MAT1 —** Match output 1 for 32-bit timer 1. |
| SWDIO/PIO1_3/ AD4/CT32B1_MAT2 | 25[5] | no | I/O | I;PU | **SWDIO —** Serial wire debug input/output. |
| | | | I/O | - | **PIO1_3 —** General purpose digital input/output pin. |
| | | | I | - | **AD4 —** A/D converter, input 4. |
| | | | O | - | **CT32B1_MAT2 —** Match output 2 for 32-bit timer 1. |
| PIO1_4/AD5/ CT32B1_MAT3/ WAKEUP | 26[5] | no | I/O | I;PU | **PIO1_4 —** General purpose digital input/output pin with 10 ns glitch filter. In Deep power-down mode, this pin serves as the Deep power-down mode wake-up pin with 20 ns glitch filter. Pull this pin HIGH externally before entering Deep power-down mode. Pull this pin LOW to exit Deep power-down mode. A LOW-going pulse as short as 50 ns wakes up the part. |
| | | | I | - | **AD5 —** A/D converter, input 5. |
| | | | O | - | **CT32B1_MAT3 —** Match output 3 for 32-bit timer 1. |
| PIO1_5/$\overline{\text{RTS}}$/ CT32B0_CAP0 | 30[3] | no | I/O | I;PU | **PIO1_5 —** General purpose digital input/output pin. |
| | | | O | - | **$\overline{\text{RTS}}$ —** Request To Send output for UART. |
| | | | I | - | **CT32B0_CAP0 —** Capture input 0 for 32-bit timer 0. |
| PIO1_6/RXD/ CT32B0_MAT0 | 31[3] | no | I/O | I;PU | **PIO1_6 —** General purpose digital input/output pin. |
| | | | I | - | **RXD —** Receiver input for UART. |
| | | | O | - | **CT32B0_MAT0 —** Match output 0 for 32-bit timer 0. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 171. LPC1111/12/13/14XL pin description table (HVQFN33 package)** *…continued*

| Symbol | Pin | Start logic input | Type | Reset state [1] | Description |
|---|---|---|---|---|---|
| PIO1_7/TXD/ CT32B0_MAT1 | 32[3] | no | I/O | I;PU | **PIO1_7 —** General purpose digital input/output pin. |
| | | | O | - | **TXD —** Transmitter output for UART. |
| | | | O | - | **CT32B0_MAT1 —** Match output 1 for 32-bit timer 0. |
| PIO1_8/ CT16B1_CAP0 | 7[3] | no | I/O | I;PU | **PIO1_8 —** General purpose digital input/output pin. |
| | | | I | - | **CT16B1_CAP0 —** Capture input 0 for 16-bit timer 1. |
| PIO1_9/ CT16B1_MAT0/ MOSI | 12[3] | no | I/O | I;PU | **PIO1_9 —** General purpose digital input/output pin. |
| | | | O | - | **CT16B1_MAT0 —** Match output 0 for 16-bit timer 1. |
| | | | I/O | - | **MOSI —** Master Out Slave In for SPI1 |
| PIO1_10/AD6/ CT16B1_MAT1/ MISO | 20[5] | no | I/O | I;PU | **PIO1_10 —** General purpose digital input/output pin. |
| | | | I | - | **AD6 —** A/D converter, input 6. |
| | | | O | - | **CT16B1_MAT1 —** Match output 1 for 16-bit timer 1. |
| | | | I/O | - | **MISO1 —** Master In Slave Out for SPI1 |
| PIO1_11/AD7/ CT32B1_CAP1 | 27[5] | no | I/O | I;PU | **PIO1_11 —** General purpose digital input/output pin. |
| | | | I | - | **AD7 —** A/D converter, input 7. |
| | | | I | - | **CT32B1_CAP1 —** Capture input 1 for 32-bit timer 1. |
| PIO2_0 | | | | | **Port 2 —** Port 2 is a 12-bit I/O port with individual direction and function controls for each bit. The operation of port 2 pins depends on the function selected through the IOCONFIG register block. Pins PIO2_1 to PIO2_11 are not available. |
| PIO2_0/$\overline{\text{DTR}}$/SSEL1 | 1[3] | no | I/O | I;PU | **PIO2_0 —** General purpose digital input/output pin. |
| | | | O | - | **$\overline{\text{DTR}}$ —** Data Terminal Ready output for UART. |
| | | | I/O | - | **SSEL1 —** Slave Select for SPI1. |
| PIO3_0 to PIO3_5 | | | | | **Port 3 —** Port 3 is a 12-bit I/O port with individual direction and function controls for each bit. The operation of port 3 pins depends on the function selected through the IOCONFIG register block. Pins PIO3_0, PIO3_1, PIO3_3 and PIO3_6 to PIO3_11 are not available. |
| PIO3_2/ CT16B0_MAT2/ SCK1 | 28[3] | no | I/O | I;PU | **PIO3_2 —** General purpose digital input/output pin. |
| | | | O | - | **CT16B0_MAT2 —** Match output 2 for 16-bit timer 0. |
| | | | I/O | - | **SCK1 —** Serial clock for SPI1. |
| PIO3_4/ CT16B0_CAP1/RXD | 13[3] | no | I/O | I;PU | **PIO3_4 —** General purpose digital input/output pin. |
| | | | I | - | **CT16B0_CAP1 —** Capture input 1 for 16-bit timer 0. |
| | | | I | - | **RXD —** Receiver input for UART. |
| PIO3_5/ CT16B1_CAP1/TXD | 14[3] | no | I/O | I;PU | **PIO3_5 —** General purpose digital input/output pin. |
| | | | I | - | **CT16B1_CAP1 —** Capture input 1 for 16-bit timer 1. |
| | | | O | - | **TXD —** Transmitter output for UART. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 171. LPC1111/12/13/14XL pin description table (HVQFN33 package)** *…continued*

| Symbol | Pin | Start logic input | Type | Reset state [1] | Description |
|---|---|---|---|---|---|
| $V_{DD}$ | 6; 29 | - | I | - | 3.3 V supply voltage to the internal regulator, the external rail, and the ADC. Also used as the ADC reference voltage. |
| XTALIN | 4[6] | - | I | - | Input to the oscillator circuit and internal clock generator circuits. Input voltage must not exceed 1.8 V. |
| XTALOUT | 5[6] | - | O | - | Output from the oscillator amplifier. |
| $V_{SS}$ | 33 | - | - | - | Thermal pad. Connect to ground. |

[1] Pin state at reset for default function: I = Input; O = Output; PU = internal pull-up enabled (pins pulled up to full $V_{DD}$ level ($V_{DD}$ = 3.3 V)); IA = inactive, no pull-up/down enabled.

[2] $\overline{\text{RESET}}$ functionality is not available in Deep power-down mode. Use the WAKEUP pin to reset the chip and wake up from Deep power-down mode. An external pull-up resistor is required on this pin for the Deep power-down mode.

[3] 5 V tolerant pad providing digital I/O functions with configurable pull-up/pull-down resistors and configurable hysteresis.

[4] $I^2C$-bus pads compliant with the $I^2C$-bus specification for $I^2C$ standard mode and $I^2C$ Fast-mode Plus. The pin requires an external pull-up to provide output functionality. When power is switched off, this pin is floating and does not disturb the I2C lines. Open-drain configuration applies to all functions on this pin.

[5] 5 V tolerant pad providing digital I/O functions with configurable pull-up/pull-down resistors, configurable hysteresis, and analog input. When configured as a ADC input, digital section of the pad is disabled, and the pin is not 5 V tolerant.

[6] When the system oscillator is not used, connect XTALIN and XTALOUT as follows: XTALIN can be left floating or can be grounded (grounding is preferred to reduce susceptibility to noise). XTALOUT should be left floating.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 12.1 How to read this chapter

The number of GPIO pins available on each port depends on the LPC111x/LPC11Cxx part and the package. See Table 172 for available GPIO pins:

**Table 172. GPIO configuration**

| Part | Package | GPIO port 0 | GPIO port 1 | GPIO port 2 | GPIO port 3 | Total GPIO pins |
|---|---|---|---|---|---|---|
| LPC1110 | SO20/ TSSOP20 | PIO0_0 to PIO0_2; PIO0_4 to PIO0_6; PIO0_8 to PIO0_11 | PIO1_0 to PIO1_3; PIO1_6 to PIO1_7 | - | - | 16 |
| LPC1111 | HVQFN33 | PIO0_0 to PIO0_11 | PIO1_0 to PIO1_11 | PIO2_0 | PIO3_2; PIO3_4; PIO3_5 | 28 |
| LPC1112 | TSSOP20 | PIO0_0 to PIO0_3; PIO0_8 to PIO0_11 | PIO1_0 to PIO1_3; PIO1_6 to PIO1_7 | - | - | 14 |
| | TSSOP28 | PIO0_0 to PIO0_11 | PIO1_0 to PIO1_9 | - | - | 22 |
| | HVQFN33 | PIO0_0 to PIO0_11 | PIO1_0 to PIO1_11 | PIO2_0 | PIO3_2; PIO3_4; PIO3_5 | 28 |
| | HVQFN33 | PIO0_0 to PIO0_3; PIO0_4 to PIO0_11 | PIO1_0 to PIO1_4; PIO1_6 to PIO1_8 | - | - | |
| LPC1113 | HVQFN33 | PIO0_0 to PIO0_11 | PIO1_0 to PIO1_11 | PIO2_0 | PIO3_2; PIO3_4; PIO3_5 | 28 |
| | LQFP48 | PIO0_0 to PIO0_11 | PIO1_0 to PIO1_11 | PIO2_0 to PIO2_11 | PIO3_0 to PIO3_5 | 42 |
| LPC1114 | TSSOP28 | PIO0_0 to PIO0_11 | PIO1_0 to PIO1_9 | - | - | 22 |
| | HVQFN33 | PIO0_0 to PIO0_11 | PIO1_0 to PIO1_11 | PIO2_0 | PIO3_2; PIO3_4; PIO3_5 | 28 |
| | LQFP48 | PIO0_0 to PIO0_11 | PIO1_0 to PIO1_11 | PIO2_0 to PIO2_11 | PIO3_0 to PIO3_5 | 42 |
| LPC11D14 | LQFP100 | PIO0_0 to PIO0_11 | PIO1_0 to PIO1_11 | PIO2_0 to PIO2_11 | PIO3_0 to PIO3_5 | 42 |
| LPC11C12 | LQFP48 | PIO0_0 to PIO0_11 | PIO1_0 to PIO1_11 | PIO2_0 to PIO2_11 | PIO3_0 to PIO3_3 | 40 |
| LPC11C14 | LQFP48 | PIO0_0 to PIO0_11 | PIO1_0 to PIO1_11 | PIO2_0 to PIO2_11 | PIO3_0 to PIO3_3 | 40 |
| LPC11C22 | LQFP48 | PIO0_0 to PIO0_11 | PIO1_0 to PIO1_11 except PIO1_9 | PIO2_0 to PIO2_11 except PIO2_4, PIO2_5, PIO2_9 | PIO3_0 to PIO3_3 | 36 |
| LPC11C24 | LQFP48 | PIO0_0 to PIO0_11 | PIO1_0 to PIO1_11 except PIO1_9 | PIO2_0 to PIO2_11 except PIO2_4, PIO2_5, PIO2_9 | PIO3_0 to PIO3_3 | 36 |

Register bits corresponding to PIOn_m pins which are not available are reserved.

## 12.2 Introduction

### 12.2.1 Features

- GPIO pins can be configured as input or output by software.
- Each individual port pin can serve as an edge or level-sensitive interrupt request.
- Interrupts can be configured on single falling or rising edges and on both edges.
- Level-sensitive interrupt pins can be HIGH or LOW-active.


All information provided in this document is subject to legal disclaimers.
© NXP B.V. 2016. All rights reserved.

- All GPIO pins are inputs by default.
- Reading and writing of data registers are masked by address bits 13:2.

## 12.3 Register description

Each GPIO register can be up to 12 bits wide and can be read or written using word or half-word operations at word addresses.

**Table 173. Register overview: GPIO (base address port 0: 0x5000 0000; port 1: 0x5001 0000, port 2: 0x5002 0000; port 3: 0x5003 0000)**

| Name | Access | Address offset | Description | Reset value |
|---|---|---|---|---|
| GPIOnDATA | R/W | 0x0000 to 0x3FF8 | Port n data address masking register locations for pins PIOn_0 to PIOn_11 (see Section 12.4.1). | n/a |
| GPIOnDATA | R/W | 0x3FFC | Port n data register for pins PIOn_0 to PIOn_11 | n/a |
| - | - | 0x4000 to 0x7FFC | reserved | - |
| GPIOnDIR | R/W | 0x8000 | Data direction register for port n | 0x00 |
| GPIOnIS | R/W | 0x8004 | Interrupt sense register for port n | 0x00 |
| GPIOnIBE | R/W | 0x8008 | Interrupt both edges register for port n | 0x00 |
| GPIOnIEV | R/W | 0x800C | Interrupt event register for port n | 0x00 |
| GPIOnIE | R/W | 0x8010 | Interrupt mask register for port n | 0x00 |
| GPIOnRIS | R | 0x8014 | Raw interrupt status register for port n | 0x00 |
| GPIOnMIS | R | 0x8018 | Masked interrupt status register for port n | 0x00 |
| GPIOnIC | W | 0x801C | Interrupt clear register for port n | 0x00 |
| - | - | 0x8020 - 0xFFFF | reserved | 0x00 |

### 12.3.1 GPIO data register

The GPIOnDATA register holds the current logic state of the pin (HIGH or LOW), independently of whether the pin is configured as an GPIO input or output or as another digital function. If the pin is configured as GPIO output, the current value of the GPIOnDATA register is driven to the pin.

**Table 174. GPIOnDATA register (GPIO0DATA, address 0x5000 0000 to 0x5000 3FFC; GPIO1DATA, address 0x5001 0000 to 0x5001 3FFC; GPIO2DATA, address 0x5002 0000 to 0x5002 3FFC; GPIO3DATA, address 0x5003 0000 to 0x5003 3FFC) bit description**

| Bit | Symbol | Description | Reset value | Access |
|---|---|---|---|---|
| 11:0 | DATA | Logic levels for pins PIOn_0 to PIOn_11. HIGH = 1, LOW = 0. | n/a | R/W |
| 31:12 | - | Reserved | - | - |

A read of the GPIOnDATA register always returns the current logic level (state) of the pin independently of its configuration. Because there is a single data register for both the value of the output driver and the state of the pin's input, write operations have different effects depending on the pin's configuration:


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

- If a pin is configured as GPIO input, a write to the GPIOnDATA register has no effect on the pin level. A read returns the current state of the pin.
- If a pin is configured as GPIO output, the current value of GPIOnDATA register is driven to the pin. This value can be a result of writing to the GPIOnDATA register, or it can reflect the previous state of the pin if the pin is switched to GPIO output from GPIO input or another digital function. A read returns the current state of the output latch.
- If a pin is configured as another digital function (input or output), a write to the GPIOnDATA register has no effect on the pin level. A read returns the current state of the pin even if it is configured as an output. This means that by reading the GPIOnDATA register, the digital output or input value of a function other than GPIO on that pin can be observed.

The following rules apply when the pins are switched from input to output:

- Pin is configured as input with a HIGH level applied:
  - Change pin to output: pin drives HIGH level.
- Pin is configured as input with a LOW level applied:
  - Change pin to output: pin drives LOW level.

The rules show that the pins mirror the current logic level. Therefore floating pins may drive an unpredictable level when switched from input to output.

### 12.3.2 GPIO data direction register

**Table 175. GPIOnDIR register (GPIO0DIR, address 0x5000 8000 to GPIO3DIR, address 0x5003 8000) bit description**

| Bit | Symbol | Description | Reset value | Access |
|---|---|---|---|---|
| 11:0 | IO | Selects pin x as input or output (x = 0 to 11).<br>0 = Pin PIOn_x is configured as input.<br>1 = Pin PIOn_x is configured as output. | 0x00 | R/W |
| 31:12 | - | Reserved | - | - |

### 12.3.3 GPIO interrupt sense register

**Table 176. GPIOnIS register (GPIO0IS, address 0x5000 8004 to GPIO3IS, address 0x5003 8004) bit description**

| Bit | Symbol | Description | Reset value | Access |
|---|---|---|---|---|
| 11:0 | ISENSE | Selects interrupt on pin x as level or edge sensitive (x = 0 to 11).<br>0 = Interrupt on pin PIOn_x is configured as edge sensitive.<br>1 = Interrupt on pin PIOn_x is configured as level sensitive. | 0x00 | R/W |
| 31:12 | - | Reserved | - | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 12.3.4 GPIO interrupt both edges sense register

Table 177. GPIOnIBE register (GPIO0IBE, address 0x5000 8008 to GPIO3IBE, address 0x5003 8008) bit description

| Bit | Symbol | Description | Reset value | Access |
|---|---|---|---|---|
| 11:0 | IBE | Selects interrupt on pin x to be triggered on both edges (x = 0 to 11).<br>0 = Interrupt on pin PIOn_x is controlled through register GPIOnIEV.<br>1 = Both edges on pin PIOn_x trigger an interrupt. | 0x00 | R/W |
| 31:12 | - | Reserved | - | - |

### 12.3.5 GPIO interrupt event register

Table 178. GPIOnIEV register (GPIO0IEV, address 0x5000 800C to GPIO3IEV, address 0x5003 800C) bit description

| Bit | Symbol | Description | Reset value | Access |
|---|---|---|---|---|
| 11:0 | IEV | Selects interrupt on pin x to be triggered rising or falling edges (x = 0 to 11).<br>0 = Depending on setting in register GPIOnIS (see Table 176), falling edges or LOW level on pin PIOn_x trigger an interrupt.<br>1 = Depending on setting in register GPIOnIS (see Table 176), rising edges or HIGH level on pin PIOn_x trigger an interrupt. | 0x00 | R/W |
| 31:12 | - | Reserved | - | - |

### 12.3.6 GPIO interrupt mask register

Bits set to HIGH in the GPIOnIE register allow the corresponding pins to trigger their individual interrupts and the combined GPIOnINTR line. Clearing a bit disables interrupt triggering on that pin.

Table 179. GPIOnIE register (GPIO0IE, address 0x5000 8010 to GPIO3IE, address 0x5003 8010) bit description

| Bit | Symbol | Description | Reset value | Access |
|---|---|---|---|---|
| 11:0 | MASK | Selects interrupt on pin x to be masked (x = 0 to 11).<br>0 = Interrupt on pin PIOn_x is masked.<br>1 = Interrupt on pin PIOn_x is not masked. | 0x00 | R/W |
| 31:12 | - | Reserved | - | - |

### 12.3.7 GPIO raw interrupt status register

Bits read HIGH in the GPIOnRIS register reflect the raw (prior to masking) interrupt status of the corresponding pins indicating that all the requirements have been met before they are allowed to trigger the GPIOIE. Bits read as zero indicate that the corresponding input pins have not initiated an interrupt. The register is read-only.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 180. GPIOnRIS register (GPIO0RIS, address 0x5000 8014 to GPIO3RIS, address 0x5003 8014) bit description**

| Bit | Symbol | Description | Reset value | Access |
|---|---|---|---|---|
| 11:0 | RAWST | Raw interrupt status (x = 0 to 11).<br>0 = No interrupt on pin PIOn_x.<br>1 = Interrupt requirements met on PIOn_x. | 0x00 | R |
| 31:12 | - | Reserved | - | - |

## 12.3.8 GPIO masked interrupt status register

Bits read HIGH in the GPIOnMIS register reflect the status of the input lines triggering an interrupt. Bits read as LOW indicate that either no interrupt on the corresponding input pins has been generated or that the interrupt is masked. GPIOMIS is the state of the interrupt after masking. The register is read-only.

**Table 181. GPIOnMIS register (GPIO0MIS, address 0x5000 8018 to GPIO3MIS, address 0x5003 8018) bit description**

| Bit | Symbol | Description | Reset value | Access |
|---|---|---|---|---|
| 11:0 | MASK | Selects interrupt on pin x to be masked (x = 0 to 11).<br>0 = No interrupt or interrupt masked on pin PIOn_x.<br>1 = Interrupt on PIOn_x. | 0x00 | R |
| 31:12 | - | Reserved | - | - |

## 12.3.9 GPIO interrupt clear register

This register allows software to clear edge detection for port bits that are identified as edge-sensitive in the Interrupt Sense register. This register has no effect on port bits identified as level-sensitive.

**Table 182. GPIOnIC register (GPIO0IC, address 0x5000 801C to GPIO3IC, address 0x5003 801C) bit description**

| Bit | Symbol | Description | Reset value | Access |
|---|---|---|---|---|
| 11:0 | CLR | Selects interrupt on pin x to be cleared (x = 0 to 11). Clears the interrupt edge detection logic. This register is write-only.<br>**Remark:** The synchronizer between the GPIO and the NVIC blocks causes a delay of 2 clocks. It is recommended to add two NOPs after the clear of the interrupt edge detection logic before the exit of the interrupt service routine.<br>0 = No effect.<br>1 = Clears edge detection logic for pin PIOn_x. | 0x00 | W |
| 31:12 | - | Reserved | - | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 12.4 Functional description

### 12.4.1 Write/read data operation

In order for software to be able to set GPIO bits without affecting any other pins in a single write operation, bits [13:2] of a 14-bit wide address bus are used to create a 12-bit wide mask for write and read operations on the 12 GPIO pins for each port. Only GPIOnDATA bits masked by 1 are affected by read and write operations. The masked GPIOnDATA register can be located anywhere between address offsets 0x0000 to 0x3FFC in the GPIOn address space. Reading and writing to the GPIOnDATA register at address 0x3FFC sets all masking bits to 1.

#### Write operation

If the address bit (i+2) associated with the GPIO port bit i (i = 0 to 11) to be written is HIGH, the value of the GPIODATA register bit i is updated. If the address bit (i+2) is LOW, the corresponding GPIODATA register bit i is left unchanged.

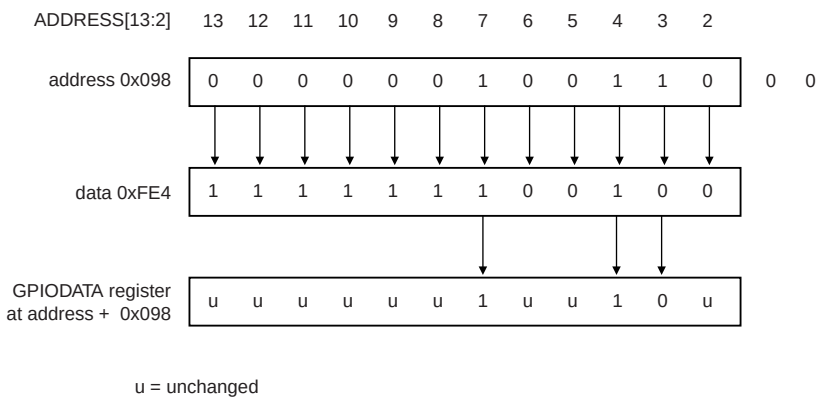


**Fig 30. Masked write operation to the GPIODATA register**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### Read operation

If the address bit associated with the GPIO data bit is HIGH, the value is read. If the address bit is LOW, the GPIO data bit is read as 0. Reading a port DATA register yields the state of port pins 11:0 ANDed with address bits 13:2.

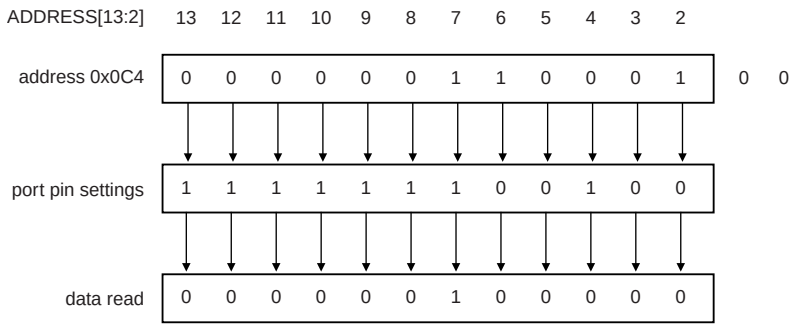


**Fig 31. Masked read operation**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 13.1 How to read this chapter

The UART block is identical for all LPC111x, LPC11D14, and LPC11Cxx parts. The $\overline{\text{DSR}}$, $\overline{\text{DCD}}$, and $\overline{\text{RI}}$ modem signals are fully pinned out on the LQFP48 packages only.

Note that for parts of the LPC1100 series (LPC111x/101/201/301), the UART pins must be configured before the UART clock can be enabled. No enabling sequence requirement exists for parts LPC11Cxx , parts in the LPC1100L and LPC1100XL series, and LPC11D14.

## 13.2 Basic configuration

The UART is configured using the following registers:

1. Pins: For the LPC111x/101/201/301 parts, the UART pins must be configured in the IOCONFIG register block (Section 7.4) before the UART clocks can be enabled in the SYSAHBCLKCTRL register. For all other parts, no special enabling sequence is required.

   **Remark:** If the modem input pins are used, the modem function location must be also selected in the UART location registers (Section 7.4)
2. Power: In the SYSAHBCLKCTRL register, set bit 12 (Table 21).
3. Peripheral clock: Enable the UART peripheral clock by writing to the UARTCLKDIV register (Table 23).

## 13.3 Features

- 16-byte receive and transmit FIFOs.
- Register locations conform to ‘550 industry standard.
- Receiver FIFO trigger points at 1, 4, 8, and 14 bytes.
- Built-in baud rate generator.
- UART allows for implementation of either software or hardware flow control.
- RS-485/EIA-485 9-bit mode support with output enable.
- Modem control.



All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 13.4 Pin description

**Table 183. UART pin description**

| Pin | Type | Description |
|---|---|---|
| RXD | Input | **Serial Input.** Serial receive data. |
| TXD | Output | **Serial Output.** Serial transmit data. |
| $\overline{\text{RTS}}$ | Output | Request To Send. RS-485 direction control pin. |
| $\overline{\text{DTR}}$ | Output | Data Terminal Ready. |
| $\overline{\text{DSR}}$[1] | Input | Data Set Ready. |
| $\overline{\text{CTS}}$ | Input | Clear To Send. |
| $\overline{\text{DCD}}$[1] | Input | Data Carrier Detect. |
| $\overline{\text{RI}}$[1] | Input | Ring Indicator. |

[1] LQFP48 packages only.

The $\overline{\text{DSR}}$, $\overline{\text{DCD}}$, and $\overline{\text{RI}}$ modem inputs are multiplexed to two different pin locations. Use the IOCON_LOC registers (see Section 7.4) to select a physical location for each function on the LQFP48 pin package in addition to selecting the function in the IOCON registers.

The $\overline{\text{DTR}}$ output is available in two pin locations as well. The output value of the $\overline{\text{DTR}}$ pin is driven in both locations identically, and the $\overline{\text{DTR}}$ function at any location can be selected simply by selecting the function in the IOCON register for that pin location.

## 13.5 Register description

The UART contains registers organized as shown in Table 184. The Divisor Latch Access Bit (DLAB) is contained in U0LCR[7] and enables access to the Divisor Latches.

The reset value reflects the data stored in used bits only. It does not include the content of reserved bits.

**Table 184. Register overview: UART (base address: 0x4000 8000)**

| Name | Access | Address offset | Description | Reset value |
|---|---|---|---|---|
| U0RBR | RO | 0x000 | Receiver Buffer Register. Contains the next received character to be read. (DLAB=0) | NA |
| U0THR | WO | 0x000 | Transmit Holding Register. The next character to be transmitted is written here. (DLAB=0) | NA |
| U0DLL | R/W | 0x000 | Divisor Latch LSB. Least significant byte of the baud rate divisor value. The full divisor is used to generate a baud rate from the fractional rate divider. (DLAB=1) | 0x01 |
| U0DLM | R/W | 0x004 | Divisor Latch MSB. Most significant byte of the baud rate divisor value. The full divisor is used to generate a baud rate from the fractional rate divider. (DLAB=1) | 0x00 |
| U0IER | R/W | 0x004 | Interrupt Enable Register. Contains individual interrupt enable bits for the 7 potential UART interrupts. (DLAB=0) | 0x00 |
| U0IIR | RO | 0x008 | Interrupt ID Register. Identifies which interrupt(s) are pending. | 0x01 |
| U0FCR | WO | 0x008 | FIFO Control Register. Controls UART FIFO usage and modes. | 0x00 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 184. Register overview: UART (base address: 0x4000 8000)**

| Name | Access | Address offset | Description | Reset value |
|---|---|---|---|---|
| U0LCR | R/W | 0x00C | Line Control Register. Contains controls for frame formatting and break generation. | 0x00 |
| U0MCR | R/W | 0x010 | Modem control register | 0x00 |
| U0LSR | RO | 0x014 | Line Status Register. Contains flags for transmit and receive status, including line errors. | 0x60 |
| U0MSR | RO | 0x018 | Modem status register | 0x00 |
| U0SCR | R/W | 0x01C | Scratch Pad Register. Eight-bit temporary storage for software. | 0x00 |
| U0ACR | R/W | 0x020 | Auto-baud Control Register. Contains controls for the auto-baud feature. | 0x00 |
| - | - | 0x024 | Reserved | - |
| U0FDR | R/W | 0x028 | Fractional Divider Register. Generates a clock input for the baud rate divider. | 0x10 |
| - | - | 0x02C | Reserved | - |
| U0TER | R/W | 0x030 | Transmit Enable Register. Turns off UART transmitter for use with software flow control. | 0x80 |
| - | - | 0x034 - 0x048 | Reserved | - |
| U0RS485CTRL | R/W | 0x04C | RS-485/EIA-485 Control. Contains controls to configure various aspects of RS-485/EIA-485 modes. | 0x00 |
| U0RS485ADRMATCH | R/W | 0x050 | RS-485/EIA-485 address match. Contains the address match value for RS-485/EIA-485 mode. | 0x00 |
| U0RS485DLY | R/W | 0x054 | RS-485/EIA-485 direction control delay. | 0x00 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 13.5.1 UART Receiver Buffer Register (U0RBR - 0x4000 8000, when DLAB = 0, Read Only)

The U0RBR is the top byte of the UART RX FIFO. The top byte of the RX FIFO contains the oldest character received and can be read via the bus interface. The LSB (bit 0) represents the “oldest” received data bit. If the character received is less than 8 bits, the unused MSBs are padded with zeroes.

The Divisor Latch Access Bit (DLAB) in U0LCR must be zero in order to access the U0RBR. The U0RBR is always Read Only.

Since PE, FE and BI bits (see Table 196) correspond to the byte sitting on the top of the RBR FIFO (i.e. the one that will be read in the next read from the RBR), the right approach for fetching the valid pair of received byte and its status bits is first to read the content of the U0LSR register, and then to read a byte from the U0RBR.

**Table 185. UART Receiver Buffer Register (U0RBR - address 0x4000 8000 when DLAB = 0, Read Only) bit description**

| Bit | Symbol | Description | Reset Value |
|---|---|---|---|
| 7:0 | RBR | The UART Receiver Buffer Register contains the oldest received byte in the UART RX FIFO. | undefined |
| 31:8 | - | Reserved | - |

### 13.5.2 UART Transmitter Holding Register (U0THR - 0x4000 8000 when DLAB = 0, Write Only)

The U0THR is the top byte of the UART TX FIFO. The top byte is the newest character in the TX FIFO and can be written via the bus interface. The LSB represents the first bit to transmit.

The Divisor Latch Access Bit (DLAB) in U0LCR must be zero in order to access the U0THR. The U0THR is always Write Only.

**Table 186. UART Transmitter Holding Register (U0THR - address 0x4000 8000 when DLAB = 0, Write Only) bit description**

| Bit | Symbol | Description | Reset Value |
|---|---|---|---|
| 7:0 | THR | Writing to the UART Transmit Holding Register causes the data to be stored in the UART transmit FIFO. The byte will be sent when it reaches the bottom of the FIFO and the transmitter is available. | NA |
| 31:8 | - | Reserved | - |

### 13.5.3 UART Divisor Latch LSB and MSB Registers (U0DLL - 0x4000 8000 and U0DLM - 0x4000 8004, when DLAB = 1)

The UART Divisor Latch is part of the UART Baud Rate Generator and holds the value used, along with the Fractional Divider, to divide the UART_PCLK clock in order to produce the baud rate clock, which must be 16x the desired baud rate. The U0DLL and U0DLM registers together form a 16-bit divisor where U0DLL contains the lower 8 bits of the divisor and U0DLM contains the higher 8 bits of the divisor. A 0x0000 value is treated like a 0x0001 value as division by zero is not allowed. The Divisor Latch Access Bit (DLAB) in U0LCR must be one in order to access the UART Divisor Latches. Details on how to select the right value for U0DLL and U0DLM can be found in Section 13.5.15.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 187. UART Divisor Latch LSB Register (U0DLL - address 0x4000 8000 when DLAB = 1) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 7:0 | DLLSB | The UART Divisor Latch LSB Register, along with the U0DLM register, determines the baud rate of the UART. | 0x01 |
| 31:8 | - | Reserved | - |

**Table 188. UART Divisor Latch MSB Register (U0DLM - address 0x4000 8004 when DLAB = 1) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 7:0 | DLMSB | The UART Divisor Latch MSB Register, along with the U0DLL register, determines the baud rate of the UART. | 0x00 |
| 31:8 | - | Reserved | - |

### 13.5.4 UART Interrupt Enable Register (U0IER - 0x4000 8004, when DLAB = 0)

The U0IER is used to enable the four UART interrupt sources.

**Table 189. UART Interrupt Enable Register (U0IER - address 0x4000 8004 when DLAB = 0) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 0 | RBRIE | | RBR Interrupt Enable. Enables the Receive Data Available interrupt for UART. It also controls the Character Receive Time-out interrupt. | 0 |
| | | 0 | Disable the RDA interrupt. | |
| | | 1 | Enable the RDA interrupt. | |
| 1 | THREIE | | THRE Interrupt Enable. Enables the THRE interrupt for UART. The status of this interrupt can be read from U0LSR[5]. | 0 |
| | | 0 | Disable the THRE interrupt. | |
| | | 1 | Enable the THRE interrupt. | |
| 2 | RXLIE | | RX Line Interrupt Enable. Enables the UART RX line status interrupts. The status of this interrupt can be read from U0LSR[4:1]. | 0 |
| | | 0 | Disable the RX line status interrupts. | |
| | | 1 | Enable the RX line status interrupts. | |
| 3 | - | - | Reserved | - |
| 6:4 | - | | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |
| 7 | - | - | Reserved | 0 |
| 8 | ABEOINTEN | | Enables the end of auto-baud interrupt. | 0 |
| | | 0 | Disable end of auto-baud Interrupt. | |
| | | 1 | Enable end of auto-baud Interrupt. | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 189. UART Interrupt Enable Register (U0IER - address 0x4000 8004 when DLAB = 0) bit description** *…continued*

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 9 | ABTOINTEN | | Enables the auto-baud time-out interrupt. | 0 |
| | | 0 | Disable auto-baud time-out Interrupt. | |
| | | 1 | Enable auto-baud time-out Interrupt. | |
| 31:10 | - | | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |

### 13.5.5 UART Interrupt Identification Register (U0IIR - 0x4004 8008, Read Only)

U0IIR provides a status code that denotes the priority and source of a pending interrupt. The interrupts are frozen during a U0IIR access. If an interrupt occurs during a U0IIR access, the interrupt is recorded for the next U0IIR access.

**Table 190. UART Interrupt Identification Register (U0IIR - address 0x4004 8008, Read Only) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 0 | INTSTATUS | | Interrupt status. Note that U0IIR[0] is active low. The pending interrupt can be determined by evaluating U0IIR[3:1]. | 1 |
| | | 0 | At least one interrupt is pending. | |
| | | 1 | No interrupt is pending. | |
| 3:1 | INTID | | Interrupt identification. U0IER[3:1] identifies an interrupt corresponding to the UART Rx FIFO. All other combinations of U0IER[3:1] not listed below are reserved (100,101,111). | 0 |
| | | 0x3 | 1 - Receive Line Status (RLS). | |
| | | 0x2 | 2a - Receive Data Available (RDA). | |
| | | 0x6 | 2b - Character Time-out Indicator (CTI). | |
| | | 0x1 | 3 - THRE Interrupt. | |
| | | 0x0 | 4 - Modem interrupt. | |
| 5:4 | - | | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |
| 7:6 | FIFOENABLE | | These bits are equivalent to U0FCR[0]. | 0 |
| 8 | ABEOINT | | End of auto-baud interrupt. True if auto-baud has finished successfully and interrupt is enabled. | 0 |
| 9 | ABTOINT | | Auto-baud time-out interrupt. True if auto-baud has timed out and interrupt is enabled. | 0 |
| 31:10 | - | | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |

Bits U0IIR[9:8] are set by the auto-baud function and signal a time-out or end of auto-baud condition. The auto-baud interrupt conditions are cleared by setting the corresponding Clear bits in the Auto-baud Control Register.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

If the IntStatus bit is one and no interrupt is pending and the IntId bits will be zero. If the IntStatus is 0, a non auto-baud interrupt is pending in which case the IntId bits identify the type of interrupt and handling as described in Table 191. Given the status of U0IIR[3:0], an interrupt handler routine can determine the cause of the interrupt and how to clear the active interrupt. The U0IIR must be read in order to clear the interrupt prior to exiting the Interrupt Service Routine.

The UART RLS interrupt (U0IIR[3:1] = 011) is the highest priority interrupt and is set whenever any one of four error conditions occur on the UART RX input: overrun error (OE), parity error (PE), framing error (FE) and break interrupt (BI). The UART Rx error condition that set the interrupt can be observed via U0LSR[4:1]. The interrupt is cleared upon a U0LSR read.

The UART RDA interrupt (U0IIR[3:1] = 010) shares the second level priority with the CTI interrupt (U0IIR[3:1] = 110). The RDA is activated when the UART Rx FIFO reaches the trigger level defined in U0FCR7:6 and is reset when the UART Rx FIFO depth falls below the trigger level. When the RDA interrupt goes active, the CPU can read a block of data defined by the trigger level.

The CTI interrupt (U0IIR[3:1] = 110) is a second level interrupt and is set when the UART Rx FIFO contains at least one character and no UART Rx FIFO activity has occurred in 3.5 to 4.5 character times. Any UART Rx FIFO activity (read or write of UART RSR) will clear the interrupt. This interrupt is intended to flush the UART RBR after a message has been received that is not a multiple of the trigger level size. For example, if a peripheral wished to send a 105 character message and the trigger level was 10 characters, the CPU would receive 10 RDA interrupts resulting in the transfer of 100 characters and 1 to 5 CTI interrupts (depending on the service routine) resulting in the transfer of the remaining 5 characters.

**Table 191. UART Interrupt Handling**

| U0IIR[3:0] value[1] | Priority | Interrupt type | Interrupt source | Interrupt reset |
|---|---|---|---|---|
| 0001 | - | None | None | - |
| 0110 | Highest | RX Line Status / Error | OE[2] or PE[2] or FE[2] or BI[2] | U0LSR Read[2] |
| 0100 | Second | RX Data Available | Rx data available or trigger level reached in FIFO (U0FCR0=1) | U0RBR Read[3] or UART FIFO drops below trigger level |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 191. UART Interrupt Handling**

| U0IIR[3:0] value[1] | Priority | Interrupt type | Interrupt source | Interrupt reset |
|---|---|---|---|---|
| 1100 | Second | Character Time-out indication | Minimum of one character in the RX FIFO and no character input or removed during a time period depending on how many characters are in FIFO and what the trigger level is set at (3.5 to 4.5 character times).<br>The exact time will be:<br>[(word length) × 7 - 2] × 8 + [(trigger level - number of characters) × 8 + 1] RCLKs | U0RBR Read[3] |
| 0010 | Third | THRE | THRE[2] | U0IIR Read[4] (if source of interrupt) or THR write |
| 0000 | Fourth | Modem status | CTS or DSR or RI or DCD | MSR read |

[1] Values “0000”, “0011”, “0101”, “0111”, “1000”, “1001”, “1010”, “1011”,”1101”,”1110”,”1111” are reserved.

[2] For details see Section 13.5.9 “UART Line Status Register (U0LSR - 0x4000 8014, Read Only)”

[3] For details see Section 13.5.1 “UART Receiver Buffer Register (U0RBR - 0x4000 8000, when DLAB = 0, Read Only)”

[4] For details see Section 13.5.5 “UART Interrupt Identification Register (U0IIR - 0x4004 8008, Read Only)” and Section 13.5.2 “UART Transmitter Holding Register (U0THR - 0x4000 8000 when DLAB = 0, Write Only)”

The UART THRE interrupt (U0IIR[3:1] = 001) is a third level interrupt and is activated when the UART THR FIFO is empty provided certain initialization conditions have been met. These initialization conditions are intended to give the UART THR FIFO a chance to fill up with data to eliminate many THRE interrupts from occurring at system start-up. The initialization conditions implement a one character delay minus the stop bit whenever THRE = 1 and there have not been at least two characters in the U0THR at one time since the last THRE = 1 event. This delay is provided to give the CPU time to write data to U0THR without a THRE interrupt to decode and service. A THRE interrupt is set immediately if the UART THR FIFO has held two or more characters at one time and currently, the U0THR is empty. The THRE interrupt is reset when a U0THR write occurs or a read of the U0IIR occurs and the THRE is the highest interrupt (U0IIR[3:1] = 001).

It is the lowest priority interrupt and is activated whenever there is any state change on modem inputs pins, DCD, DSR or CTS. In addition, a low to high transition on modem input RI will generate a modem interrupt. The source of the modem interrupt can be determined by examining MSR[3:0]. A MSR read will clear the modem interrupt.

### 13.5.6 UART FIFO Control Register (U0FCR - 0x4000 8008, Write Only)

The U0FCR controls the operation of the UART RX and TX FIFOs.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 192. UART FIFO Control Register (U0FCR - address 0x4000 8008, Write Only) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 0 | FIFOEN | | FIFO Enable | 0 |
| | | 0 | UART FIFOs are disabled. Must not be used in the application. | |
| | | 1 | Active high enable for both UART Rx and TX FIFOs and U0FCR[7:1] access. This bit must be set for proper UART operation. Any transition on this bit will automatically clear the UART FIFOs. | |
| 1 | RXFIFORES | | RX FIFO Reset | 0 |
| | | 0 | No impact on either of UART FIFOs. | |
| | | 1 | Writing a logic 1 to U0FCR[1] will clear all bytes in UART Rx FIFO, reset the pointer logic. This bit is self-clearing. | |
| 2 | TXFIFORES | | TX FIFO Reset | 0 |
| | | 0 | No impact on either of UART FIFOs. | |
| | | 1 | Writing a logic 1 to U0FCR[2] will clear all bytes in UART TX FIFO, reset the pointer logic. This bit is self-clearing. | |
| 3 | - | - | Reserved | 0 |
| 5:4 | - | | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |
| 7:6 | RXTL | | RX Trigger Level. These two bits determine how many receiver UART FIFO characters must be written before an interrupt is activated. | 0 |
| | | 0x0 | Trigger level 0 (1 character or 0x01). | |
| | | 0x1 | Trigger level 1 (4 characters or 0x04). | |
| | | 0x2 | Trigger level 2 (8 characters or 0x08). | |
| | | 0x3 | Trigger level 3 (14 characters or 0x0E). | |
| 31:8 | - | - | Reserved | - |

## 13.5.7 UART Line Control Register (U0LCR - 0x4000 800C)

The U0LCR determines the format of the data character that is to be transmitted or received.

**Table 193. UART Line Control Register (U0LCR - address 0x4000 800C) bit description**

| Bit | Symbol | Value | Description | Reset Value |
|---|---|---|---|---|
| 1:0 | WLS | | Word Length Select | 0 |
| | | 0x0 | 5-bit character length. | |
| | | 0x1 | 6-bit character length. | |
| | | 0x2 | 7-bit character length. | |
| | | 0x3 | 8-bit character length. | |
| 2 | SBS | | Stop Bit Select | 0 |
| | | 0 | 1 stop bit. | |
| | | 1 | 2 stop bits (1.5 if U0LCR[1:0]=00). | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 193. UART Line Control Register (U0LCR - address 0x4000 800C) bit description**

| Bit | Symbol | Value | Description | Reset Value |
|---|---|---|---|---|
| 3 | PE | | Parity Enable | 0 |
| | | 0 | Disable parity generation and checking. | |
| | | 1 | Enable parity generation and checking. | |
| 5:4 | PS | | Parity Select | 0 |
| | | 0x0 | Odd parity. Number of 1s in the transmitted character and the attached parity bit will be odd. | |
| | | 0x1 | Even Parity. Number of 1s in the transmitted character and the attached parity bit will be even. | |
| | | 0x2 | Forced 1 stick parity. | |
| | | 0x3 | Forced 0 stick parity. | |
| 6 | BC | | Break Control | 0 |
| | | 0 | Disable break transmission. | |
| | | 1 | Enable break transmission. Output pin UART TXD is forced to logic 0 when U0LCR[6] is active high. | |
| 7 | DLAB | | Divisor Latch Access Bit | 0 |
| | | 0 | Disable access to Divisor Latches. | |
| | | 1 | Enable access to Divisor Latches. | |
| 31:8 | - | - | Reserved | - |

## 13.5.8 UART Modem Control Register

The U0MCR enables the modem loopback mode and controls the modem output signals.

**Table 194. UART0 Modem Control Register (U0MCR - address 0x4000 8010) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 0 | DTRC | | DTR Control. Source for modem output pin, $\overline{\text{DTR}}$. This bit reads as 0 when modem loopback mode is active. | 0 |
| 1 | RTSC | | RTS Control. Source for modem output pin $\overline{\text{RTS}}$. This bit reads as 0 when modem loopback mode is active. | 0 |
| 3:2 | - | | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | 0 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 194. UART0 Modem Control Register (U0MCR - address 0x4000 8010) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 4 | LMS | | Loopback Mode Select. The modem loopback mode provides a mechanism to perform diagnostic loopback testing. Serial data from the transmitter is connected internally to serial input of the receiver. Input pin, RXD, has no effect on loopback and output pin, TXD is held in marking state. The four modem inputs ($\overline{CTS}$, $\overline{DSR}$, $\overline{RI}$ and $\overline{DCD}$) are disconnected externally. Externally, the modem outputs ($\overline{RTS}$, $\overline{DTR}$) are set inactive. Internally, the four modem outputs are connected to the four modem inputs. As a result of these connections, the upper four bits of the U0MSR will be driven by the lower four bits of the U0MCR rather than the four modem inputs in normal mode. This permits modem status interrupts to be generated in loopback mode by writing the lower four bits of U0MCR. | 0 |
| | | 0 | Disable modem loopback mode. | |
| | | 1 | Enable modem loopback mode. | |
| 5 | - | | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | 0 |
| 6 | RTSEN | | RTS flow control | 0 |
| | | 0 | Disable auto-rts flow control. | |
| | | 1 | Enable auto-rts flow control. | |
| 7 | CTSEN | | CTS flow control | 0 |
| | | 0 | Disable auto-cts flow control. | |
| | | 1 | Enable auto-cts flow control. | |
| 31:8 | - | - | Reserved | - |

### 13.5.8.1 Auto-flow control

If auto-RTS mode is enabled the UART‘s receiver FIFO hardware controls the $\overline{RTS}$ output of the UART. If the auto-CTS mode is enabled the UART‘s U0TSR hardware will only start transmitting if the $\overline{CTS}$ input signal is asserted.

#### 13.5.8.1.1 Auto-RTS

The auto-RTS function is enabled by setting the RTSen bit. Auto-RTS data flow control originates in the U0RBR module and is linked to the programmed receiver FIFO trigger level. If auto-RTS is enabled, the data-flow is controlled as follows:

When the receiver FIFO level reaches the programmed trigger level, $\overline{RTS}$ is deasserted (to a high value). It is possible that the sending UART sends an additional byte after the trigger level is reached (assuming the sending UART has another byte to send) because it might not recognize the deassertion of $\overline{RTS}$ until after it has begun sending the additional byte. $\overline{RTS}$ is automatically reasserted (to a low value) once the receiver FIFO has reached the previous trigger level. The reassertion of $\overline{RTS}$ signals the sending UART to continue transmitting data.

If Auto-RTS mode is disabled, the RTSen bit controls the $\overline{RTS}$ output of the UART. If Auto-RTS mode is enabled, hardware controls the $\overline{RTS}$ output, and the actual value of $\overline{RTS}$ will be copied in the RTS Control bit of the UART. As long as Auto-RTS is enabled, the value of the RTS Control bit is read-only for software.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Example: Suppose the UART operating in type ‘550 mode has the trigger level in U0FCR set to 0x2, then, if Auto-RTS is enabled, the UART will deassert the RTS output as soon as the receive FIFO contains 8 bytes (Table 192 on page 206). The RTS output will be reasserted as soon as the receive FIFO hits the previous trigger level: 4 bytes.

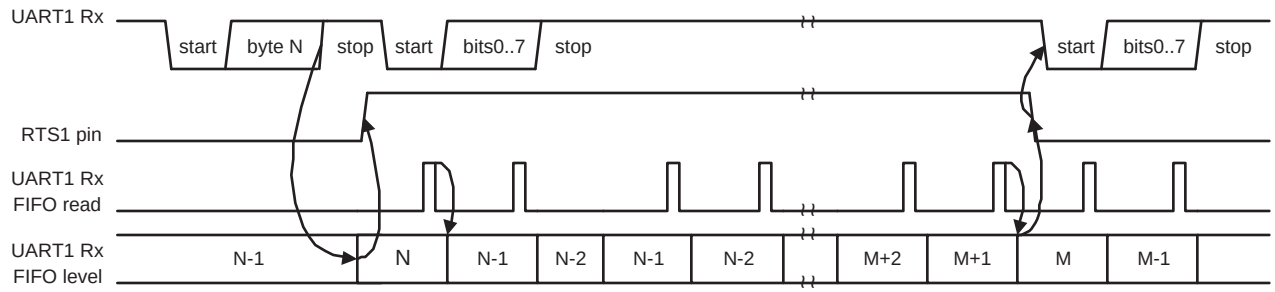


**Fig 32. Auto-RTS Functional Timing**

#### 13.5.8.1.2 Auto-CTS

The Auto-CTS function is enabled by setting the CTSen bit. If Auto-CTS is enabled, the transmitter circuitry in the U0TSR module checks CTS input before sending the next data byte. When CTS is active (low), the transmitter sends the next byte. To stop the transmitter from sending the following byte, CTS must be released before the middle of the last stop bit that is currently being sent. In Auto-CTS mode, a change of the CTS signal does not trigger a modem status interrupt unless the CTS Interrupt Enable bit is set, Delta CTS bit in the U0MSR will be set though. Table 195 lists the conditions for generating a Modem Status interrupt.

**Table 195. Modem status interrupt generation**

| Enable modem status interrupt (U0ER[3]) | CTSen (U0MCR[7]) | CTS interrupt enable (U0IER[7]) | Delta CTS (U0MSR[0]) | Delta DCD or trailing edge RI or Delta DSR (U0MSR[3] or U0MSR[2] or U0MSR[1]) | Modem status interrupt |
|---|---|---|---|---|---|
| 0 | x | x | x | x | No |
| 1 | 0 | x | 0 | 0 | No |
| 1 | 0 | x | 1 | x | Yes |
| 1 | 0 | x | x | 1 | Yes |
| 1 | 1 | 0 | x | 0 | No |
| 1 | 1 | 0 | x | 1 | Yes |
| 1 | 1 | 1 | 0 | 0 | No |
| 1 | 1 | 1 | 1 | x | Yes |
| 1 | 1 | 1 | x | 1 | Yes |

The auto-CTS function reduces interrupts to the host system. When flow control is enabled, a CTS state change does not trigger host interrupts because the device automatically controls its own transmitter. Without Auto-CTS, the transmitter sends any data present in the transmit FIFO and a receiver overrun error can result. Figure 33 illustrates the Auto-CTS functional timing.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

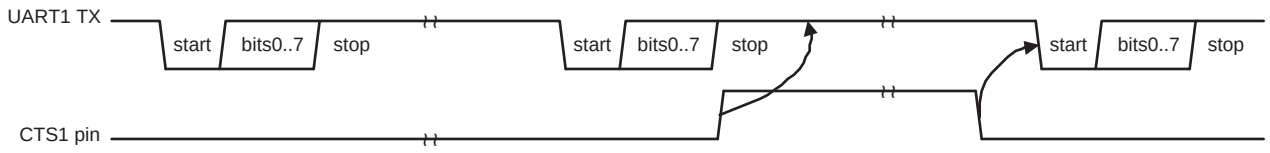


**Fig 33. Auto-CTS Functional Timing**

While starting transmission of the initial character, the $\overline{\text{CTS}}$ signal is asserted. Transmission will stall as soon as the pending transmission has completed. The UART will continue transmitting a 1 bit as long as $\overline{\text{CTS}}$ is de-asserted (high). As soon as $\overline{\text{CTS}}$ gets de-asserted, transmission resumes and a start bit is sent followed by the data bits of the next character.

### 13.5.9 UART Line Status Register (U0LSR - 0x4000 8014, Read Only)

The U0LSR is a Read Only register that provides status information on the UART TX and RX blocks.

**Table 196. UART Line Status Register (U0LSR - address 0x4000 8014, Read Only) bit description**

| Bit | Symbol | Value | Description | Reset Value |
|---|---|---|---|---|
| 0 | RDR | | Receiver Data Ready. U0LSR[0] is set when the U0RBR holds an unread character and is cleared when the UART RBR FIFO is empty. | 0 |
| | | 0 | U0RBR is empty. | |
| | | 1 | U0RBR contains valid data. | |
| 1 | OE | | Overrun Error. The overrun error condition is set as soon as it occurs. A U0LSR read clears U0LSR[1]. U0LSR[1] is set when UART RSR has a new character assembled and the UART RBR FIFO is full. In this case, the UART RBR FIFO will not be overwritten and the character in the UART RSR will be lost. | 0 |
| | | 0 | Overrun error status is inactive. | |
| | | 1 | Overrun error status is active. | |
| 2 | PE | | Parity Error. When the parity bit of a received character is in the wrong state, a parity error occurs. A U0LSR read clears U0LSR[2]. Time of parity error detection is dependent on U0FCR[0].<br>**Note:** A parity error is associated with the character at the top of the UART RBR FIFO. | 0 |
| | | 0 | Parity error status is inactive. | |
| | | 1 | Parity error status is active. | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 196. UART Line Status Register (U0LSR - address 0x4000 8014, Read Only) bit description** *…continued*

| Bit | Symbol | Value | Description | Reset Value |
|---|---|---|---|---|
| 3 | FE | | Framing Error. When the stop bit of a received character is a logic 0, a framing error occurs. A U0LSR read clears U0LSR[3]. The time of the framing error detection is dependent on U0FCR0. Upon detection of a framing error, the RX will attempt to re-synchronize to the data and assume that the bad stop bit is actually an early start bit. However, it cannot be assumed that the next received byte will be correct even if there is no Framing Error.<br>**Note:** A framing error is associated with the character at the top of the UART RBR FIFO. | 0 |
| | | 0 | Framing error status is inactive. | |
| | | 1 | Framing error status is active. | |
| 4 | BI | | Break Interrupt. When RXD1 is held in the spacing state (all zeros) for one full character transmission (start, data, parity, stop), a break interrupt occurs. Once the break condition has been detected, the receiver goes idle until RXD1 goes to marking state (all ones). A U0LSR read clears this status bit. The time of break detection is dependent on U0FCR[0].<br>**Note:** The break interrupt is associated with the character at the top of the UART RBR FIFO. | 0 |
| | | 0 | Break interrupt status is inactive. | |
| | | 1 | Break interrupt status is active. | |
| 5 | THRE | | Transmitter Holding Register Empty. THRE is set immediately upon detection of an empty UART THR and is cleared on a U0THR write. | 1 |
| | | 0 | U0THR contains valid data. | |
| | | 1 | U0THR is empty. | |
| 6 | TEMT | | Transmitter Empty. TEMT is set when both U0THR and U0TSR are empty; TEMT is cleared when either the U0TSR or the U0THR contain valid data. This bit is updated as soon as 50 % of the first stop bit has been transmitted or a byte has been written into the THR. | 1 |
| | | 0 | U0THR and/or the U0TSR contains valid data. | |
| | | 1 | U0THR and the U0TSR are empty. | |
| 7 | RXFE | | Error in RX FIFO. U0LSR[7] is set when a character with a RX error such as framing error, parity error or break interrupt, is loaded into the U0RBR. This bit is cleared when the U0LSR register is read and there are no subsequent errors in the UART FIFO. | 0 |
| | | 0 | U0RBR contains no UART RX errors or U0FCR[0]=0. | |
| | | 1 | UART RBR contains at least one UART RX error. | |
| 31:8 | - | - | Reserved | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 13.5.10 UART Modem Status Register

The U0MSR is a read-only register that provides status information on the modem input signals. U0MSR[3:0] is cleared on U0MSR read. Note that modem signals have no direct effect on the UART operation. They facilitate the software implementation of modem signal operations.

**Table 197. UART Modem Status Register (U0MSR - address 0x4000 8018) bit description**

| Bit | Symbol | Value | Description | Reset Value |
|---|---|---|---|---|
| 0 | DCTS | | Delta CTS. Set upon state change of input $\overline{CTS}$. Cleared on a U0MSR read. | 0 |
| | | 0 | No change detected on modem input $\overline{CTS}$. | |
| | | 1 | State change detected on modem input $\overline{CTS}$. | |
| 1 | DDSR | | Delta DSR. Set upon state change of input $\overline{DSR}$. Cleared on a U0MSR read. | 0 |
| | | 0 | No change detected on modem input $\overline{DSR}$. | |
| | | 1 | State change detected on modem input $\overline{DSR}$. | |
| 2 | TERI | | Trailing Edge RI. Set upon low to high transition of input $\overline{RI}$. Cleared on a U0MSR read. | 0 |
| | | 0 | No change detected on modem input, $\overline{RI}$. | |
| | | 1 | Low-to-high transition detected on $\overline{RI}$. | |
| 3 | DDCD | | Delta DCD. Set upon state change of input $\overline{DCD}$. Cleared on a U0MSR read. | 0 |
| | | 0 | No change detected on modem input $\overline{DCD}$. | |
| | | 1 | State change detected on modem input $\overline{DCD}$. | |
| 4 | CTS | | Clear To Send State. Complement of input signal $\overline{CTS}$. This bit is connected to U0MCR[1] in modem loopback mode. | 0 |
| 5 | DSR | | Data Set Ready State. Complement of input signal $\overline{DSR}$. This bit is connected to U0MCR[0] in modem loopback mode. | 0 |
| 6 | RI | | Ring Indicator State. Complement of input $\overline{RI}$. This bit is connected to U0MCR[2] in modem loopback mode. | 0 |
| 7 | DCD | | Data Carrier Detect State. Complement of input $\overline{DCD}$. This bit is connected to U0MCR[3] in modem loopback mode. | 0 |
| 31:8 | - | - | Reserved | - |

### 13.5.11 UART Scratch Pad Register (U0SCR - 0x4000 801C)

The U0SCR has no effect on the UART operation. This register can be written and/or read at user's discretion. There is no provision in the interrupt interface that would indicate to the host that a read or write of the U0SCR has occurred.

**Table 198. UART Scratch Pad Register (U0SCR - address 0x4000 801C) bit description**

| Bit | Symbol | Description | Reset Value |
|---|---|---|---|
| 7:0 | Pad | A readable, writable byte. | 0x00 |
| 31:8 | - | Reserved | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 13.5.12 UART Auto-baud Control Register (U0ACR - 0x4000 8020)

The UART Auto-baud Control Register (U0ACR) controls the process of measuring the incoming clock/data rate for the baud rate generation and can be read and written at user's discretion.

**Table 199. Auto baud Control Register (U0ACR - address 0x4000 8020) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 0 | START | | Start bit. This bit is automatically cleared after auto-baud completion. | 0 |
| | | 0 | Auto-baud stop (auto-baud is not running). | |
| | | 1 | Auto-baud start (auto-baud is running). Auto-baud run bit. This bit is automatically cleared after auto-baud completion. | |
| 1 | MODE | | Auto-baud mode select | 0 |
| | | 0 | Mode 0. | |
| | | 1 | Mode 1. | |
| 2 | AUTORESTART | | Restart enable | 0 |
| | | 0 | No restart | |
| | | 1 | Restart in case of time-out (counter restarts at next UART Rx falling edge) | 0 |
| 7:3 | - | | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | 0 |
| 8 | ABEOINTCLR | | End of auto-baud interrupt clear (write only accessible) | 0 |
| | | 0 | Writing a 0 has no impact. | |
| | | 1 | Writing a 1 will clear the corresponding interrupt in the U0IIR. | |
| 9 | ABTOINTCLR | | Auto-baud time-out interrupt clear (write only accessible) | 0 |
| | | 0 | Writing a 0 has no impact. | |
| | | 1 | Writing a 1 will clear the corresponding interrupt in the U0IIR. | |
| 31:10 | - | | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | 0 |

### 13.5.13 Auto-baud

The UART auto-baud function can be used to measure the incoming baud rate based on the "AT" protocol (Hayes command). If enabled the auto-baud feature will measure the bit time of the receive data stream and set the divisor latch registers U0DLM and U0DLL accordingly.

Auto-baud is started by setting the U0ACR Start bit. Auto-baud can be stopped by clearing the U0ACR Start bit. The Start bit will clear once auto-baud has finished and reading the bit will return the status of auto-baud (pending/finished).


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Two auto-baud measuring modes are available which can be selected by the U0ACR Mode bit. In Mode 0 the baud rate is measured on two subsequent falling edges of the UART Rx pin (the falling edge of the start bit and the falling edge of the least significant bit). In Mode 1 the baud rate is measured between the falling edge and the subsequent rising edge of the UART Rx pin (the length of the start bit).

The U0ACR AutoRestart bit can be used to automatically restart baud rate measurement if a time-out occurs (the rate measurement counter overflows). If this bit is set, the rate measurement will restart at the next falling edge of the UART Rx pin.

The auto-baud function can generate two interrupts.

- The U0IIR ABTOInt interrupt will get set if the interrupt is enabled (U0IER ABToIntEn is set and the auto-baud rate measurement counter overflows).
- The U0IIR ABEOInt interrupt will get set if the interrupt is enabled (U0IER ABEOIntEn is set and the auto-baud has completed successfully).

The auto-baud interrupts have to be cleared by setting the corresponding U0ACR ABTOIntClr and ABEOIntEn bits.

The fractional baud rate generator must be disabled (DIVADDVAL = 0) during auto-baud. Also, when auto-baud is used, any write to U0DLM and U0DLL registers should be done before U0ACR register write. The minimum and the maximum baud rates supported by UART are function of UART_PCLK, number of data bits, stop bits and parity bits.

(2)

$$ratemin = \frac{2 \times PCLK}{16 \times 2^{15}} \leq UART_{baudrate} \leq \frac{PCLK}{16 \times (2 + databits + paritybits + stopbits)} = ratemax$$

### 13.5.14 Auto-baud modes

When the software is expecting an ”AT" command, it configures the UART with the expected character format and sets the U0ACR Start bit. The initial values in the divisor latches U0DLM and U0DLM don‘t care. Because of the ”A" or ”a" ASCII coding (”A" = 0x41, ”a" = 0x61), the UART Rx pin sensed start bit and the LSB of the expected character are delimited by two falling edges. When the U0ACR Start bit is set, the auto-baud protocol will execute the following phases:

1. On U0ACR Start bit setting, the baud rate measurement counter is reset and the UART U0RSR is reset. The U0RSR baud rate is switched to the highest rate.
2. A falling edge on UART Rx pin triggers the beginning of the start bit. The rate measuring counter will start counting UART_PCLK cycles.
3. During the receipt of the start bit, 16 pulses are generated on the RSR baud input with the frequency of the UART input clock, guaranteeing the start bit is stored in the U0RSR.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

4. During the receipt of the start bit (and the character LSB for Mode = 0), the rate counter will continue incrementing with the pre-scaled UART input clock (UART_PCLK).
5. If Mode = 0, the rate counter will stop on next falling edge of the UART Rx pin. If Mode = 1, the rate counter will stop on the next rising edge of the UART Rx pin.
6. The rate counter is loaded into U0DLM/U0DLL and the baud rate will be switched to normal operation. After setting the U0DLM/U0DLL, the end of auto-baud interrupt U0IIR ABEOInt will be set, if enabled. The U0RSR will now continue receiving the remaining bits of the ”A/a" character.

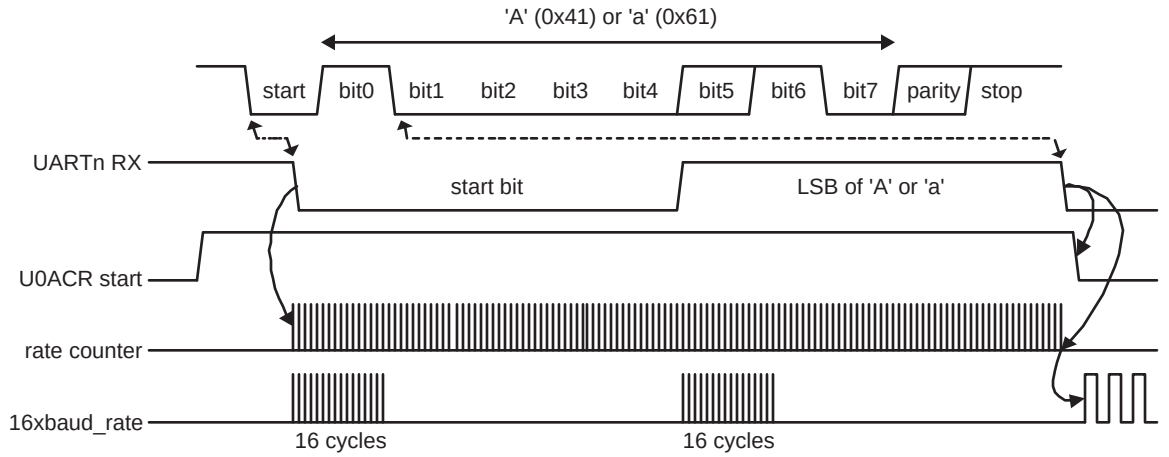


a. Mode 0 (start bit and LSB are used for auto-baud)

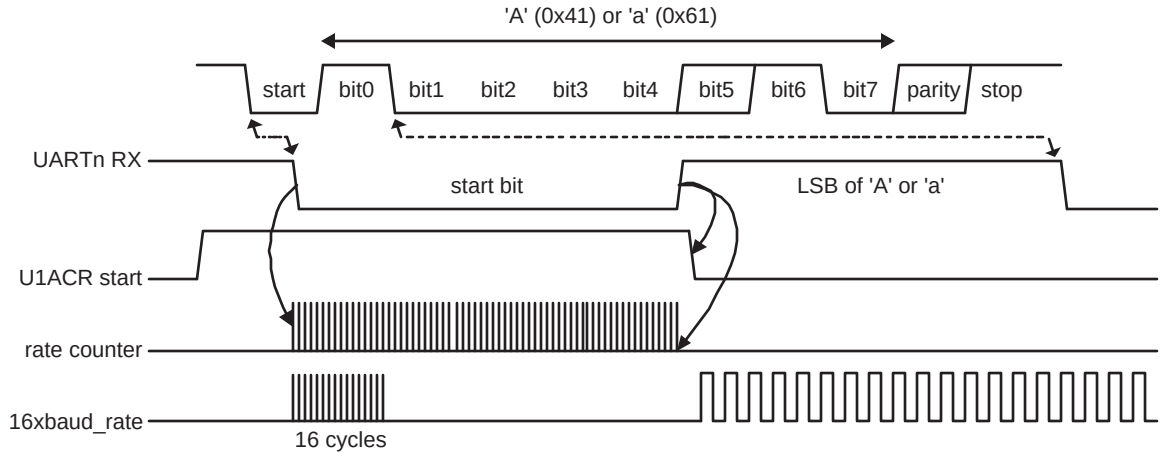


b. Mode 1 (only start bit is used for auto-baud)

**Fig 34. Auto-baud a) mode 0 and b) mode 1 waveform**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 13.5.15 UART Fractional Divider Register (U0FDR - 0x4000 8028)

The UART Fractional Divider Register (U0FDR) controls the clock pre-scaler for the baud rate generation and can be read and written at the user's discretion. This pre-scaler takes the APB clock and generates an output clock according to the specified fractional requirements.

**Important:** If the fractional divider is active (DIVADDVAL > 0) and DLM = 0, the value of the DLL register must be 3 or greater.

**Table 200. UART Fractional Divider Register (U0FDR - address 0x4000 8028) bit description**

| Bit | Function | Description | Reset value |
|---|---|---|---|
| 3:0 | DIVADDVAL | Baud rate generation pre-scaler divisor value. If this field is 0, fractional baud rate generator will not impact the UART baud rate. | 0 |
| 7:4 | MULVAL | Baud rate pre-scaler multiplier value. This field must be greater or equal 1 for UART to operate properly, regardless of whether the fractional baud rate generator is used or not. | 1 |
| 31:8 | - | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | 0 |

This register controls the clock pre-scaler for the baud rate generation. The reset value of the register keeps the fractional capabilities of UART disabled making sure that UART is fully software and hardware compatible with UARTs not equipped with this feature.

The UART baud rate can be calculated as:

(3)

$$UART_{baudrate} = \frac{PCLK}{16 \times (256 \times U0DLM + U0DLL) \times \left(1 + \frac{DivAddVal}{MulVal}\right)}$$

Where UART_PCLK is the peripheral clock, U0DLM and U0DLL are the standard UART baud rate divider registers, and DIVADDVAL and MULVAL are UART fractional baud rate generator specific parameters.

The value of MULVAL and DIVADDVAL should comply to the following conditions:

1. $1 \leq MULVAL \leq 15$
2. $0 \leq DIVADDVAL \leq 14$
3. DIVADDVAL< MULVAL

The value of the U0FDR should not be modified while transmitting/receiving data or data may be lost or corrupted.

If the U0FDR register value does not comply to these two requests, then the fractional divider output is undefined. If DIVADDVAL is zero then the fractional divider is disabled, and the clock will not be divided.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

#### 13.5.15.1 Baud rate calculation

UART can operate with or without using the Fractional Divider. In real-life applications it is likely that the desired baud rate can be achieved using several different Fractional Divider settings. The following algorithm illustrates one way of finding a set of DLM, DLL, MULVAL, and DIVADDVAL values. Such set of parameters yields a baud rate with a relative error of less than 1.1% from the desired one.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

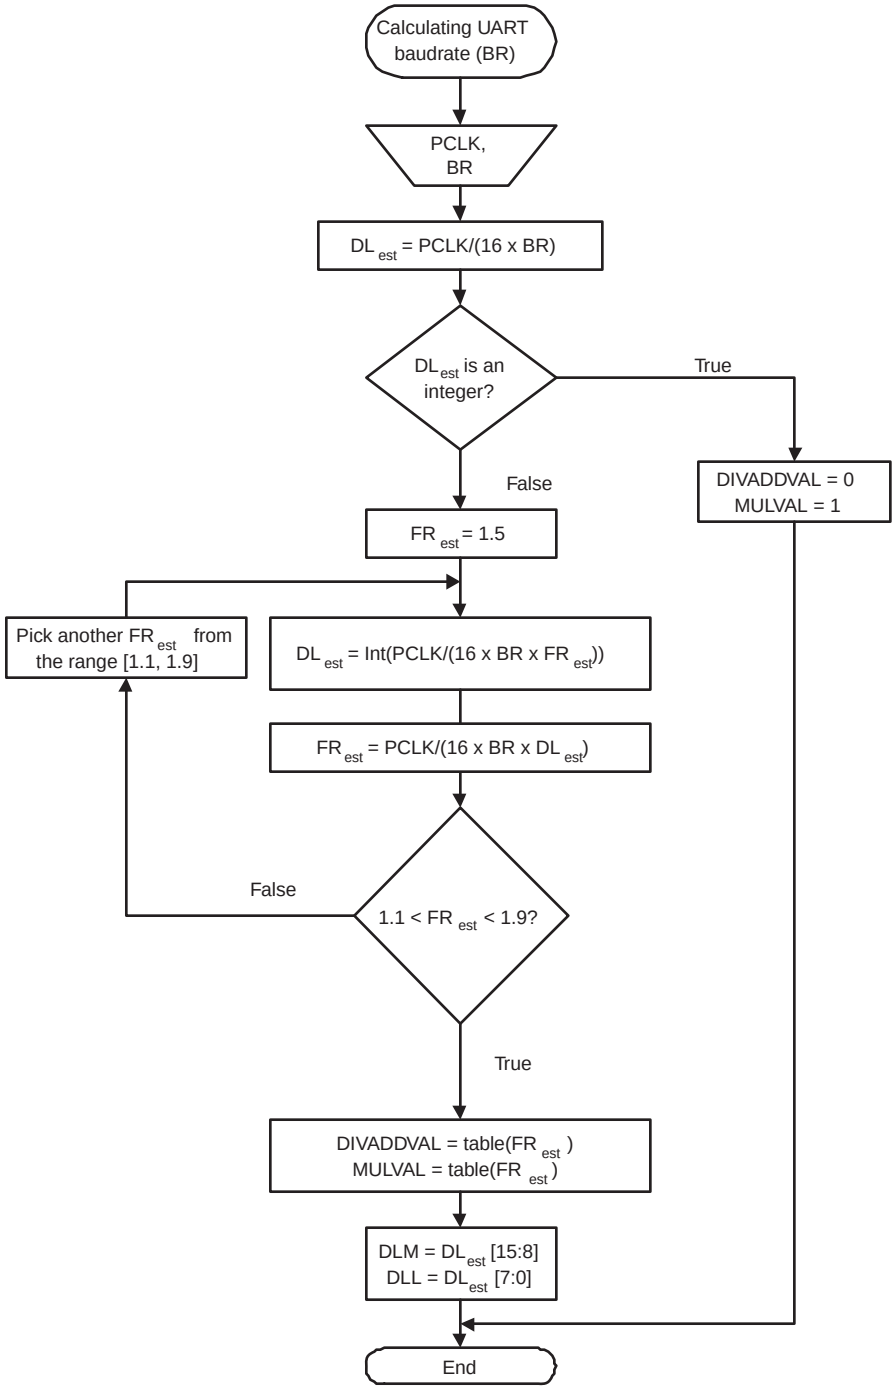


**Fig 35. Algorithm for setting UART dividers**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 201. Fractional Divider setting look-up table**

| FR | DivAddVal/ MulVal | FR | DivAddVal/ MulVal | FR | DivAddVal/ MulVal | FR | DivAddVal/ MulVal |
|---|---|---|---|---|---|---|---|
| 1.000 | 0/1 | 1.250 | 1/4 | 1.500 | 1/2 | 1.750 | 3/4 |
| 1.067 | 1/15 | 1.267 | 4/15 | 1.533 | 8/15 | 1.769 | 10/13 |
| 1.071 | 1/14 | 1.273 | 3/11 | 1.538 | 7/13 | 1.778 | 7/9 |
| 1.077 | 1/13 | 1.286 | 2/7 | 1.545 | 6/11 | 1.786 | 11/14 |
| 1.083 | 1/12 | 1.300 | 3/10 | 1.556 | 5/9 | 1.800 | 4/5 |
| 1.091 | 1/11 | 1.308 | 4/13 | 1.571 | 4/7 | 1.818 | 9/11 |
| 1.100 | 1/10 | 1.333 | 1/3 | 1.583 | 7/12 | 1.833 | 5/6 |
| 1.111 | 1/9 | 1.357 | 5/14 | 1.600 | 3/5 | 1.846 | 11/13 |
| 1.125 | 1/8 | 1.364 | 4/11 | 1.615 | 8/13 | 1.857 | 6/7 |
| 1.133 | 2/15 | 1.375 | 3/8 | 1.625 | 5/8 | 1.867 | 13/15 |
| 1.143 | 1/7 | 1.385 | 5/13 | 1.636 | 7/11 | 1.875 | 7/8 |
| 1.154 | 2/13 | 1.400 | 2/5 | 1.643 | 9/14 | 1.889 | 8/9 |
| 1.167 | 1/6 | 1.417 | 5/12 | 1.667 | 2/3 | 1.900 | 9/10 |
| 1.182 | 2/11 | 1.429 | 3/7 | 1.692 | 9/13 | 1.909 | 10/11 |
| 1.200 | 1/5 | 1.444 | 4/9 | 1.700 | 7/10 | 1.917 | 11/12 |
| 1.214 | 3/14 | 1.455 | 5/11 | 1.714 | 5/7 | 1.923 | 12/13 |
| 1.222 | 2/9 | 1.462 | 6/13 | 1.727 | 8/11 | 1.929 | 13/14 |
| 1.231 | 3/13 | 1.467 | 7/15 | 1.733 | 11/15 | 1.933 | 14/15 |

#### 13.5.15.1.1 Example 1: UART_PCLK = 14.7456 MHz, BR = 9600

According to the provided algorithm $DL_{est}$ = PCLK/(16 x BR) = 14.7456 MHz / (16 x 9600) = 96. Since this $DL_{est}$ is an integer number, DIVADDVAL = 0, MULVAL = 1, DLM = 0, and DLL = 96.

#### 13.5.15.1.2 Example 2: UART_PCLK = 12 MHz, BR = 115200

According to the provided algorithm $DL_{est}$ = PCLK/(16 x BR) = 12 MHz / (16 x 115200) = 6.51. This $DL_{est}$ is not an integer number and the next step is to estimate the FR parameter. Using an initial estimate of $FR_{est}$ = 1.5 a new $DL_{est}$ = 4 is calculated and $FR_{est}$ is recalculated as $FR_{est}$ = 1.628. Since $FR_{est}$ = 1.628 is within the specified range of 1.1 and 1.9, DIVADDVAL and MULVAL values can be obtained from the attached look-up table.

The closest value for FRest = 1.628 in the look-up Table 201 is FR = 1.625. It is equivalent to DIVADDVAL = 5 and MULVAL = 8.

Based on these findings, the suggested UART setup would be: DLM = 0, DLL = 4, DIVADDVAL = 5, and MULVAL = 8. According to Equation 3, the UART's baud rate is 115384. This rate has a relative error of 0.16% from the originally specified 115200.

### 13.5.16 UART Transmit Enable Register (U0TER - 0x4000 8030)

In addition to being equipped with full hardware flow control (auto-cts and auto-rts mechanisms described above), U0TER enables implementation of software flow control. When TxEn = 1, UART transmitter will keep sending data as long as they are available. As soon as TxEn becomes 0, UART transmission will stop.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Although Table 202 describes how to use TxEn bit in order to achieve hardware flow control, it is strongly suggested to let UART hardware implemented auto flow control features take care of this, and limit the scope of TxEn to software flow control.

Table 202 describes how to use TXEN bit in order to achieve software flow control.

**Table 202. UART Transmit Enable Register (U0TER - address 0x4000 8030) bit description**

| Bit | Symbol | Description | Reset Value |
|---|---|---|---|
| 6:0 | - | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |
| 7 | TXEN | When this bit is 1, as it is after a Reset, data written to the THR is output on the TXD pin as soon as any preceding data has been sent. If this bit cleared to 0 while a character is being sent, the transmission of that character is completed, but no further characters are sent until this bit is set again. In other words, a 0 in this bit blocks the transfer of characters from the THR or TX FIFO into the transmit shift register. Software can clear this bit when it detects that the a hardware-handshaking TX-permit signal ($\overline{CTS}$) has gone false, or with software handshaking, when it receives an XOFF character (DC3). Software can set this bit again when it detects that the TX-permit signal has gone true, or when it receives an XON (DC1) character. | 1 |
| 31:8 | - | Reserved | - |

## 13.5.17 UART RS485 Control register (U0RS485CTRL - 0x4000 804C)

The U0RS485CTRL register controls the configuration of the UART in RS-485/EIA-485 mode.

**Table 203. UART RS485 Control register (U0RS485CTRL - address 0x4000 804C) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 0 | NMMEN | | NMM enable. | 0 |
| | | 0 | RS-485/EIA-485 Normal Multidrop Mode (NMM) is disabled. | |
| | | 1 | RS-485/EIA-485 Normal Multidrop Mode (NMM) is enabled. In this mode, an address is detected when a received byte causes the UART to set the parity error and generate an interrupt. | |
| 1 | RXDIS | | Receiver enable. | 0 |
| | | 0 | The receiver is enabled. | |
| | | 1 | The receiver is disabled. | |
| 2 | AADEN | | AAD enable. | 0 |
| | | 0 | Auto Address Detect (AAD) is disabled. | |
| | | 1 | Auto Address Detect (AAD) is enabled. | |
| 3 | SEL | | Select direction control pin | 0 |
| | | 0 | If direction control is enabled (bit DCTRL = 1), pin $\overline{RTS}$ is used for direction control. | |
| | | 1 | If direction control is enabled (bit DCTRL = 1), pin $\overline{DTR}$ is used for direction control. | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 203. UART RS485 Control register (U0RS485CTRL - address 0x4000 804C) bit description** *…continued*

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 4 | DCTRL | | Auto direction control enable. | 0 |
| | | 0 | Disable Auto Direction Control. | |
| | | 1 | Enable Auto Direction Control. | |
| 5 | OINV | | Polarity control. This bit reverses the polarity of the direction control signal on the RTS (or DTR) pin. | 0 |
| | | 0 | The direction control pin will be driven to logic 0 when the transmitter has data to be sent. It will be driven to logic 1 after the last bit of data has been transmitted. | |
| | | 1 | The direction control pin will be driven to logic 1 when the transmitter has data to be sent. It will be driven to logic 0 after the last bit of data has been transmitted. | |
| 31:6 | - | - | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |

## 13.5.18 UART RS485 Address Match register (U0RS485ADRMATCH - 0x4000 8050)

The U0RS485ADRMATCH register contains the address match value for RS-485/EIA-485 mode.

**Table 204. UART RS485 Address Match register (U0RS485ADRMATCH - address 0x4000 8050) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 7:0 | ADRMATCH | Contains the address match value. | 0x00 |
| 31:8 | - | Reserved | - |

## 13.5.19 UART1 RS485 Delay value register (U0RS485DLY - 0x4000 8054)

The user may program the 8-bit RS485DLY register with a delay between the last stop bit leaving the TXFIFO and the de-assertion of RTS (or DTR). This delay time is in periods of the baud clock. Any delay time from 0 to 255 bit times may be programmed.

**Table 205. UART RS485 Delay value register (U0RS485DLY - address 0x4000 8054) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 7:0 | DLY | Contains the direction control (RTS or DTR) delay value. This register works in conjunction with an 8-bit counter. | 0x00 |
| 31:8 | - | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |

## 13.5.20 RS-485/EIA-485 modes of operation

The RS-485/EIA-485 feature allows the UART to be configured as an addressable slave. The addressable slave is one of multiple slaves controlled by a single master.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

The UART master transmitter will identify an address character by setting the parity (9th) bit to ‘1’. For data characters, the parity bit is set to ‘0’.

Each UART slave receiver can be assigned a unique address. The slave can be programmed to either manually or automatically reject data following an address which is not theirs.

### RS-485/EIA-485 Normal Multidrop Mode (NMM)

Setting the RS485CTRL bit 0 enables this mode. In this mode, an address is detected when a received byte causes the UART to set the parity error and generate an interrupt.

If the receiver is disabled (RS485CTRL bit 1 = ‘1’), any received data bytes will be ignored and will not be stored in the RXFIFO. When an address byte is detected (parity bit = ‘1’) it will be placed into the RXFIFO and an Rx Data Ready Interrupt will be generated. The processor can then read the address byte and decide whether or not to enable the receiver to accept the following data.

While the receiver is enabled (RS485CTRL bit 1 =’0’), all received bytes will be accepted and stored in the RXFIFO regardless of whether they are data or address. When an address character is received a parity error interrupt will be generated and the processor can decide whether or not to disable the receiver.

### RS-485/EIA-485 Auto Address Detection (AAD) mode

When both RS485CTRL register bits 0 (9-bit mode enable) and 2 (AAD mode enable) are set, the UART is in auto address detect mode.

In this mode, the receiver will compare any address byte received (parity = ‘1’) to the 8-bit value programmed into the RS485ADRMATCH register.

If the receiver is disabled (RS485CTRL bit 1 = ‘1’), any received byte will be discarded if it is either a data byte OR an address byte which fails to match the RS485ADRMATCH value.

When a matching address character is detected it will be pushed onto the RXFIFO along with the parity bit, and the receiver will be automatically enabled (RS485CTRL bit 1 will be cleared by hardware). The receiver will also generate an Rx Data Ready Interrupt.

While the receiver is enabled (RS485CTRL bit 1 = ‘0’), all bytes received will be accepted and stored in the RXFIFO until an address byte which does not match the RS485ADRMATCH value is received. When this occurs, the receiver will be automatically disabled in hardware (RS485CTRL bit 1 will be set), The received non-matching address character will not be stored in the RXFIFO.

### RS-485/EIA-485 Auto Direction Control

RS485/EIA-485 mode includes the option of allowing the transmitter to automatically control the state of the DIR pin as a direction control output signal.

Setting RS485CTRL bit 4 = ‘1’ enables this feature.

Direction control, if enabled, will use the $\overline{\text{RTS}}$ pin when RS485CTRL bit 3 = ‘0’. It will use the $\overline{\text{DTR}}$ pin when RS485CTRL bit 3 = ‘1’.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

When Auto Direction Control is enabled, the selected pin will be asserted (driven LOW) when the CPU writes data into the TXFIFO. The pin will be de-asserted (driven HIGH) once the last bit of data has been transmitted. See bits 4 and 5 in the RS485CTRL register.

The RS485CTRL bit 4 takes precedence over all other mechanisms controlling the direction control pin with the exception of loopback mode.

#### RS485/EIA-485 driver delay time

The driver delay time is the delay between the last stop bit leaving the TXFIFO and the de-assertion of $\overline{\text{RTS}}$. This delay time can be programmed in the 8-bit RS485DLY register. The delay time is in periods of the baud clock. Any delay time from 0 to 255 bit times may be used.

#### RS485/EIA-485 output inversion

The polarity of the direction control signal on the $\overline{\text{RTS}}$ (or $\overline{\text{DTR}}$) pins can be reversed by programming bit 5 in the U0RS485CTRL register. When this bit is set, the direction control pin will be driven to logic 1 when the transmitter has data waiting to be sent. The direction control pin will be driven to logic 0 after the last bit of data has been transmitted.

## 13.6 Architecture

The architecture of the UART is shown below in the block diagram.

The APB interface provides a communications link between the CPU or host and the UART.

The UART receiver block, U0RX, monitors the serial input line, RXD, for valid input. The UART RX Shift Register (U0RSR) accepts valid characters via RXD. After a valid character is assembled in the U0RSR, it is passed to the UART RX Buffer Register FIFO to await access by the CPU or host via the generic host interface.

The UART transmitter block, U0TX, accepts data written by the CPU or host and buffers the data in the UART TX Holding Register FIFO (U0THR). The UART TX Shift Register (U0TSR) reads the data stored in the U0THR and assembles the data to transmit via the serial output pin, TXD1.

The UART Baud Rate Generator block, U0BRG, generates the timing enables used by the UART TX block. The U0BRG clock input source is UART_PCLK. The main clock is divided down per the divisor specified in the U0DLL and U0DLM registers. This divided down clock is a 16x oversample clock, NBAUDOUT.

The interrupt interface contains registers U0IER and U0IIR. The interrupt interface receives several one clock wide enables from the U0TX and U0RX blocks.

Status information from the U0TX and U0RX is stored in the U0LSR. Control information for the U0TX and U0RX is stored in the U0LCR.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

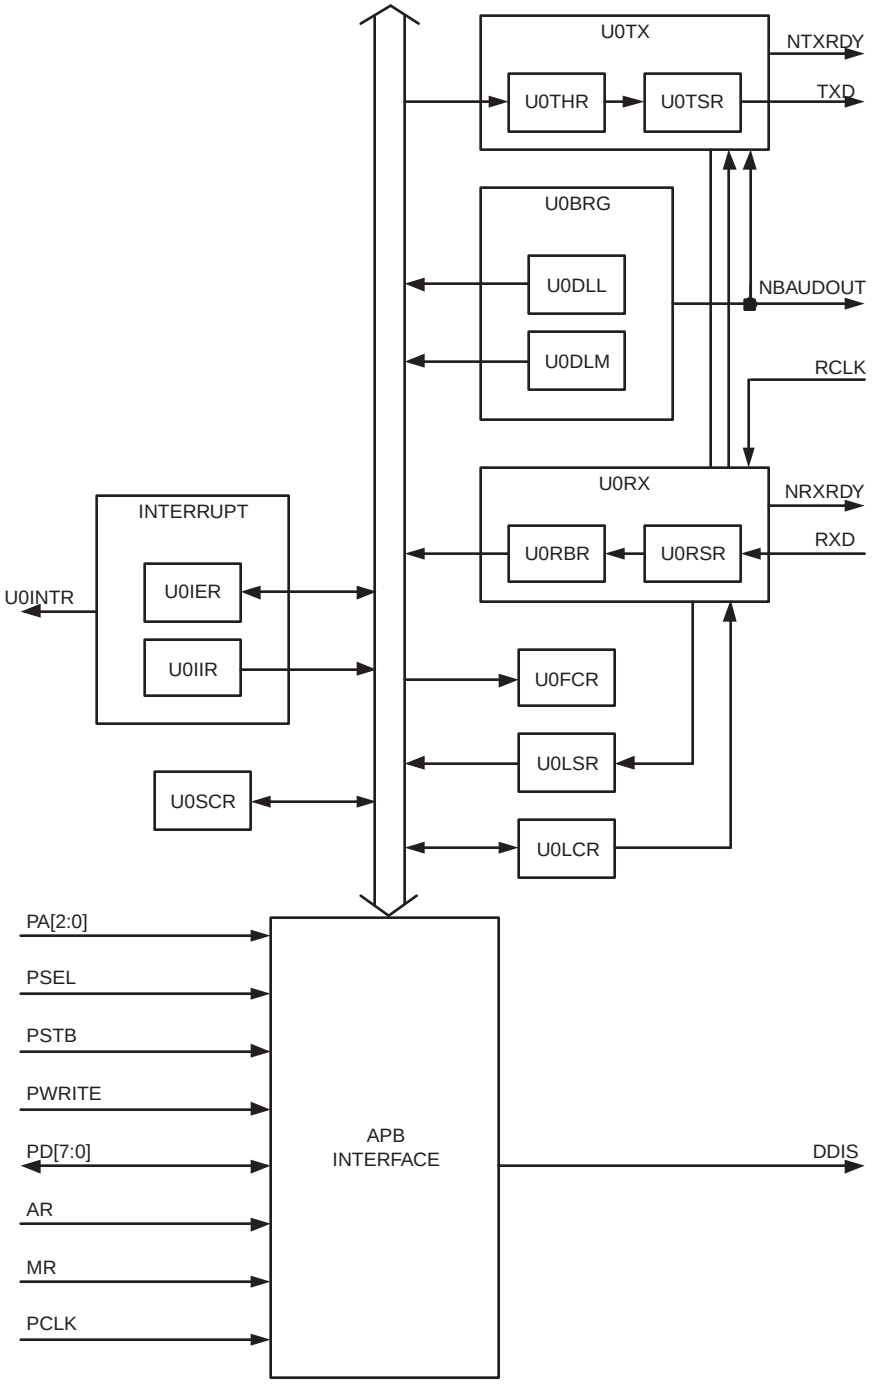


**Fig 36. UART block diagram**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 14.1 How to read this chapter

The SPI blocks are identical for all LPC111x, LPC11D14, and LPC11Cxx parts. The second SPI block, SPI1, is available on LQFP48 packages.

For parts in the LPC1100 and LPC1100L series, SPI1 is not available on HVQFN33 packages.

For parts in the LPC1100XL series, SPI1 is supported on all packages.

**Remark:** Both SPI blocks include the full SSP feature set, and all register names use the SSP prefix.

## 14.2 Basic configuration

The SPI0/1 are configured using the following registers:

1. Pins: The SPI pins must be configured in the IOCONFIG register block. In addition, use the IOCON_LOC register (see Section 7.4) to select a location for the SCK0 function.
2. Power: In the SYSAHBCLKCTRL register, set bit 11 and bit 18 (Table 21).
3. Peripheral clock: Enable the SPI0/1 peripheral clock by writing to the SSP0/1CLKDIV registers (Section 3.5.15 and Section 3.5.17).
4. Reset: Before accessing the SPI blocks, ensure that the SSP_RST_N bits (bit 0 and bit 2) in the PRESETCTRL register (Table 9) is set to 1. This de-asserts the reset signal to the SPI blocks.

## 14.3 Features

- Compatible with Motorola SPI, 4-wire TI SSI, and National Semiconductor Microwire buses.
- Synchronous Serial Communication.
- Supports master or slave operation.
- Eight-frame FIFOs for both transmit and receive.
- 4-bit to 16-bit frame.

## 14.4 General description

The SPI/SSP is a Synchronous Serial Port (SSP) controller capable of operation on a SPI, 4-wire SSI, or Microwire bus. It can interact with multiple masters and slaves on the bus. Only a single master and a single slave can communicate on the bus during a given data transfer. Data transfers are in principle full duplex, with frames of 4 bits to 16 bits of data flowing from the master to the slave and from the slave to the master. In practice it is often the case that only one of these data flows carries meaningful data.


All information provided in this document is subject to legal disclaimers.
© NXP B.V. 2016. All rights reserved.

The LPC111x/LPC11Cxx has two SPI/Synchronous Serial Port controllers.

## 14.5 Pin description

**Table 206. SPI pin descriptions**

| Pin name | Type | Interface pin name/function | | | Pin description |
|---|---|---|---|---|---|
| | | SPI | SSI | Microwire | |
| SCK0/1 | I/O | SCK | CLK | SK | **Serial Clock.** SCK/CLK/SK is a clock signal used to synchronize the transfer of data. It is driven by the master and received by the slave. When SPI/SSP interface is used, the clock is programmable to be active-high or active-low, otherwise it is always active-high. SCK only switches during a data transfer. Any other time, the SPI/SSP interface either holds it in its inactive state or does not drive it (leaves it in high-impedance state). |
| SSEL0/1 | I/O | SSEL | FS | CS | **Frame Sync/Slave Select.** When the SPI/SSP interface is a bus master, it drives this signal to an active state before the start of serial data and then releases it to an inactive state after the data has been sent.The active state of this signal can be high or low depending upon the selected bus and mode. When the SPI/SSP interface is a bus slave, this signal qualifies the presence of data from the Master according to the protocol in use.<br>When there is just one bus master and one bus slave, the Frame Sync or Slave Select signal from the Master can be connected directly to the slave's corresponding input. When there is more than one slave on the bus, further qualification of their Frame Select/Slave Select inputs will typically be necessary to prevent more than one slave from responding to a transfer. |
| MISO0/1 | I/O | MISO | DR(M)<br>DX(S) | SI(M)<br>SO(S) | **Master In Slave Out.** The MISO signal transfers serial data from the slave to the master. When the SPI/SSP is a slave, serial data is output on this signal. When the SPI/SSP is a master, it clocks in serial data from this signal. When the SPI/SSP is a slave and is not selected by FS/SSEL, it does not drive this signal (leaves it in high-impedance state). |
| MOSI0/1 | I/O | MOSI | DX(M)<br>DR(S) | SO(M)<br>SI(S) | **Master Out Slave In.** The MOSI signal transfers serial data from the master to the slave. When the SPI/SSP is a master, it outputs serial data on this signal. When the SPI/SSP is a slave, it clocks in serial data from this signal. |

**Remark:** The SCK0 function is multiplexed to three different pin locations (two locations on the HVQFN package). Use the IOCON_LOC register (see Section 7.4) to select a physical location for the SCK0 function in addition to selecting the function in the IOCON registers. The SCK1 pin is not multiplexed.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 14.6 Register description

The register addresses of the SPI controllers are shown in Table 207 and Table 208.

The reset value reflects the data stored in used bits only. It does not include the content of reserved bits.

**Remark:** Register names use the SSP prefix to indicate that the SPI controllers have full SSP capabilities.

**Table 207. Register overview: SPI0 (base address 0x4004 0000)**

| Name | Access | Address offset | Description | Reset value |
|---|---|---|---|---|
| SSP0CR0 | R/W | 0x000 | Control Register 0. Selects the serial clock rate, bus type, and data size. | 0 |
| SSP0CR1 | R/W | 0x004 | Control Register 1. Selects master/slave and other modes. | 0 |
| SSP0DR | R/W | 0x008 | Data Register. Writes fill the transmit FIFO, and reads empty the receive FIFO. | 0 |
| SSP0SR | RO | 0x00C | Status Register | 0x0000 0003 |
| SSP0CPSR | R/W | 0x010 | Clock Prescale Register | 0 |
| SSP0IMSC | R/W | 0x014 | Interrupt Mask Set and Clear Register | 0 |
| SSP0RIS | RO | 0x018 | Raw Interrupt Status Register | 0x0000 0008 |
| SSP0MIS | RO | 0x01C | Masked Interrupt Status Register | 0 |
| SSP0ICR | WO | 0x020 | SSPICR Interrupt Clear Register | NA |

**Table 208. Register overview: SPI1 (base address 0x4005 8000)**

| Name | Access | Address offset | Description | Reset value |
|---|---|---|---|---|
| SSP1CR0 | R/W | 0x000 | Control Register 0. Selects the serial clock rate, bus type, and data size. | 0 |
| SSP1CR1 | R/W | 0x004 | Control Register 1. Selects master/slave and other modes. | 0 |
| SSP1DR | R/W | 0x008 | Data Register. Writes fill the transmit FIFO, and reads empty the receive FIFO. | 0 |
| SSP1SR | RO | 0x00C | Status Register | 0x0000 0003 |
| SSP1CPSR | R/W | 0x010 | Clock Prescale Register | 0 |
| SSP1IMSC | R/W | 0x014 | Interrupt Mask Set and Clear Register | 0 |
| SSP1RIS | RO | 0x018 | Raw Interrupt Status Register | 0x0000 0008 |
| SSP1MIS | RO | 0x01C | Masked Interrupt Status Register | 0 |
| SSP1ICR | WO | 0x020 | SSPICR Interrupt Clear Register | NA |

### 14.6.1 SPI/SSP Control Register 0

This register controls the basic operation of the SPI/SSP controller.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 209: SPI/SSP Control Register 0 (SSP0CR0 - address 0x4004 0000, SSP1CR0 - address 0x4005 8000) bit description

| Bit | Symbol | Value | Description | Reset Value |
|---|---|---|---|---|
| 3:0 | DSS | | Data Size Select. This field controls the number of bits transferred in each frame. Values 0000-0010 are not supported and should not be used. | 0000 |
| | | 0x3 | 4-bit transfer | |
| | | 0x4 | 5-bit transfer | |
| | | 0x5 | 6-bit transfer | |
| | | 0x6 | 7-bit transfer | |
| | | 0x7 | 8-bit transfer | |
| | | 0x8 | 9-bit transfer | |
| | | 0x9 | 10-bit transfer | |
| | | 0xA | 11-bit transfer | |
| | | 0xB | 12-bit transfer | |
| | | 0xC | 13-bit transfer | |
| | | 0xD | 14-bit transfer | |
| | | 0xE | 15-bit transfer | |
| | | 0xF | 16-bit transfer | |
| 5:4 | FRF | | Frame Format. | 00 |
| | | 0x0 | SPI | |
| | | 0x1 | TI | |
| | | 0x2 | Microwire | |
| | | 0x3 | This combination is not supported and should not be used. | |
| 6 | CPOL | | Clock Out Polarity. This bit is only used in SPI mode. | 0 |
| | | 0 | SPI controller maintains the bus clock low between frames. | |
| | | 1 | SPI controller maintains the bus clock high between frames. | |
| 7 | CPHA | | Clock Out Phase. This bit is only used in SPI mode. | 0 |
| | | 0 | SPI controller captures serial data on the first clock transition of the frame, that is, the transition **away from** the inter-frame state of the clock line. | |
| | | 1 | SPI controller captures serial data on the second clock transition of the frame, that is, the transition **back to** the inter-frame state of the clock line. | |
| 15:8 | SCR | | Serial Clock Rate. The number of prescaler output clocks per bit on the bus, minus one. Given that CPSDVSR is the prescale divider, and the APB clock PCLK clocks the prescaler, the bit frequency is PCLK / (CPSDVSR × [SCR+1]). | 0x00 |
| 31:16 | - | - | Reserved | - |

## 14.6.2 SPI/SSP0 Control Register 1

This register controls certain aspects of the operation of the SPI/SSP controller.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 210: SPI/SSP Control Register 1 (SSP0CR1 - address 0x4004 0004, SSP1CR1 - address 0x4005 8004) bit description**

| Bit | Symbol | Value | Description | Reset Value |
|---|---|---|---|---|
| 0 | LBM | | Loop Back Mode. | 0 |
| | | 0 | During normal operation. | |
| | | 1 | Serial input is taken from the serial output (MOSI or MISO) rather than the serial input pin (MISO or MOSI respectively). | |
| 1 | SSE | | SPI Enable. | 0 |
| | | 0 | The SPI controller is disabled. | |
| | | 1 | The SPI controller will interact with other devices on the serial bus. Software should write the appropriate control information to the other SPI/SSP registers and interrupt controller registers, before setting this bit. | |
| 2 | MS | | Master/Slave Mode.This bit can only be written when the SSE bit is 0. | 0 |
| | | 0 | The SPI controller acts as a master on the bus, driving the SCLK, MOSI, and SSEL lines and receiving the MISO line. | |
| | | 1 | The SPI controller acts as a slave on the bus, driving MISO line and receiving SCLK, MOSI, and SSEL lines. | |
| 3 | SOD | | Slave Output Disable. This bit is relevant only in slave mode (MS = 1). If it is 1, this blocks this SPI controller from driving the transmit data line (MISO). | 0 |
| 31:4 | - | | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |

### 14.6.3 SPI/SSP Data Register

Software can write data to be transmitted to this register and read data that has been received.

**Table 211: SPI/SSP Data Register (SSP0DR - address 0x4004 0008, SSP1DR - address 0x4005 8008) bit description**

| Bit | Symbol | Description | Reset Value |
|---|---|---|---|
| 15:0 | DATA | **Write:** software can write data to be sent in a future frame to this register whenever the TNF bit in the Status register is 1, indicating that the Tx FIFO is not full. If the Tx FIFO was previously empty and the SPI controller is not busy on the bus, transmission of the data will begin immediately. Otherwise the data written to this register will be sent as soon as all previous data has been sent (and received). If the data length is less than 16 bit, software must right-justify the data written to this register.<br>**Read:** software can read data from this register whenever the RNE bit in the Status register is 1, indicating that the Rx FIFO is not empty. When software reads this register, the SPI controller returns data from the least recent frame in the Rx FIFO. If the data length is less than 16 bit, the data is right-justified in this field with higher order bits filled with 0s. | 0x0000 |
| 31:16 | - | Reserved. | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 14.6.4 SPI/SSP Status Register

This read-only register reflects the current status of the SPI controller.

**Table 212: SPI/SSP Status Register (SSP0SR - address 0x4004 000C, SSP1SR - address 0x4005 800C) bit description**

| Bit | Symbol | Description | Reset Value |
|---|---|---|---|
| 0 | TFE | Transmit FIFO Empty. This bit is 1 is the Transmit FIFO is empty, 0 if not. | 1 |
| 1 | TNF | Transmit FIFO Not Full. This bit is 0 if the Tx FIFO is full, 1 if not. | 1 |
| 2 | RNE | Receive FIFO Not Empty. This bit is 0 if the Receive FIFO is empty, 1 if not. | 0 |
| 3 | RFF | Receive FIFO Full. This bit is 1 if the Receive FIFO is full, 0 if not. | 0 |
| 4 | BSY | Busy. This bit is 0 if the SPI controller is idle, 1 if it is currently sending/receiving a frame and/or the Tx FIFO is not empty. | 0 |
| 31:5 | - | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |

### 14.6.5 SPI/SSP Clock Prescale Register

This register controls the factor by which the Prescaler divides the SPI peripheral clock SPI_PCLK to yield the prescaler clock that is, in turn, divided by the SCR factor in the SSPCR0 registers, to determine the bit clock.

**Table 213: SPI/SSP Clock Prescale Register (SSP0CPSR - address 0x4004 0010, SSP1CPSR - address 0x4005 8010) bit description**

| Bit | Symbol | Description | Reset Value |
|---|---|---|---|
| 7:0 | CPSDVSR | This even value between 2 and 254, by which SPI_PCLK is divided to yield the prescaler output clock. Bit 0 always reads as 0. | 0 |
| 31:8 | - | Reserved. | - |

**Important:** the SSPnCPSR value must be properly initialized, or the SPI controller will not be able to transmit data correctly.

In Slave mode, the SPI clock rate provided by the master must not exceed 1/12 of the SPI peripheral clock selected in Section 3.5.15. The content of the SSPnCPSR register is not relevant.

In master mode, $CPSDVSR_{min}$ = 2 or larger (even numbers only).

### 14.6.6 SPI/SSP Interrupt Mask Set/Clear Register

This register controls whether each of the four possible interrupt conditions in the SPI controller are enabled. Note that ARM uses the word “masked” in the opposite sense from classic computer terminology, in which “masked” meant “disabled”. ARM uses the word “masked” to mean “enabled”. To avoid confusion we will not use the word “masked”.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 214: SPI/SSP Interrupt Mask Set/Clear register (SSP0IMSC - address 0x4004 0014, SSP1IMSC - address 0x4005 8014) bit description

| Bit | Symbol | Description | Reset Value |
|---|---|---|---|
| 0 | RORIM | Software should set this bit to enable interrupt when a Receive Overrun occurs, that is, when the Rx FIFO is full and another frame is completely received. The ARM spec implies that the preceding frame data is overwritten by the new frame data when this occurs. | 0 |
| 1 | RTIM | Software should set this bit to enable interrupt when a Receive Time-out condition occurs. A Receive Time-out occurs when the Rx FIFO is not empty, and no has not been read for a time-out period. The time-out period is the same for master and slave modes and is determined by the SSP bit rate: 32 bits at PCLK / (CPSDVSR × [SCR+1]). | 0 |
| 2 | RXIM | Software should set this bit to enable interrupt when the Rx FIFO is at least half full. | 0 |
| 3 | TXIM | Software should set this bit to enable interrupt when the Tx FIFO is at least half empty. | 0 |
| 31:4 | - | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |

### 14.6.7 SPI/SSP Raw Interrupt Status Register

This read-only register contains a 1 for each interrupt condition that is asserted, regardless of whether or not the interrupt is enabled in the SSPIMSC registers.

Table 215: SPI/SSP Raw Interrupt Status register (SSP0RIS - address 0x4004 0018, SSP1RIS - address 0x4005 8018) bit description

| Bit | Symbol | Description | Reset Value |
|---|---|---|---|
| 0 | RORRIS | This bit is 1 if another frame was completely received while the RxFIFO was full. The ARM spec implies that the preceding frame data is overwritten by the new frame data when this occurs. | 0 |
| 1 | RTRIS | This bit is 1 if the Rx FIFO is not empty, and has not been read for a time-out period. The time-out period is the same for master and slave modes and is determined by the SSP bit rate: 32 bits at PCLK / (CPSDVSR × [SCR+1]). | 0 |
| 2 | RXRIS | This bit is 1 if the Rx FIFO is at least half full. | 0 |
| 3 | TXRIS | This bit is 1 if the Tx FIFO is at least half empty. | 1 |
| 31:4 | - | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |

### 14.6.8 SPI/SSP Masked Interrupt Status Register

This read-only register contains a 1 for each interrupt condition that is asserted and enabled in the SSPIMSC registers. When an SPI interrupt occurs, the interrupt service routine should read this register to determine the cause(s) of the interrupt.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 216: SPI/SSP Masked Interrupt Status register (SSP0MIS - address 0x4004 001C, SSP1MIS - address 0x4005 801C) bit description

| Bit | Symbol | Description | Reset Value |
|---|---|---|---|
| 0 | RORMIS | This bit is 1 if another frame was completely received while the RxFIFO was full, and this interrupt is enabled. | 0 |
| 1 | RTMIS | This bit is 1 if the Rx FIFO is not empty, has not been read for a time-out period, and this interrupt is enabled. The time-out period is the same for master and slave modes and is determined by the SSP bit rate: 32 bits at PCLK / (CPSDVSR × [SCR+1]). | 0 |
| 2 | RXMIS | This bit is 1 if the Rx FIFO is at least half full, and this interrupt is enabled. | 0 |
| 3 | TXMIS | This bit is 1 if the Tx FIFO is at least half empty, and this interrupt is enabled. | 0 |
| 31:4 | - | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |

### 14.6.9 SPI/SSP Interrupt Clear Register

Software can write one or more one(s) to this write-only register, to clear the corresponding interrupt condition(s) in the SPI controller. Note that the other two interrupt conditions can be cleared by writing or reading the appropriate FIFO or disabled by clearing the corresponding bit in SSPIMSC registers.

Table 217: SPI/SSP interrupt Clear Register (SSP0ICR - address 0x4004 0020, SSP1ICR - address 0x4005 8020) bit description

| Bit | Symbol | Description | Reset Value |
|---|---|---|---|
| 0 | RORIC | Writing a 1 to this bit clears the “frame was received when RxFIFO was full” interrupt. | NA |
| 1 | RTIC | Writing a 1 to this bit clears the Rx FIFO was not empty and has not been read for a timeout period interrupt. The timeout period is the same for master and slave modes and is determined by the SSP bit rate: 32 bits at PCLK / (CPSDVSR × [SCR+1]). | NA |
| 31:2 | - | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |

## 14.7 Functional description

### 14.7.1 Texas Instruments synchronous serial frame format

Figure 37 shows the 4-wire Texas Instruments synchronous serial frame format supported by the SPI module.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

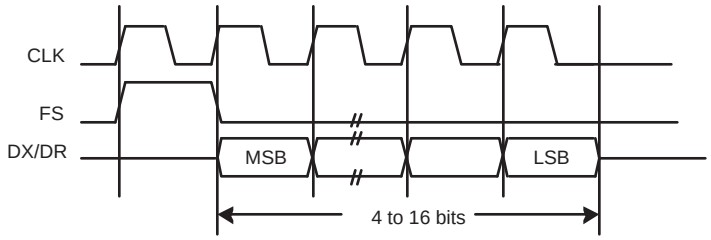


a. Single frame transfer

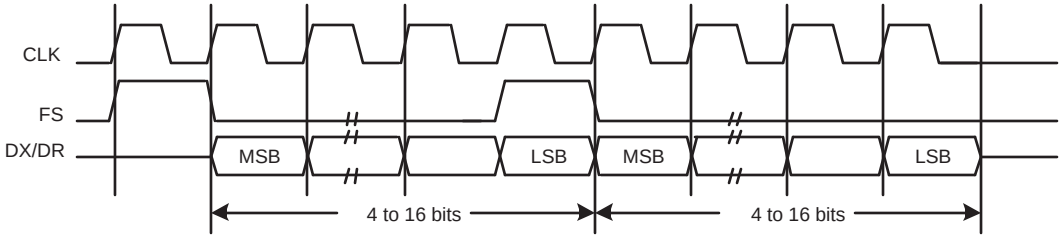


b. Continuous/back-to-back frames transfer

**Fig 37. Texas Instruments Synchronous Serial Frame Format: a) Single and b) Continuous/back-to-back Two Frames Transfer**

For device configured as a master in this mode, CLK and FS are forced LOW, and the transmit data line DX is in 3-state mode whenever the SSP is idle. Once the bottom entry of the transmit FIFO contains data, FS is pulsed HIGH for one CLK period. The value to be transmitted is also transferred from the transmit FIFO to the serial shift register of the transmit logic. On the next rising edge of CLK, the MSB of the 4-bit to 16-bit data frame is shifted out on the DX pin. Likewise, the MSB of the received data is shifted onto the DR pin by the off-chip serial slave device.

Both the SSP and the off-chip serial slave device then clock each data bit into their serial shifter on the falling edge of each CLK. The received data is transferred from the serial shifter to the receive FIFO on the first rising edge of CLK after the LSB has been latched.

### 14.7.2 SPI frame format

The SPI interface is a four-wire interface where the SSEL signal behaves as a slave select. The main feature of the SPI format is that the inactive state and phase of the SCK signal are programmable through the CPOL and CPHA bits within the SSPCR0 control register.

#### 14.7.2.1 Clock Polarity (CPOL) and Phase (CPHA) control

When the CPOL clock polarity control bit is LOW, it produces a steady state low value on the SCK pin. If the CPOL clock polarity control bit is HIGH, a steady state high value is placed on the CLK pin when data is not being transferred.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

The CPHA control bit selects the clock edge that captures data and allows it to change state. It has the most impact on the first bit transmitted by either allowing or not allowing a clock transition before the first data capture edge. When the CPHA phase control bit is LOW, data is captured on the first clock edge transition. If the CPHA clock phase control bit is HIGH, data is captured on the second clock edge transition.

### 14.7.2.2 SPI format with CPOL=0,CPHA=0

Single and continuous transmission signal sequences for SPI format with CPOL = 0, CPHA = 0 are shown in Figure 38.

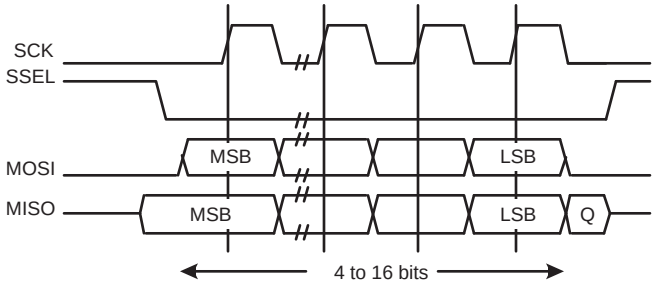


a. Single transfer with CPOL=0 and CPHA=0

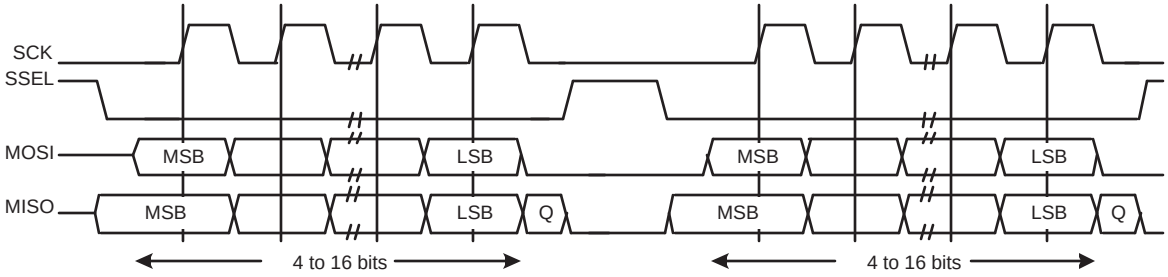


b. Continuous transfer with CPOL=0 and CPHA=0

**Fig 38. SPI frame format with CPOL=0 and CPHA=0 (a) Single and b) Continuous Transfer)**

In this configuration, during idle periods:

- The CLK signal is forced LOW.
- SSEL is forced HIGH.
- The transmit MOSI/MISO pad is in high impedance.

If the SPI/SSP is enabled and there is valid data within the transmit FIFO, the start of transmission is signified by the SSEL master signal being driven LOW. This causes slave data to be enabled onto the MISO input line of the master. Master's MOSI is enabled.

One half SCK period later, valid master data is transferred to the MOSI pin. Now that both the master and slave data have been set, the SCK master clock pin goes HIGH after one further half SCK period.

The data is captured on the rising and propagated on the falling edges of the SCK signal.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

In the case of a single word transmission, after all bits of the data word have been transferred, the SSEL line is returned to its idle HIGH state one SCK period after the last bit has been captured.

However, in the case of continuous back-to-back transmissions, the SSEL signal must be pulsed HIGH between each data word transfer. This is because the slave select pin freezes the data in its serial peripheral register and does not allow it to be altered if the CPHA bit is logic zero. Therefore the master device must raise the SSEL pin of the slave device between each data transfer to enable the serial peripheral data write. On completion of the continuous transfer, the SSEL pin is returned to its idle state one SCK period after the last bit has been captured.

### 14.7.2.3 SPI format with CPOL=0,CPHA=1

The transfer signal sequence for SPI format with CPOL = 0, CPHA = 1 is shown in Figure 39, which covers both single and continuous transfers.

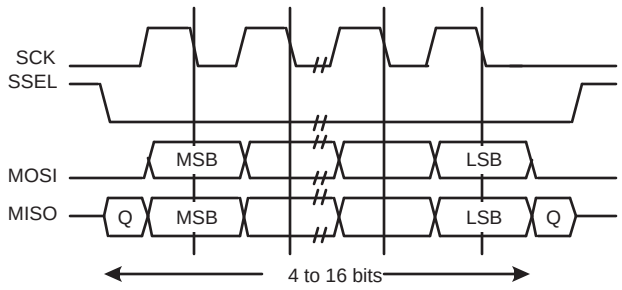


**Fig 39. SPI frame format with CPOL=0 and CPHA=1**

In this configuration, during idle periods:

- The CLK signal is forced LOW.
- SSEL is forced HIGH.
- The transmit MOSI/MISO pad is in high impedance.

If the SPI/SSP is enabled and there is valid data within the transmit FIFO, the start of transmission is signified by the SSEL master signal being driven LOW. Master's MOSI pin is enabled. After a further one half SCK period, both master and slave valid data is enabled onto their respective transmission lines. At the same time, the SCK is enabled with a rising edge transition.

Data is then captured on the falling edges and propagated on the rising edges of the SCK signal.

In the case of a single word transfer, after all bits have been transferred, the SSEL line is returned to its idle HIGH state one SCK period after the last bit has been captured.

For continuous back-to-back transfers, the SSEL pin is held LOW between successive data words and termination is the same as that of the single word transfer.

### 14.7.2.4 SPI format with CPOL = 1,CPHA = 0

Single and continuous transmission signal sequences for SPI format with CPOL=1, CPHA=0 are shown in Figure 40.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

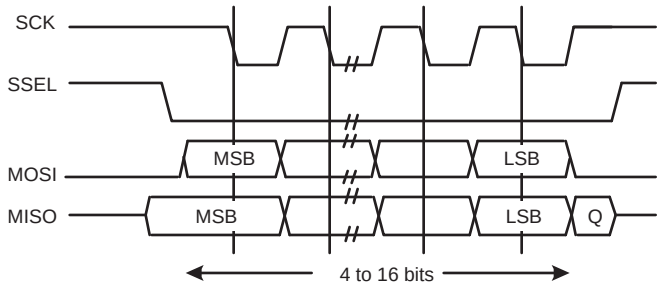


a. Single transfer with CPOL=1 and CPHA=0

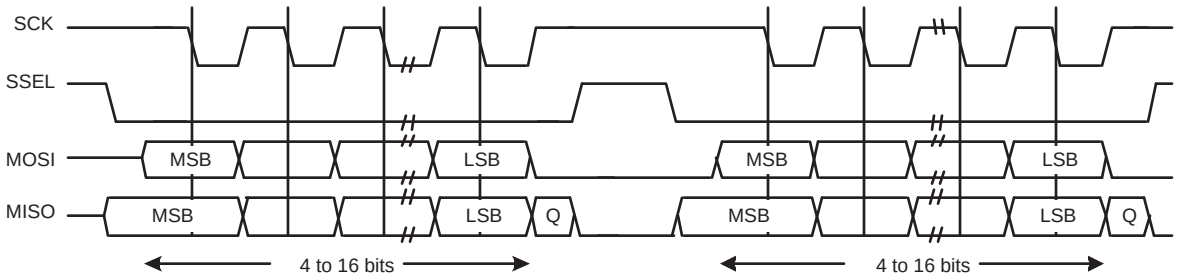


b. Continuous transfer with CPOL=1 and CPHA=0

**Fig 40. SPI frame format with CPOL = 1 and CPHA = 0 (a) Single and b) Continuous Transfer)**

In this configuration, during idle periods:

- The CLK signal is forced HIGH.
- SSEL is forced HIGH.
- The transmit MOSI/MISO pad is in high impedance.

If the SPI/SSP is enabled and there is valid data within the transmit FIFO, the start of transmission is signified by the SSEL master signal being driven LOW, which causes slave data to be immediately transferred onto the MISO line of the master. Master's MOSI pin is enabled.

One half period later, valid master data is transferred to the MOSI line. Now that both the master and slave data have been set, the SCK master clock pin becomes LOW after one further half SCK period. This means that data is captured on the falling edges and be propagated on the rising edges of the SCK signal.

In the case of a single word transmission, after all bits of the data word are transferred, the SSEL line is returned to its idle HIGH state one SCK period after the last bit has been captured.

However, in the case of continuous back-to-back transmissions, the SSEL signal must be pulsed HIGH between each data word transfer. This is because the slave select pin freezes the data in its serial peripheral register and does not allow it to be altered if the CPHA bit is logic zero. Therefore the master device must raise the SSEL pin of the slave device between each data transfer to enable the serial peripheral data write. On completion of the continuous transfer, the SSEL pin is returned to its idle state one SCK period after the last bit has been captured.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

#### 14.7.2.5 SPI format with CPOL = 1,CPHA = 1

The transfer signal sequence for SPI format with CPOL = 1, CPHA = 1 is shown in Figure 41, which covers both single and continuous transfers.

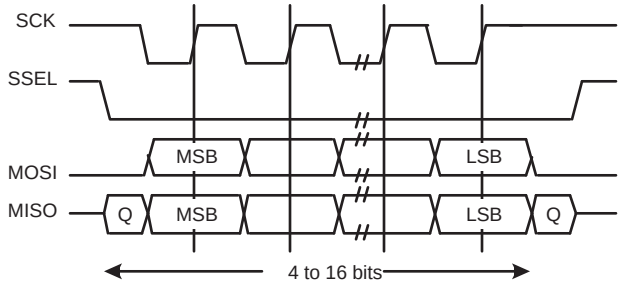


**Fig 41. SPI Frame Format with CPOL = 1 and CPHA = 1**

In this configuration, during idle periods:

- The CLK signal is forced HIGH.
- SSEL is forced HIGH.
- The transmit MOSI/MISO pad is in high impedance.

If the SPI/SSP is enabled and there is valid data within the transmit FIFO, the start of transmission is signified by the SSEL master signal being driven LOW. Master's MOSI is enabled. After a further one half SCK period, both master and slave data are enabled onto their respective transmission lines. At the same time, the SCK is enabled with a falling edge transition. Data is then captured on the rising edges and propagated on the falling edges of the SCK signal.

After all bits have been transferred, in the case of a single word transmission, the SSEL line is returned to its idle HIGH state one SCK period after the last bit has been captured. For continuous back-to-back transmissions, the SSEL pins remains in its active LOW state, until the final bit of the last word has been captured, and then returns to its idle state as described above. In general, for continuous back-to-back transfers the SSEL pin is held LOW between successive data words and termination is the same as that of the single word transfer.

### 14.7.3 Semiconductor Microwire frame format

Figure 42 shows the Microwire frame format for a single frame. Figure 43 shows the same format when back-to-back frames are transmitted.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

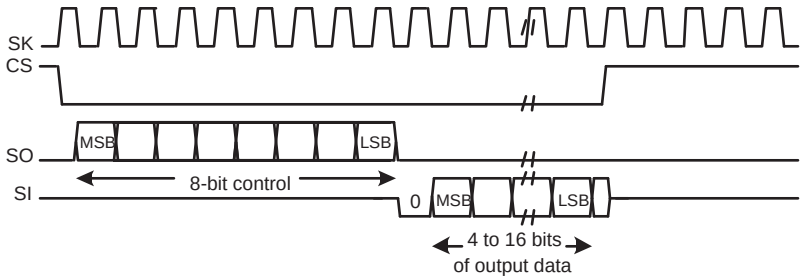


**Fig 42. Microwire frame format (single transfer)**

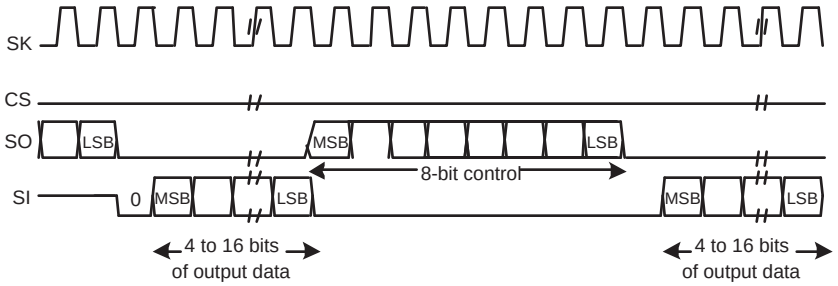


**Fig 43. Microwire frame format (continuous transfers)**

Microwire format is very similar to SPI format, except that transmission is half-duplex instead of full-duplex, using a master-slave message passing technique. Each serial transmission begins with an 8-bit control word that is transmitted from the SPI/SSP to the off-chip slave device. During this transmission, no incoming data is received by the SPI/SSP. After the message has been sent, the off-chip slave decodes it and, after waiting one serial clock after the last bit of the 8-bit control message has been sent, responds with the required data. The returned data is 4 to 16 bit in length, making the total frame length anywhere from 13 to 25 bits.

In this configuration, during idle periods:

- The SK signal is forced LOW.
- CS is forced HIGH.
- The transmit data line SO is arbitrarily forced LOW.

A transmission is triggered by writing a control byte to the transmit FIFO.The falling edge of CS causes the value contained in the bottom entry of the transmit FIFO to be transferred to the serial shift register of the transmit logic, and the MSB of the 8-bit control frame to be shifted out onto the SO pin. CS remains LOW for the duration of the frame transmission. The SI pin remains tristated during this transmission.

The off-chip serial slave device latches each control bit into its serial shifter on the rising edge of each SK. After the last bit is latched by the slave device, the control byte is decoded during a one clock wait-state, and the slave responds by transmitting data back to the SPI/SSP. Each bit is driven onto SI line on the falling edge of SK. The SPI/SSP in


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

turn latches each bit on the rising edge of SK. At the end of the frame, for single transfers, the CS signal is pulled HIGH one clock period after the last bit has been latched in the receive serial shifter, that causes the data to be transferred to the receive FIFO.

**Note:** The off-chip slave device can tristate the receive line either on the falling edge of SK after the LSB has been latched by the receive shiftier, or when the CS pin goes HIGH.

For continuous transfers, data transmission begins and ends in the same manner as a single transfer. However, the CS line is continuously asserted (held LOW) and transmission of data occurs back to back. The control byte of the next frame follows directly after the LSB of the received data from the current frame. Each of the received values is transferred from the receive shifter on the falling edge SK, after the LSB of the frame has been latched into the SPI/SSP.

#### 14.7.3.1 Setup and hold time requirements on CS with respect to SK in Microwire mode

In the Microwire mode, the SPI/SSP slave samples the first bit of receive data on the rising edge of SK after CS has gone LOW. Masters that drive a free-running SK must ensure that the CS signal has sufficient setup and hold margins with respect to the rising edge of SK.

Figure 44 illustrates these setup and hold time requirements. With respect to the SK rising edge on which the first bit of receive data is to be sampled by the SPI/SSP slave, CS must have a setup of at least two times the period of SK on which the SPI/SSP operates. With respect to the SK rising edge previous to this edge, CS must have a hold of at least one SK period.

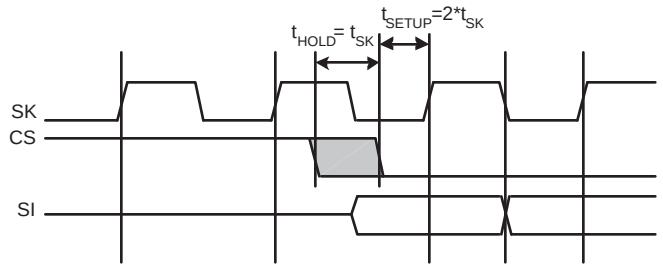


**Fig 44. Microwire frame format setup and hold details**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 15.1 How to read this chapter

The I$^2$C-bus block is identical for all LPC111x, LPC11D14, and LPC11Cxx parts.

The I2C-bus is interface is not available on part LPC1112FDH20/102.

## 15.2 Basic configuration

The I$^2$C-bus interface is configured using the following registers:

1. Pins: The I2C pin functions and the I2C mode are configured in the IOCONFIG register block (Section 7.4, Table 68 and Table 69).
2. Power and peripheral clock: In the SYSAHBCLKCTRL register, set bit 5 (Table 21).
3. Reset: Before accessing the I2C block, ensure that the I2C_RST_N bit (bit 1) in the PRESETCTRL register (Table 9) is set to 1. This de-asserts the reset signal to the I2C block.

## 15.3 Features

- Standard I$^2$C-compliant bus interfaces may be configured as Master, Slave, or Master/Slave.
- Arbitration is handled between simultaneously transmitting masters without corruption of serial data on the bus.
- Programmable clock allows adjustment of I$^2$C transfer rates.
- Data transfer is bidirectional between masters and slaves.
- Serial clock synchronization allows devices with different bit rates to communicate via one serial bus.
- Serial clock synchronization is used as a handshake mechanism to suspend and resume serial transfer.
- Supports Fast-mode Plus.
- Optional recognition of up to four distinct slave addresses.
- Monitor mode allows observing all I$^2$C-bus traffic, regardless of slave address.
- I$^2$C-bus can be used for test and diagnostic purposes.
- The I$^2$C-bus contains a standard I$^2$C-compliant bus interface with two pins.

## 15.4 Applications

Interfaces to external I$^2$C standard parts, such as serial RAMs, LCDs, tone generators, other microcontrollers, etc.


All information provided in this document is subject to legal disclaimers.
© NXP B.V. 2016. All rights reserved.

## 15.5 General description

A typical I²C-bus configuration is shown in Figure 45. Depending on the state of the direction bit (R/W), two types of data transfers are possible on the I²C-bus:

- Data transfer from a master transmitter to a slave receiver. The first byte transmitted by the master is the slave address. Next follows a number of data bytes. The slave returns an acknowledge bit after each received byte.
- Data transfer from a slave transmitter to a master receiver. The first byte (the slave address) is transmitted by the master. The slave then returns an acknowledge bit. Next follows the data bytes transmitted by the slave to the master. The master returns an acknowledge bit after all received bytes other than the last byte. At the end of the last received byte, a “not acknowledge” is returned. The master device generates all of the serial clock pulses and the START and STOP conditions. A transfer is ended with a STOP condition or with a Repeated START condition. Since a Repeated START condition is also the beginning of the next serial transfer, the I²C bus will not be released.

The I²C interface is byte oriented and has four operating modes: master transmitter mode, master receiver mode, slave transmitter mode and slave receiver mode.

The I²C interface complies with the entire I²C specification, supporting the ability to turn power off to the ARM Cortex-M0 without interfering with other devices on the same I²C-bus.

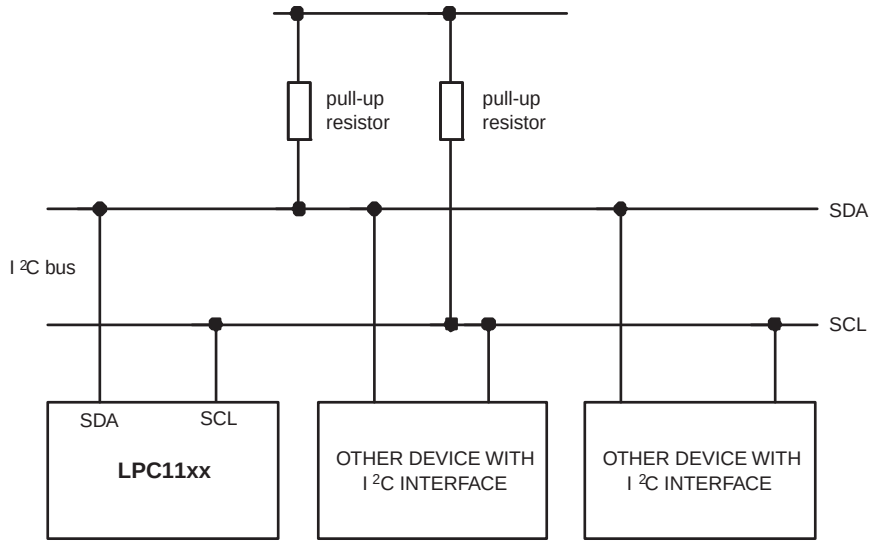


**Fig 45. I²C-bus configuration**

### 15.5.1 I²C Fast-mode Plus

Fast-Mode Plus supports a 1 Mbit/sec transfer rate to communicate with the I²C-bus products which NXP Semiconductors is now providing.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 15.6 Pin description

**Table 218. I²C-bus pin description**

| Pin | Type | Description |
|---|---|---|
| SDA | Input/Output | I²C Serial Data |
| SCL | Input/Output | I²C Serial Clock |

The I²C-bus pins must be configured through the IOCON_PIO0_4 (Table 68) and IOCON_PIO0_5 (Table 69) registers for Standard/ Fast-mode or Fast-mode Plus. In Fast-mode Plus, rates above 400 kHz and up to 1 MHz may be selected. The I²C-bus pins are open-drain outputs and fully compatible with the I²C-bus specification.

## 15.7 Register description

**Table 219. Register overview: I²C (base address 0x4000 0000)**

| Name | Access | Address offset | Description | Reset value[1] |
|---|---|---|---|---|
| I2C0CONSET | R/W | 0x000 | **I2C Control Set Register.** When a one is written to a bit of this register, the corresponding bit in the I²C control register is set. Writing a zero has no effect on the corresponding bit in the I²C control register. | 0x00 |
| I2C0STAT | RO | 0x004 | **I2C Status Register.** During I²C operation, this register provides detailed status codes that allow software to determine the next action needed. | 0xF8 |
| I2C0DAT | R/W | 0x008 | **I2C Data Register.** During master or slave transmit mode, data to be transmitted is written to this register. During master or slave receive mode, data that has been received may be read from this register. | 0x00 |
| I2C0ADR0 | R/W | 0x00C | **I2C Slave Address Register 0.** Contains the 7-bit slave address for operation of the I²C interface in slave mode, and is not used in master mode. The least significant bit determines whether a slave responds to the General Call address. | 0x00 |
| I2C0SCLH | R/W | 0x010 | **SCH Duty Cycle Register High Half Word.** Determines the high time of the I²C clock. | 0x04 |
| I2C0SCLL | R/W | 0x014 | **SCL Duty Cycle Register Low Half Word.** Determines the low time of the I²C clock. I2nSCLL and I2nSCLH together determine the clock frequency generated by an I²C master and certain times used in slave mode. | 0x04 |
| I2C0CONCLR | WO | 0x018 | **I2C Control Clear Register.** When a one is written to a bit of this register, the corresponding bit in the I²C control register is cleared. Writing a zero has no effect on the corresponding bit in the I²C control register. | NA |
| I2C0MMCTRL | R/W | 0x01C | **Monitor mode control register.** | 0x00 |
| I2C0ADR1 | R/W | 0x020 | **I2C Slave Address Register 1.** Contains the 7-bit slave address for operation of the I²C interface in slave mode, and is not used in master mode. The least significant bit determines whether a slave responds to the General Call address. | 0x00 |
| I2C0ADR2 | R/W | 0x024 | **I2C Slave Address Register 2.** Contains the 7-bit slave address for operation of the I²C interface in slave mode, and is not used in master mode. The least significant bit determines whether a slave responds to the General Call address. | 0x00 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 219. Register overview: I²C (base address 0x4000 0000)** *…continued*

| Name | Access | Address offset | Description | Reset value[1] |
|---|---|---|---|---|
| I2C0ADR3 | R/W | 0x028 | **I2C Slave Address Register 3.** Contains the 7-bit slave address for operation of the I²C interface in slave mode, and is not used in master mode. The least significant bit determines whether a slave responds to the General Call address. | 0x00 |
| I2C0DATA_BUFFER | RO | 0x02C | **Data buffer register.** The contents of the 8 MSBs of the I2DAT shift register will be transferred to the DATA_BUFFER automatically after every nine bits (8 bits of data plus ACK or NACK) has been received on the bus. | 0x00 |
| I2C0MASK0 | R/W | 0x030 | **I2C Slave address mask register 0**. This mask register is associated with I2ADR0 to determine an address match. The mask register has no effect when comparing to the General Call address (‘0000000’). | 0x00 |
| I2C0MASK1 | R/W | 0x034 | **I2C Slave address mask register 1**. This mask register is associated with I2ADR1 to determine an address match. The mask register has no effect when comparing to the General Call address (‘0000000’). | 0x00 |
| I2C0MASK2 | R/W | 0x038 | **I2C Slave address mask register 2**. This mask register is associated with I2ADR2 to determine an address match. The mask register has no effect when comparing to the General Call address (‘0000000’). | 0x00 |
| I2C0MASK3 | R/W | 0x03C | **I2C Slave address mask register 3**. This mask register is associated with I2ADR3 to determine an address match. The mask register has no effect when comparing to the General Call address (‘0000000’). | 0x00 |

[1] Reset value reflects the data stored in used bits only. It does not include reserved bits content.

### 15.7.1 I²C Control Set register (I2C0CONSET - 0x4000 0000)

The CONSET registers control setting of bits in the CON register that controls operation of the I²C interface. Writing a one to a bit of this register causes the corresponding bit in the I²C control register to be set. Writing a zero has no effect.

**Table 220. I²C Control Set register (I2C0CONSET - address 0x4000 0000) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 1:0 | - | Reserved. User software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |
| 2 | AA | Assert acknowledge flag. | |
| 3 | SI | I²C interrupt flag. | 0 |
| 4 | STO | STOP flag. | 0 |
| 5 | STA | START flag. | 0 |
| 6 | I2EN | I²C interface enable. | 0 |
| 31:7 | - | Reserved. The value read from a reserved bit is not defined. | - |

**I2EN** I²C Interface Enable. When I2EN is 1, the I²C interface is enabled. I2EN can be cleared by writing 1 to the I2ENC bit in the CONCLR register. When I2EN is 0, the I²C interface is disabled.

When I2EN is “0”, the SDA and SCL input signals are ignored, the I²C block is in the “not addressed” slave state, and the STO bit is forced to “0”.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

I2EN should not be used to temporarily release the $I^2C$-bus since, when I2EN is reset, the $I^2C$-bus status is lost. The AA flag should be used instead.

**STA** is the START flag. Setting this bit causes the $I^2C$ interface to enter master mode and transmit a START condition or transmit a Repeated START condition if it is already in master mode.

When STA is 1 and the $I^2C$ interface is not already in master mode, it enters master mode, checks the bus and generates a START condition if the bus is free. If the bus is not free, it waits for a STOP condition (which will free the bus) and generates a START condition after a delay of a half clock period of the internal clock generator. If the $I^2C$ interface is already in master mode and data has been transmitted or received, it transmits a Repeated START condition. STA may be set at any time, including when the $I^2C$ interface is in an addressed slave mode.

STA can be cleared by writing 1 to the STAC bit in the CONCLR register. When STA is 0, no START condition or Repeated START condition will be generated.

If STA and STO are both set, then a STOP condition is transmitted on the $I^2C$-bus if it the interface is in master mode, and transmits a START condition thereafter. If the $I^2C$ interface is in slave mode, an internal STOP condition is generated, but is not transmitted on the bus.

**STO** is the STOP flag. Setting this bit causes the $I^2C$ interface to transmit a STOP condition in master mode, or recover from an error condition in slave mode. When STO is 1 in master mode, a STOP condition is transmitted on the $I^2C$-bus. When the bus detects the STOP condition, STO is cleared automatically.

In slave mode, setting this bit can recover from an error condition. In this case, no STOP condition is transmitted to the bus. The hardware behaves as if a STOP condition has been received and it switches to “not addressed” slave receiver mode. The STO flag is cleared by hardware automatically.

**SI** is the $I^2C$ Interrupt Flag. This bit is set when the $I^2C$ state changes. However, entering state F8 does not set SI since there is nothing for an interrupt service routine to do in that case.

While SI is set, the low period of the serial clock on the SCL line is stretched, and the serial transfer is suspended. When SCL is HIGH, it is unaffected by the state of the SI flag. SI must be reset by software, by writing a 1 to the SIC bit in the CONCLR register.

**AA** is the Assert Acknowledge Flag. When set to 1, an acknowledge (low level to SDA) will be returned during the acknowledge clock pulse on the SCL line on the following situations:

1. The address in the Slave Address Register has been received.
2. The General Call address has been received while the General Call bit (GC) in the ADR register is set.
3. A data byte has been received while the $I^2C$ is in the master receiver mode.
4. A data byte has been received while the $I^2C$ is in the addressed slave receiver mode


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

The AA bit can be cleared by writing 1 to the AAC bit in the CONCLR register. When AA is 0, a not acknowledge (HIGH level to SDA) will be returned during the acknowledge clock pulse on the SCL line on the following situations:

1. A data byte has been received while the $I^2C$ is in the master receiver mode.
2. A data byte has been received while the $I^2C$ is in the addressed slave receiver mode.

### 15.7.2 $I^2C$ Status register (I2C0STAT - 0x4000 0004)

Each $I^2C$ Status register reflects the condition of the corresponding $I^2C$ interface. The $I^2C$ Status register is Read-Only.

**Table 221. $I^2C$ Status register (I2C0STAT - 0x4000 0004) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 2:0 | - | These bits are unused and are always 0. | 0 |
| 7:3 | Status | These bits give the actual status information about the $I^2C$ interface. | 0x1F |
| 31:8 | - | Reserved. The value read from a reserved bit is not defined. | - |

The three least significant bits are always 0. Taken as a byte, the status register contents represent a status code. There are 26 possible status codes. When the status code is 0xF8, there is no relevant information available and the SI bit is not set. All other 25 status codes correspond to defined $I^2C$ states. When any of these states entered, the SI bit will be set. For a complete list of status codes, refer to tables from Table 236 to Table 241.

### 15.7.3 $I^2C$ Data register (I2C0DAT - 0x4000 0008)

This register contains the data to be transmitted or the data just received. The CPU can read and write to this register only while it is not in the process of shifting a byte, when the SI bit is set. Data in DAT register remains stable as long as the SI bit is set. Data in DAT register is always shifted from right to left: the first bit to be transmitted is the MSB (bit 7), and after a byte has been received, the first bit of received data is located at the MSB of the DAT register.

**Table 222. $I^2C$ Data register (I2C0DAT - 0x4000 0008) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 7:0 | Data | This register holds data values that have been received or are to be transmitted. | 0 |
| 31:8 | - | Reserved. The value read from a reserved bit is not defined. | - |

### 15.7.4 $I^2C$ Slave Address register 0 (I2C0ADR0- 0x4000 000C)

This register is readable and writable and are only used when an $I^2C$ interface is set to slave mode. In master mode, this register has no effect. The LSB of the ADR register is the General Call bit. When this bit is set, the General Call address (0x00) is recognized.

If this register contains 0x00, the $I^2C$ will not acknowledge any address on the bus. All four registers (ADR0 to ADR3) will be cleared to this disabled state on reset. See also Table 229.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 223. I²C Slave Address register 0 (I2C0ADR0- 0x4000 000C) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 0 | GC | General Call enable bit. | 0 |
| 7:1 | Address | The I²C device address for slave mode. | 0x00 |
| 31:8 | - | Reserved. The value read from a reserved bit is not defined. | - |

### 15.7.5 I²C SCL HIGH and LOW duty cycle registers (I2C0SCLH - 0x4000 0010 and I2C0SCLL- 0x4000 0014)

**Table 224. I²C SCL HIGH Duty Cycle register (I2C0SCLH - address 0x4000 0010) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 15:0 | SCLH | Count for SCL HIGH time period selection. | 0x0004 |
| 31:16 | - | Reserved. The value read from a reserved bit is not defined. | - |

**Table 225. I²C SCL Low duty cycle register (I2C0SCLL - 0x4000 0014) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 15:0 | SCLL | Count for SCL low time period selection. | 0x0004 |
| 31:16 | - | Reserved. The value read from a reserved bit is not defined. | - |

#### 15.7.5.1 Selecting the appropriate I²C data rate and duty cycle

Software must set values for the registers SCLH and SCLL to select the appropriate data rate and duty cycle. SCLH defines the number of I2C_PCLK cycles for the SCL HIGH time, SCLL defines the number of I2C_PCLK cycles for the SCL low time. The frequency is determined by the following formula (I2C_PCLK is the frequency of the peripheral I2C clock):

(4)

$$I^2C_{bitfrequency} = \frac{I2CPCLK}{SCLH + SCLL}$$

The values for SCLL and SCLH must ensure that the data rate is in the appropriate I²C data rate range. Each register value must be greater than or equal to 4. Table 226 gives some examples of I²C-bus rates based on I2C_PCLK frequency and SCLL and SCLH values.

**Table 226. SCLL + SCLH values for selected I²C clock values**

| I²C mode | I²C bit frequency | I2C_PCLK (MHz) | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| | | 6 | 8 | 10 | 12 | 16 | 20 | 30 | 40 | 50 |
| | | SCLH + SCLL | | | | | | | | |
| Standard mode | 100 kHz | 60 | 80 | 100 | 120 | 160 | 200 | 300 | 400 | 500 |
| Fast-mode | 400 kHz | 15 | 20 | 25 | 30 | 40 | 50 | 75 | 100 | 125 |
| Fast-mode Plus | 1 MHz | - | 8 | 10 | 12 | 16 | 20 | 30 | 40 | 50 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

SCLL and SCLH values should not necessarily be the same. Software can set different duty cycles on SCL by setting these two registers. For example, the I2C-bus specification defines the SCL low time and high time at different values for a Fast-mode and Fast-mode Plus I2C.

### 15.7.6 I2C Control Clear register (I2C0CONCLR - 0x4000 0018)

The CONCLR register control clearing of bits in the CON register that controls operation of the I2C interface. Writing a one to a bit of this register causes the corresponding bit in the I2C control register to be cleared. Writing a zero has no effect.

**Table 227. I2C Control Clear register (I2C0CONCLR - 0x4000 0018) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 1:0 | - | Reserved. User software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |
| 2 | AAC | Assert acknowledge Clear bit. | |
| 3 | SIC | I2C interrupt Clear bit. | 0 |
| 4 | - | Reserved. User software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |
| 5 | STAC | START flag Clear bit. | 0 |
| 6 | I2ENC | I2C interface Disable bit. | 0 |
| 7 | - | Reserved. User software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |
| 31:8 | - | Reserved. The value read from a reserved bit is not defined. | - |

**AAC** is the Assert Acknowledge Clear bit. Writing a 1 to this bit clears the AA bit in the CONSET register. Writing 0 has no effect.

**SIC** is the I2C Interrupt Clear bit. Writing a 1 to this bit clears the SI bit in the CONSET register. Writing 0 has no effect.

**STAC** is the START flag Clear bit. Writing a 1 to this bit clears the STA bit in the CONSET register. Writing 0 has no effect.

I**2ENC** is the I2C Interface Disable bit. Writing a 1 to this bit clears the I2EN bit in the CONSET register. Writing 0 has no effect.

### 15.7.7 I2C Monitor mode control register (I2C0MMCTRL - 0x4000 001C)

This register controls the Monitor mode which allows the I2C module to monitor traffic on the I2C bus without actually participating in traffic or interfering with the I2C bus.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 228. I²C Monitor mode control register (I2C0MMCTRL - 0x4000 001C) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 0 | MM_ENA | | Monitor mode enable. | 0 |
| | | 0 | Monitor mode disabled. | |
| | | 1 | The I²C module will enter monitor mode. In this mode the SDA output will be forced high. This will prevent the I²C module from outputting data of any kind (including ACK) onto the I²C data bus.<br>Depending on the state of the ENA_SCL bit, the output may be also forced high, preventing the module from having control over the I²C clock line. | |
| 1 | ENA_SCL | | SCL output enable. | 0 |
| | | 0 | When this bit is cleared to '0', the SCL output will be forced high when the module is in monitor mode. As described above, this will prevent the module from having any control over the I²C clock line. | |
| | | 1 | When this bit is set, the I²C module may exercise the same control over the clock line that it would in normal operation. This means that, acting as a slave peripheral, the I²C module can "stretch" the clock line (hold it low) until it has had time to respond to an I²C interrupt.[1] | |
| 2 | MATCH_ALL | | Select interrupt register match. | 0 |
| | | 0 | When this bit is cleared, an interrupt will only be generated when a match occurs to one of the (up-to) four address registers described above. That is, the module will respond as a normal slave as far as address-recognition is concerned. | |
| | | 1 | When this bit is set to '1' and the I²C is in monitor mode, an interrupt will be generated on ANY address received. This will enable the part to monitor all traffic on the bus. | |
| 31:3 | - | - | Reserved. The value read from reserved bits is not defined. | |

[1] When the ENA_SCL bit is cleared and the I²C no longer has the ability to stall the bus, interrupt response time becomes important. To give the part more time to respond to an I²C interrupt under these conditions, a DATA _BUFFER register is used (Section 15.7.9) to hold received data for a full 9-bit word transmission time.

**Remark:** The ENA_SCL and MATCH_ALL bits have no effect if the MM_ENA is '0' (i.e. if the module is NOT in monitor mode).

#### 15.7.7.1 Interrupt in Monitor mode

All interrupts will occur as normal when the module is in monitor mode. This means that the first interrupt will occur when an address-match is detected (any address received if the MATCH_ALL bit is set, otherwise an address matching one of the four address registers).

Subsequent to an address-match detection, interrupts will be generated after each data byte is received for a slave-write transfer, or after each byte that the module "thinks" it has transmitted for a slave-read transfer. In this second case, the data register will actually contain data transmitted by some other slave on the bus which was actually addressed by the master.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Following all of these interrupts, the processor may read the data register to see what was actually transmitted on the bus.

#### 15.7.7.2 Loss of arbitration in Monitor mode

In monitor mode, the I2C module will not be able to respond to a request for information by the bus master or issue an ACK). Some other slave on the bus will respond instead. This will most probably result in a lost-arbitration state as far as our module is concerned.

Software should be aware of the fact that the module is in monitor mode and should not respond to any loss of arbitration state that is detected. In addition, hardware may be designed into the module to block some/all loss of arbitration states from occurring if those state would either prevent a desired interrupt from occurring or cause an unwanted interrupt to occur. Whether any such hardware will be added is still to be determined.

### 15.7.8 I2C Slave Address registers (I2C0ADR[1, 2, 3] - 0x4000 00[20, 24, 28])

These registers are readable and writable and are only used when an I2C interface is set to slave mode. In master mode, this register has no effect. The LSB of the ADR register is the General Call bit. When this bit is set, the General Call address (0x00) is recognized.

If these registers contain 0x00, the I2C will not acknowledge any address on the bus. All four registers will be cleared to this disabled state on reset (also see Table 223).

**Table 229. I2C Slave Address registers (I2C0ADR[1, 2, 3]- 0x4000 00[20, 24, 28]) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 0 | GC | General Call enable bit. | 0 |
| 7:1 | Address | The I2C device address for slave mode. | 0x00 |
| 31:8 | - | Reserved. The value read from a reserved bit is not defined. | 0 |

### 15.7.9 I2C Data buffer register (I2C0DATA_BUFFER - 0x4000 002C)

In monitor mode, the I2C module may lose the ability to stretch the clock (stall the bus) if the ENA_SCL bit is not set. This means that the processor will have a limited amount of time to read the contents of the data received on the bus. If the processor reads the DAT shift register, as it ordinarily would, it could have only one bit-time to respond to the interrupt before the received data is overwritten by new data.

To give the processor more time to respond, a new 8-bit, read-only DATA_BUFFER register will be added. The contents of the 8 MSBs of the DAT shift register will be transferred to the DATA_BUFFER automatically after every nine bits (8 bits of data plus ACK or NACK) has been received on the bus. This means that the processor will have nine bit transmission times to respond to the interrupt and read the data before it is overwritten.

The processor will still have the ability to read the DAT register directly, as usual, and the behavior of DAT will not be altered in any way.

Although the DATA_BUFFER register is primarily intended for use in monitor mode with the ENA_SCL bit = ‘0’, it will be available for reading at any time under any mode of operation.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 230. I²C Data buffer register (I2C0DATA_BUFFER - 0x4000 002C) bit description

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 7:0 | Data | This register holds contents of the 8 MSBs of the DAT shift register. | 0 |
| 31:8 | - | Reserved. The value read from a reserved bit is not defined. | 0 |

### 15.7.10 I²C Mask registers (I2C0MASK[0, 1, 2, 3] - 0x4000 00[30, 34, 38, 3C])

The four mask registers each contain seven active bits (7:1). Any bit in these registers which is set to '1' will cause an automatic compare on the corresponding bit of the received address when it is compared to the ADDRn register associated with that mask register. In other words, bits in an ADDRn register which are masked are not taken into account in determining an address match.

On reset, all mask register bits are cleared to '0'.

The mask register has no effect on comparison to the General Call address ("0000000").

Bits(31:8) and bit(0) of the mask registers are unused and should not be written to. These bits will always read back as zeros.

When an address-match interrupt occurs, the processor will have to read the data register (DAT) to determine what the received address was that actually caused the match.

Table 231. I²C Mask registers (I2C0MASK[0, 1, 2, 3] - 0x4000 00[30, 34, 38, 3C]) bit description

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 0 | - | Reserved. User software should not write ones to reserved bits. This bit reads always back as 0. | 0 |
| 7:1 | MASK | Mask bits. | 0x00 |
| 31:8 | - | Reserved. The value read from reserved bits is undefined. | 0 |

## 15.8 I²C operating modes

In a given application, the I²C block may operate as a master, a slave, or both. In the slave mode, the I²C hardware looks for any one of its four slave addresses and the General Call address. If one of these addresses is detected, an interrupt is requested. If the processor wishes to become the bus master, the hardware waits until the bus is free before the master mode is entered so that a possible slave operation is not interrupted. If bus arbitration is lost in the master mode, the I²C block switches to the slave mode immediately and can detect its own slave address in the same serial transfer.

### 15.8.1 Master Transmitter mode

In this mode data is transmitted from master to slave. Before the master transmitter mode can be entered, the CONSET register must be initialized as shown in Table 232. I2EN must be set to 1 to enable the I²C function. If the AA bit is 0, the I²C interface will not acknowledge any address when another device is master of the bus, so it can not enter slave mode. The STA, STO and SI bits must be 0. The SI Bit is cleared by writing 1 to the SIC bit in the CONCLR register. THe STA bit should be cleared after writing the slave address.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 232. I2C0CONSET and I2C1CONSET used to configure Master mode**

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---|---|---|---|---|---|---|---|---|
| Symbol | - | I2EN | STA | STO | SI | AA | - | - |
| Value | - | 1 | 0 | 0 | 0 | 0 | - | - |

The first byte transmitted contains the slave address of the receiving device (7 bits) and the data direction bit. In this mode the data direction bit (R/W) should be 0 which means Write. The first byte transmitted contains the slave address and Write bit. Data is transmitted 8 bits at a time. After each byte is transmitted, an acknowledge bit is received. START and STOP conditions are output to indicate the beginning and the end of a serial transfer.

The $I^2C$ interface will enter master transmitter mode when software sets the STA bit. The $I^2C$ logic will send the START condition as soon as the bus is free. After the START condition is transmitted, the SI bit is set, and the status code in the STAT register is 0x08. This status code is used to vector to a state service routine which will load the slave address and Write bit to the DAT register, and then clear the SI bit. SI is cleared by writing a 1 to the SIC bit in the CONCLR register.

When the slave address and R/W bit have been transmitted and an acknowledgment bit has been received, the SI bit is set again, and the possible status codes now are 0x18, 0x20, or 0x38 for the master mode, or 0x68, 0x78, or 0xB0 if the slave mode was enabled (by setting AA to 1). The appropriate actions to be taken for each of these status codes are shown in Table 236 to Table 241.

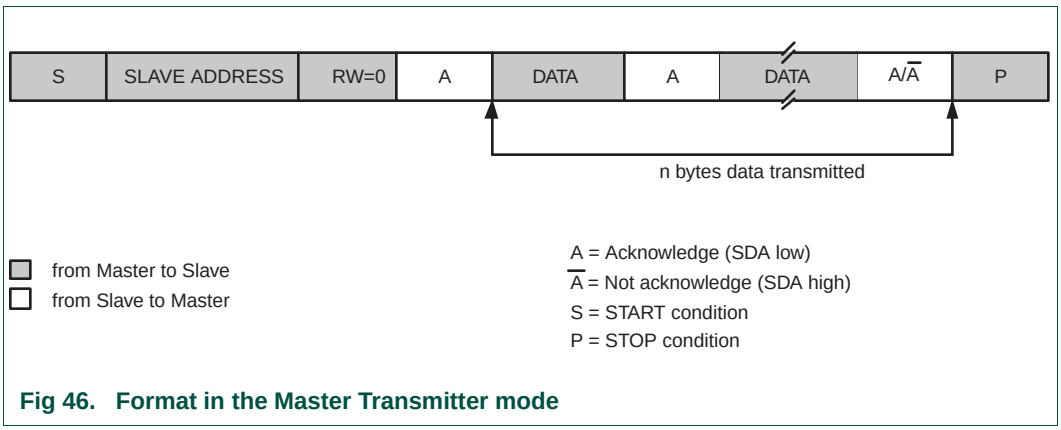


**Fig 46. Format in the Master Transmitter mode**

## 15.8.2 Master Receiver mode

In the master receiver mode, data is received from a slave transmitter. The transfer is initiated in the same way as in the master transmitter mode. When the START condition has been transmitted, the interrupt service routine must load the slave address and the data direction bit to the $I^2C$ Data register (DAT), and then clear the SI bit. In this case, the data direction bit (R/W) should be 1 to indicate a read.

When the slave address and data direction bit have been transmitted and an acknowledge bit has been received, the SI bit is set, and the Status Register will show the status code. For master mode, the possible status codes are 0x40, 0x48, or 0x38. For slave mode, the possible status codes are 0x68, 0x78, or 0xB0. For details, refer to Table 237.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

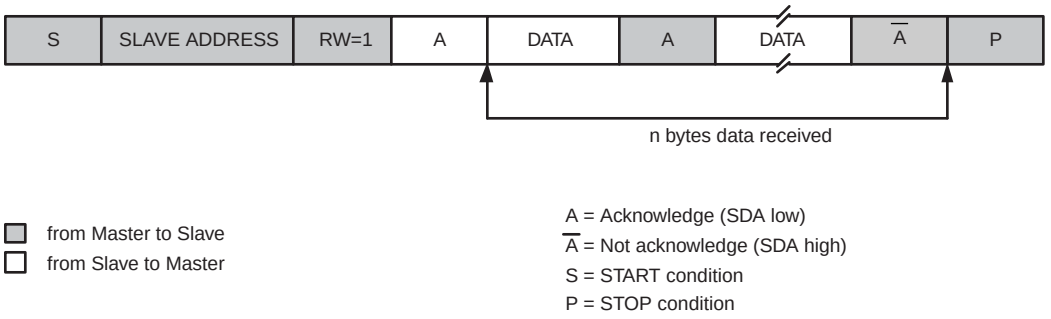


**Fig 47. Format of Master Receiver mode**

After a Repeated START condition, I²C may switch to the master transmitter mode.

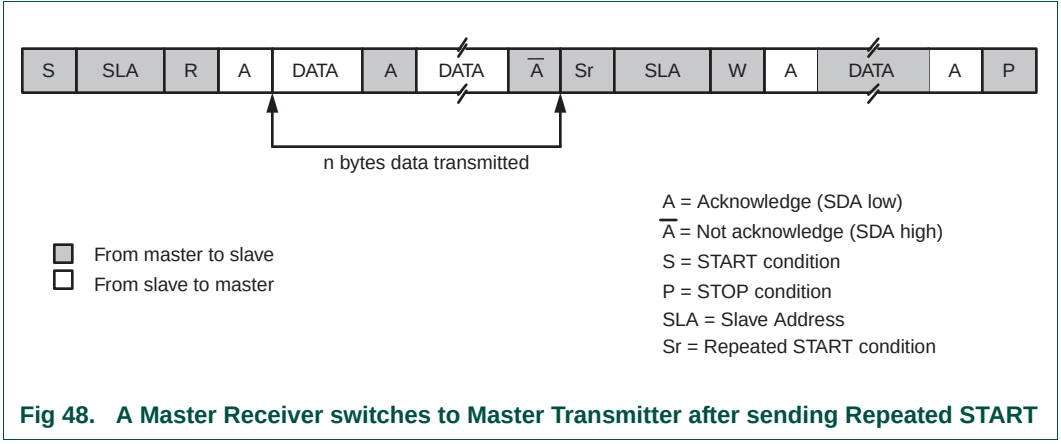


**Fig 48. A Master Receiver switches to Master Transmitter after sending Repeated START**

### 15.8.3 Slave Receiver mode

In the slave receiver mode, data bytes are received from a master transmitter. To initialize the slave receiver mode, write any of the Slave Address registers (ADR0-3) and write the I²C Control Set register (CONSET) as shown in Table 233.

**Table 233. I2C0CONSET and I2C1CONSET used to configure Slave mode**

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---|---|---|---|---|---|---|---|---|
| Symbol | - | I2EN | STA | STO | SI | AA | - | - |
| Value | - | 1 | 0 | 0 | 0 | 1 | - | - |

I2EN must be set to 1 to enable the I²C function. AA bit must be set to 1 to acknowledge its own slave address or the General Call address. The STA, STO and SI bits are set to 0.

After ADR and CONSET are initialized, the I²C interface waits until it is addressed by its own address or general address followed by the data direction bit. If the direction bit is 0 (W), it enters slave receiver mode. If the direction bit is 1 (R), it enters slave transmitter mode. After the address and direction bit have been received, the SI bit is set and a valid status code can be read from the Status register (STAT). Refer to Table 240 for the status codes and actions.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

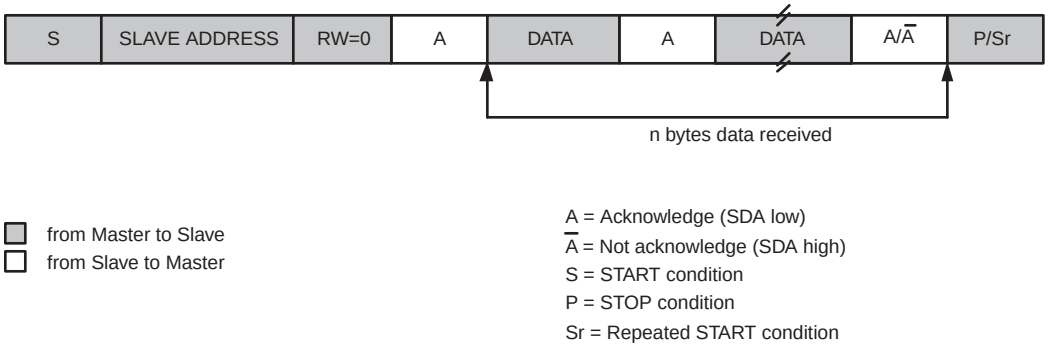


**Fig 49. Format of Slave Receiver mode**

### 15.8.4 Slave Transmitter mode

The first byte is received and handled as in the slave receiver mode. However, in this mode, the direction bit will be 1, indicating a read operation. Serial data is transmitted via SDA while the serial clock is input through SCL. START and STOP conditions are recognized as the beginning and end of a serial transfer. In a given application, $I^2C$ may operate as a master and as a slave. In the slave mode, the $I^2C$ hardware looks for its own slave address and the General Call address. If one of these addresses is detected, an interrupt is requested. When the microcontrollers wishes to become the bus master, the hardware waits until the bus is free before the master mode is entered so that a possible slave action is not interrupted. If bus arbitration is lost in the master mode, the $I^2C$ interface switches to the slave mode immediately and can detect its own slave address in the same serial transfer.

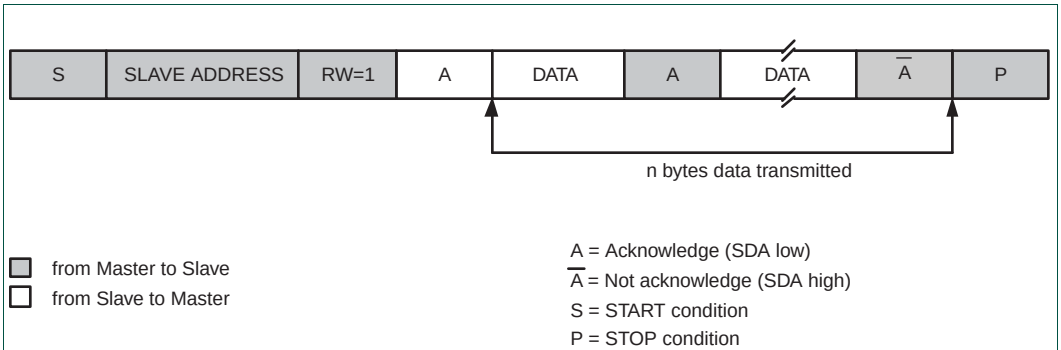


**Fig 50. Format of Slave Transmitter mode**

## 15.9 $I^2C$ implementation and operation

Figure 51 shows how the on-chip $I^2C$-bus interface is implemented, and the following text describes the individual blocks.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

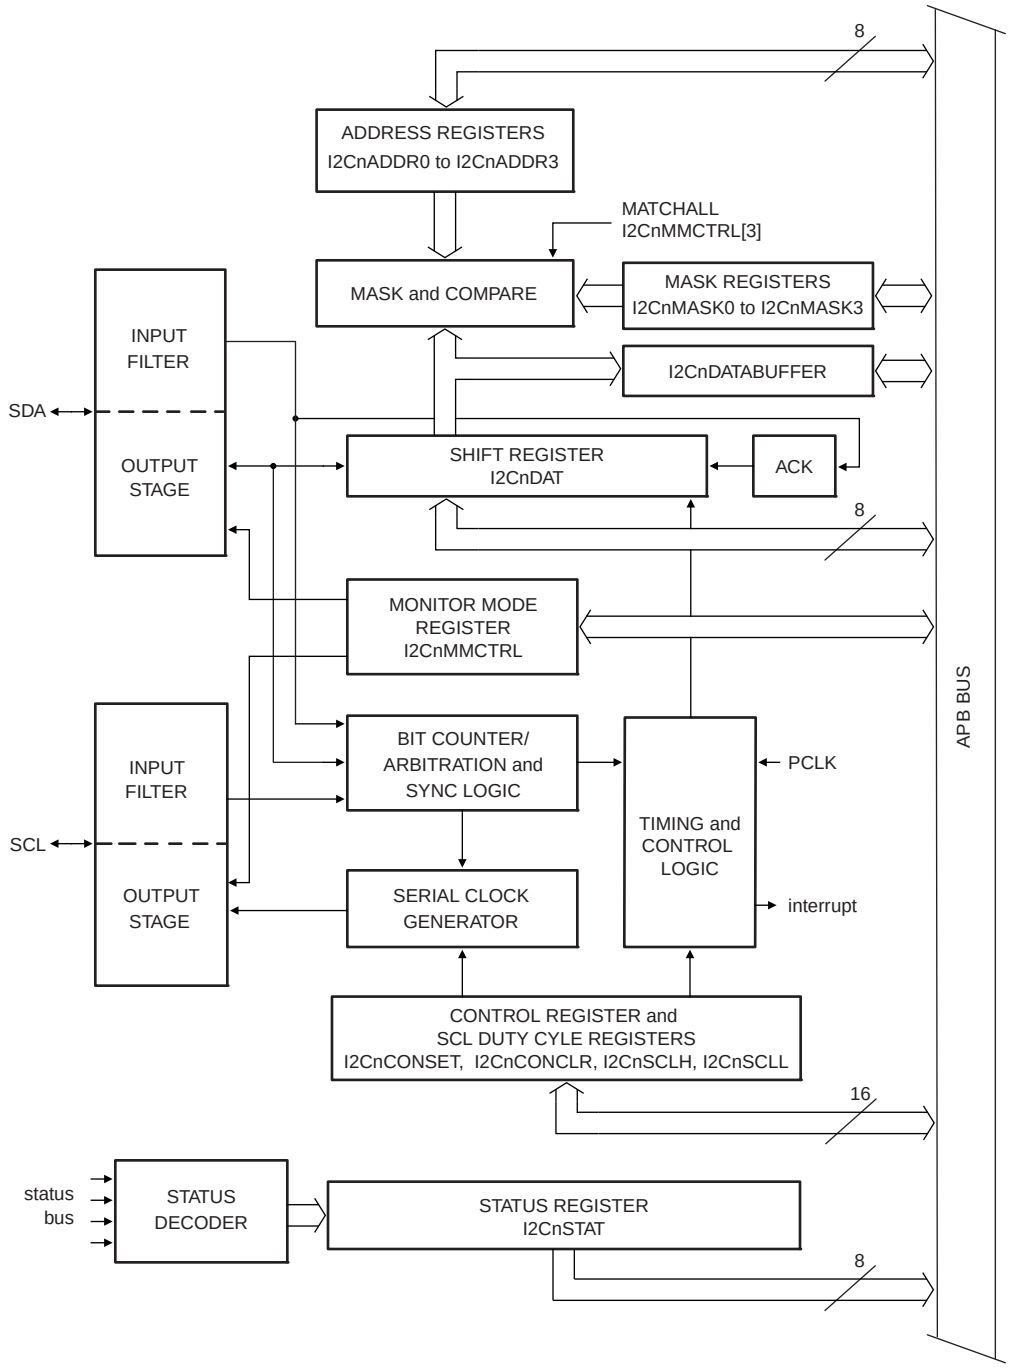


**Fig 51. I²C serial interface block diagram**

### 15.9.1 Input filters and output stages

Input signals are synchronized with the internal clock, and spikes shorter than three clocks are filtered out.

The output for I²C is a special pad designed to conform to the I²C specification.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 15.9.2 Address Registers, ADDR0 to ADDR3

These registers may be loaded with the 7-bit slave address (7 most significant bits) to which the $I^2C$ block will respond when programmed as a slave transmitter or receiver. The LSB (GC) is used to enable General Call address (0x00) recognition. When multiple slave addresses are enabled, the actual address received may be read from the DAT register at the state where the own slave address has been received.

### 15.9.3 Address mask registers, MASK0 to MASK3

The four mask registers each contain seven active bits (7:1). Any bit in these registers which is set to '1' will cause an automatic compare on the corresponding bit of the received address when it is compared to the ADDRn register associated with that mask register. In other words, bits in an ADDRn register which are masked are not taken into account in determining an address match.

When an address-match interrupt occurs, the processor will have to read the data register (DAT) to determine what the received address was that actually caused the match.

### 15.9.4 Comparator

The comparator compares the received 7-bit slave address with its own slave address (7 most significant bits in ADR). It also compares the first received 8-bit byte with the General Call address (0x00). If an equality is found, the appropriate status bits are set and an interrupt is requested.

### 15.9.5 Shift register, DAT

This 8-bit register contains a byte of serial data to be transmitted or a byte which has just been received. Data in DAT is always shifted from right to left; the first bit to be transmitted is the MSB (bit 7) and, after a byte has been received, the first bit of received data is located at the MSB of DAT. While data is being shifted out, data on the bus is simultaneously being shifted in; DAT always contains the last byte present on the bus. Thus, in the event of lost arbitration, the transition from master transmitter to slave receiver is made with the correct data in DAT.

### 15.9.6 Arbitration and synchronization logic

In the master transmitter mode, the arbitration logic checks that every transmitted logic 1 actually appears as a logic 1 on the $I^2C$-bus. If another device on the bus overrules a logic 1 and pulls the SDA line low, arbitration is lost, and the $I^2C$ block immediately changes from master transmitter to slave receiver. The $I^2C$ block will continue to output clock pulses (on SCL) until transmission of the current serial byte is complete.

Arbitration may also be lost in the master receiver mode. Loss of arbitration in this mode can only occur while the $I^2C$ block is returning a "not acknowledge: (logic 1) to the bus. Arbitration is lost when another device on the bus pulls this signal low. Since this can occur only at the end of a serial byte, the $I^2C$ block generates no further clock pulses. Figure 52 shows the arbitration procedure.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

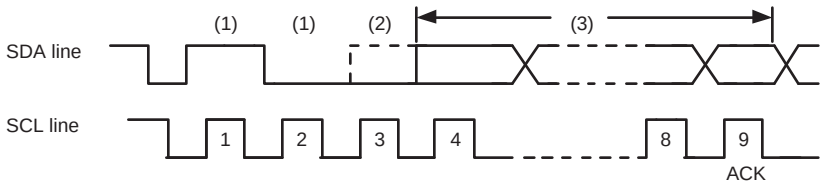


(1) Another device transmits serial data.

(2) Another device overrules a logic (dotted line) transmitted this I2C master by pulling the SDA line low. Arbitration is lost, and this I2C enters Slave Receiver mode.

(3) This I2C is in Slave Receiver mode but still generates clock pulses until the current byte has been transmitted. This I2C will not generate clock pulses for the next byte. Data on SDA originates from the new master once it has won arbitration.

**Fig 52. Arbitration procedure**

The synchronization logic will synchronize the serial clock generator with the clock pulses on the SCL line from another device. If two or more master devices generate clock pulses, the “mark” duration is determined by the device that generates the shortest “marks,” and the “space” duration is determined by the device that generates the longest “spaces”. Figure 53 shows the synchronization procedure.

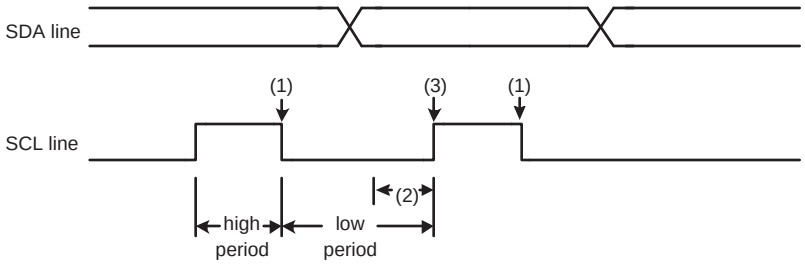


(1) Another device pulls the SCL line low before this I2C has timed a complete high time. The other device effectively determines the (shorter) HIGH period.

(2) Another device continues to pull the SCL line low after this I2C has timed a complete low time and released SCL. The I2C clock generator is forced to wait until SCL goes HIGH. The other device effectively determines the (longer) LOW period.

(3) The SCL line is released , and the clock generator begins timing the HIGH time.

**Fig 53. Serial clock synchronization**

A slave may stretch the space duration to slow down the bus master. The space duration may also be stretched for handshaking purposes. This can be done after each bit or after a complete byte transfer. the I2C block will stretch the SCL space duration after a byte has been transmitted or received and the acknowledge bit has been transferred. The serial interrupt flag (SI) is set, and the stretching continues until the serial interrupt flag is cleared.

### 15.9.7 Serial clock generator

This programmable clock pulse generator provides the SCL clock pulses when the I2C block is in the master transmitter or master receiver mode. It is switched off when the I2C block is in slave mode. The I2C output clock frequency and duty cycle is programmable


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

via the I2C Clock Control Registers. See the description of the I2CSCLL and I2CSCLH registers for details. The output clock pulses have a duty cycle as programmed unless the bus is synchronizing with other SCL clock sources as described above.

### 15.9.8 Timing and control

The timing and control logic generates the timing and control signals for serial byte handling. This logic block provides the shift pulses for DAT, enables the comparator, generates and detects START and STOP conditions, receives and transmits acknowledge bits, controls the master and slave modes, contains interrupt request logic, and monitors the I2C-bus status.

### 15.9.9 Control register, CONSET and CONCLR

The I2C control register contains bits used to control the following I2C block functions: start and restart of a serial transfer, termination of a serial transfer, bit rate, address recognition, and acknowledgment.

The contents of the I2C control register may be read as CONSET. Writing to CONSET will set bits in the I2C control register that correspond to ones in the value written. Conversely, writing to CONCLR will clear bits in the I2C control register that correspond to ones in the value written.

### 15.9.10 Status decoder and status register

The status decoder takes all of the internal status bits and compresses them into a 5-bit code. This code is unique for each I2C-bus status. The 5-bit code may be used to generate vector addresses for fast processing of the various service routines. Each service routine processes a particular bus status. There are 26 possible bus states if all four modes of the I2C block are used. The 5-bit status code is latched into the five most significant bits of the status register when the serial interrupt flag is set (by hardware) and remains stable until the interrupt flag is cleared by software. The three least significant bits of the status register are always zero. If the status code is used as a vector to service routines, then the routines are displaced by eight address locations. Eight bytes of code is sufficient for most of the service routines (see the software example in this section).

## 15.10 Details of I2C operating modes

The four operating modes are:

- Master Transmitter
- Master Receiver
- Slave Receiver
- Slave Transmitter

Data transfers in each mode of operation are shown in Figure 54, Figure 55, Figure 56, Figure 57, and Figure 58. Table 234 lists abbreviations used in these figures when describing the I2C operating modes.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 234. Abbreviations used to describe an I²C operation**

| Abbreviation | Explanation |
|---|---|
| S | START Condition |
| SLA | 7-bit slave address |
| R | Read bit (HIGH level at SDA) |
| W | Write bit (LOW level at SDA) |
| A | Acknowledge bit (LOW level at SDA) |
| $\overline{A}$ | Not acknowledge bit (HIGH level at SDA) |
| Data | 8-bit data byte |
| P | STOP condition |

In Figure 54 to Figure 58, circles are used to indicate when the serial interrupt flag is set. The numbers in the circles show the status code held in the STAT register. At these points, a service routine must be executed to continue or complete the serial transfer. These service routines are not critical since the serial transfer is suspended until the serial interrupt flag is cleared by software.

When a serial interrupt routine is entered, the status code in STAT is used to branch to the appropriate service routine. For each status code, the required software action and details of the following serial transfer are given in tables from Table 236 to Table 242.

### 15.10.1 Master Transmitter mode

In the master transmitter mode, a number of data bytes are transmitted to a slave receiver (see Figure 54). Before the master transmitter mode can be entered, I2CON must be initialized as follows:

**Table 235. I2C0CONSET used to initialize Master Transmitter mode**

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---|---|---|---|---|---|---|---|---|
| Symbol | - | I2EN | STA | STO | SI | AA | - | - |
| Value | - | 1 | 0 | 0 | 0 | x | - | - |

The I²C rate must also be configured in the SCLL and SCLH registers. I2EN must be set to logic 1 to enable the I²C block. If the AA bit is reset, the I²C block will not acknowledge its own slave address or the General Call address in the event of another device becoming master of the bus. In other words, if AA is reset, the I²C interface cannot enter slave mode. STA, STO, and SI must be reset.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

The master transmitter mode may now be entered by setting the STA bit. The $I^2C$ logic will now test the $I^2C$-bus and generate a START condition as soon as the bus becomes free. When a START condition is transmitted, the serial interrupt flag (SI) is set, and the status code in the status register (STAT) will be 0x08. This status code is used by the interrupt service routine to enter the appropriate state service routine that loads DAT with the slave address and the data direction bit (SLA+W). The SI bit in CON must then be reset before the serial transfer can continue.

When the slave address and the direction bit have been transmitted and an acknowledgment bit has been received, the serial interrupt flag (SI) is set again, and a number of status codes in STAT are possible. There are 0x18, 0x20, or 0x38 for the master mode and also 0x68, 0x78, or 0xB0 if the slave mode was enabled (AA = logic 1). The appropriate action to be taken for each of these status codes is detailed in Table 236. After a Repeated START condition (state 0x10). The $I^2C$ block may switch to the master receiver mode by loading DAT with SLA+R).


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 236. Master Transmitter mode**

| Status Code (I2CSTAT) | Status of the $I^2C$-bus and hardware | Application software response | | | | | Next action taken by $I^2C$ hardware |
|---|---|---|---|---|---|---|---|
| | | To/From DAT | To CON | | | | |
| | | | STA | STO | SI | AA | |
| 0x08 | A START condition has been transmitted. | Load SLA+W; clear STA | X | 0 | 0 | X | SLA+W will be transmitted; ACK bit will be received. |
| 0x10 | A Repeated START condition has been transmitted. | Load SLA+W or | X | 0 | 0 | X | As above. |
| | | Load SLA+R; Clear STA | X | 0 | 0 | X | SLA+R will be transmitted; the $I^2C$ block will be switched to MST/REC mode. |
| 0x18 | SLA+W has been transmitted; ACK has been received. | Load data byte or | 0 | 0 | 0 | X | Data byte will be transmitted; ACK bit will be received. |
| | | No DAT action or | 1 | 0 | 0 | X | Repeated START will be transmitted. |
| | | No DAT action or | 0 | 1 | 0 | X | STOP condition will be transmitted; STO flag will be reset. |
| | | No DAT action | 1 | 1 | 0 | X | STOP condition followed by a START condition will be transmitted; STO flag will be reset. |
| 0x20 | SLA+W has been transmitted; NOT ACK has been received. | Load data byte or | 0 | 0 | 0 | X | Data byte will be transmitted; ACK bit will be received. |
| | | No DAT action or | 1 | 0 | 0 | X | Repeated START will be transmitted. |
| | | No DAT action or | 0 | 1 | 0 | X | STOP condition will be transmitted; STO flag will be reset. |
| | | No DAT action | 1 | 1 | 0 | X | STOP condition followed by a START condition will be transmitted; STO flag will be reset. |
| 0x28 | Data byte in DAT has been transmitted; ACK has been received. | Load data byte or | 0 | 0 | 0 | X | Data byte will be transmitted; ACK bit will be received. |
| | | No DAT action or | 1 | 0 | 0 | X | Repeated START will be transmitted. |
| | | No DAT action or | 0 | 1 | 0 | X | STOP condition will be transmitted; STO flag will be reset. |
| | | No DAT action | 1 | 1 | 0 | X | STOP condition followed by a START condition will be transmitted; STO flag will be reset. |
| 0x30 | Data byte in DAT has been transmitted; NOT ACK has been received. | Load data byte or | 0 | 0 | 0 | X | Data byte will be transmitted; ACK bit will be received. |
| | | No DAT action or | 1 | 0 | 0 | X | Repeated START will be transmitted. |
| | | No DAT action or | 0 | 1 | 0 | X | STOP condition will be transmitted; STO flag will be reset. |
| | | No DAT action | 1 | 1 | 0 | X | STOP condition followed by a START condition will be transmitted; STO flag will be reset. |
| 0x38 | Arbitration lost in SLA+R/W or Data bytes. | No DAT action or | 0 | 0 | 0 | X | $I^2C$-bus will be released; not addressed slave will be entered. |
| | | No DAT action | 1 | 0 | 0 | X | A START condition will be transmitted when the bus becomes free. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

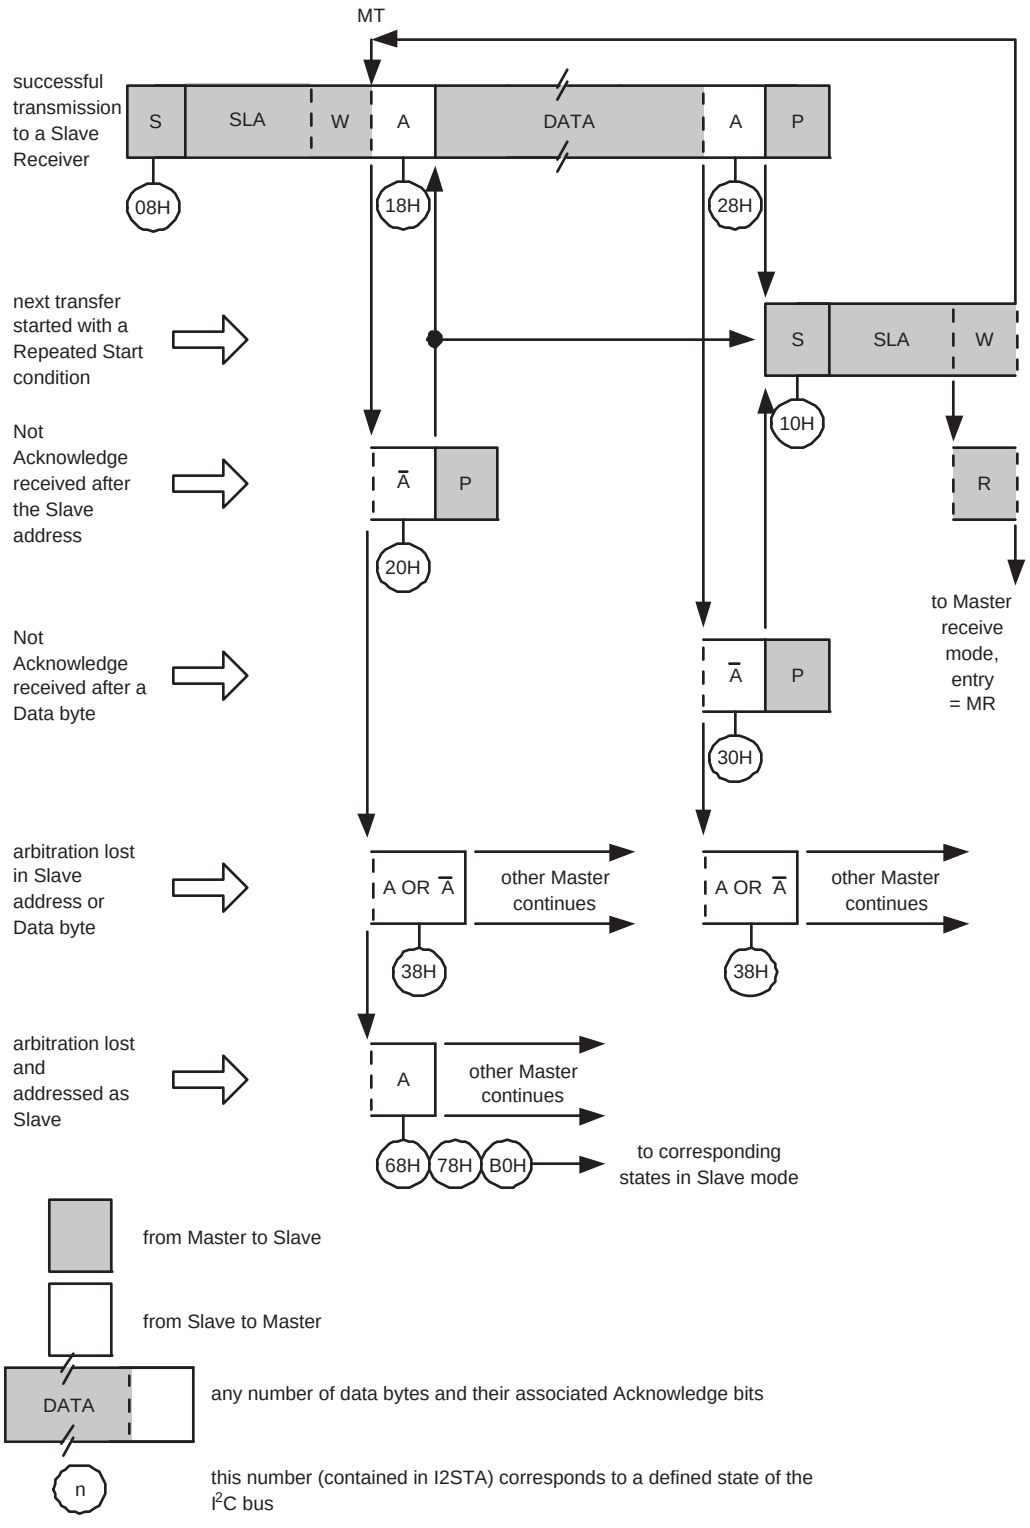


**Fig 54. Format and states in the Master Transmitter mode**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 15.10.2 Master Receiver mode

In the master receiver mode, a number of data bytes are received from a slave transmitter (see Figure 55). The transfer is initialized as in the master transmitter mode. When the START condition has been transmitted, the interrupt service routine must load DAT with the 7-bit slave address and the data direction bit (SLA+R). The SI bit in CON must then be cleared before the serial transfer can continue.

When the slave address and the data direction bit have been transmitted and an acknowledgment bit has been received, the serial interrupt flag (SI) is set again, and a number of status codes in STAT are possible. These are 0x40, 0x48, or 0x38 for the master mode and also 0x68, 0x78, or 0xB0 if the slave mode was enabled (AA = 1). The appropriate action to be taken for each of these status codes is detailed in Table 237. After a Repeated START condition (state 0x10), the $I^2C$ block may switch to the master transmitter mode by loading DAT with SLA+W.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 237. Master Receiver mode**

| Status Code (STAT) | Status of the $I^2C$-bus and hardware | Application software response | | | | | Next action taken by $I^2C$ hardware |
|---|---|---|---|---|---|---|---|
| | | To/From DAT | To CON | | | | |
| | | | STA | STO | SI | AA | |
| 0x08 | A START condition has been transmitted. | Load SLA+R | X | 0 | 0 | X | SLA+R will be transmitted; ACK bit will be received. |
| 0x10 | A Repeated START condition has been transmitted. | Load SLA+R or | X | 0 | 0 | X | As above. |
| | | Load SLA+W | X | 0 | 0 | X | SLA+W will be transmitted; the $I^2C$ block will be switched to MST/TRX mode. |
| 0x38 | Arbitration lost in NOT ACK bit. | No DAT action or | 0 | 0 | 0 | X | $I^2C$-bus will be released; the $I^2C$ block will enter slave mode. |
| | | No DAT action | 1 | 0 | 0 | X | A START condition will be transmitted when the bus becomes free. |
| 0x40 | SLA+R has been transmitted; ACK has been received. | No DAT action or | 0 | 0 | 0 | 0 | Data byte will be received; NOT ACK bit will be returned. |
| | | No DAT action | 0 | 0 | 0 | 1 | Data byte will be received; ACK bit will be returned. |
| 0x48 | SLA+R has been transmitted; NOT ACK has been received. | No DAT action or | 1 | 0 | 0 | X | Repeated START condition will be transmitted. |
| | | No DAT action or | 0 | 1 | 0 | X | STOP condition will be transmitted; STO flag will be reset. |
| | | No DAT action | 1 | 1 | 0 | X | STOP condition followed by a START condition will be transmitted; STO flag will be reset. |
| 0x50 | Data byte has been received; ACK has been returned. | Read data byte or | 0 | 0 | 0 | 0 | Data byte will be received; NOT ACK bit will be returned. |
| | | Read data byte | 0 | 0 | 0 | 1 | Data byte will be received; ACK bit will be returned. |
| 0x58 | Data byte has been received; NOT ACK has been returned. | Read data byte or | 1 | 0 | 0 | X | Repeated START condition will be transmitted. |
| | | Read data byte or | 0 | 1 | 0 | X | STOP condition will be transmitted; STO flag will be reset. |
| | | Read data byte | 1 | 1 | 0 | X | STOP condition followed by a START condition will be transmitted; STO flag will be reset. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

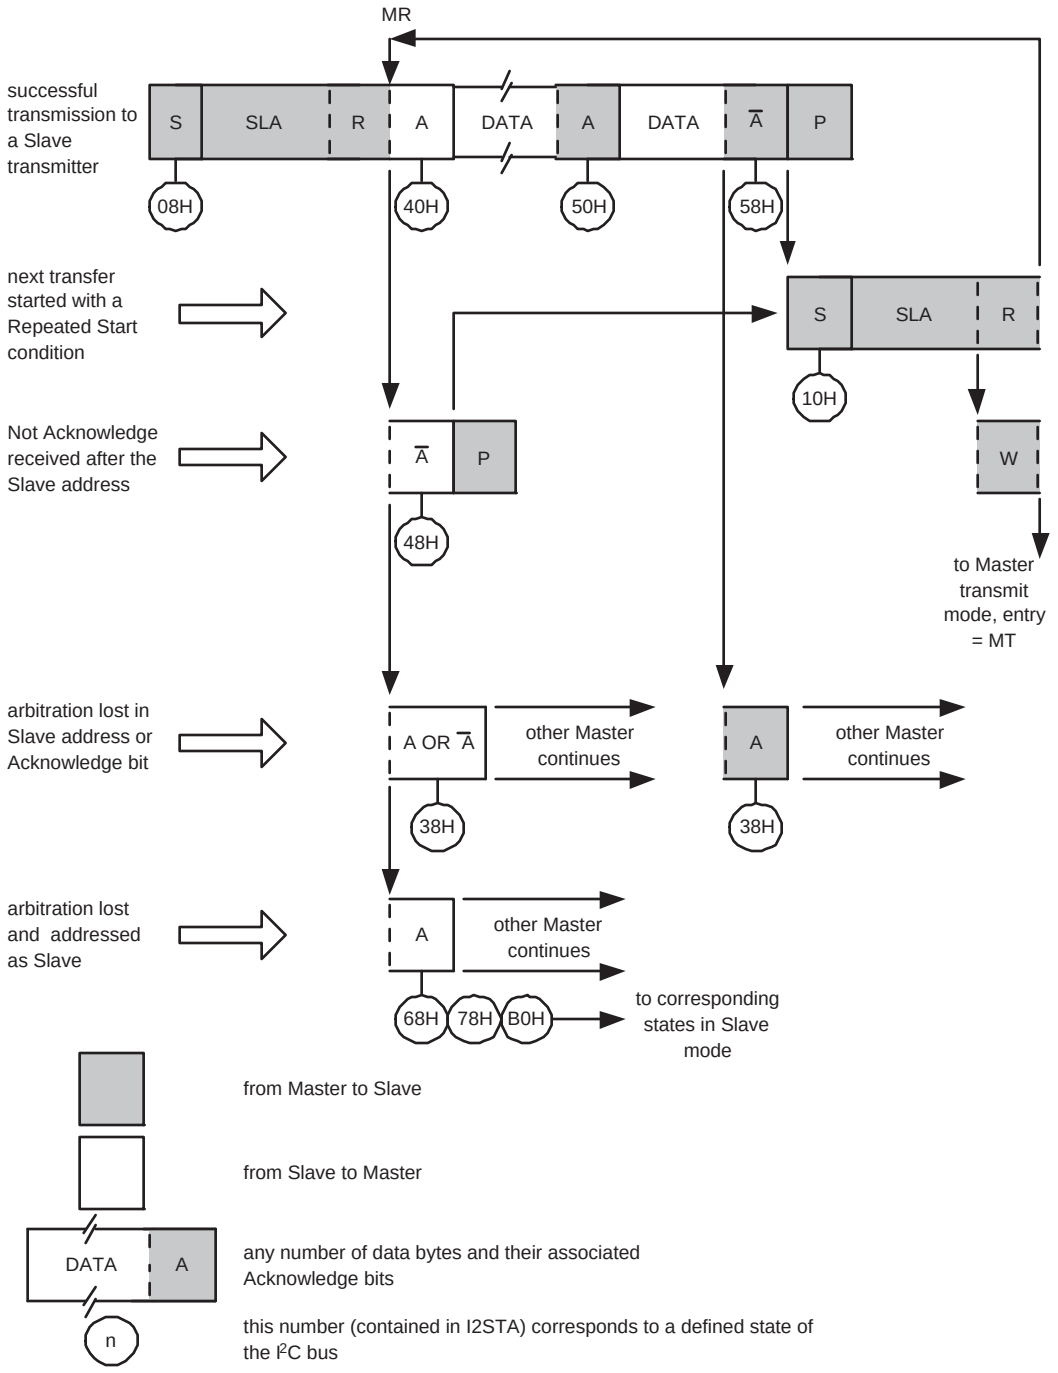


**Fig 55. Format and states in the Master Receiver mode**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 15.10.3 Slave Receiver mode

In the slave receiver mode, a number of data bytes are received from a master transmitter (see Figure 56). To initiate the slave receiver mode, ADR and CON must be loaded as follows:

**Table 238. I2C0ADR and I2C1ADR usage in Slave Receiver mode**

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---|---|---|---|---|---|---|---|---|
| Symbol | own slave 7-bit address | | | | | | | GC |

The upper 7 bits are the address to which the $I^2C$ block will respond when addressed by a master. If the LSB (GC) is set, the $I^2C$ block will respond to the General Call address (0x00); otherwise it ignores the General Call address.

**Table 239. I2C0CONSET and I2C1CONSET used to initialize Slave Receiver mode**

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---|---|---|---|---|---|---|---|---|
| Symbol | - | I2EN | STA | STO | SI | AA | - | - |
| Value | - | 1 | 0 | 0 | 0 | 1 | - | - |

The $I^2C$-bus rate settings do not affect the $I^2C$ block in the slave mode. I2EN must be set to logic 1 to enable the $I^2C$ block. The AA bit must be set to enable the $I^2C$ block to acknowledge its own slave address or the General Call address. STA, STO, and SI must be reset.

When ADR and CON have been initialized, the $I^2C$ block waits until it is addressed by its own slave address followed by the data direction bit which must be “0” (W) for the $I^2C$ block to operate in the slave receiver mode. After its own slave address and the W bit have been received, the serial interrupt flag (SI) is set and a valid status code can be read from STAT. This status code is used to vector to a state service routine. The appropriate action to be taken for each of these status codes is detailed in Table 240. The slave receiver mode may also be entered if arbitration is lost while the $I^2C$ block is in the master mode (see status 0x68 and 0x78).

If the AA bit is reset during a transfer, the $I^2C$ block will return a not acknowledge (logic 1) to SDA after the next received data byte. While AA is reset, the $I^2C$ block does not respond to its own slave address or a General Call address. However, the $I^2C$-bus is still monitored and address recognition may be resumed at any time by setting AA. This means that the AA bit may be used to temporarily isolate the $I^2C$ block from the $I^2C$-bus.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 240. Slave Receiver mode**

| Status Code (STAT) | Status of the I²C-bus and hardware | Application software response | | | | | Next action taken by I²C hardware |
|---|---|---|---|---|---|---|---|
| | | To/From DAT | To CON | | | | |
| | | | STA | STO | SI | AA | |
| 0x60 | Own SLA+W has been received; ACK has been returned. | No DAT action or | X | 0 | 0 | 0 | Data byte will be received and NOT ACK will be returned. |
| | | No DAT action | X | 0 | 0 | 1 | Data byte will be received and ACK will be returned. |
| 0x68 | Arbitration lost in SLA+R/W as master; Own SLA+W has been received, ACK returned. | No DAT action or | X | 0 | 0 | 0 | Data byte will be received and NOT ACK will be returned. |
| | | No DAT action | X | 0 | 0 | 1 | Data byte will be received and ACK will be returned. |
| 0x70 | General call address (0x00) has been received; ACK has been returned. | No DAT action or | X | 0 | 0 | 0 | Data byte will be received and NOT ACK will be returned. |
| | | No DAT action | X | 0 | 0 | 1 | Data byte will be received and ACK will be returned. |
| 0x78 | Arbitration lost in SLA+R/W as master; General call address has been received, ACK has been returned. | No DAT action or | X | 0 | 0 | 0 | Data byte will be received and NOT ACK will be returned. |
| | | No DAT action | X | 0 | 0 | 1 | Data byte will be received and ACK will be returned. |
| 0x80 | Previously addressed with own SLV address; DATA has been received; ACK has been returned. | Read data byte or | X | 0 | 0 | 0 | Data byte will be received and NOT ACK will be returned. |
| | | Read data byte | X | 0 | 0 | 1 | Data byte will be received and ACK will be returned. |
| 0x88 | Previously addressed with own SLA; DATA byte has been received; NOT ACK has been returned. | Read data byte or | 0 | 0 | 0 | 0 | Switched to not addressed SLV mode; no recognition of own SLA or General call address. |
| | | Read data byte or | 0 | 0 | 0 | 1 | Switched to not addressed SLV mode; Own SLA will be recognized; General call address will be recognized if ADR[0] = logic 1. |
| | | Read data byte or | 1 | 0 | 0 | 0 | Switched to not addressed SLV mode; no recognition of own SLA or General call address. A START condition will be transmitted when the bus becomes free. |
| | | Read data byte | 1 | 0 | 0 | 1 | Switched to not addressed SLV mode; Own SLA will be recognized; General call address will be recognized if ADR[0] = logic 1. A START condition will be transmitted when the bus becomes free. |
| 0x90 | Previously addressed with General Call; DATA byte has been received; ACK has been returned. | Read data byte or | X | 0 | 0 | 0 | Data byte will be received and NOT ACK will be returned. |
| | | Read data byte | X | 0 | 0 | 1 | Data byte will be received and ACK will be returned. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 240. Slave Receiver mode** *…continued*

| Status Code (STAT) | Status of the I²C-bus and hardware | Application software response | | | | | Next action taken by I²C hardware |
|---|---|---|---|---|---|---|---|
| | | To/From DAT | To CON | | | | |
| | | | STA | STO | SI | AA | |
| 0x98 | Previously addressed with General Call; DATA byte has been received; NOT ACK has been returned. | Read data byte or | 0 | 0 | 0 | 0 | Switched to not addressed SLV mode; no recognition of own SLA or General call address. |
| | | Read data byte or | 0 | 0 | 0 | 1 | Switched to not addressed SLV mode; Own SLA will be recognized; General call address will be recognized if ADR[0] = logic 1. |
| | | Read data byte or | 1 | 0 | 0 | 0 | Switched to not addressed SLV mode; no recognition of own SLA or General call address. A START condition will be transmitted when the bus becomes free. |
| | | Read data byte | 1 | 0 | 0 | 1 | Switched to not addressed SLV mode; Own SLA will be recognized; General call address will be recognized if ADR[0] = logic 1. A START condition will be transmitted when the bus becomes free. |
| 0xA0 | A STOP condition or Repeated START condition has been received while still addressed as SLV/REC or SLV/TRX. | No STDAT action or | 0 | 0 | 0 | 0 | Switched to not addressed SLV mode; no recognition of own SLA or General call address. |
| | | No STDAT action or | 0 | 0 | 0 | 1 | Switched to not addressed SLV mode; Own SLA will be recognized; General call address will be recognized if ADR[0] = logic 1. |
| | | No STDAT action or | 1 | 0 | 0 | 0 | Switched to not addressed SLV mode; no recognition of own SLA or General call address. A START condition will be transmitted when the bus becomes free. |
| | | No STDAT action | 1 | 0 | 0 | 1 | Switched to not addressed SLV mode; Own SLA will be recognized; General call address will be recognized if ADR[0] = logic 1. A START condition will be transmitted when the bus becomes free. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

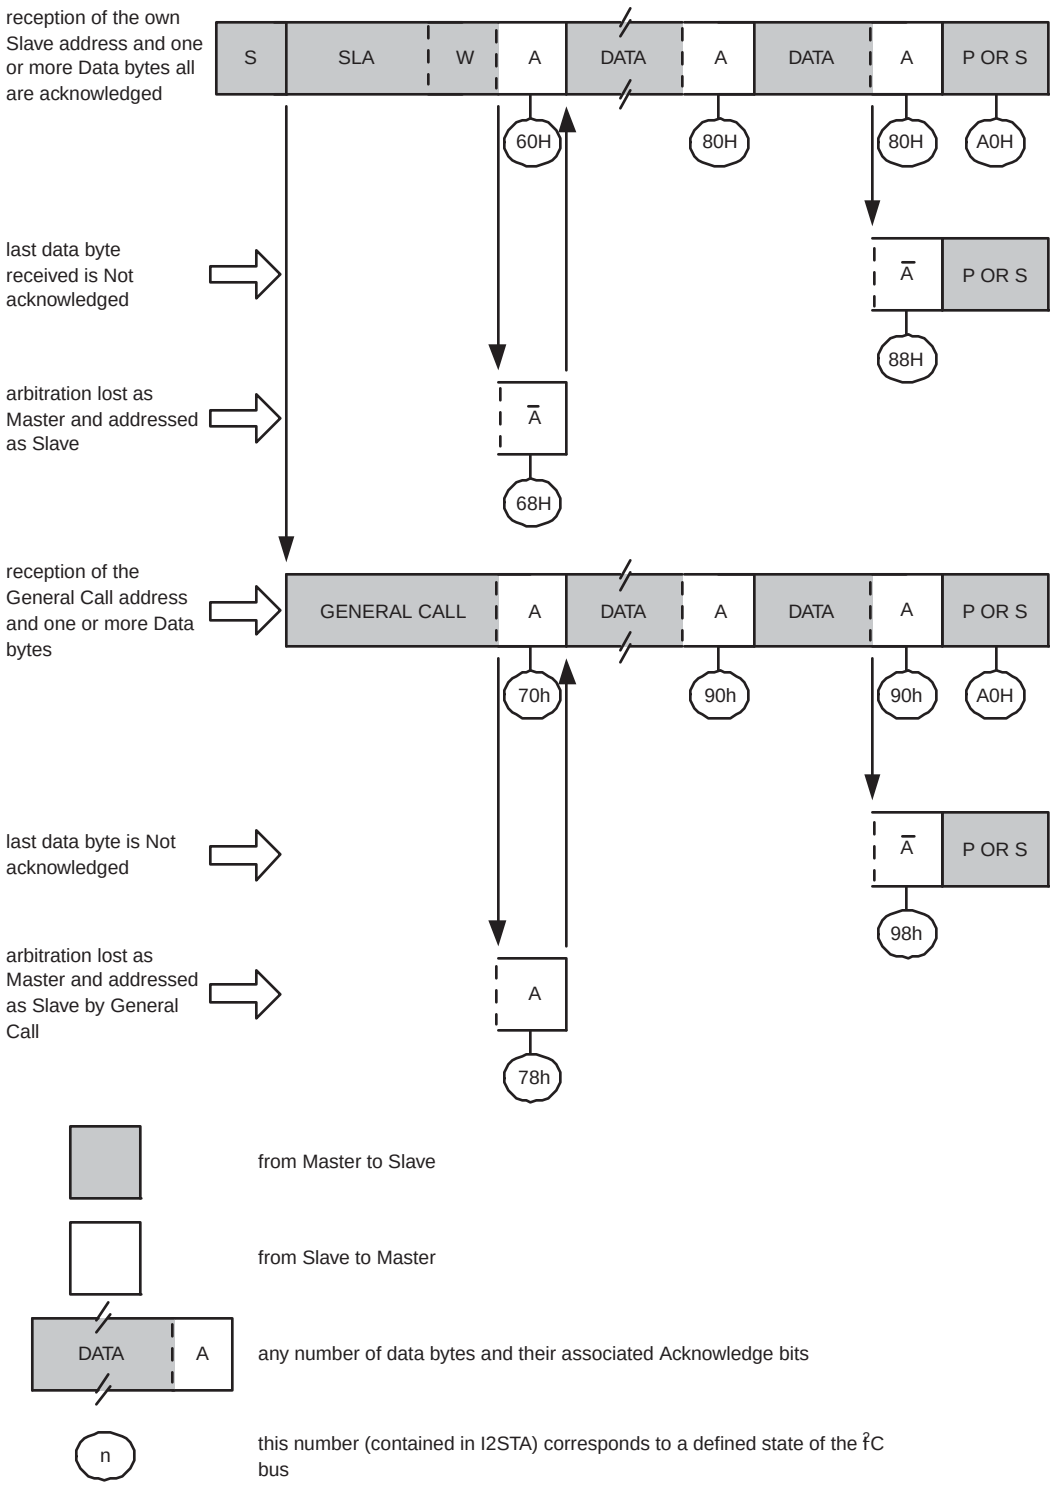


**Fig 56. Format and states in the Slave Receiver mode**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 15.10.4 Slave Transmitter mode

In the slave transmitter mode, a number of data bytes are transmitted to a master receiver (see Figure 57). Data transfer is initialized as in the slave receiver mode. When ADR and CON have been initialized, the $I^2C$ block waits until it is addressed by its own slave address followed by the data direction bit which must be “1” (R) for the $I^2C$ block to operate in the slave transmitter mode. After its own slave address and the R bit have been received, the serial interrupt flag (SI) is set and a valid status code can be read from STAT. This status code is used to vector to a state service routine, and the appropriate action to be taken for each of these status codes is detailed in Table 241. The slave transmitter mode may also be entered if arbitration is lost while the $I^2C$ block is in the master mode (see state 0xB0).

If the AA bit is reset during a transfer, the $I^2C$ block will transmit the last byte of the transfer and enter state 0xC0 or 0xC8. The $I^2C$ block is switched to the not addressed slave mode and will ignore the master receiver if it continues the transfer. Thus the master receiver receives all 1s as serial data. While AA is reset, the $I^2C$ block does not respond to its own slave address or a General Call address. However, the $I^2C$-bus is still monitored, and address recognition may be resumed at any time by setting AA. This means that the AA bit may be used to temporarily isolate the $I^2C$ block from the $I^2C$-bus.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 241. Slave Transmitter mode**

| Status Code (STAT) | Status of the I²C-bus and hardware | Application software response | | | | | Next action taken by I²C hardware |
|---|---|---|---|---|---|---|---|
| | | To/From DAT | To CON | | | | |
| | | | STA | STO | SI | AA | |
| 0xA8 | Own SLA+R has been received; ACK has been returned. | Load data byte or | X | 0 | 0 | 0 | Last data byte will be transmitted and ACK bit will be received. |
| | | Load data byte | X | 0 | 0 | 1 | Data byte will be transmitted; ACK will be received. |
| 0xB0 | Arbitration lost in SLA+R/W as master; Own SLA+R has been received, ACK has been returned. | Load data byte or | X | 0 | 0 | 0 | Last data byte will be transmitted and ACK bit will be received. |
| | | Load data byte | X | 0 | 0 | 1 | Data byte will be transmitted; ACK bit will be received. |
| 0xB8 | Data byte in DAT has been transmitted; ACK has been received. | Load data byte or | X | 0 | 0 | 0 | Last data byte will be transmitted and ACK bit will be received. |
| | | Load data byte | X | 0 | 0 | 1 | Data byte will be transmitted; ACK bit will be received. |
| 0xC0 | Data byte in DAT has been transmitted; NOT ACK has been received. | No DAT action or | 0 | 0 | 0 | 0 | Switched to not addressed SLV mode; no recognition of own SLA or General call address. |
| | | No DAT action or | 0 | 0 | 0 | 1 | Switched to not addressed SLV mode; Own SLA will be recognized; General call address will be recognized if ADR[0] = logic 1. |
| | | No DAT action or | 1 | 0 | 0 | 0 | Switched to not addressed SLV mode; no recognition of own SLA or General call address. A START condition will be transmitted when the bus becomes free. |
| | | No DAT action | 1 | 0 | 0 | 1 | Switched to not addressed SLV mode; Own SLA will be recognized; General call address will be recognized if ADR[0] = logic 1. A START condition will be transmitted when the bus becomes free. |
| 0xC8 | Last data byte in DAT has been transmitted (AA = 0); ACK has been received. | No DAT action or | 0 | 0 | 0 | 0 | Switched to not addressed SLV mode; no recognition of own SLA or General call address. |
| | | No DAT action or | 0 | 0 | 0 | 1 | Switched to not addressed SLV mode; Own SLA will be recognized; General call address will be recognized if ADR[0] = logic 1. |
| | | No DAT action or | 1 | 0 | 0 | 0 | Switched to not addressed SLV mode; no recognition of own SLA or General call address. A START condition will be transmitted when the bus becomes free. |
| | | No DAT action | 1 | 0 | 0 | 01 | Switched to not addressed SLV mode; Own SLA will be recognized; General call address will be recognized if ADR.0 = logic 1. A START condition will be transmitted when the bus becomes free. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

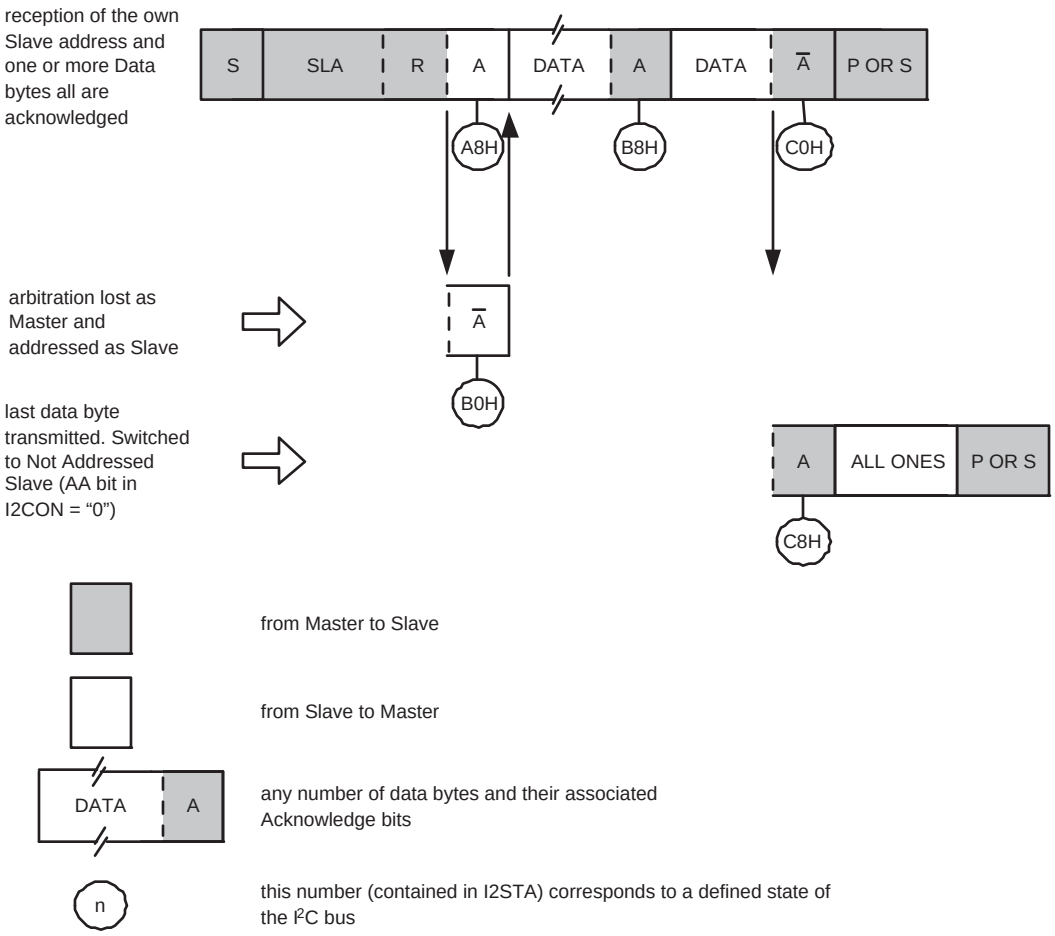


**Fig 57. Format and states in the Slave Transmitter mode**

### 15.10.5 Miscellaneous states

There are two STAT codes that do not correspond to a defined $I^2C$ hardware state (see Table 242). These are discussed below.

#### 15.10.5.1 STAT = 0xF8

This status code indicates that no relevant information is available because the serial interrupt flag, SI, is not yet set. This occurs between other states and when the $I^2C$ block is not involved in a serial transfer.

#### 15.10.5.2 STAT = 0x00

This status code indicates that a bus error has occurred during an $I^2C$ serial transfer. A bus error is caused when a START or STOP condition occurs at an illegal position in the format frame. Examples of such illegal positions are during the serial transfer of an address byte, a data byte, or an acknowledge bit. A bus error may also be caused when external interference disturbs the internal $I^2C$ block signals. When a bus error occurs, SI is set. To recover from a bus error, the STO flag must be set and SI must be cleared. This


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

causes the I²C block to enter the “not addressed” slave mode (a defined state) and to clear the STO flag (no other bits in CON are affected). The SDA and SCL lines are released (a STOP condition is not transmitted).

**Table 242. Miscellaneous States**

| Status Code (STAT) | Status of the I²C-bus and hardware | Application software response | | | | | Next action taken by I²C hardware |
|---|---|---|---|---|---|---|---|
| | | To/From DAT | To CON | | | | |
| | | | STA | STO | SI | AA | |
| 0xF8 | No relevant state information available; SI = 0. | No DAT action | No CON action | | | | Wait or proceed current transfer. |
| 0x00 | Bus error during MST or selected slave modes, due to an illegal START or STOP condition. State 0x00 can also occur when interference causes the I²C block to enter an undefined state. | No DAT action | 0 | 1 | 0 | X | Only the internal hardware is affected in the MST or addressed SLV modes. In all cases, the bus is released and the I²C block is switched to the not addressed SLV mode. STO is reset. |

### 15.10.6 Some special cases

The I²C hardware has facilities to handle the following special cases that may occur during a serial transfer:

- Simultaneous Repeated START conditions from two masters
- Data transfer after loss of arbitration
- Forced access to the I²C-bus
- I²C-bus obstructed by a LOW level on SCL or SDA
- Bus error

#### 15.10.6.1 Simultaneous Repeated START conditions from two masters

A Repeated START condition may be generated in the master transmitter or master receiver modes. A special case occurs if another master simultaneously generates a Repeated START condition (see Figure 58). Until this occurs, arbitration is not lost by either master since they were both transmitting the same data.

If the I²C hardware detects a Repeated START condition on the I²C-bus before generating a Repeated START condition itself, it will release the bus, and no interrupt request is generated. If another master frees the bus by generating a STOP condition, the I²C block will transmit a normal START condition (state 0x08), and a retry of the total serial data transfer can commence.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

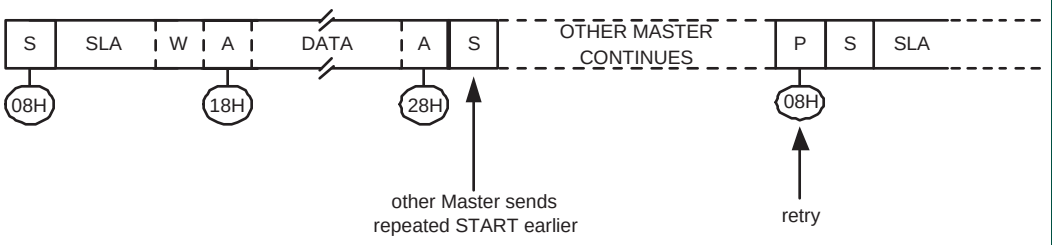


**Fig 58. Simultaneous Repeated START conditions from two masters**

### 15.10.6.2 Data transfer after loss of arbitration

Arbitration may be lost in the master transmitter and master receiver modes (see Figure 52). Loss of arbitration is indicated by the following states in STAT; 0x38, 0x68, 0x78, and 0xB0 (see Figure 54 and Figure 55).

If the STA flag in CON is set by the routines which service these states, then, if the bus is free again, a START condition (state 0x08) is transmitted without intervention by the CPU, and a retry of the total serial transfer can commence.

### 15.10.6.3 Forced access to the I²C-bus

In some applications, it may be possible for an uncontrolled source to cause a bus hang-up. In such situations, the problem may be caused by interference, temporary interruption of the bus or a temporary short-circuit between SDA and SCL.

If an uncontrolled source generates a superfluous START or masks a STOP condition, then the I²C-bus stays busy indefinitely. If the STA flag is set and bus access is not obtained within a reasonable amount of time, then a forced access to the I²C-bus is possible. This is achieved by setting the STO flag while the STA flag is still set. No STOP condition is transmitted. The I²C hardware behaves as if a STOP condition was received and is able to transmit a START condition. The STO flag is cleared by hardware (see Figure 59).

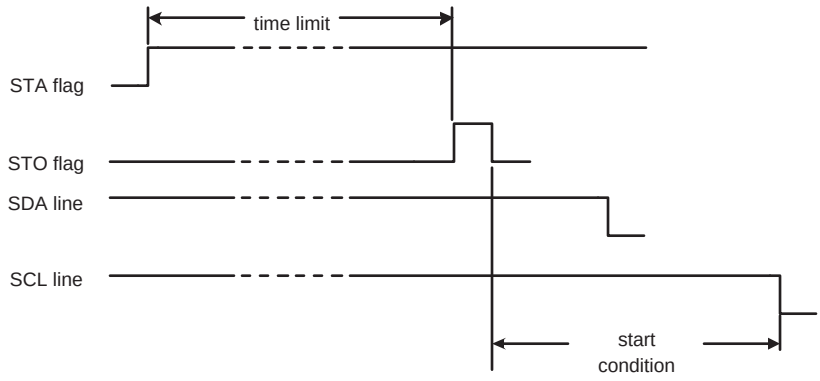


**Fig 59. Forced access to a busy I²C-bus**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

#### 15.10.6.4 I²C-bus obstructed by a LOW level on SCL or SDA

An I²C-bus hang-up can occur if either the SDA or SCL line is held LOW by any device on the bus. If the SCL line is obstructed (pulled LOW) by a device on the bus, no further serial transfer is possible, and the problem must be resolved by the device that is pulling the SCL bus line LOW.

Typically, the SDA line may be obstructed by another device on the bus that has become out of synchronization with the current bus master by either missing a clock, or by sensing a noise pulse as a clock. In this case, the problem can be solved by transmitting additional clock pulses on the SCL line (see Figure 60). The I²C interface does not include a dedicated time-out timer to detect an obstructed bus, but this can be implemented using another timer in the system. When detected, software can force clocks (up to 9 may be required) on SCL until SDA is released by the offending device. At that point, the slave may still be out of synchronization, so a START should be generated to insure that all I²C peripherals are synchronized.

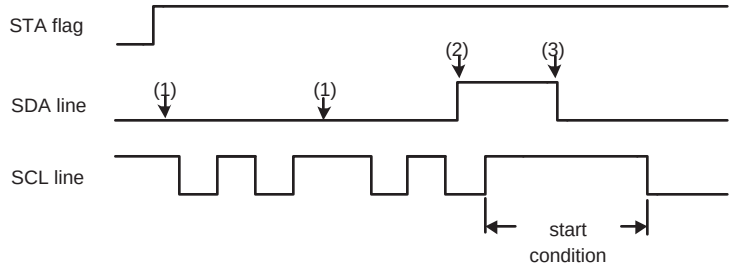


(1) Unsuccessful attempt to send a START condition.

(2) SDA line is released.

(3) Successful attempt to send a START condition. State 08H is entered.

**Fig 60. Recovering from a bus obstruction caused by a LOW level on SDA**

#### 15.10.6.5 Bus error

A bus error occurs when a START or STOP condition is detected at an illegal position in the format frame. Examples of illegal positions are during the serial transfer of an address byte, a data bit, or an acknowledge bit.

The I²C hardware only reacts to a bus error when it is involved in a serial transfer either as a master or an addressed slave. When a bus error is detected, the I²C block immediately switches to the not addressed slave mode, releases the SDA and SCL lines, sets the interrupt flag, and loads the status register with 0x00. This status code may be used to vector to a state service routine which either attempts the aborted serial transfer again or simply recovers from the error condition as shown in Table 242.

### 15.10.7 I²C state service routines

This section provides examples of operations that must be performed by various I²C state service routines. This includes:

- Initialization of the I²C block after a Reset.
- I²C Interrupt Service
- The 26 state service routines providing support for all four I²C operating modes.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 15.10.8 Initialization

In the initialization example, the $I^2C$ block is enabled for both master and slave modes. For each mode, a buffer is used for transmission and reception. The initialization routine performs the following functions:

- ADR is loaded with the part's own slave address and the General Call bit (GC)
- The $I^2C$ interrupt enable and interrupt priority bits are set
- The slave mode is enabled by simultaneously setting the I2EN and AA bits in CON and the serial clock frequency (for master modes) is defined by is defined by loading the SCLH and SCLL registers. The master routines must be started in the main program.

The $I^2C$ hardware now begins checking the $I^2C$-bus for its own slave address and General Call. If the General Call or the own slave address is detected, an interrupt is requested and STAT is loaded with the appropriate state information.

### 15.10.9 $I^2C$ interrupt service

When the $I^2C$ interrupt is entered, STAT contains a status code which identifies one of the 26 state services to be executed.

### 15.10.10 The state service routines

Each state routine is part of the $I^2C$ interrupt routine and handles one of the 26 states.

### 15.10.11 Adapting state services to an application

The state service examples show the typical actions that must be performed in response to the 26 $I^2C$ state codes. If one or more of the four $I^2C$ operating modes are not used, the associated state services can be omitted, as long as care is taken that the those states can never occur.

In an application, it may be desirable to implement some kind of time-out during $I^2C$ operations, in order to trap an inoperative bus or a lost service routine.

## 15.11 Software example

### 15.11.1 Initialization routine

Example to initialize $I^2C$ Interface as a Slave and/or Master.

1. Load ADR with own Slave Address, enable General Call recognition if needed.
2. Enable $I^2C$ interrupt.
3. Write 0x44 to CONSET to set the I2EN and AA bits, enabling Slave functions. For Master only functions, write 0x40 to CONSET.

### 15.11.2 Start Master Transmit function

Begin a Master Transmit operation by setting up the buffer, pointer, and data count, then initiating a START.

1. Initialize Master data counter.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

2. Set up the Slave Address to which data will be transmitted, and add the Write bit.
3. Write 0x20 to CONSET to set the STA bit.
4. Set up data to be transmitted in Master Transmit buffer.
5. Initialize the Master data counter to match the length of the message being sent.
6. Exit

### 15.11.3 Start Master Receive function

Begin a Master Receive operation by setting up the buffer, pointer, and data count, then initiating a START.

1. Initialize Master data counter.
2. Set up the Slave Address to which data will be transmitted, and add the Read bit.
3. Write 0x20 to CONSET to set the STA bit.
4. Set up the Master Receive buffer.
5. Initialize the Master data counter to match the length of the message to be received.
6. Exit

### 15.11.4 $I^2C$ interrupt routine

Determine the $I^2C$ state and which state routine will be used to handle it.

1. Read the $I^2C$ status from STA.
2. Use the status value to branch to one of 26 possible state routines.

### 15.11.5 Non mode specific states

#### 15.11.5.1 State: 0x00

Bus Error. Enter not addressed Slave mode and release bus.

1. Write 0x14 to CONSET to set the STO and AA bits.
2. Write 0x08 to CONCLR to clear the SI flag.
3. Exit

#### 15.11.5.2 Master States

State 08 and State 10 are for both Master Transmit and Master Receive modes. The R/W bit decides whether the next state is within Master Transmit mode or Master Receive mode.

#### 15.11.5.3 State: 0x08

A START condition has been transmitted. The Slave Address + R/W bit will be transmitted, an ACK bit will be received.

1. Write Slave Address with R/W bit to DAT.
2. Write 0x04 to CONSET to set the AA bit.
3. Write 0x08 to CONCLR to clear the SI flag.
4. Set up Master Transmit mode data buffer.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

5. Set up Master Receive mode data buffer.
6. Initialize Master data counter.
7. Exit

#### 15.11.5.4 State: 0x10

A Repeated START condition has been transmitted. The Slave Address + R/W bit will be transmitted, an ACK bit will be received.

1. Write Slave Address with R/W bit to DAT.
2. Write 0x04 to CONSET to set the AA bit.
3. Write 0x08 to CONCLR to clear the SI flag.
4. Set up Master Transmit mode data buffer.
5. Set up Master Receive mode data buffer.
6. Initialize Master data counter.
7. Exit

### 15.11.6 Master Transmitter states

#### 15.11.6.1 State: 0x18

Previous state was State 8 or State 10, Slave Address + Write has been transmitted, ACK has been received. The first data byte will be transmitted, an ACK bit will be received.

1. Load DAT with first data byte from Master Transmit buffer.
2. Write 0x04 to CONSET to set the AA bit.
3. Write 0x08 to CONCLR to clear the SI flag.
4. Increment Master Transmit buffer pointer.
5. Exit

#### 15.11.6.2 State: 0x20

Slave Address + Write has been transmitted, NOT ACK has been received. A STOP condition will be transmitted.

1. Write 0x14 to CONSET to set the STO and AA bits.
2. Write 0x08 to CONCLR to clear the SI flag.
3. Exit

#### 15.11.6.3 State: 0x28

Data has been transmitted, ACK has been received. If the transmitted data was the last data byte then transmit a STOP condition, otherwise transmit the next data byte.

1. Decrement the Master data counter, skip to step 5 if not the last data byte.
2. Write 0x14 to CONSET to set the STO and AA bits.
3. Write 0x08 to CONCLR to clear the SI flag.
4. Exit
5. Load DAT with next data byte from Master Transmit buffer.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

6. Write 0x04 to CONSET to set the AA bit.
7. Write 0x08 to CONCLR to clear the SI flag.
8. Increment Master Transmit buffer pointer
9. Exit

#### 15.11.6.4 State: 0x30

Data has been transmitted, NOT ACK received. A STOP condition will be transmitted.

1. Write 0x14 to CONSET to set the STO and AA bits.
2. Write 0x08 to CONCLR to clear the SI flag.
3. Exit

#### 15.11.6.5 State: 0x38

Arbitration has been lost during Slave Address + Write or data. The bus has been released and not addressed Slave mode is entered. A new START condition will be transmitted when the bus is free again.

1. Write 0x24 to CONSET to set the STA and AA bits.
2. Write 0x08 to CONCLR to clear the SI flag.
3. Exit

### 15.11.7 Master Receive states

#### 15.11.7.1 State: 0x40

Previous state was State 08 or State 10. Slave Address + Read has been transmitted, ACK has been received. Data will be received and ACK returned.

1. Write 0x04 to CONSET to set the AA bit.
2. Write 0x08 to CONCLR to clear the SI flag.
3. Exit

#### 15.11.7.2 State: 0x48

Slave Address + Read has been transmitted, NOT ACK has been received. A STOP condition will be transmitted.

1. Write 0x14 to CONSET to set the STO and AA bits.
2. Write 0x08 to CONCLR to clear the SI flag.
3. Exit

#### 15.11.7.3 State: 0x50

Data has been received, ACK has been returned. Data will be read from DAT. Additional data will be received. If this is the last data byte then NOT ACK will be returned, otherwise ACK will be returned.

1. Read data byte from DAT into Master Receive buffer.
2. Decrement the Master data counter, skip to step 5 if not the last data byte.
3. Write 0x0C to CONCLR to clear the SI flag and the AA bit.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

4. Exit
5. Write 0x04 to CONSET to set the AA bit.
6. Write 0x08 to CONCLR to clear the SI flag.
7. Increment Master Receive buffer pointer
8. Exit

#### 15.11.7.4 State: 0x58

Data has been received, NOT ACK has been returned. Data will be read from DAT. A STOP condition will be transmitted.

1. Read data byte from DAT into Master Receive buffer.
2. Write 0x14 to CONSET to set the STO and AA bits.
3. Write 0x08 to CONCLR to clear the SI flag.
4. Exit

### 15.11.8 Slave Receiver states

#### 15.11.8.1 State: 0x60

Own Slave Address + Write has been received, ACK has been returned. Data will be received and ACK returned.

1. Write 0x04 to CONSET to set the AA bit.
2. Write 0x08 to CONCLR to clear the SI flag.
3. Set up Slave Receive mode data buffer.
4. Initialize Slave data counter.
5. Exit

#### 15.11.8.2 State: 0x68

Arbitration has been lost in Slave Address and R/W bit as bus Master. Own Slave Address + Write has been received, ACK has been returned. Data will be received and ACK will be returned. STA is set to restart Master mode after the bus is free again.

1. Write 0x24 to CONSET to set the STA and AA bits.
2. Write 0x08 to CONCLR to clear the SI flag.
3. Set up Slave Receive mode data buffer.
4. Initialize Slave data counter.
5. Exit.

#### 15.11.8.3 State: 0x70

General call has been received, ACK has been returned. Data will be received and ACK returned.

1. Write 0x04 to CONSET to set the AA bit.
2. Write 0x08 to CONCLR to clear the SI flag.
3. Set up Slave Receive mode data buffer.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

4. Initialize Slave data counter.
5. Exit

#### 15.11.8.4 State: 0x78

Arbitration has been lost in Slave Address + R/W bit as bus Master. General call has been received and ACK has been returned. Data will be received and ACK returned. STA is set to restart Master mode after the bus is free again.

1. Write 0x24 to CONSET to set the STA and AA bits.
2. Write 0x08 to CONCLR to clear the SI flag.
3. Set up Slave Receive mode data buffer.
4. Initialize Slave data counter.
5. Exit

#### 15.11.8.5 State: 0x80

Previously addressed with own Slave Address. Data has been received and ACK has been returned. Additional data will be read.

1. Read data byte from DAT into the Slave Receive buffer.
2. Decrement the Slave data counter, skip to step 5 if not the last data byte.
3. Write 0x0C to CONCLR to clear the SI flag and the AA bit.
4. Exit.
5. Write 0x04 to CONSET to set the AA bit.
6. Write 0x08 to CONCLR to clear the SI flag.
7. Increment Slave Receive buffer pointer.
8. Exit

#### 15.11.8.6 State: 0x88

Previously addressed with own Slave Address. Data has been received and NOT ACK has been returned. Received data will not be saved. Not addressed Slave mode is entered.

1. Write 0x04 to CONSET to set the AA bit.
2. Write 0x08 to CONCLR to clear the SI flag.
3. Exit

#### 15.11.8.7 State: 0x90

Previously addressed with General Call. Data has been received, ACK has been returned. Received data will be saved. Only the first data byte will be received with ACK. Additional data will be received with NOT ACK.

1. Read data byte from DAT into the Slave Receive buffer.
2. Write 0x0C to CONCLR to clear the SI flag and the AA bit.
3. Exit


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

#### 15.11.8.8 State: 0x98

Previously addressed with General Call. Data has been received, NOT ACK has been returned. Received data will not be saved. Not addressed Slave mode is entered.

1. Write 0x04 to CONSET to set the AA bit.
2. Write 0x08 to CONCLR to clear the SI flag.
3. Exit

#### 15.11.8.9 State: 0xA0

A STOP condition or Repeated START has been received, while still addressed as a Slave. Data will not be saved. Not addressed Slave mode is entered.

1. Write 0x04 to CONSET to set the AA bit.
2. Write 0x08 to CONCLR to clear the SI flag.
3. Exit

### 15.11.9 Slave Transmitter states

#### 15.11.9.1 State: 0xA8

Own Slave Address + Read has been received, ACK has been returned. Data will be transmitted, ACK bit will be received.

1. Load DAT from Slave Transmit buffer with first data byte.
2. Write 0x04 to CONSET to set the AA bit.
3. Write 0x08 to CONCLR to clear the SI flag.
4. Set up Slave Transmit mode data buffer.
5. Increment Slave Transmit buffer pointer.
6. Exit

#### 15.11.9.2 State: 0xB0

Arbitration lost in Slave Address and R/W bit as bus Master. Own Slave Address + Read has been received, ACK has been returned. Data will be transmitted, ACK bit will be received. STA is set to restart Master mode after the bus is free again.

1. Load DAT from Slave Transmit buffer with first data byte.
2. Write 0x24 to CONSET to set the STA and AA bits.
3. Write 0x08 to CONCLR to clear the SI flag.
4. Set up Slave Transmit mode data buffer.
5. Increment Slave Transmit buffer pointer.
6. Exit

#### 15.11.9.3 State: 0xB8

Data has been transmitted, ACK has been received. Data will be transmitted, ACK bit will be received.

1. Load DAT from Slave Transmit buffer with data byte.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

2. Write 0x04 to CONSET to set the AA bit.
3. Write 0x08 to CONCLR to clear the SI flag.
4. Increment Slave Transmit buffer pointer.
5. Exit

#### 15.11.9.4 State: 0xC0

Data has been transmitted, NOT ACK has been received. Not addressed Slave mode is entered.

1. Write 0x04 to CONSET to set the AA bit.
2. Write 0x08 to CONCLR to clear the SI flag.
3. Exit.

#### 15.11.9.5 State: 0xC8

The last data byte has been transmitted, ACK has been received. Not addressed Slave mode is entered.

1. Write 0x04 to CONSET to set the AA bit.
2. Write 0x08 to CONCLR to clear the SI flag.
3. Exit


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 16.1 How to read this chapter

The C_CAN block is available in LPC11Cxx parts only (LPC11C00 series).

The LPC11C22 and LPC11C24 parts include an on-chip, high-speed transceiver. For these parts, the CAN_RXD and CAN_TXD signals are connected internally to the on-chip transceiver and the transceiver signals are pinned out (see Table 244).

## 16.2 Basic configuration

The C_CAN is configured using the following registers:

1. Power: In the SYSAHBCLKCTRL register, set bit 17 (Table 21).
2. Clocking: For an accurate peripheral clock to the C_CAN block, select the system oscillator either as the main clock (Table 18) or as input to the system PLL (Table 16). Do not select the IRC if C_CAN baud rates above 100 kbit/s are required.
3. Reset: Before accessing the C_CAN block, ensure that the CAN_RST_N bit (bit 3) in the PRESETCTRL register (Table 9) is set to 1. This de-asserts the reset signal to the C_CAN block.

The peripheral clock to the C_CAN (the C_CAN system clock) and to the programmable C_CAN clock divider (see Table 275) is provided by the system clock (seeTable 21). This clock can be disabled through bit 17 in the SYSAHBCLKCTRL register for power savings.

**Remark:** If C_CAN baudrates above 100 kbit/s are required, the system oscillator must be selected as the clock source for the system clock. For lower baudrates, the IRC may also be used as clock source.

## 16.3 Features

- Conforms to protocol version 2.0 parts A and B.
- Supports bit rate of up to 1 Mbit/s.
- Supports 32 Message Objects.
- Each Message Object has its own identifier mask.
- Provides programmable FIFO mode (concatenation of Message Objects).
- Provides maskable interrupts.
- Supports Disabled Automatic Retransmission (DAR) mode for time-triggered CAN applications.
- Provides programmable loop-back mode for self-test operation.


All information provided in this document is subject to legal disclaimers.
© NXP B.V. 2016. All rights reserved.

## 16.4 General description

Controller Area Network (CAN) is the definition of a high performance communication protocol for serial data communication. The C_CAN controller is designed to provide a full implementation of the CAN protocol according to the CAN Specification Version 2.0B. The C_CAN controller allows to build powerful local networks with low-cost multiplex wiring by supporting distributed real-time control with a very high level of security.

The CAN controller consists of a CAN core, message RAM, a message handler, control registers, and the APB interface.

For communication on a CAN network, individual Message Objects are configured. The Message Objects and Identifier Masks for acceptance filtering of received messages are stored in the Message RAM.

All functions concerning the handling of messages are implemented in the Message Handler. Those functions are the acceptance filtering, the transfer of messages between the CAN Core and the Message RAM, and the handling of transmission requests as well as the generation of the module interrupt.

The register set of the CAN controller can be accessed directly by an external CPU via the APB bus. These registers are used to control/configure the CAN Core and the Message Handler and to access the Message RAM.

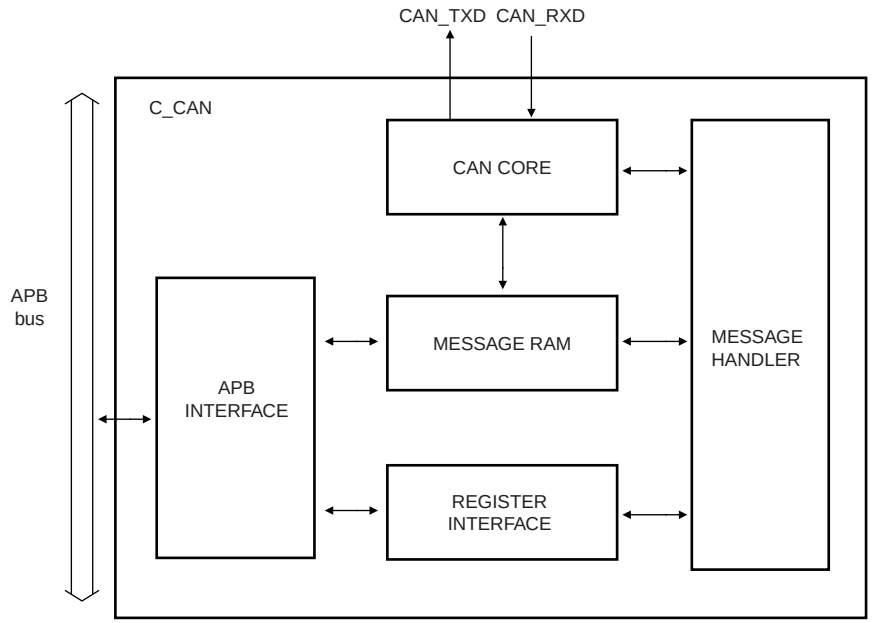


**Fig 61. C_CAN block diagram**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 16.5 Pin description

**Table 243. CAN pin description (LPC11C12/C14)**

| Pin | Type | Description |
|---|---|---|
| CAN_TXD | O | C_CAN transmit output |
| CAN_RXD | I | C_CAN receive input |

**Table 244. CAN pin description (LPC11C22/C24)**

| Pin | Type | Description |
|---|---|---|
| CANL | I/O | LOW-level CAN bus line. |
| CANH | I/O | HIGH-level CAN bus line. |
| STB | I | Silent mode control input for CAN transceiver (LOW = Normal mode, HIGH = silent mode). |
| VDD_CAN | - | Supply voltage for I/O level of CAN transceiver. |
| $V_{CC}$ | - | Supply voltage for CAN transceiver. |
| GND | - | Ground for CAN transceiver. |

## 16.6 Register description

The C_CAN registers are organized as 32-bit wide registers.

The two sets of interface registers (IF1 and IF2) control the CPU access to the Message RAM. They buffer the data to be transferred to and from the RAM, avoiding conflicts between CPU accesses and message reception/transmission.

**Table 245. Register overview: CCAN (base address 0x4005 0000)**

| Name | Access | Address offset | Description | Reset value |
|---|---|---|---|---|
| CANCNTL | R/W | 0x000 | CAN control | 0x0001 |
| CANSTAT | R/W | 0x004 | Status register | 0x0000 |
| CANEC | RO | 0x008 | Error counter | 0x0000 |
| CANBT | R/W | 0x00C | Bit timing register | 0x2301 |
| CANINT | RO | 0x010 | Interrupt register | 0x0000 |
| CANTEST | R/W | 0x014 | Test register | - |
| CANBRPE | R/W | 0x018 | Baud rate prescaler extension register | 0x0000 |
| - | - | 0x01C | Reserved | - |
| CANIF1_CMDREQ | R/W | 0x020 | Message interface 1 command request | 0x0001 |
| CANIF1_CMDMSK_W | R/W | 0x024 | Message interface 1 command mask (write direction) | 0x0000 |
| CANIF1_CMDMSK_R | R/W | 0x024 | Message interface 1 command mask (read direction) | 0x0000 |
| CANIF1_MSK1 | R/W | 0x028 | Message interface 1 mask 1 | 0xFFFF |
| CANIF1_MSK2 | R/W | 0x02C | Message interface 1 mask 2 | 0xFFFF |
| CANIF1_ARB1 | R/W | 0x030 | Message interface 1 arbitration 1 | 0x0000 |
| CANIF1_ARB2 | R/W | 0x034 | Message interface 1 arbitration 2 | 0x0000 |
| CANIF1_MCTRL | R/W | 0x038 | Message interface 1 message control | 0x0000 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 245. Register overview: CCAN (base address 0x4005 0000)**

| Name | Access | Address offset | Description | Reset value |
|---|---|---|---|---|
| CANIF1_DA1 | R/W | 0x03C | Message interface 1 data A1 | 0x0000 |
| CANIF1_DA2 | R/W | 0x040 | Message interface 1 data A2 | 0x0000 |
| CANIF1_DB1 | R/W | 0x044 | Message interface 1 data B1 | 0x0000 |
| CANIF1_DB2 | R/W | 0x048 | Message interface 1 data B2 | 0x0000 |
| - | - | 0x04C - 0x07C | Reserved | - |
| CANIF2_CMDREQ | R/W | 0x080 | Message interface 2 command request | 0x0001 |
| CANIF2_CMDMSK_W | R/W | 0x084 | Message interface 2 command mask (write direction) | 0x0000 |
| CANIF2_CMDMSK_R | R/W | 0x084 | Message interface 2 command mask (read direction) | 0x0000 |
| CANIF2_MSK1 | R/W | 0x088 | Message interface 2 mask 1 | 0xFFFF |
| CANIF2_MSK2 | R/W | 0x08C | Message interface 2 mask 2 | 0xFFFF |
| CANIF2_ARB1 | R/W | 0x090 | Message interface 2 arbitration 1 | 0x0000 |
| CANIF2_ARB2 | R/W | 0x094 | Message interface 2 arbitration 2 | 0x0000 |
| CANIF2_MCTRL | R/W | 0x098 | Message interface 2 message control | 0x0000 |
| CANIF2_DA1 | R/W | 0x09C | Message interface 2 data A1 | 0x0000 |
| CANIF2_DA2 | R/W | 0x0A0 | Message interface 2 data A2 | 0x0000 |
| CANIF2_DB1 | R/W | 0x0A4 | Message interface 2 data B1 | 0x0000 |
| CANIF2_DB2 | R/W | 0x0A8 | Message interface 2 data B2 | 0x0000 |
| - | - | 0x0AC - 0x0FC | Reserved | - |
| CANTXREQ1 | RO | 0x100 | Transmission request 1 | 0x0000 |
| CANTXREQ2 | RO | 0x104 | Transmission request 2 | 0x0000 |
| - | - | 0x108 - 0x11C | Reserved | - |
| CANND1 | RO | 0x120 | New data 1 | 0x0000 |
| CANND2 | RO | 0x124 | New data 2 | 0x0000 |
| - | - | 0x128 - 0x13C | Reserved | - |
| CANIR1 | RO | 0x140 | Interrupt pending 1 | 0x0000 |
| CANIR2 | RO | 0x144 | Interrupt pending 2 | 0x0000 |
| - | - | 0x148 - 0x15C | Reserved | - |
| CANMSGV1 | RO | 0x160 | Message valid 1 | 0x0000 |
| CANMSGV2 | RO | 0x164 | Message valid 2 | 0x0000 |
| - | - | 0x168 - 0x17C | Reserved | - |
| CANCLKDIV | R/W | 0x180 | Can clock divider register | 0x0001 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 16.6.1 CAN protocol registers

#### 16.6.1.1 CAN control register

The reset value 0x0001 of the CANCTL register enables initialization by software (INIT = 1). The C_CAN does not influence the CAN bus until the CPU resets the INIT bit to 0.

**Table 246. CAN control registers (CANCNTL, address 0x4005 0000) bit description**

| Bit | Symbol | Value | Description | Reset value | Access |
|---|---|---|---|---|---|
| 0 | INIT | | Initialization | 1 | R/W |
| | | 0 | Normal operation. | | |
| | | 1 | Started. Initialization is started. On reset, software needs to initialize the CAN controller. | | |
| 1 | IE | | Module interrupt enable | 0 | R/W |
| | | 0 | Disable CAN interrupts. The interrupt line is always HIGH. | | |
| | | 1 | Enable CAN interrupts. The interrupt line is set to LOW and remains LOW until all pending interrupts are cleared. | | |
| 2 | SIE | | Status change interrupt enable | 0 | R/W |
| | | 0 | Disable status change interrupts. No status change interrupt will be generated. | | |
| | | 1 | Enable status change interrupts. A status change interrupt will be generated when a message transfer is successfully completed or a CAN bus error is detected. | | |
| 3 | EIE | | Error interrupt enable | 0 | R/W |
| | | 0 | Disable error interrupt. No error status interrupt will be generated. | | |
| | | 1 | Enable error interrupt. A change in the bits BOFF or EWARN in the CANSTAT registers will generate an interrupt. | | |
| 4 | - | - | reserved | 0 | - |
| 5 | DAR | | Disable automatic retransmission | 0 | R/W |
| | | 0 | Enabled. Automatic retransmission of disturbed messages enabled. | | |
| | | 1 | Disabled. Automatic retransmission disabled. | | |
| 6 | CCE | | Configuration change enable | 0 | R/W |
| | | 0 | No write access. The CPU has no write access to the bit timing register. | | |
| | | 1 | Write access. The CPU has write access to the CANBT register while the INIT bit is one. | | |
| 7 | TEST | | Test mode enable | 0 | R/W |
| | | 0 | Normal operation. | | |
| | | 1 | Test mode. | | |
| 31:8 | - | | reserved | - | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Remark:** The busoff recovery sequence (see *CAN Specification Rev. 2.0*) cannot be shortened by setting or resetting the INIT bit. If the device goes into busoff state, it will set INIT, stopping all bus activities. Once INIT has been cleared by the CPU, the device will then wait for 129 occurrences of Bus Idle (129 × 11 consecutive HIGH/recessive bits) before resuming normal operations. At the end of the busoff recovery sequence, the Error Management Counters will be reset.

During the waiting time after the resetting of INIT, each time a sequence of 11 HIGH/recessive bits has been monitored, a Bit0Error code is written to the Status Register CANSTAT, enabling the CPU to monitor the proceeding of the busoff recovery sequence and to determine whether the CAN bus is stuck at LOW/dominant or continuously disturbed.

#### 16.6.1.2 CAN status register

A status interrupt is generated by bits BOFF, EWARN, RXOK, TXOK, or LEC. BOFF and EWARN generate an error interrupt, and RXOK, TXOK, and LEC generate a status change interrupt if EIE and SIE respectively are set to enabled in the CANCTRL register.

A change of bit EPASS and a write to RXOK, TXOK, or LEC will never create a status interrupt.

Reading the CANSTAT register will clear the Status Interrupt value (0x8000) in the CANINT register.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 247. CAN status register (CANSTAT, address 0x4005 0004) bit description**

| Bit | Symbol | Value | Description | Reset value | Access |
|---|---|---|---|---|---|
| 2:0 | LEC | | Last error code<br>Type of the last error to occur on the CAN bus.The LEC field holds a code which indicates the type of the last error to occur on the CAN bus.<br>This field will be cleared to '0' when a message has been transferred (reception or transmission) without error. The unused code '111' may be written by the CPU to check for updates. | 000 | R/W |
| | | 0x0 | **No error**. | | |
| | | 0x1 | **Stuff error**. More than 5 equal bits in a sequence have occurred in a part of a received message where this is not allowed. | | |
| | | 0x2 | **Form error**. A fixed format part of a received frame has the wrong format. | | |
| | | 0x3 | **AckError**. The message this CAN core transmitted was not acknowledged. | | |
| | | 0x4 | **Bit1Error**. During the transmission of a message (with the exception of the arbitration field), the device wanted to send a HIGH/recessive level (bit of logical value '1'), but the monitored bus value was LOW/dominant. | | |
| | | 0x5 | **Bit0Error**. During the transmission of a message (or acknowledge bit, or active error flag, or overload flag), the device wanted to send a LOW/dominant level (data or identifier bit logical value '0'), but the monitored Bus value was HIGH/recessive. During busoff recovery this status is set each time a sequence of 11 HIGH/recessive bits has been monitored. This enables the CPU to monitor the proceeding of the busoff recovery sequence (indicating the bus is not stuck at LOW/dominant or continuously disturbed). | | |
| | | 0x6 | **CRCError**. The CRC checksum was incorrect in the message received. | | |
| | | 0x7 | **Unused.** No CAN bus event was detected (written by the CPU). | | |
| 3 | TXOK | | Transmitted a message successfully<br>This bit must be reset by the CPU. It is never reset by the CAN controller. | 0 | R/W |
| | | 0 | No transmit. Since this bit was last reset by the CPU, no message has been successfully transmitted. | | |
| | | 1 | Successful transmit. Since this bit was last reset by the CPU, a message has been successfully transmitted (error free and acknowledged by at least one other node). | | |
| 4 | RXOK | | Received a message successfully<br>This bit must be reset by the CPU. It is never reset by the CAN controller. | 0 | R/W |
| | | 0 | No receive. Since this bit was last reset by the CPU, no message has been successfully received. | | |
| | | 1 | Successful receive.Since this bit was last set to zero by the CPU, a message has been successfully received independent of the result of acceptance filtering. | | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 247. CAN status register (CANSTAT, address 0x4005 0004) bit description**

*…continued*

| Bit | Symbol | Value | Description | Reset value | Access |
|---|---|---|---|---|---|
| 5 | EPASS | | Error passive | 0 | RO |
| | | 0 | Active. The CAN controller is in the error active state. | | |
| | | 1 | Passive. The CAN controller is in the error passive state as defined in the *CAN 2.0 specification*. | | |
| 6 | EWARN | | Warning status | 0 | RO |
| | | 0 | Below limit. Both error counters are below the error warning limit of 96. | | |
| | | 1 | At limit. At least one of the error counters in the EC has reached the error warning limit of 96. | | |
| 7 | BOFF | | Busoff status | 0 | RO |
| | | 0 | The CAN module is not in busoff. | | |
| | | 1 | The CAN controller is in busoff state. | | |
| 31:8 | - | - | reserved | | |

### 16.6.1.3 CAN error counter

**Table 248. CAN error counter (CANEC, address 0x4005 0008) bit description**

| Bit | Symbol | Value | Description | Reset value | Access |
|---|---|---|---|---|---|
| 7:0 | TEC7_0 | | Transmit error counter<br>Current value of the transmit error counter (maximum value 255) | 0 | RO |
| 14:8 | REC6_0 | | Receive error counter<br>Current value of the receive error counter (maximum value 127). | - | RO |
| 15 | RP | | Receive error passive | - | RO |
| | | 0 | Below error level. The receive counter is below the error passive level. | | |
| | | 1 | At error level. The receive counter has reached the error passive level as defined in the *CAN2.0 specification*. | | |
| 31:16 | - | - | Reserved | - | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

#### 16.6.1.4 CAN bit timing register

**Table 249. CAN bit timing register (CANBT, address 0x4005 000C) bit description**

| Bit | Symbol | Description | Reset value | Access |
|---|---|---|---|---|
| 5:0 | BRP | Baud rate prescaler<br>The value by which the oscillator frequency is divided for generating the bit time quanta. The bit time is built up from a multiple of this quanta. Valid values for the Baud Rate Prescaler are 0 to 63.[1] | 000001 | R/W |
| 7:6 | SJW | (Re)synchronization jump width<br>Valid programmed values are 0 to 3.[1] | 00 | R/W |
| 11:8 | TSEG1 | Time segment before the sample point including propagation segment.<br>Valid values are 1 to 15.[1] | 0011 | R/W |
| 14:12 | TSEG2 | Time segment after the sample point<br>Valid values are 0 to 7.[1] | 010 | R/W |
| 31:15 | - | Reserved | - | - |

[1] Hardware interprets the value programmed into these bits as the bit value + 1.

For example, with a LPC11Cx system clock set to of 8 MHz, the reset value of 0x2301 configures the C_CAN for a bit rate of 500 kBit/s.

The registers are only writable if a configuration change is enabled in CANCTRL and the controller is initialized by software (bits CCE and INIT in the CAN Control Register are set).

For details on bit timing, see Section 16.7.5 and the *Bosch C_CAN user's manual, revision 1.2*.

##### Baud rate prescaler

The bit time quanta $t_q$ are determined by the BRP value:

$t_q = BRP / f_{sys}$

($f_{sys}$ is the LPC11Cx system clock to the C_CAN block).

##### Time segments 1 and 2

Time segments TSEG1 and TSEG2 determine the number of time quanta per bit time and the location of the sample point:

$t_{TSEG1/2} = t_q \times (TSEG1/2 + 1)$

##### Synchronization jump width

To compensate for phase shifts between clock oscillators of different bus controllers, any bus controller must re-synchronize on any relevant signal edge of the current transmission. The synchronization jump width $t_{SJW}$ defines the maximum number of clock cycles a certain bit period may be shortened or lengthened by one re-synchronization:

$t_{SJW} = t_q \times (SJW + 1)$


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 16.6.1.5 CAN interrupt register

**Table 250. CAN interrupt register (CANINT, address 0x4005 0010) bit description**

| Bit | Symbol | Description | Reset value | Access |
|---|---|---|---|---|
| 15:0 | INTID | 0x0000 = No interrupt is pending.<br>0x0001 - 0x0020 = Number of message object which caused the interrupt.<br>0x0021 - 0x7FFF = Unused<br>0x8000 = Status interrupt<br>0x8001 - 0xFFFF = Unused | 0 | R |
| 31:16 | - | Reserved | - | - |

If several interrupts are pending, the CAN Interrupt Register will point to the pending interrupt with the highest priority, disregarding their chronological order. An interrupt remains pending until the CPU has cleared it. If INTID is different from 0x0000 and IE is set, the interrupt line to the CPU is active. The interrupt line remains active until INTID is back to value 0x0000 (the cause of the interrupt is reset) or until IE is reset.

The Status Interrupt has the highest priority. Among the message interrupts, the Message Object' s interrupt priority decreases with increasing message number.

A message interrupt is cleared by clearing the Message Object's INTPND bit. The StatusInterrupt is cleared by reading the Status Register.

### 16.6.1.6 CAN test register

Write access to the Test Register is enabled by setting bit Test in the CAN Control Register.

The different test functions may be combined, but when TX[1:0] ≠ "00" is selected, the message transfer is disturbed.

**Table 251. CAN test register (CANTEST, address 0x4005 0014) bit description**

| Bit | Symbol | Value | Description | Reset value | Access |
|---|---|---|---|---|---|
| 1:0 | - | - | Reserved | | - |
| 2 | BASIC | | Basic mode | 0 | R/W |
| | | 0 | Disabled. Basic mode disabled. | | |
| | | 1 | Enabled. IF1 registers used as TX buffer, IF2 registers used as RX buffer. | | |
| 3 | SILENT | | Silent mode | 0 | R/W |
| | | 0 | Normal operation. | | |
| | | 1 | Silent mode. The module is in silent mode. | | |
| 4 | LBACK | | Loop back mode | 0 | R/W |
| | | 0 | Disabled. Loop back mode is disabled. | | |
| | | 1 | Enabled. Loop back mode is enabled. | | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 251. CAN test register (CANTEST, address 0x4005 0014) bit description**

| Bit | Symbol | Value | Description | Reset value | Access |
|---|---|---|---|---|---|
| 6:5 | TX | | Control of CAN_TXD pins | 00 | R/W |
| | | 0x0 | Controller. Level at the CAN_TXD pin is controlled by the CAN controller. This is the value at reset. | | |
| | | 0x1 | Sample point. The sample point can be monitored at the CAN_TXD pin. | | |
| | | 0x2 | Low. CAN_TXD pin is driven LOW/dominant. | | |
| | | 0x3 | High. CAN_TXD pin is driven HIGH/recessive. | | |
| 7 | RX | | Monitors the actual value of the CAN_RXD pin. | 0 | R |
| | | 0 | Dominant. The CAN bus is dominant (CAN_RXD = 0). | | |
| | | 1 | Recessive. The CAN bus is recessive (CAN_RXD = 1). | | |
| 31:8 | - | | R/W | | - |

### 16.6.1.7 CAN baud rate prescaler extension register

**Table 252. CAN baud rate prescaler extension register (CANBRPE, address 0x4005 0018) bit description**

| Bit | Symbol | Description | Reset value | Access |
|---|---|---|---|---|
| 3:0 | BRPE | Baud rate prescaler extension<br>By programming BRPE the Baud Rate Prescaler can be extended to values up to 1023. Hardware interprets the value as the value of BRPE (MSBs) and BRP (LSBs) plus one. Allowed values are 0 to 15. | 0x0000 | R/W |
| 31:4 | - | Reserved | - | - |

## 16.6.2 Message interface registers

There are two sets of interface registers which are used to control the CPU access to the Message RAM. The interface registers avoid conflicts between CPU access to the Message RAM and CAN message reception and transmission by buffering the data to be transferred. A complete Message Object (see Section 16.6.2.1) or parts of the Message Object may be transferred between the Message RAM and the IFx Message Buffer registers in one single transfer.

The function of the two interface register sets is identical (except for test mode Basic). One set of registers may be used for data transfer to the Message RAM while the other set of registers may be used for the data transfer from the Message RAM, allowing both processes to be interrupted by each other.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Each set of interface registers consists of message buffer registers controlled by their own command registers. The command mask register specifies the direction of the data transfer and which parts of a message object will be transferred. The command request register is used to select a message object in the message RAM as target or source for the transfer and to start the action specified in the command mask register.

**Table 253. Message interface registers**

| IF1 register names | IF1 register set | IF2 register names | IF2 register set |
|---|---|---|---|
| CANIF1_CMDREQ | IF1 command request | CANIF2_CMDREQ | IF2 command request |
| CANIF1_CMDMASK | IF1 command mask | CANIF2_CMDMASK | IF2 command mask |
| CANIF1_MASK1 | IF1 mask 1 | CANIF2_MSK1 | IF2 mask 1 |
| CANIF1_MASK2 | IF1 mask 2 | CANIF2_MSK2 | IF2 mask 2 |
| CANIF1_ARB1 | IF1 arbitration 1 | CANIF2_ARB1 | IF2 arbitration 1 |
| CANIF1_ARB2 | IF1 arbitration 2 | CANIF2_ARB2 | IF2 arbitration 2 |
| CANIF1_MCTRL | IF1 message control | CANIF2_MCTRL | IF2 message control |
| CANIF1_DA1 | IF1 data A1 | CANIF2_DA1 | IF2 data A1 |
| CANIF1_DA2 | IF1 data A2 | CANIF2_DA2 | IF2 data A2 |
| CANIF1_DB1 | IF1 data B1 | CANIF2_DB1 | IF2 data B1 |
| CANIF1_DB2 | IF1 data B2 | CANIF2_DB2 | IF2 data B2 |

There are 32 Message Objects in the Message RAM. To avoid conflicts between CPU access to the Message RAM and CAN message reception and transmission, the CPU cannot directly access the Message Objects. The message objects are accessed through the IFx Interface Registers.

For details of message handling, see Section 16.7.3.

### 16.6.2.1 Message objects

A message object contains the information from the various bits in the message interface registers. Table 254 below shows a schematic representation of the structure of the message object. The bits of a message object and the respective interface register where this bit is set or cleared are shown. For bit functions see the corresponding interface register.

**Table 254. Structure of a message object in the message RAM**

| UMASK | MSK[28:0] | MXTD | MDIR | EOB | NEWDAT | MSGLST | RXIE | TXIE | INTPND |
|---|---|---|---|---|---|---|---|---|---|
| IF1/2_MCTRL | IF1/2_MSK1/2 | | | IF1/2_MCTRL | | | | | |

| RMTEN | TXRQST | MSGVAL | ID[28:0] | XTD | DIR | DLC3 | DLC2 | DLC1 | DLC0 |
|---|---|---|---|---|---|---|---|---|---|
| IF1/2_MCTRL | | IF1/2_ARB1/2 | | | | IF1/2_MCTRL | | | |

| DATA0 | DATA1 | DATA2 | DATA3 | DATA4 | DATA5 | DATA6 | DATA7 |
|---|---|---|---|---|---|---|---|
| IF1/2_DA1 | | IF1/2_DA2 | | IF1/2_DB1 | | IF1/2_DB2 | |

### 16.6.2.2 CAN message interface command request registers

A message transfer is started as soon as the CPU has written the message number to the Command Request Register. With this write operation the BUSY bit is automatically set to ‘1’ and the signal CAN_WAIT_B is pulled LOW to notify the CPU that a transfer is in progress. After a wait time of 3 to 6 CAN_CLK periods, the transfer between the Interface Register and the Message RAM has completed. The BUSY bit is set back to zero and the signal CAN_WAIT_B is set back.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 255. CAN message interface command request registers (CANIF1_CMDREQ, address 0x4005 0020 and CANIF2_CMDREQ, address 0x4005 0080) bit description**

| Bit | Symbol | Value | Description | Reset Value | Access |
|---|---|---|---|---|---|
| 5:0 | MN | | Message number<br>0x01 - 0x20 = Valid message numbers. The message object in the message RAM is selected for data transfer.<br>0x00 = Not a valid message number. This value is interpreted as 0x20.[1]<br>0x21 - 0x3F = Not a valid message number. This value is interpreted as 0x01 - 0x1F.[1] | 0x00 | R/W |
| 14:6 | - | | reserved | - | - |
| 15 | BUSY | | BUSY flag | 0 | RO |
| | | 0 | Done. Set to zero by hardware when read/write action to this Command request register has finished. | | |
| | | 1 | Busy. Set to one by hardware when writing to this Command request register. | | |
| 31:16 | - | - | Reserved | - | - |

[1] When a message number that is not valid is written into the Command request registers, the message number will be transformed into a valid value and that message object will be transferred.

### 16.6.2.3 CAN message interface command mask registers

The control bits of the IFx Command Mask Register specify the transfer direction and select which of the IFx Message Buffer Registers are source or target of the data transfer.The functions of the register bits depend on the transfer direction (read or write) which is selected in the WR/RD bit (bit 7) of this Command mask register.

Select the WR/RD to

**one** for the Write transfer direction (write to message RAM)

**zero** for the Read transfer direction (read from message RAM)

**Table 256. CAN message interface command mask registers (CANIF1_CMDMSK_W, address 0x4005 0024 and CANIF2_CMDMSK_W, address 0x4005 0084) bit description for write direction**

| Bit | Symbol | Value | Description | Reset value | Access |
|---|---|---|---|---|---|
| 0 | DATA_B | | Access data bytes 4-7 | 0 | R/W |
| | | 0 | Unchanged. Data bytes 4-7 unchanged. | | |
| | | 1 | Transfer. Transfer data bytes 4-7 to message object. | | |
| 1 | DATA_A | | Access data bytes 0-3 | 0 | R/W |
| | | 0 | Unchanged. Data bytes 0-3 unchanged. | | |
| | | 1 | Transfer. Transfer data bytes 0-3 to message object. | | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 256. CAN message interface command mask registers (CANIF1_CMDMSK_W, address 0x4005 0024 and CANIF2_CMDMSK_W, address 0x4005 0084) bit description for write direction** *…continued*

| Bit | Symbol | Value | Description | Reset value | Access |
|---|---|---|---|---|---|
| 2 | TXRQST | | Access transmission request bit | 0 | R/W |
| | | 0 | No transmission request. TXRQST bit unchanged in IF1/2_MCTRL.<br>**Remark:** If a transmission is requested by programming this bit, the TXRQST bit in the CANIFn_MCTRL register is ignored. | | |
| | | 1 | Request a transmission. Set the TXRQST bit IF1/2_MCTRL. | | |
| 3 | CLRINTPND | - | This bit is ignored in the write direction. | 0 | R/W |
| 4 | CTRL | | Access control bits | 0 | R/W |
| | | 0 | Unchanged. Control bits unchanged. | | |
| | | 1 | Transfer. Transfer control bits to message object | | |
| 5 | ARB | | Access arbitration bits | 0 | R/W |
| | | 0 | Unchanged. Arbitration bits unchanged. | | |
| | | 1 | Transfer. Transfer Identifier, DIR, XTD, and MSGVAL bits to message object. | | |
| 6 | MASK | | Access mask bits | 0 | R/W |
| | | 0 | Unchanged. Mask bits unchanged. | | |
| | | 1 | Transfer. Transfer Identifier MSK + MDIR + MXTD to message object. | | |
| 7 | WR_RD | 1 | Write transfer<br>Transfer data from the selected message buffer registers to the message object addressed by the command request register CANIFn_CMDREQ. | 0 | R/W |
| 31:8 | - | - | reserved | 0 | - |

**Table 257. CAN message interface command mask registers (CANIF1_CMDMSK_R, address 0x4005 0024 and CANIF2_CMDMSK_R, address 0x4005 0084) bit description for read direction**

| Bit | Symbol | Value | Description | Reset value | Access |
|---|---|---|---|---|---|
| 0 | DATA_B | | Access data bytes 4-7 | 0 | R/W |
| | | 0 | Unchanged. Data bytes 4-7 unchanged. | | |
| | | 1 | Transfer. Transfer data bytes 4-7 to IFx message buffer register. | | |
| 1 | DATA_A | | Access data bytes 0-3 | 0 | R/W |
| | | 0 | Unchanged. Data bytes 0-3 unchanged. | | |
| | | 1 | Transfer. Transfer data bytes 0-3 to IFx message buffer. | | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 257. CAN message interface command mask registers (CANIF1_CMDMSK_R, address 0x4005 0024 and CANIF2_CMDMSK_R, address 0x4005 0084) bit description for read direction** *…continued*

| Bit | Symbol | Value | Description | Reset value | Access |
|---|---|---|---|---|---|
| 2 | NEWDAT | | Access new data bit | 0 | R/W |
| | | 0 | Unchanged. NEWDAT bit remains unchanged.<br>**Remark:** A read access to a message object can be combined with the reset of the control bits INTPND and NEWDAT in IF1/2_MCTRL. The values of these bits transferred to the IFx Message Control Register always reflect the status before resetting these bits. | | |
| | | 1 | Clear. Clear NEWDAT bit in the message object. | | |
| 3 | CLRINTPND | | Clear interrupt pending bit. | 0 | R/W |
| | | 0 | Unchanged. INTPND bit remains unchanged. | | |
| | | 1 | Clear. Clear INTPND bit in the message object. | | |
| 4 | CTRL | | Access control bits | 0 | R/W |
| | | 0 | Unchanged. Control bits unchanged. | | |
| | | 1 | Transfer. Transfer control bits to IFx message buffer. | | |
| 5 | ARB | | Access arbitration bits | 0 | R/W |
| | | 0 | Unchanged. Arbitration bits unchanged. | | |
| | | 1 | Transfer. Transfer Identifier, DIR, XTD, and MSGVAL bits to IFx message buffer register. | | |
| 6 | MASK | | Access mask bits | 0 | R/W |
| | | 0 | Unchanged. Mask bits unchanged. | | |
| | | 1 | Transfer. Transfer Identifier MSK + MDIR + MXTD to IFx message buffer register. | | |
| 7 | WR_RD | 0 | Read transfer<br>Transfer data from the message object addressed by the command request register to the selected message buffer registers CANIFn_CMDREQ. | 0 | R/W |
| 31:8 | - | - | reserved | 0 | - |

### 16.6.2.4 IF1 and IF2 message buffer registers

The bits of the Message Buffer registers mirror the Message Objects in the Message RAM.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

#### 16.6.2.4.1 CAN message interface mask 1 registers

**Table 258. CAN message interface mask 1 registers (CANIF1_MSK1, address 0x4005 0028 and CANIF2_MASK1, address 0x4005 0088) bit description**

| Bit | Symbol | Value | Description | Reset value | Access |
|---|---|---|---|---|---|
| 15:0 | MSK15_0 | | Identifier mask [15:0] | 0xFFFF | R/W |
| | | 0 | Match. The corresponding bit in the identifier of the message cannot inhibit the match in the acceptance filtering. | | |
| | | 1 | Mask. The corresponding identifier bit is used for acceptance filtering. | | |
| 31:16 | - | - | Reserved | 0 | - |

#### 16.6.2.4.2 CAN message interface mask 2 registers

**Table 259. CAN message interface mask 2 registers (CANIF1_MSK2, address 0x4005 002C and CANIF2_MASK2, address 0x4005 008C) bit description**

| Bit | Symbol | Value | Description | Reset value | Access |
|---|---|---|---|---|---|
| 12:0 | MSK28_16 | | Identifier mask [28:16] | 0xFFF | R/W |
| | | 0 | Match. The corresponding bit in the identifier of the message cannot inhibit the match in the acceptance filtering. | | |
| | | 1 | Mask. The corresponding identifier bit is used for acceptance filtering. | | |
| 13 | - | | Reserved | 1 | - |
| 14 | MDIR | | Mask message direction | 1 | R/W |
| | | 0 | Without DIR bit. The message direction bit (DIR) has no effect on acceptance filtering. | | |
| | | 1 | With DIR bit. The message direction bit (DIR) is used for acceptance filtering. | | |
| 15 | MXTD | | Mask extend identifier | 1 | R/W |
| | | 0 | Without XTD. The extended identifier bit (XTD) has no effect on acceptance filtering. | | |
| | | 1 | With XTD. The extended identifier bit (XTD) is used for acceptance filtering. | | |
| 31:16 | - | - | Reserved | 0 | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

#### 16.6.2.4.3 CAN message interface c arbitration 1 registers

**Table 260. CAN message interface arbitration 1 registers (CANIF1_ARB1, address 0x4005 0030 and CANIF2_ARB1, address 0x4005 0090) bit description**

| Bit | Symbol | Description | Reset value | Access |
|---|---|---|---|---|
| 15:0 | ID15_0 | Message identifier [15:0]<br>29-bit identifier (extended frame)<br>11-bit identifier (standard frame). These bits are not used for 11-bit identifiers. | 0x00 | R/W |
| 31:16 | - | Reserved | 0 | - |

[1]

#### 16.6.2.4.4 CAN message interface arbitration 2 registers

**Table 261. CAN message interface arbitration 2 registers (CANIF1_ARB2, address 0x4005 0034 and CANIF2_ARB2, address 0x4005 0094) bit description**

| Bit | Symbol | Value | Description | Reset value | Access |
|---|---|---|---|---|---|
| 12:0 | ID[28:16]<br>ID[28:18] | | Message identifier<br>29-bit identifier (extended frame)<br>11-bit identifier (standard frame). ID[17:16] are not used for 11-bit identifiers. | 0x00 | R/W |
| 13 | DIR | | Message direction | 0x00 | R/W |
| | | 0 | Receive.<br>On TXRQST, a Remote Frame with the identifier of this Message Object is transmitted. On reception of a Data Frame with matching identifier, that message is stored in this Message Object. | | |
| | | 1 | Transmit.<br>On TXRQST, the respective Message Object is transmitted as a Data Frame. On reception of a Remote Frame with matching identifier, the TXRQST bit of this Message Object is set (if RMTEN = one). | | |
| 14 | XTD | | Extend identifier | 0x00 | R/W |
| | | 0 | Standard. The 11-bit standard identifier will be used for this message object. | | |
| | | 1 | Extended. The 29-bit extended identifier will be used for this message object. | | |
| 15 | MSGVAL | | Message valid<br>**Remark:** The CPU must reset the MSGVAL bit of all unused Messages Objects during the initialization before it resets bit INIT in the CAN Control Register. This bit must also be reset before the identifier ID28:0, the control bits XTD, DIR, or the Data Length Code DLC3:0 are modified, or if the Messages Object is no longer required. | 0 | R/W |
| | | 0 | Invalid. The message object is ignored by the message handler. | | |
| | | 1 | Valid. The message object is configured and should be considered by the message handler. | | |
| 31:16 | - | - | Reserved | 0 | - |

[1]


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

#### 16.6.2.4.5 CAN message interface message control registers

**Table 262. CAN message interface message control registers (CANIF1_MCTRL, address 0x4005 0038 and CANIF2_MCTRL, address 0x4005 0098) bit description**

| Bit | Symbol | Value | Description | Reset value | Access |
|---|---|---|---|---|---|
| 3:0 | DLC3_0 | | Data length code 3:0<br>**Remark:** The Data Length Code of a Message Object must be defined the same as in all the corresponding objects with the same identifier at other nodes. When the Message Handler stores a data frame, it will write the DLC to the value given by the received message.<br>0000 - 1000 = Data frame has 0 - 8 data bytes.<br>1001 - 1111 = Data frame has 8 data bytes. | 0000 | R/W |
| 6:4 | - | | Reserved | - | - |
| 7 | EOB | | End of buffer | 0 | R/W |
| | | 0 | Not end of buffer. Message object belongs to a FIFO buffer and is not the last message object of that FIFO buffer. | | |
| | | 1 | End of buffer. Single message object or last message object of a FIFO buffer. | | |
| 8 | TXRQST | | Transmit request | 0 | R/W |
| | | 0 | Not waiting. This message object is not waiting for transmission. | | |
| | | 1 | Waiting. The transmission of this message object is requested and is not yet done | | |
| 9 | RMTEN | | Remote enable | 0 | R/W |
| | | 0 | TXRQST unchanged. At the reception of a remote frame, TXRQST is left unchanged. | | |
| | | 1 | TXRQST set. At the reception of a remote frame, TXRQST is set. | | |
| 10 | RXIE | | Receive interrupt enable | 0 | R/W |
| | | 0 | INTPND unchanged. INTPND will be left unchanged after successful reception of a frame. | | |
| | | 1 | INTPND set. INTPND will be set after successful reception of a frame. | | |
| 11 | TXIE | | Transmit interrupt enable | 0 | R/W |
| | | 0 | INTPND unchanged. The INTPND bit will be left unchanged after a successful transmission of a frame. | | |
| | | 1 | INTPND set. INTPND will be set after a successful transmission of a frame. | | |
| 12 | UMASK | | Use acceptance mask<br>**Remark:** If UMASK is set to 1, the message object's mask bits have to be programmed during initialization of the message object before MAGVAL is set to 1. | 0 | R/W |
| | | 0 | Ignore. Mask ignored. | | |
| | | 1 | Use. Use mask (MSK[28:0], MXTD, and MDIR) for acceptance filtering. | | |
| 13 | INTPND | | Interrupt pending | 0 | R/W |
| | | 0 | Not pending. This message object is not the source of an interrupt. | | |
| | | 1 | Pending. This message object is the source of an interrupt. The Interrupt Identifier in the Interrupt Register will point to this message object if there is no other interrupt source with higher priority. | | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 262. CAN message interface message control registers (CANIF1_MCTRL, address 0x4005 0038 and CANIF2_MCTRL, address 0x4005 0098) bit description** *…continued*

| Bit | Symbol | Value | Description | Reset value | Access |
|---|---|---|---|---|---|
| 14 | MSGLST | | Message lost (only valid for message objects in the direction receive). | 0 | R/W |
| | | 0 | Not lost. No message lost since this bit was reset last by the CPU. | | |
| | | 1 | Lost. The Message Handler stored a new message into this object when NEWDAT was still set, the CPU has lost a message. | | |
| 15 | NEWDAT | | New data | 0 | R/W |
| | | 0 | No new data. No new data has been written into the data portion of this message object by the message handler since this flag was cleared last by the CPU. | | |
| | | 1 | New data. The message handler or the CPU has written new data into the data portion of this message object. | | |
| 31:16 | - | - | Reserved | 0 | - |

#### 16.6.2.4.6 CAN message interface data A1 registers

In a CAN Data Frame, DATA0 is the first, DATA7 (in CAN_IF1B2 AND CAN_IF2B2) is the last byte to be transmitted or received. In CAN's serial bit stream, the MSB of each byte will be transmitted first.

**Remark:** Byte DATA0 is the first data byte shifted into the shift register of the CAN Core during a reception, byte DATA7 is the last. When the Message Handler stores a Data Frame, it will write all the eight data bytes into a Message Object. If the Data Length Code is less than 8, the remaining bytes of the Message Object will be overwritten by non specified values.

**Table 263. CAN message interface data A1 registers (CANIF1_DA1, address 0x4005 003C and CANIF2_DA1, address 0x4005 009C) bit description**

| Bit | Symbol | Description | Reset value | Access |
|---|---|---|---|---|
| 7:0 | DATA0 | Data byte 0 | 0x00 | R/W |
| 15:8 | DATA1 | Data byte 1 | 0x00 | R/W |
| 31:16 | - | Reserved | - | - |

#### 16.6.2.4.7 CAN message interface data A2 registers

**Table 264. CAN message interface data A2 registers (CANIF1_DA2, address 0x4005 0040 and CANIF2_DA2, address 0x4005 00A0) bit description**

| Bit | Symbol | Description | Reset value | Access |
|---|---|---|---|---|
| 7:0 | DATA2 | Data byte 2 | 0x00 | R/W |
| 15:8 | DATA3 | Data byte 3 | 0x00 | R/W |
| 31:16 | - | Reserved | - | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

#### 16.6.2.4.8 CAN message interface data B1 registers

Table 265. CAN message interface data B1 registers (CANIF1_DB1, address 0x4005 0044 and CANIF2_DB1, address 0x4005 00A4) bit description

| Bit | Symbol | Description | Reset value | Access |
|---|---|---|---|---|
| 7:0 | DATA4 | Data byte 4 | 0x00 | R/W |
| 15:8 | DATA5 | Data byte 5 | 0x00 | R/W |
| 31:16 | - | Reserved | - | - |

#### 16.6.2.4.9 CAN message interface data B2 registers

Table 266. CAN message interface data B2 registers (CANIF1_DB2, address 0x4005 0048 and CANIF2_DB2, address 0x4005 00A8) bit description

| Bit | Symbol | Description | Reset value | Access |
|---|---|---|---|---|
| 7:0 | DATA6 | Data byte 6 | 0x00 | R/W |
| 15:8 | DATA7 | Data byte 7 | 0x00 | R/W |
| 31:16 | - | Reserved | - | - |

### 16.6.3 Message handler registers

All Message Handler registers are read-only. Their contents (TXRQST, NEWDAT, INTPND, and MSGVAL bits of each Message Object and the Interrupt Identifier) is status information provided by the Message Handler FSM.

#### 16.6.3.1 CAN transmission request 1 register

This register contains the TXRQST bits of message objects 1 to 16. By reading out the TXRQST bits, the CPU can check for which Message Object a Transmission Request is pending. The TXRQST bit of a specific Message Object can be set/reset by the CPU via the IFx Message Interface Registers or by the Message Handler after reception of a Remote Frame or after a successful transmission.

Table 267. CAN transmission request 1 register (CANTXREQ1, address 0x4005 0100) bit description

| Bit | Symbol | Description | Reset value | Access |
|---|---|---|---|---|
| 15:0 | TXRQST16_1 | Transmission request bit of message objects 16 to 1.<br>0 = This message object is not waiting for transmission.<br>1 = The transmission of this message object is requested and not yet done. | 0x00 | R |
| 31:16 | - | Reserved | - | - |

#### 16.6.3.2 CAN transmission request 2 register

This register contains the TXRQST bits of message objects 32 to 17. By reading out the TXRQST bits, the CPU can check for which Message Object a Transmission Request is pending. The TXRQST bit of a specific Message Object can be set/reset by the CPU via the IFx Message Interface Registers or by the Message Handler after reception of a Remote Frame or after a successful transmission.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 268. CAN transmission request 2 register (CANTXREQ2, address 0x4005 0104) bit description**

| Bit | Symbol | Description | Reset value | Access |
|---|---|---|---|---|
| 15:0 | TXRQST32_17 | Transmission request bit of message objects 32 to 17.<br>0 = This message object is not waiting for transmission.<br>1 = The transmission of this message object is requested and not yet done. | 0x00 | R |
| 31:16 | - | Reserved | - | - |

### 16.6.3.3 CAN new data 1 register

This register contains the NEWDAT bits of message objects 16 to 1. By reading out the NEWDAT bits, the CPU can check for which Message Object the data portion was updated. The NEWDAT bit of a specific Message Object can be set/reset by the CPU via the IFx Message Interface Registers or by the Message Handler after reception of a Data Frame or after a successful transmission.

**Table 269. CAN new data 1 register (CANND1, address 0x4005 0120) bit description**

| Bit | Symbol | Description | Reset value | Access |
|---|---|---|---|---|
| 15:0 | NEWDAT16_1 | New data bits of message objects 16 to 1.<br>0 = No new data has been written into the data portion of this Message Object by the Message Handler since last time this flag was cleared by the CPU.<br>1 = The Message Handler or the CPU has written new data into the data portion of this Message Object. | 0x00 | R |
| 31:16 | - | Reserved | - | - |

### 16.6.3.4 CAN new data 2 register

This register contains the NEWDAT bits of message objects 32 to 17. By reading out the NEWDAT bits, the CPU can check for which Message Object the data portion was updated. The NEWDAT bit of a specific Message Object can be set/reset by the CPU via the IFx Message Interface Registers or by the Message Handler after reception of a Data Frame or after a successful transmission.

**Table 270. CAN new data 2 register (CANND2, address 0x4005 0124) bit description**

| Bit | Symbol | Description | Reset value | Access |
|---|---|---|---|---|
| 15:0 | NEWDAT32_17 | New data bits of message objects 32 to 17.<br>0 = No new data has been written into the data portion of this Message Object by the Message Handler since last time this flag was cleared by the CPU.<br>1 = The Message Handler or the CPU has written new data into the data portion of this Message Object. | 0x00 | R |
| 31:16 | - | Reserved | - | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 16.6.3.5 CAN interrupt pending 1 register

This register contains the INTPND bits of message objects 16 to 1. By reading out the INTPND bits, the CPU can check for which Message Object an interrupt is pending. The INTPND bit of a specific Message Object can be set/reset by the CPU via the IFx Message Interface Registers or by the Message Handler after reception or after a successful transmission of a frame. This will also affect the value of INTPND in the Interrupt Register.

**Table 271. CAN interrupt pending 1 register (CANIR1, address 0x4005 0140) bit description**

| Bit | Symbol | Description | Reset value | Access |
|---|---|---|---|---|
| 15:0 | INTPND16_1 | Interrupt pending bits of message objects 16 to 1.<br>0 = This message object is ignored by the message handler.<br>1 = This message object is the source of an interrupt. | 0x00 | R |
| 31:16 | - | Reserved | - | - |

### 16.6.3.6 CAN interrupt pending 2 register

This register contains the INTPND bits of message objects 32 to 17. By reading out the INTPND bits, the CPU can check for which Message Object an interrupt is pending. The INTPND bit of a specific Message Object can be set/reset by the CPU via the IFx Message Interface Registers or by the Message Handler after reception or after a successful transmission of a frame. This will also affect the value of INTPND in the Interrupt Register.

**Table 272. CAN interrupt pending 2 register (CANIR2, addresses 0x4005 0144) bit description**

| Bit | Symbol | Description | Reset value | Access |
|---|---|---|---|---|
| 15:0 | INTPND32_17 | Interrupt pending bits of message objects 32 to 17.<br>0 = This message object is ignored by the message handler.<br>1 = This message object is the source of an interrupt. | 0x00 | R |
| 31:16 | - | Reserved | - | - |

### 16.6.3.7 CAN message valid 1 register

This register contains the MSGVAL bits of message objects 16 to 1. By reading out the MSGVAL bits, the CPU can check which Message Object is valid. The MSGVAL bit of a specific Message Object can be set/reset by the CPU via the IFx Message Interface Registers.

**Table 273. CAN message valid 1 register (CANMSGV1, addresses 0x4005 0160) bit description**

| Bit | Symbol | Description | Reset value | Access |
|---|---|---|---|---|
| 15:0 | MSGVAL16_1 | Message valid bits of message objects 16 to 1.<br>0 = This message object is ignored by the message handler.<br>1 = This message object is configured and should be considered by the message handler. | 0x00 | R |
| 31:16 | - | Reserved | - | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

#### 16.6.3.8 CAN message valid 2 register

This register contains the MSGVAL bits of message objects 32 to 17. By reading out the MSGVAL bits, the CPU can check which Message Object is valid. The MSGVAL bit of a specific Message Object can be set/reset by the CPU via the IFx Message Interface Registers.

**Table 274. CAN message valid 2 register (CANMSGV2, address 0x4005 0164) bit description**

| Bit | Symbol | Description | Access | Reset value |
|---|---|---|---|---|
| 15:0 | MSGVAL32_17 | Message valid bits of message objects 32 to 17.<br>0 = This message object is ignored by the message handler.<br>1 = This message object is configured and should be considered by the message handler. | R | 0x00 |
| 31:16 | - | Reserved | - | - |

### 16.6.4 CAN timing register

#### 16.6.4.1 CAN clock divider register

This register determines the CAN clock signal. The CAN_CLK is derived from the peripheral clock PCLK divided by the values in this register.

**Table 275. CAN clock divider register (CANCLKDIV, address 0x4005 0180) bit description**

| Bit | Symbol | Description | Reset value | Access |
|---|---|---|---|---|
| 3:0 | CLKDIVVAL | Clock divider value. CAN_CLK = PCLK/(CLKDIVVAL +1)<br>0000: CAN_CLK = PCLK divided by 1.<br>0001: CAN_CLK = PCLK divided by 2.<br>0010: CAN_CLK = PCLK divided by 3<br>0011: CAN_CLK = PCLK divided by 4.<br>...<br>1111: CAN_CLK = PCLK divided by 16. | 1 | R/W |
| 31:4 | - | reserved | - | - |

## 16.7 Functional description

### 16.7.1 C_CAN controller state after reset

After a hardware reset, the registers hold the values described in Table 245. Additionally, the busoff state is reset and the output CAN_TXD is set to recessive (HIGH). The value 0x0001 (INIT = ‘1’) in the CAN Control Register enables the software initialization. The CAN controller does not communicate with the CAN bus until the CPU resets INIT to ‘0’.

The data stored in the message RAM is not affected by a hardware reset. After power-on, the contents of the message RAM is undefined.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 16.7.2 C_CAN operating modes

### 16.7.2.1 Software initialization

The software initialization is started by setting the bit INIT in the CAN Control Register, either by software or by a hardware reset, or by entering the busoff state.

During software initialization (INIT bit is set), the following conditions are present:

- All message transfer from and to the CAN bus is stopped.
- The status of the CAN output CAN_TXD is recessive (HIGH).
- The EC counters are unchanged.
- The configuration registers are unchanged.
- Access to the bit timing register and the BRP extension register is enabled if the CCE bit in the CAN control register is also set.

To initialize the CAN controller, software has to set up the bit timing register and each message object. If a message object is not needed, it is sufficient to set its MSGVAL bit to not valid. Otherwise, the whole message object has to be initialized.

Resetting the INIT bit finishes the software initialization. Afterwards the Bit Stream Processor BSP synchronizes itself to the data transfer on the CAN bus by waiting for the occurrence of a sequence of 11 consecutive recessive bits (Bus Idle) before it can take part in bus activities and starts the message transfer.

**Remark:** The initialization of the Message Objects is independent of INIT and also can be done on the fly, but the Message Objects should all be configured to particular identifiers or set to not valid during software initialization before the BSP starts the message transfer. To change the configuration of a Message Object during normal operation, the CPU has to start by setting the MSGVAL bit to not valid. When the configuration is completed, MSAGVALis set to valid again.

### 16.7.2.2 CAN message transfer

Once the CAN controller is initialized and INIT is reset to zero, the CAN core synchronizes itself to the CAN bus and starts the message transfer.

Received messages are stored into their appropriate Message Objects if they pass the Message Handler’s acceptance filtering. The whole message including all arbitration bits, DLC and eight data bytes is stored into the Message Object. If the Identifier Mask is used, the arbitration bits which are masked to “don’t care” may be overwritten in the Message Object.

The CPU may read or write each message any time via the Interface Registers. The Message Handler guarantees data consistency in case of concurrent accesses.

Messages to be transmitted are updated by the CPU. If a permanent Message Object (arbitration and control bits set up during configuration) exists for the message, only the data bytes are updated and then TXRQST bit with NEWDAT bit are set to start the transmission. If several transmit messages are assigned to the same Message Object (when the number of Message Objects is not sufficient), the whole Message Object has to be configured before the transmission of this message is requested.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

The transmission of any number of Message Objects may be requested at the same time, and they are transmitted subsequently according to their internal priority. Messages may be updated or set to not valid any time, even when their requested transmission is still pending. The old data will be discarded when a message is updated before its pending transmission has started.

Depending on the configuration of the Message Object, the transmission of a message may be requested autonomously by the reception of a remote frame with a matching identifier.

#### 16.7.2.3 Disabled Automatic Retransmission (DAR)

According to the *CAN Specification (ISO11898, 6.3.3 Recovery Management)*, the CAN controller provides means for automatic retransmission of frames that have lost arbitration or that have been disturbed by errors during transmission. The frame transmission service will not be confirmed to the user before the transmission is successfully completed. By default, the automatic retransmission on lost arbitration or error is enabled. It can be disabled to enable the CAN controller to work within a Time Triggered CAN (TTCAN, see ISO11898-1) environment.

The Disable Automatic Retransmission mode is enabled by programming bit DAR in the CAN Control Register to one. In this operation mode the programmer has to consider the different behavior of bits TXRQST and NEWDAT in the Control Registers of the Message Buffers:

- When a transmission starts, bit TXRQST of the respective Message Buffer is reset while bit NEWDAT remains set.
- When the transmission completed successfully, bit NEWDAT is reset.
- When a transmission failed (lost arbitration or error), bit NEWDAT remains set. To restart the transmission, the CPU has to set TXRQST back to one.

#### 16.7.2.4 Test modes

The Test mode is entered by setting bit TEST in the CAN Control Register to one. In Test mode the bits TX[1:0], TX0, LBACK, SILENT, and BASIC in the Test Register are writable. Bit RX monitors the state of pin CAN_RXD and therefore is only readable. All Test register functions are disabled when bit TEST is reset to zero.

##### 16.7.2.4.1 Silent mode

The CAN core can be set in Silent mode by programming the Test register bit SILENT to one.

In Silent Mode, the CAN controller is able to receive valid data frames and valid remote frames, but it sends only recessive bits on the CAN bus, and it cannot start a transmission. If the CAN Core is required to send a dominant bit (ACK bit, overload flag, active error flag), the bit is rerouted internally so that the CAN Core monitors this dominant bit, although the CAN bus may remain in recessive state. The Silent mode can be used to analyze the traffic on a CAN bus without affecting it by the transmission of dominant bits (Acknowledge Bits, Error Frames).


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

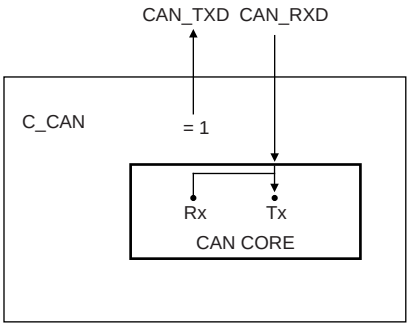


**Fig 62. CAN core in Silent mode**

#### 16.7.2.4.2 Loop-back mode

The CAN Core can be set in Loop-back mode by programming the Test Register bit LBACK to one. In Loop-back Mode, the CAN Core treats its own transmitted messages as received messages and stores them (if they pass acceptance filtering) into a Receive Buffer.

This mode is provided for self-test functions. To be independent from external stimulation, the CAN Core ignores acknowledge errors (recessive bit sampled in the acknowledge slot of a data/remote frame) in Loop-back mode. In this mode the CAN core performs an internal feedback from its CAN_TXD output to its CAN_RXD input. The actual value of the CAN_RXD input pin is disregarded by the CAN Core. The transmitted messages can be monitored at the CAN_TXD pin.

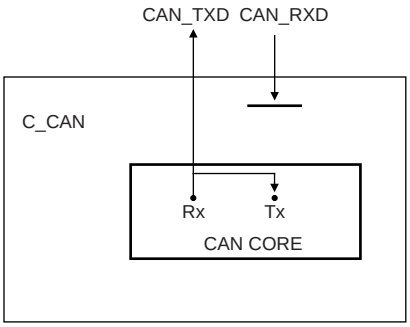


**Fig 63. CAN core in Loop-back mode**

#### 16.7.2.4.3 Loop-back mode combined with Silent mode

It is also possible to combine Loop-back mode and Silent mode by programming bits LBACK and SILENT to one at the same time. This mode can be used for a “Hot Selftest”, meaning the C_CAN can be tested without affecting a running CAN system connected to the pins CAN_TXD and CAN_RXD. In this mode the CAN_RXD pin is disconnected from the CAN Core and the CAN_TXD pin is held recessive.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

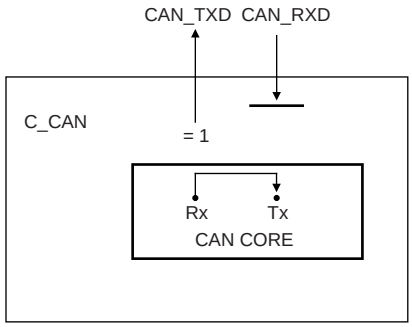


**Fig 64. CAN core in Loop-back mode combined with Silent mode**

#### 16.7.2.4.4 Basic mode

The CAN Core can be set in Basic mode by programming the Test Register bit BASIC to one. In this mode the CAN controller runs without the Message RAM.

The IF1 Registers are used as Transmit Buffer. The transmission of the contents of the IF1 Registers is requested by writing the BUSY bit of the IF1 Command Request Register to ‘1’. The IF1 Registers are locked while the BUSY bit is set. The BUSY bit indicates that the transmission is pending.

As soon the CAN bus is idle, the IF1 Registers are loaded into the shift register of the CAN Core and the transmission is started. When the transmission has completed, the BUSY bit is reset and the locked IF1 Registers are released.

A pending transmission can be aborted at any time by resetting the BUSY bit in the IF1 Command Request Register while the IF1 Registers are locked. If the CPU has reset the BUSY bit, a possible retransmission in case of lost arbitration or in case of an error is disabled.

The IF2 Registers are used as Receive Buffer. After the reception of a message the contents of the shift register is stored into the IF2 Registers, without any acceptance filtering.

Additionally, the actual contents of the shift register can be monitored during the message transfer. Each time a read Message Object is initiated by writing the BUSY bit of the IF2 Command Request Register to ‘1’, the contents of the shift register is stored into the IF2 Registers.

In Basic mode the evaluation of all Message Object related control and status bits and of the control bits of the IFx Command Mask Registers is turned off. The message number of the Command request registers is not evaluated. The NEWDAT and MSGLST bits of the IF2 Message Control Register retain their function, DLC3-0 will show the received DLC, the other control bits will be read as ‘0’.

In Basic mode the ready output CAN_WAIT_B is disabled (always ‘1’)

#### 16.7.2.4.5 Software control of pin CAN_TXD

Four output functions are available for the CAN transmit pin CAN_TXD:

1. serial data output (default).


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

2. drives CAN sample point signal to monitor the CAN controller's timing.
3. drives recessive constant value.
4. drives dominant constant value.

The last two functions, combined with the readable CAN receive pin CAN_RXD, can be used to check the CAN bus' physical layer.

The output mode of pin CAN_TXD is selected by programming the Test Register bits TX1 and TX0 as described Section 16.6.1.6.

**Remark:** The three test functions for pin CAN_TXD interfere with all CAN protocol functions. The CAN_TXD pin must be left in its default function when CAN message transfer or any of the test modes Loo-back mode, Silent mode, or Basic mode are selected.

### 16.7.3 CAN message handler

The Message handler controls the data transfer between the Rx/Tx Shift Register of the CAN Core, the Message RAM and the IFx Registers, see Figure 65.

The message handler controls the following functions:

- Data Transfer between IFx Registers and the Message RAM
- Data Transfer from Shift Register to the Message RAM
- Data Transfer from Message RAM to Shift Register
- Data Transfer from Shift Register to the Acceptance Filtering unit
- Scanning of Message RAM for a matching Message Object
- Handling of TXRQST flags
- Handling of interrupts


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

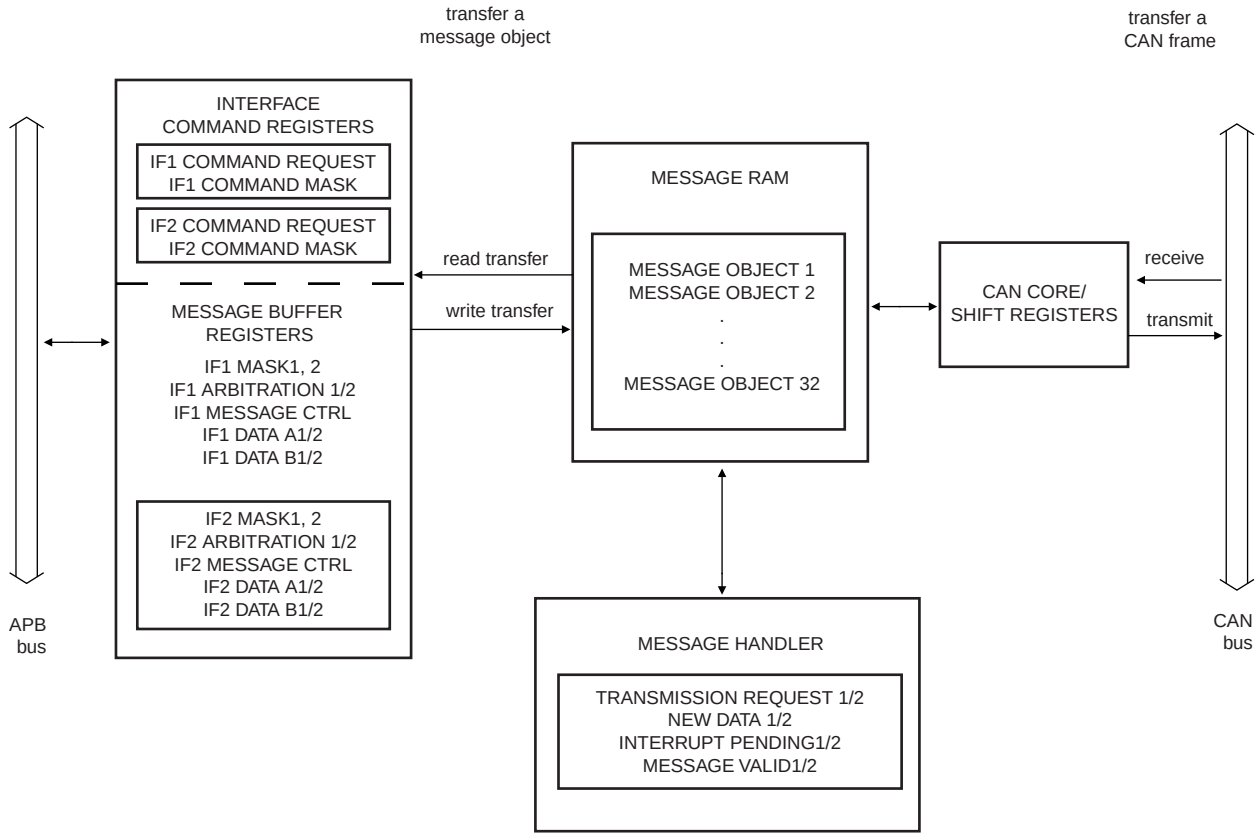


**Fig 65. Block diagram of a message object transfer**

### 16.7.3.1 Management of message objects

The configuration of the Message Objects in the Message RAM will (with the exception of the bits MSGVAL, NEWDAT, INTPND, and TXRQST) is not be affected by resetting the chip. All the Message Objects must be initialized by the CPU or they must be set to not valid (MSGVAL = '0').The bit timing must be configured before the CPU clears the INIT bit in the CAN Control Register.

The configuration of a Message Object is done by programming Mask, Arbitration, Control and Data field of one of the two interface register sets to the desired values. By writing to the corresponding IFx Command Request Register, the IFx Message Buffer Registers are loaded into the addressed Message Object in the Message RAM.

When the INIT bit in the CAN Control Register is cleared, the CAN Protocol Controller state machine of the CAN core and the Message Handler State Machine control the CAN controller's internal data flow. Received messages that pass the acceptance filtering are stored into the Message RAM, and messages with pending transmission request are loaded into the CAN core's shift register and are transmitted via the CAN bus.

The CPU reads received messages and updates messages to be transmitted via the IFx Interface Registers. Depending on the configuration, the CPU is interrupted on certain CAN message and CAN error events.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

#### 16.7.3.2 Data Transfer between IFx Registers and the Message RAM

When the CPU initiates a data transfer between the IFx Registers and Message RAM, the Message Handler sets the BUSY bit in the respective Command Register to ‘1’. After the transfer has completed, the BUSY bit is set back to ‘0’.

The Command Mask Register specifies whether a complete Message Object or only parts of it will be transferred. Due to the structure of the Message RAM it is not possible to write single bits/bytes of one Message Object. Software must always write a complete Message Object into the Message RAM. Therefore the data transfer from the IFx Registers to the Message RAM requires a read-modify-write cycle:

1. Read the parts of the message object that are not to be changed from the message RAM using the command mask register.
   - After the partial read of a Message Object, the Message Buffer Registers that are not selected in the Command Mask Register will be left unchanged.
2. Write the complete contents of the message buffer registers into the message object.
   - After the partial write of a Message Object, the Message Buffer Registers that are not selected in the Command Mask Register will set to the actual contents of the selected Message Object.

#### 16.7.3.3 Transmission of messages between the shift registers in the CAN core and the Message buffer

If the shift register of the CAN Core cell is ready for loading and if there is no data transfer between the IFx Registers and Message RAM, the MSGVAL bits in the Message Valid Register TXRQST bits in the Transmission Request Register are evaluated. The valid Message Object with the highest priority pending transmission request is loaded into the shift register by the Message Handler and the transmission is started. The Message Object’s NEWDAT bit is reset.

After a successful transmission and if no new data was written to the Message Object (NEWDAT = ‘0’) since the start of the transmission, the TXRQST bit will be reset. If TXIE is set, INTPND will be set after a successful transmission. If the CAN controller has lost the arbitration or if an error occurred during the transmission, the message will be retransmitted as soon as the CAN bus is free again. If meanwhile the transmission of a message with higher priority has been requested, the messages will be transmitted in the order of their priority.

#### 16.7.3.4 Acceptance filtering of received messages

When the arbitration and control field (Identifier + IDE + RTR + DLC) of an incoming message is completely shifted into the Rx/Tx Shift Register of the CAN Core, the Message Handler state machine starts the scanning of the Message RAM for a matching valid Message Object.

To scan the Message RAM for a matching Message Object, the Acceptance Filtering unit is loaded with the arbitration bits from the CAN Core shift register. Then the arbitration and mask fields (including MSGVAL, UMASK, NEWDAT, and EOB) of Message Object 1 are loaded into the Acceptance Filtering unit and compared with the arbitration field from the shift register. This is repeated with each following Message Object until a matching Message Object is found or until the end of the Message RAM is reached.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

If a match occurs, the scanning is stopped and the Message Handler state machine proceeds depending on the type of frame (Data Frame or Remote Frame) received.

#### 16.7.3.4.1 Reception of a data frame

The Message Handler state machine stores the message from the CAN Core shift register into the respective Message Object in the Message RAM. The data bytes, all arbitration bits, and the Data Length Code are stored into the corresponding Message Object. This is implemented to keep the data bytes connected with the identifier even if arbitration mask registers are used.

The NEWDAT bit is set to indicate that new data (not yet seen by the CPU) has been received. The CPU/software should reset NEWDAT when it reads the Message Object. If at the time of the reception the NEWDAT bit was already set, MSGLST is set to indicate that the previous data (supposedly not seen by the CPU) is lost. If the RxIE bit is set, the INTPND bit is also set, causing the Interrupt Register to point to this Message Object.

The TXRQST bit of this Message Object is reset to prevent the transmission of a Remote Frame, while the requested Data Frame has just been received.

#### 16.7.3.4.2 Reception of a remote frame

When a Remote Frame is received, three different configurations of the matching Message Object have to be considered:

1. DIR = ‘1’ (direction = transmit), RMTEN = ‘1’, UMASK = ‘1’ or’0’

   On the reception of a matching Remote Frame, the TXRQST bit of this Message Object is set. The rest of the Message Object remains unchanged.

2. DIR = ‘1’ (direction = transmit), RMTEN = ‘0’, UMASK = ’0’

   On the reception of a matching Remote Frame, the TXRQST bit of this Message Object remains unchanged; the Remote Frame is ignored.

3. DIR = ‘1’ (direction = transmit), RMTEN = ‘0’, UMASK = ’1’

   On the reception of a matching Remote Frame, the TXRQST bit of this Message Object is reset. The arbitration and control field (Identifier + IDE + RTR + DLC) from the shift register is stored into the Message Object in the Message RAM, and the NEWDAT bit of this Message Object is set. The data field of the Message Object remains unchanged; the Remote Frame is treated similar to a received Data Frame.

### 16.7.3.5 Receive/transmit priority

The receive/transmit priority for the Message Objects is attached to the message number. Message Object 1 has the highest priority, while Message Object 32 has the lowest priority. If more than one transmission request is pending, they are serviced due to the priority of the corresponding Message Object.

### 16.7.3.6 Configuration of a transmit object

Table 276 shows how a transmit object should be initialized by software (see also Table 254):


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 276. Initialization of a transmit object**

| MSGVAL | Arbitration bits | Data bits | Mask bits | EOB | DIR | NEWDAT |
|---|---|---|---|---|---|---|
| 1 | application dependent | application dependent | application dependent | 1 | 1 | 0 |
| **MSGLST** | **RXIE** | **TXIE** | **INTPND** | **RMTEN** | **TXRQST** | |
| 0 | 0 | application dependent | 0 | application dependent | 0 | |

The Arbitration Registers (ID28:0 and XTD bit) are given by the application. They define the identifier and the type of the outgoing message. If an 11-bit Identifier (“Standard Frame”) is used, it is programmed to ID28. In this case ID18, ID17 to ID0 can be disregarded.

If the TXIE bit is set, the INTPND bit will be set after a successful transmission of the Message Object.

If the RMTEN bit is set, a matching received Remote Frame will cause the TXRQST bit to be set, and the Remote Frame will autonomously be answered by a Data Frame.

The Data Registers (DLC3:0, Data0:7) are given by the application. TXRQST and RMTEN may not be set before the data is valid.

The Mask Registers (Msk28-0, UMASK, MXTD, and MDIR bits) may be used (UMASK=’1’) to allow groups of Remote Frames with similar identifiers to set the TXRQST bit. For details see Section 16.7.3.4.2. The DIR bit should not be masked.

### 16.7.3.7 Updating a transmit object

The CPU may update the data bytes of a Transmit Object any time via the IFx Interface registers. Neither MSGVAL nor TXRQST have to be reset before the update.

Even if only a part of the data bytes are to be updated, all four bytes of the corresponding IFx Data A Register or IFx Data B Register have to be valid before the content of that register is transferred to the Message Object. Either the CPU has to write all four bytes into the IFx Data Register or the Message Object is transferred to the IFx Data Register before the CPU writes the new data bytes.

When only the (eight) data bytes are updated, first 0x0087 is written to the Command Mask Register. Then the number of the Message Object is written to the Command Request Register, concurrently updating the data bytes and setting TXRQST.

To prevent the reset of TXRQST at the end of a transmission that may already be in progress while the data is updated, NEWDAT has to be set together with TXRQST. For details see Section 16.7.3.3.

When NEWDAT is set together with TXRQST, NEWDAT will be reset as soon as the new transmission has started.

### 16.7.3.8 Configuration of a receive object

Table 277 shows how a receive object should be initialized by software (see also Table 254)


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 277. Initialization of a receive object**

| MSGVAL | Arbitration bits | Data bits | Mask bits | EOB | DIR | NEWDAT |
|---|---|---|---|---|---|---|
| 1 | application dependent | application dependent | application dependent | 1 | 0 | 0 |
| **MSGLST** | **RXIE** | **TXIE** | **INTPND** | **RMTEN** | **TXRQST** | |
| 0 | application dependent | 0 | 0 | 0 | 0 | |

The Arbitration Registers (ID28-0 and XTD bit) are given by the application. They define the identifier and type of accepted received messages. If an 11-bit Identifier (“Standard Frame”) is used, it is programmed to ID[28:18]. ID17 to ID0 can then be disregarded. When a Data Frame with an 11-bit Identifier is received, ID17 to ID0 will be set to ‘0’.

If the RxIE bit is set, the INTPND bit will be set when a received Data Frame is accepted and stored in the Message Object.

The Data Length Code (DLC[3:0] is given by the application. When the Message Handler stores a Data Frame in the Message Object, it will store the received Data Length Code and eight data bytes. If the Data Length Code is less than 8, the remaining bytes of the Message Object will be overwritten by non specified values.

The Mask Registers (Msk[28:0], UMASK, MXTD, and MDIR bits) may be used (UMASK=’1’) to allow groups of Data Frames with similar identifiers to be accepted. For details see section Section 16.7.3.4.1. The DIR bit should not be masked in typical applications.

### 16.7.3.9 Handling of received messages

The CPU may read a received message any time via the IFx Interface registers. The data consistency is guaranteed by the Message Handler state machine.

To transfer the entire received message from message RAM into the message buffer, software must write first 0x007F to the Command Mask Register and then the number of the Message Object to the Command Request Register. Additionally, the bits NEWDAT and INTPND are cleared in the Message RAM (not in the Message Buffer).

If the Message Object uses masks for acceptance filtering, the arbitration bits show which of the matching messages has been received.

The actual value of NEWDAT shows whether a new message has been received since last time this Message Object was read. The actual value of MSGLST shows whether more than one message has been received since last time this Message Object was read. MSGLST will not be automatically reset.

Using a Remote Frame, the CPU may request another CAN node to provide new data for a receive object. Setting the TXRQST bit of a receive object will cause the transmission of a Remote Frame with the receive object’s identifier. This Remote Frame triggers the other CAN node to start the transmission of the matching Data Frame. If the matching Data Frame is received before the Remote Frame could be transmitted, the TXRQST bit is automatically reset.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

#### 16.7.3.10 Configuration of a FIFO buffer

With the exception of the EOB bit, the configuration of Receive Objects belonging to a FIFO Buffer is the same as the configuration of a (single) Receive Object, see section Section 16.7.3.8.

To concatenate two or more Message Objects into a FIFO Buffer, the identifiers and masks (if used) of these Message Objects have to be programmed to matching values. Due to the implicit priority of the Message Objects, the Message Object with the lowest number will be the first Message Object of the FIFO Buffer. The EOB bit of all Message Objects of a FIFO Buffer except the last have to be programmed to zero. The EOB bits of the last Message Object of a FIFO Buffer is set to one, configuring it as the End of the Block.

##### 16.7.3.10.1 Reception of messages with FIFO buffers

Received messages with identifiers matching to a FIFO Buffer are stored into a Message Object of this FIFO Buffer starting with the Message Object with the lowest message number.

When a message is stored into a Message Object of a FIFO Buffer the NEWDAT bit of this Message Object is set. By setting NEWDAT while EOB is zero the Message Object is locked for further write accesses by the Message Handler until the CPU has written the NEWDAT bit back to zero.

Messages are stored into a FIFO Buffer until the last Message Object of this FIFO Buffer is reached. If none of the preceding Message Objects is released by writing NEWDAT to zero, all further messages for this FIFO Buffer will be written into the last Message Object of the FIFO Buffer and therefore overwrite previous messages.

##### 16.7.3.10.2 Reading from a FIFO buffer

When the CPU transfers the contents of Message Object to the IFx Message Buffer registers by writing its number to the IFx Command Request Register, bits NEWDAT and INTPND in the corresponding Command Mask Register should be reset to zero (TXRQST/NEWDAT = ‘1’ and ClrINTPND = ‘1’). The values of these bits in the Message Control Register always reflect the status before resetting the bits.

To assure the correct function of a FIFO Buffer, the CPU should read out the Message Objects starting at the FIFO Object with the lowest message number.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

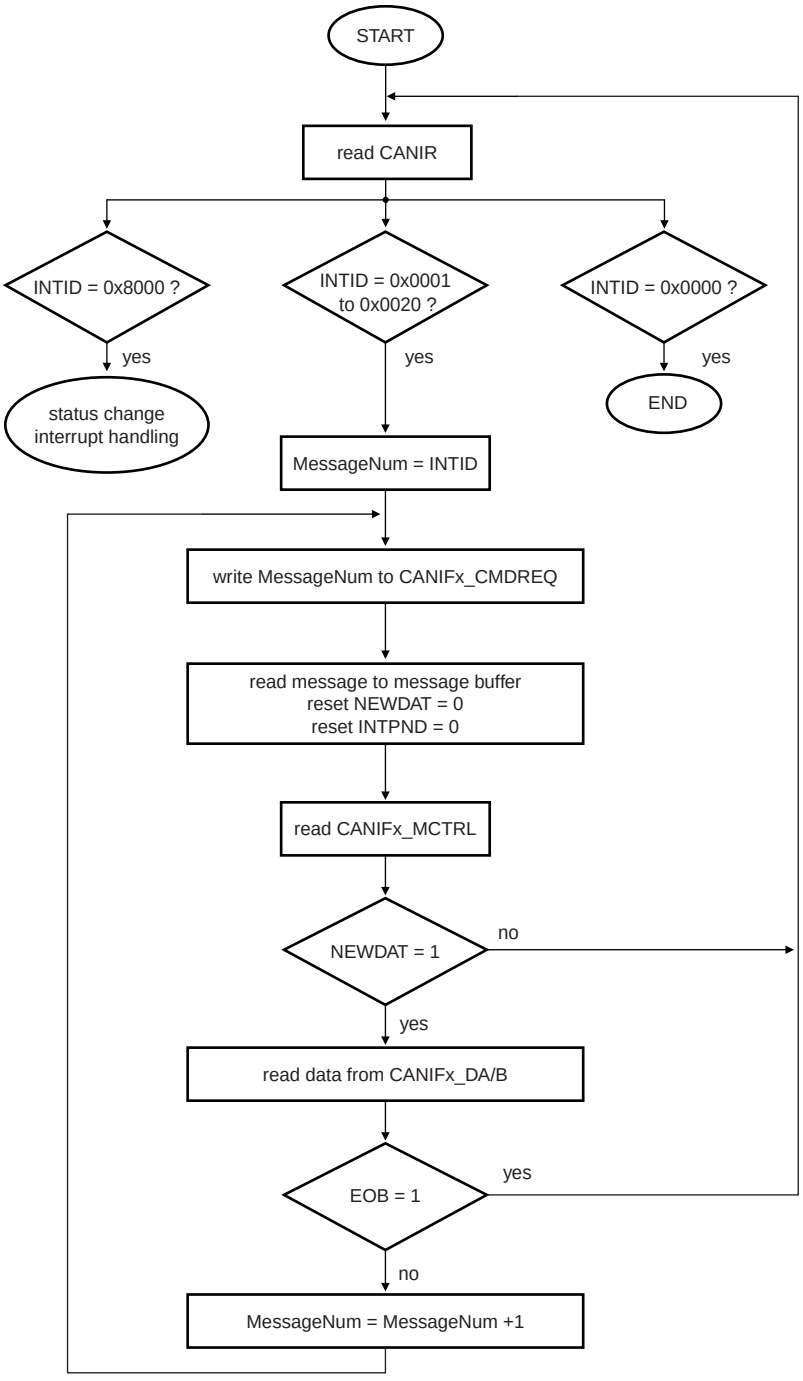


**Fig 66. Reading a message from the FIFO buffer to the message buffer**

### 16.7.4 Interrupt handling

If several interrupts are pending, the CAN Interrupt Register will point to the pending interrupt with the highest priority, disregarding their chronological order. An interrupt remains pending until the CPU has cleared it.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

The Status Interrupt has the highest priority. Among the message interrupts, the Message Object's interrupt priority decreases with increasing message number.

A message interrupt is cleared by clearing the Message Object's INTPND bit. The Status Interrupt is cleared by reading the Status Register.

The interrupt identifier INTID in the Interrupt Register indicates the cause of the interrupt. When no interrupt is pending, the register will hold the value zero. If the value of the Interrupt Register is different from zero, then there is an interrupt pending and, if IE is set, the interrupt line to the CPU, IRQ_B, is active. The interrupt line remains active until the Interrupt Register is back to value zero (the cause of the interrupt is reset) or until IE is reset.

The value 0x8000 indicates that an interrupt is pending because the CAN Core has updated (not necessarily changed) the Status Register (Error Interrupt or Status Interrupt). This interrupt has the highest priority. The CPU can update (reset) the status bits RXOK, TXOK and LEC, but a write access of the CPU to the Status Register can never generate or reset an interrupt.

All other values indicate that the source of the interrupt is one of the Message Objects where INTID points to the pending message interrupt with the highest interrupt priority.

The CPU controls whether a change of the Status Register may cause an interrupt (bits EIE and SIE in the CAN Control Register) and whether the interrupt line becomes active when the Interrupt Register is different from zero (bit IE in the CAN Control Register). The Interrupt Register will be updated even when IE is reset.

The CPU has two possibilities to follow the source of a message interrupt:

- Software can follow the INTID in the Interrupt Register.
- Software can poll the interrupt pending register, see Section 16.6.3.5.

An interrupt service routine reading the message that is the source of the interrupt may read the message and reset the Message Object's INTPND at the same time (bit ClrINTPND in the Command Mask Register). When INTPND is cleared, the Interrupt Register will point to the next Message Object with a pending interrupt.

### 16.7.5 Bit timing

Even if minor errors in the configuration of the CAN bit timing do not result in immediate failure, the performance of a CAN network can be reduced significantly. In many cases, the CAN bit synchronization will amend a faulty configuration of the CAN bit timing to such a degree that only occasionally an error frame is generated. In the case of arbitration however, when two or more CAN nodes simultaneously try to transmit a frame, a misplaced sample point may cause one of the transmitters to become error passive.

The analysis of such sporadic errors requires a detailed knowledge of the CAN bit synchronization inside a CAN node and of the CAN nodes' interaction on the CAN bus.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

#### 16.7.5.1 Bit time and bit rate

CAN supports bit rates in the range of lower than 1 kBit/s up to 1000 kBit/s. Each member of the CAN network has its own clock generator, usually a quartz oscillator. The timing parameter of the bit time (i.e. the reciprocal of the bit rate) can be configured individually for each CAN node, creating a common bit rate even though the CAN nodes' oscillator periods ($f_{osc}$) may be different.

The frequencies of these oscillators are not absolutely stable, as small variations are caused by changes in temperature or voltage and by deteriorating components. As long as the variations remain inside a specific oscillator tolerance range (df), the CAN nodes are able to compensate for the different bit rates by re-synchronizing to the bit stream.

According to the CAN specification, the bit time is divided into four segments (Figure 67). The Synchronization Segment, the Propagation Time Segment, the Phase Buffer Segment 1, and the Phase Buffer Segment 2. Each segment consists of a specific, programmable number of time quanta (see Table 278). The length of the time quantum ($t_q$), which is the basic time unit of the bit time, is defined by the CAN controller's system clock f and the Baud Rate Prescaler (BRP): $t_q$ = BRP / $f_{sys}$. The C_CAN's system clock $f_{sys}$ is the frequency of the LPC11Cx system clock (see Section 16.2).

The Synchronization Segment Sync_Seg is the part of the bit time where edges of the CAN bus level are expected to occur; the distance between an edge that occurs outside of Sync_Seg and the Sync_Seg is called the phase error of that edge. The Propagation Time Segment Prop_Seg is intended to compensate for the physical delay times within the CAN network. The Phase Buffer Segments Phase_Seg1 and Phase_Seg2 surround the Sample Point. The (Re-)Synchronization Jump Width (SJW) defines how far a re-synchronization may move the Sample Point inside the limits defined by the Phase Buffer Segments to compensate for edge phase errors.

Table 278 describes the minimum programmable ranges required by the CAN protocol. Bit time parameters are programmed through the CANBT register, Table 249. For details on bit timing and examples, see the *C_CAN user's manual, revision 1.2*.

**Table 278. Parameters of the C_CAN bit time**

| Parameter | Range | Function |
|---|---|---|
| BRP | (1...32) | Defines the length of the time quantum $t_q$. |
| SYNC_SEG | $1t_q$ | Synchronization segment. Fixed length. Synchronization of bus input to system clock. |
| PROP_SEG | (1...8) × $t_q$ | Propagation time segment. Compensates for physical delay times. This parameter is determined by the system delay times in the C_CAN network. |
| PHASE_SEG1 | (1...8) × $t_q$ | Phase buffer segment 1. May be lengthened temporarily by synchronization. |
| PHASE_SEG2 (TSEG2) | (1...8) × $t_q$ | Phase buffer segment 2. May be shortened temporarily by synchronization. |
| SJW | (1...4) × $t_q$ | (Re-) synchronization jump width. May not be longer than either phase buffer segment. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

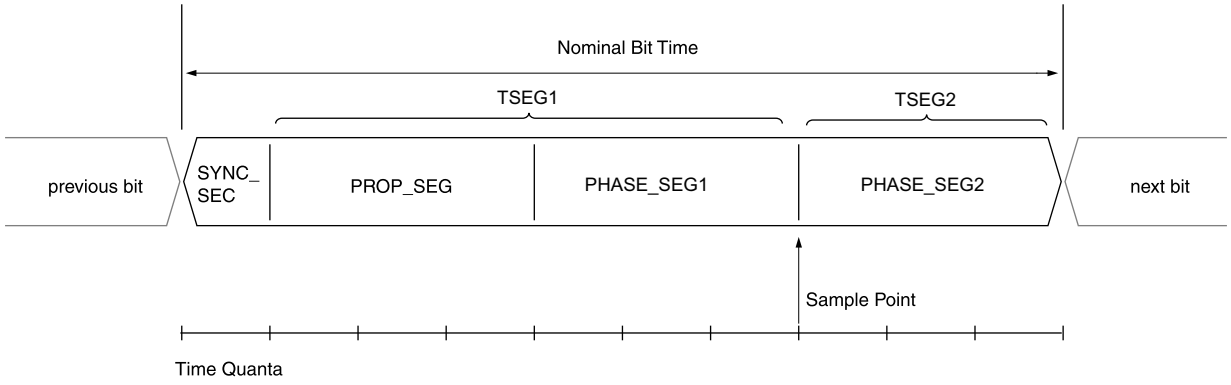


**Fig 67. Bit timing**

### 16.7.5.2 Calculating the C_CAN bit rate

The C_CAN clock is derived from the system clock. The C_CAN clock can be divided by the C_CAN clock divider (Table 275): CAN_CLK = system clock/ (DIVVAL +1).

Using Figure 67 and Table 278, the bit rate and sample point can be expressed as follows using $t_q$ = BRP / CAN_CLK:

Bit rate = 1/($t_q$ x total number of quantas) = 1 / ($t_q$ x (1 + PROP_SEG+TSEG1+TSEG2)) = CAN_CLK / (BRP x (1 + PROP_SEG+TSEG1+TSEG2))

Sample point = (1 + PROP_SEG+TSEG1) / (1 + PROP_SEG+TSEG1+TSEG2) x 100

The CAN BT register (see Table 249) stores the bit timing information for parameters BRP (bits 5:0), PROP_SEG +TSEG1 (bits 11:8, named TSEG1), and TSEG2. Note that the register content are +1 encoded.

Using the contents of the BT register for BRP, TSEG1, and TSEG2, the bit rate can be calculated as follows:

Bit rate = CAN_CLK/((BRP + 1) x (TSEG1+2+TSEG2+1))

Sample point = (TSEG1+2) / (TSEG1+2+TSEG2+1) x 100


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 17.1 How to read this chapter

The C_CAN block is available in LPC11Cxx parts only (LPC11C00 series).

## 17.2 Features

The on-chip drivers are stored in boot ROM and offer CAN and CANopen initialization and communication features to user applications via a defined API. The following functions are included in the API:

- CAN set-up and initialization
- CAN send and receive messages
- CAN status
- CANopen Object Dictionary
- CANopen SDO expedited communication
- CANopen SDO segmented communication primitives
- CANopen SDO fall-back handler

## 17.3 General description

In addition to the CAN ISP, the boot ROM provides a CAN and CANopen API to simplify CAN application development. It covers initialization, configuration, basic CAN send/receive as well as a CANopen SDO interface. Callback functions are available to process receive events.

### 17.3.1 Differences to fully-compliant CANopen

While the bootloader uses the SDO communication protocol and the Object Dictionary data organization method, it is not a fully CiA 301 standard compliant CANopen node. In particular, the following features are not available or different to the standard:

- No Network Management (NMT) message processing.
- No Heartbeat Message, no entry 0x1017.
- Uses proprietary SDO Abort Codes to indicate device errors
- “Empty” SDO responses during SDO segmented download/write to the node are shortened to one data byte, rather than full eight data bytes as the standard describes. This to speed up the communication.
- Entry [1018h,1] Vendor ID reads 0x0000 0000 rather than an official CiA-assigned unique Vendor ID. This in particular because the chip will be incorporated into designs of customers who will become the “vendor” of the whole device. The host will have to use a different method to identify the CAN ISP devices.
- The maximum OD entries allowed is 255.


All information provided in this document is subject to legal disclaimers.
© NXP B.V. 2016. All rights reserved.

## 17.4 API description

### 17.4.1 Calling the C_CAN API

A fixed location in ROM contains a pointer to the ROM driver table i.e. 0x1FFF 1FF8. This location is the same for all LPC11Cxx parts. The ROM driver table contains pointer to the CAN API table. Pointers to the various CAN API functions are stored in this table. CAN API functions can be called by using a C structure.

Figure 68 illustrates the pointer mechanism used to access the on-chip CAN API. On-chip RAM from address 0x1000 0050 to 0x1000 00B8 is used by the CAN API. This address range should not be used by the application. For applications using the on-chip CAN API, the linker control file should be modified appropriately to prevent usage of this area for application's variable storage.

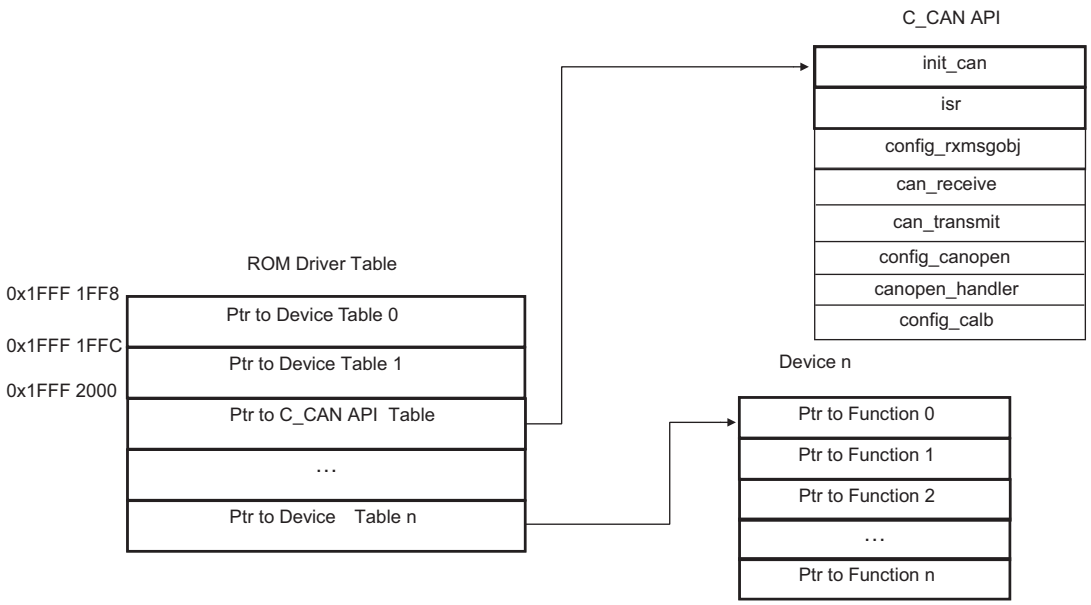


**Fig 68. CAN API pointer structure**

In C, the structure with the function list that is referenced to call the API functions looks as follows:

```
typedef struct _CAND {
  void   (*init_can)       (uint32_t * can_cfg, uint8_t isr_ena);
  void   (*isr)            (void);
  void   (*config_rxmsgobj) (CAN_MSG_OBJ * msg_obj);
  uint8_t (*can_receive)    (CAN_MSG_OBJ * msg_obj);
  void   (*can_transmit)   (CAN_MSG_OBJ * msg_obj);
  void   (*config_canopen) (CAN_CANOPENCFG * canopen_cfg);
  void   (*canopen_handler) (void);
  void   (*config_calb)    (CAN_CALLBACKS * callback_cfg);
} CAND;
```


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 17.4.2 CAN initialization

The CAN controller clock divider, the CAN bit rate is set, and the CAN controller is initialized based on an array of register values that are passed on via a pointer.

```
void init_can (uint32_t * can_cfg, uint8_t isr_ena)
```

The first 32-bit value in the array is applied to the CANCLKDIV register, the second value is applied to the CAN_BTR register.

The second parameter enables interrupts on the CAN controller level. Set to FALSE for polled communication.

Example call:

```
ROM **rom = (ROM **)(0x1fff1ff8);

uint32_t CanApiClkInitTable[2] = {
 0x00000000UL, // CANCLKDIV
 0x00004DC5UL // CAN_BTR
};

(*rom)->pCAND->init_can(&CanApiCanInitTable[0], 1);
```

### 17.4.3 CAN interrupt handler

When the user application is active, the interrupt handlers are mapped in the user flash space. The user application must provide an interrupt handler for the CAN interrupt. In order to process CAN events and call the callback functions the application must call the CAN API interrupt handler directly from the interrupt handler routine. The CAN API interrupt handler takes appropriate action according to the data received and the status detected on the CAN bus.

```
void isr (void)
```

The CAN interrupt handler does not process CANopen messages.

Example call:

```
(*rom)->pCAND->isr();
```

For polled communication, the interrupt handler may be called manually as often as required. The callback functions for receive, transmit, and error will be executed as described and on the same level the interrupt handler was called from.

### 17.4.4 CAN Rx message object configuration

The CAN API supports and uses the full CAN model with 32 message objects. Any of the message objects can be used for receive or transmit of either 11-bit or 29-bit CAN messages. CAN messages that have their RTR-bit set (remote transmit) are also supported. For receive objects, a mask pattern for the message identifier allows to receive ranges of messages, up to receiving all CAN messages on the bus in a single message object. See also Section 16.7.3.4.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Transmit message objects are automatically configured when used.

```
// control bits for CAN_MSG_OBJ.mode_id
#define CAN_MSGOBJ_STD  0x00000000UL   // CAN 2.0a 11-bit ID
#define CAN_MSGOBJ_EXT  0x20000000UL   // CAN 2.0b 29-bit ID
#define CAN_MSGOBJ_DAT  0x00000000UL   // data frame
#define CAN_MSGOBJ_RTR  0x40000000UL   // rtr frame

typedef struct _CAN_MSG_OBJ {
 uint32_t  mode_id;
 uint32_t  mask;
 uint8_t   data[8];
 uint8_t   dlc;
 uint8_t   msgobj;
}  CAN_MSG_OBJ;

void config_rxmsgobj (CAN_MSG_OBJ * msg_obj)
```

Example call:

```
// Configure message object 1 to receive all 11-bit messages 0x000-0x00F
msg_obj.msgobj  = 1;
msg_obj.mode_id = 0x000;
msg_obj.mask    = 0x7F0;
(*rom)->pCAND-> config_rxmsgobj(&msg_obj);
```

### 17.4.5 CAN receive

The CAN receive function allows reading messages that have been received by an Rx message object. A pointer to a message object structure is passed to the receive function. Before calling, the number of the message object that is to be read has to be set in the structure.

```
void config_rxmsgobj (CAN_MSG_OBJ * msg_obj)
```

Example call:

```
// Read out received message
msg_obj.msgobj = 5;
(*rom)->pCAND->can_receive(&msg_obj);
```

### 17.4.6 CAN transmit

The CAN transmit function allows setting up a message object and triggering the transmission of a CAN message on the bus. 11-bit standard and 29-bit extended messages are supported as well as both standard data and remote-transmit (RTR) messages.

```
void config_txmsgobj (CAN_MSG_OBJ * msg_obj)
```

Example call:

```
msg_obj.msgobj = 3;
msg_obj.mode_id = 0x123UL;
```


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

```
msg_obj.mask = 0x0UL;
msg_obj.dlc = 1;
msg_obj.data[0] = 0x00;
(*rom)->pCAND->can_transmit(&msg_obj);
```

### 17.4.7 CANopen configuration

The CAN API supports an Object Dictionary interface and the SDO protocol. In order to activate it, the CANopen configuration function has to be called with a pointer to a structure with the CANopen Node ID (1...127), the message object numbers to use for receive and transmit SDOs, a flag to decide whether the CANopen SDO handling should happen in the interrupt serving function automatically or via the dedicated API function, and two pointers to Object Dictionary configuration tables and their sizes. One table contains all read-only, constant entries of four bytes or less. The second table contains all variable and writable entries as well as SDO segmented entries.

```
typedef struct _CAN_ODCONSTENTRY {
  uint16_t index;
  uint8_t  subindex;
  uint8_t  len;
  uint32_t val;
}  CAN_ODCONSTENTRY;

// upper-nibble values for CAN_ODENTRY.entrytype_len
#define OD_NONE 0x00 // Object Dictionary entry doesn't exist
#define OD_EXP_RO 0x10 // Object Dictionary entry expedited, read-only
#define OD_EXP_WO 0x20 // Object Dictionary entry expedited, write-only
#define OD_EXP_RW 0x30 // Object Dictionary entry expedited, read-write
#define OD_SEG_RO 0x40 // Object Dictionary entry segmented, read-only
#define OD_SEG_WO 0x50 // Object Dictionary entry segmented, write-only
#define OD_SEG_RW 0x60 // Object Dictionary entry segmented, read-write

typedef struct _CAN_ODENTRY {
  uint16_t index;
  uint8_t subindex;
  uint8_t entrytype_len;
  unint8_t isr_handled;
  uint8_t *val;
} CAN_ODENTRY;

typedef struct _CAN_CANOPENCFG {
  uint8_t node_id;
  uint8_t msgobj_rx;
  uint8_t msgobj_tx;
  uint8_t isr_handled;
  uint32_t od_const_num;
  CAN_ODCONSTENTRY *od_const_table;
  uint32_t od_num;
  CAN_ODENTRY *od_table;
} CAN_CANOPENCFG;
```


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Example OD tables and CANopen configuration structure:

```
// List of fixed, read-only Object Dictionary (OD) entries
// Expedited SDO only, length=1/2/4 bytes
const CAN_ODCONSTENTRY myConstOD [] = {
// index subindex length value
  { 0x1000, 0x00, 4, 0x54534554UL }, // "TEST"
  { 0x1018, 0x00, 1, 0x00000003UL },
  { 0x1018, 0x01, 4, 0x00000003UL },
  { 0x2000, 0x00, 1, (uint32_t)'M' },
};

// List of variable OD entries
// Expedited SDO with length=1/2/4 bytes
// Segmented SDO application-handled with length and value_pointer don't care
const CAN_ODENTRY myOD [] = {
// index subindex access_type|length value_pointer
  { 0x1001, 0x00, OD_EXP_RO | 1, (uint8_t *)&error_register },
  { 0x1018, 0x02, OD_EXP_RO | 4, (uint8_t *)&device_id },
  { 0x1018, 0x03, OD_EXP_RO | 4, (uint8_t *)&fw_ver },
  { 0x2001, 0x00, OD_EXP_RW | 2, (uint8_t *)&param },
  { 0x2200, 0x00, OD_SEG_RW, (uint8_t *)NULL },
};

// CANopen configuration structure
const CAN_CANOPENCFG myCANopen = {
  20, // node_id
  5, // msgobj_rx
  6, // msgobj_tx
  TRUE, // isr_handled
  sizeof(myConstOD)/sizeof(myConstOD[0]), // od_const_num
  (CAN_ODCONSTENTRY *)myConstOD, // od_const_table
  sizeof(myOD)/sizeof(myOD[0]), // od_num
  (CAN_ODENTRY *)myOD, // od_table
};
```

Example call:

```
// Initialize CANopen handler
(*rom)->pCAND->config_canopen((CAN_CANOPENCFG *)&myCANopen[0]);
```


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 17.4.8 CANopen handler

The CANopen handler processes the CANopen SDO messages to access the Object Dictionary and calls the CANopen callback functions when initialized. It can either be called by the interrupt handler automatically (isr_handled == TRUE in CANopen initialization structure) or manually via the CANopen handler API function. If called manually, the CANopen handler has to be called cyclically as often as needed for the application.

In a typical CANopen application, SDO handling has the lowest priority and is done in the foreground rather than through interrupt processing.

Example call:

```
// Call CANopen handler
(*rom)->pCAND->canopen_handler();
```

### 17.4.9 CAN/CANopen callback functions

The CAN API supports callback functions for various events. The callback functions are published via an API function.

```
typedef struct _CAN_CALLBACKS {
  void (*CAN_rx)(uint8_t msg_obj);
  void (*CAN_tx)(uint8_t msg_obj);
  void (*CAN_error)(uint32_t error_info);
  uint32_t (*CANOPEN_sdo_read)(uint16_t index, uint8_t subindex);
  uint32_t (*CANOPEN_sdo_write)(
    uint16_t index, uint8_t subindex, uint8_t *dat_ptr);
  uint32_t (*CANOPEN_sdo_seg_read)(
    uint16_t index, uint8_t subindex, uint8_t openclose,
    uint8_t *length, uint8_t *data, uint8_t *last);
  uint32_t (*CANOPEN_sdo_seg_write)(
    uint16_t index, uint8_t subindex, uint8_t openclose,
    uint8_t length, uint8_t *data, uint8_t *fast_resp);
  uint8_t (*CANOPEN_sdo_req)(
    uint8_t length_req, uint8_t *req_ptr, uint8_t *length_resp,
    uint8_t *resp_ptr);
} CAN_CALLBACKS;
```

Example callback table definition:

```
// List of callback function pointers
const CAN_CALLBACKS callbacks = {
  CAN_rx,
  CAN_tx,
  CAN_error,
  CANOPEN_sdo_exp_read,
  CANOPEN_sdo_exp_write,
  CANOPEN_sdo_seg_read,
  CANOPEN_sdo_seg_write,
  CANOPEN_sdo_req,
};
```


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

```
/* Callback function prototypes */
void CAN_rx(uint8_t msg_obj_num);
void CAN_tx(uint8_t msg_obj_num);
void CAN_error(uint32_t error_info);

/* CANopen Callback function prototypes */
uint32_t CANOPEN_sdo_exp_read (uint16_t index, uint8_t subindex);
uint32_t CANOPEN_sdo_exp_write(uint16_t index, uint8_t subindex, uint8_t *dat_ptr);
uint32_t CANOPEN_sdo_seg_read(uint16_t index, uint8_t subindex, uint8_t openclose, uint8_t *length, uint8_t *data,
        uint8_t *last);
uint32_t CANOPEN_sdo_seg_write(uint16_t index, uint8_t subindex, uint8_t openclose, uint8_t length, uint8_t *data,
        uint8_t *fast_resp);
uint8_t CANOPEN_sdo_req(uint8_t length_req, uint8_t *req_ptr, uint8_t *length_resp, uint8_t *resp_ptr);
```

Example call:

```
// Publish callbacks
(*rom)->pCAND->config_calb(&callbacks);
```

### 17.4.10 CAN message received callback

The CAN message received callback function is called on the interrupt level by the CAN interrupt handler.

Example call:

```
// CAN receive handler
void CAN_rx(uint8_t msgobj_num)
{
  // Read out received message
  msg_obj.msgobj = msgobj_num;
  (*rom)->pCAND->can_receive(&msg_obj);

  return;
}
```

**Remark:** The callback is not called if the user CANopen handler is activated for the message object that is used for SDO receive.

### 17.4.11 CAN message transmit callback

Called on the interrupt level by the CAN interrupt handler after a message has been successfully transmitted on the bus.

Example call:

```
// CAN transmit handler
void CAN_tx(uint8_t msgobj_num)
{
  // Reset flag used by application to wait for transmission finished
  if (wait_for_tx_finished == msgobj_num)
    wait_for_tx_finished = 0;
  return;
}
```


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Remark:** The callback is not called after the user CANopen handler has used a message object to transmit an SDO response.

### 17.4.12 CAN error callback

The CAN error callback function is called on the interrupt level by the CAN interrupt handler.

```
// error status bits
#define CAN_ERROR_NONE 0x00000000UL
#define CAN_ERROR_PASS 0x00000001UL
#define CAN_ERROR_WARN 0x00000002UL
#define CAN_ERROR_BOFF 0x00000004UL
#define CAN_ERROR_STUF 0x00000008UL
#define CAN_ERROR_FORM 0x00000010UL
#define CAN_ERROR_ACK 0x00000020UL
#define CAN_ERROR_BIT1 0x00000040UL
#define CAN_ERROR_BIT0 0x00000080UL
#define CAN_ERROR_CRC 0x00000100UL
```

Example call:

```
// CAN error handler
void CAN_error(uint32_t error_info)
  // If we went into bus off state, tell the application to
  // re-initialize the CAN controller
  if (error_info & CAN_ERROR_BOFF)
    reset_can = TRUE;

  return;
}
```

### 17.4.13 CANopen SDO expedited read callback

The CANopen SDO expedited read callback function is called by the CANopen handler. The callback function is called before the SDO response is generated, allowing to modify or update the data.

Example call:

```
// CANopen callback for expedited read accesses
uint32_t CANOPEN_sdo_exp_read(uint16_t index, uint8_t subindex)
{
  // Every read of [2001h,0] increases param by one
  if ((index == 0x2001) && (subindex==0))
    param++;

  return 0;
}
```

**Remark:** If the flag isr_handled was set to TRUE when initializing CANopen, this callback function will be called by the CAN API interrupt handler and therefore will execute on the interrupt level.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 17.4.14 CANopen SDO expedited write callback

The CANopen SDO expedited write callback function is called by the CANopen handler. The callback passes on the new data and is called before the new data has been written, allowing to reject or condition the data.

Example call:

```
// CANopen callback for expedited write accesses
uint32_t CANOPEN_sdo_exp_write(uint16_t index, uint8_t subindex, uint8_t
*dat_ptr)
{
 // Writing 0xAA55 to entry [2001h,0] unlocks writing the config table
 if ((index == 0x2001) && (subindex == 0))
 if (*(uint16_t *)dat_ptr == 0xAA55)
   {
    write_config_ena = TRUE;
        return(TRUE);
   }
   else
    return(FALSE); // Reject any other value
}
```

**Remark:** If the flag isr_handled was set TRUE when initializing CANopen, this callback function will be called by the CAN API interrupt handler and therefore will execute on the interrupt level.

### 17.4.15 CANopen SDO segmented read callback

The CANopen SDO segmented read callback function is called by the CANopen handler. The callback function allows the following actions:

- inform about the opening of the read channel.
- provide data segments of up to seven bytes to the reading host.
- close the channel when all data has been read.
- abort the transmission at any time.

```
// Values for CANOPEN_sdo_seg_read/write() callback 'openclose' parameter
#define CAN_SDOSEG_SEGMENT 0 // segment read/write
#define CAN_SDOSEG_OPEN 1 // channel is opened
#define CAN_SDOSEG_CLOSE 2 // channel is closed
```

Example call (reading a buffer):

```
uint8_t read_buffer[0x123];

// CANopen callback for segmented read accesses
uint32_t CANOPEN_sdo_seg_read(
 uint16_t index, uint8_t subindex, uint8_t openclose,
 uint8_t *length, uint8_t *data, uint8_t *last)
{
 static uint16_t read_ofs;
 uint16_t i;
```


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

```
 if ((index == 0x2200) && (subindex==0))
 {
  if (openclose == CAN_SDOSEG_OPEN)
  {
    // Initialize the read buffer with "something"
    for (i=0; i<sizeof(read_buffer); i++)
    {
      read_buffer[i] = (i+5) + (i<<2);
    }
    read_ofs = 0;
  }
  else if (openclose == CAN_SDOSEG_SEGMENT)
  {
    i = 7;
    while (i && (read_ofs < sizeof(read_buffer)))
    {
      *data++ = read_buffer[read_ofs++];
      i--;
    }
    *length = 7-i;
    if (read_ofs == sizeof(read_buffer)) // The whole buffer read:
                                         // this is last segment
    {
      *last = TRUE;
    }
  }
  return 0;
 }
 else
 {
  return SDO_ABORT_NOT_EXISTS;
 }
}
```

**Remark:** If the flag isr_handled was set TRUE when initializing CANopen, this callback function will be called by the CAN API interrupt handler and therefore will execute on the interrupt level.

### 17.4.16 CANopen SDO segmented write callback

The CANopen SDO segmented write callback function is called by the CANopen handler. The callback function allows the following actions:

- inform about the opening and closing of the write channel.
- pass on data segments of up to seven bytes from the writing host.
- abort the transmission at any time, for example when there is a buffer overflow.

Responses can be selected to be 8-byte (CANopen standard compliant) or 1-byte (faster but not supported by all SDO clients).

```
// Values for CANOPEN_sdo_seg_read/write() callback 'openclose' parameter
```


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

```
#define CAN_SDOSEG_SEGMENT 0 // segment read/write
#define CAN_SDOSEG_OPEN 1 // channel is opened
#define CAN_SDOSEG_CLOSE 2 // channel is closed
```

Example call (writing a buffer):

```
uint8_t write_buffer[0x321];

// CANopen callback for segmented write accesses
uint32_t CANOPEN_sdo_seg_write(
  uint16_t index, uint8_t subindex, uint8_t openclose,
  uint8_t length, uint8_t *data, uint8_t *fast_resp)
{
  static uint16_t write_ofs;
  uint16_t i;

  if ((index == 0x2200) && (subindex==0))
  {
    if (openclose == CAN_SDOSEG_OPEN)
    {
      // Initialize the write buffer
      for (i=0; i<sizeof(write_buffer); i++)
      {
        write_buffer[i] = 0;
      }
      write_ofs = 0;
    }
    else if (openclose == CAN_SDOSEG_SEGMENT)
    {
      *fast_resp = TRUE;  // Use fast 1-byte segment write response
      i = length;
      while (i && (write_ofs < sizeof(write_buffer)))
      {
        write_buffer[write_ofs++] = *data++;
        i--;
      }
      if (i && (write_ofs >= sizeof(write_buffer))) // Too much data to write
      {
        return SDO_ABORT_TRANSFER;  // Data could not be written
      }
    }
    else if (openclose == CAN_SDOSEG_CLOSE)
    {
      // Write has successfully finished: mark the buffer valid etc.
    }
    return 0;
  }
  else
  {
    return SDO_ABORT_NOT_EXISTS;
  }
}
```


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Remark:** If the flag isr_handled was set TRUE when initializing CANopen, this callback function will be called by the CAN API interrupt handler and therefore will execute on the interrupt level.

### 17.4.17 CANopen fall-back SDO handler callback

The CANopen fall-back SDO handler callback function is called by the CANopen handler. This function is called whenever an SDO request could not be processed or would end in an SDO abort response. It is called with the full data buffer of the request and allows to generate any type of SDO response. This can be used to implement custom SDO handlers, for example to implement the SDO block transfer method.

```
// Return values for CANOPEN_sdo_req() callback
#define CAN_SDOREQ_NOTHANDLED 0 // process regularly, no impact
#define CAN_SDOREQ_HANDLED_SEND 1 // processed in callback, auto-send
                                  // returned msg
#define CAN_SDOREQ_HANDLED_NOSEND 2 // processed in callback, don't send
                                  // response
```

Example call (not implementing custom processing):

```
// CANopen callback for custom SDO request handler
uint8_t CANOPEN_sdo_req (
  uint8_t length, uint8_t *req_ptr, uint8_t *length_resp, uint8_t *resp_ptr)
{
  return CAN_SDOREQ_NOTHANDLED;
}
```

**Remark:** If the flag isr_handled was set TRUE when initializing CANopen, this callback function will be called by the CAN API interrupt handler and therefore will execute on the interrupt level.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

# Chapter 18: LPC1100/LPC1100C/LPC1100L series: 16-bit counter/timer CT16B0/1

Rev. 12.4 — 22 December 2016 User manual

## 18.1 How to read this chapter

The 16-bit timer blocks are identical for all LPC111x, LPC11D14, and LPC11Cxx parts in the LPC1100, LPC1100C, and LPC1100L series.

### Pin-out variations

The match output MAT0 of timer 1 (CT16B1_MAT0) is not pinned out on parts LPC11C22 and LPC11C24.

## 18.2 Basic configuration

The CT16B0/1 are configured using the following registers:

1. Pins: The CT16B0/1 pins must be configured in the IOCONFIG register block (Section 7.4).
2. Power and peripheral clock: In the SYSAHBCLKCTRL register, set bit 7 and bit 8 (Table 21). The peripheral clock is provided by the system clock (see Table 20).

## 18.3 Features

- Two 16-bit counter/timers with a programmable 16-bit prescaler.
- Counter or timer operation.
- One 16-bit capture channel that can take a snapshot of the timer value when an input signal transitions. A capture event may also optionally generate an interrupt.
- Four 16-bit match registers that allow:
  - Continuous operation with optional interrupt generation on match.
  - Stop timer on match with optional interrupt generation.
  - Reset timer on match with optional interrupt generation.
- Up to three (CT16B0) or two (CT16B1) external outputs corresponding to match registers with the following capabilities:
  - Set LOW on match.
  - Set HIGH on match.
  - Toggle on match.
  - Do nothing on match.
- For each timer, up to four match registers can be configured as PWM allowing to use up to three match outputs as single edge controlled PWM outputs.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 18.4 Applications

- Interval timer for counting internal events
- Pulse Width Demodulator via capture input
- Free-running timer
- Pulse Width Modulator via match outputs

## 18.5 Description

Each Counter/timer is designed to count cycles of the peripheral clock (PCLK) or an externally supplied clock and can optionally generate interrupts or perform other actions at specified timer values based on four match registers. The peripheral clock is provided by the system clock (see Figure 8). Each counter/timer also includes one capture input to trap the timer value when an input signal transitions, optionally generating an interrupt.

In PWM mode, three match registers on CT16B0 and two match registers on CT16B1 can be used to provide a single-edge controlled PWM output on the match output pins. It is recommended to use the match registers that are not pinned out to control the PWM cycle length.

**Remark:** The 16-bit counter/timer0 (CT16B0) and the 16-bit counter/timer1 (CT16B1) are functionally identical except for the peripheral base address.

## 18.6 Pin description

Table 279 gives a brief summary of each of the counter/timer related pins.

**Table 279. Counter/timer pin description**

| Pin | Type | Description |
|---|---|---|
| CT16B0_CAP0<br>CT16B1_CAP0 | Input | Capture Signal:<br>A transition on a capture pin can be configured to load the Capture Register with the value in the counter/timer and optionally generate an interrupt.<br>Counter/Timer block can select a capture signal as a clock source instead of the PCLK derived clock. For more details see Section 18.7.11. |
| CT16B0_MAT[2:0]<br>CT16B1_MAT[1:0] | Output | External Match Outputs of CT16B0/1:<br>When a match register of CT16B0/1 (MR3:0) equals the timer counter (TC), this output can either toggle, go LOW, go HIGH, or do nothing. The External Match Register (EMR) and the PWM Control Register (PWMCON) control the functionality of this output. |

## 18.7 Register description

The 16-bit counter/timer0 contains the registers shown in Table 280 and the 16-bit counter/timer1 contains the registers shown in Table 281. More detailed descriptions follow.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 280. Register overview: 16-bit counter/timer 0 CT16B0 (base address 0x4000 C000)**

| Name | Access | Address offset | Description | Reset value[1] |
|---|---|---|---|---|
| TMR16B0IR | R/W | 0x000 | Interrupt Register (IR). The IR can be written to clear interrupts. The IR can be read to identify which of five possible interrupt sources are pending. | 0 |
| TMR16B0TCR | R/W | 0x004 | Timer Control Register (TCR). The TCR is used to control the Timer Counter functions. The Timer Counter can be disabled or reset through the TCR. | 0 |
| TMR16B0TC | R/W | 0x008 | Timer Counter (TC). The 16-bit TC is incremented every PR+1 cycles of PCLK. The TC is controlled through the TCR. | 0 |
| TMR16B0PR | R/W | 0x00C | Prescale Register (PR). When the Prescale Counter (below) is equal to this value, the next clock increments the TC and clears the PC. | 0 |
| TMR16B0PC | R/W | 0x010 | Prescale Counter (PC). The 16-bit PC is a counter which is incremented to the value stored in PR. When the value in PR is reached, the TC is incremented and the PC is cleared. The PC is observable and controllable through the bus interface. | 0 |
| TMR16B0MCR | R/W | 0x014 | Match Control Register (MCR). The MCR is used to control if an interrupt is generated and if the TC is reset when a Match occurs. | 0 |
| TMR16B0MR0 | R/W | 0x018 | Match Register 0 (MR0). MR0 can be enabled through the MCR to reset the TC, stop both the TC and PC, and/or generate an interrupt every time MR0 matches the TC. | 0 |
| TMR16B0MR1 | R/W | 0x01C | Match Register 1 (MR1). See MR0 description. | 0 |
| TMR16B0MR2 | R/W | 0x020 | Match Register 2 (MR2). See MR0 description. | 0 |
| TMR16B0MR3 | R/W | 0x024 | Match Register 3 (MR3). See MR0 description. | 0 |
| TMR16B0CCR | R/W | 0x028 | Capture Control Register (CCR). The CCR controls which edges of the capture inputs are used to load the Capture Registers and whether or not an interrupt is generated when a capture takes place. | 0 |
| TMR16B0CR0 | RO | 0x02C | Capture Register 0 (CR0). CR0 is loaded with the value of TC when there is an event on the CT16B0_CAP0 input. | 0 |
| TMR16B0EMR | R/W | 0x03C | External Match Register (EMR). The EMR controls the match function and the external match pins CT16B0_MAT[2:0]. | 0 |
| - | - | 0x040 - 0x06C | reserved | - |
| TMR16B0CTCR | R/W | 0x070 | Count Control Register (CTCR). The CTCR selects between Timer and Counter mode, and in Counter mode selects the signal and edge(s) for counting. | 0 |
| TMR16B0PWMC | R/W | 0x074 | PWM Control Register (PWMCON). The PWMCON enables PWM mode for the external match pins CT16B0_MAT[2:0]. | 0 |

[1] Reset value reflects the data stored in used bits only. It does not include reserved bits content.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 281. Register overview: 16-bit counter/timer 1 CT16B1 (base address 0x4001 0000)**

| Name | Access | Address offset | Description | Reset value[1] |
|---|---|---|---|---|
| TMR16B1IR | R/W | 0x000 | Interrupt Register (IR). The IR can be written to clear interrupts. The IR can be read to identify which of five possible interrupt sources are pending. | 0 |
| TMR16B1TCR | R/W | 0x004 | Timer Control Register (TCR). The TCR is used to control the Timer Counter functions. The Timer Counter can be disabled or reset through the TCR. | 0 |
| TMR16B1TC | R/W | 0x008 | Timer Counter (TC). The 16-bit TC is incremented every PR+1 cycles of PCLK. The TC is controlled through the TCR. | 0 |
| TMR16B1PR | R/W | 0x00C | Prescale Register (PR). When the Prescale Counter (below) is equal to this value, the next clock increments the TC and clears the PC. | 0 |
| TMR16B1PC | R/W | 0x010 | Prescale Counter (PC). The 16-bit PC is a counter which is incremented to the value stored in PR. When the value in PR is reached, the TC is incremented and the PC is cleared. The PC is observable and controllable through the bus interface. | 0 |
| TMR16B1MCR | R/W | 0x014 | Match Control Register (MCR). The MCR is used to control if an interrupt is generated and if the TC is reset when a Match occurs. | 0 |
| TMR16B1MR0 | R/W | 0x018 | Match Register 0 (MR0). MR0 can be enabled through the MCR to reset the TC, stop both the TC and PC, and/or generate an interrupt every time MR0 matches the TC. | 0 |
| TMR16B1MR1 | R/W | 0x01C | Match Register 1 (MR1). See MR0 description. | 0 |
| TMR16B1MR2 | R/W | 0x020 | Match Register 2 (MR2). See MR0 description. | 0 |
| TMR16B1MR3 | R/W | 0x024 | Match Register 3 (MR3). See MR0 description. | 0 |
| TMR16B1CCR | R/W | 0x028 | Capture Control Register (CCR). The CCR controls which edges of the capture inputs are used to load the Capture Registers and whether or not an interrupt is generated when a capture takes place. | 0 |
| TMR16B1CR0 | RO | 0x02C | Capture Register 0 (CR0). CR0 is loaded with the value of TC when there is an event on the CT16B1_CAP0 input. | 0 |
| TMR16B1EMR | R/W | 0x03C | External Match Register (EMR). The EMR controls the match function and the external match pins CT16B1_MAT[1:0]. | 0 |
| - | - | 0x040 - 0x06C | reserved | - |
| TMR16B1CTCR | R/W | 0x070 | Count Control Register (CTCR). The CTCR selects between Timer and Counter mode, and in Counter mode selects the signal and edge(s) for counting. | 0 |
| TMR16B1PWMC | R/W | 0x074 | PWM Control Register (PWMCON). The PWMCON enables PWM mode for the external match pins CT16B1_MAT[1:0]. | 0 |

[1] Reset value reflects the data stored in used bits only. It does not include reserved bits content.

### 18.7.1 Interrupt Register (TMR16B0IR and TMR16B1IR)

The Interrupt Register (IR) consists of four bits for the match interrupts and one bit for the capture interrupt. If an interrupt is generated then the corresponding bit in the IR will be HIGH. Otherwise, the bit will be LOW. Writing a logic one to the corresponding IR bit will reset the interrupt. Writing a zero has no effect.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 282. Interrupt Register (TMR16B0IR - address 0x4000 C000 and TMR16B1IR - address 0x4001 0000) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 0 | MR0 Interrupt | Interrupt flag for match channel 0. | 0 |
| 1 | MR1 Interrupt | Interrupt flag for match channel 1. | 0 |
| 2 | MR2 Interrupt | Interrupt flag for match channel 2. | 0 |
| 3 | MR3 Interrupt | Interrupt flag for match channel 3. | 0 |
| 4 | CR0 Interrupt | Interrupt flag for capture channel 0 event. | 0 |
| 31:5 | - | Reserved | - |

### 18.7.2 Timer Control Register (TMR16B0TCR and TMR16B1TCR)

The Timer Control Register (TCR) is used to control the operation of the counter/timer.

**Table 283. Timer Control Register (TMR16B0TCR - address 0x4000 C004 and TMR16B1TCR - address 0x4001 0004) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 0 | CEn | Counter Enable. When one, the Timer Counter and Prescale Counter are enabled for counting. When zero, the counters are disabled. | 0 |
| 1 | CRst | Counter Reset. When one, the Timer Counter and the Prescale Counter are synchronously reset on the next positive edge of PCLK. The counters remain reset until TCR[1] is returned to zero. | 0 |
| 31:2 | - | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |

### 18.7.3 Timer Counter (TMR16B0TC - address 0x4000 C008 and TMR16B1TC - address 0x4001 0008)

The 16-bit Timer Counter is incremented when the Prescale Counter reaches its terminal count. Unless it is reset before reaching its upper limit, the TC will count up through the value 0x0000 FFFF and then wrap back to the value 0x0000 0000. This event does not cause an interrupt, but a Match register can be used to detect an overflow if needed.

**Table 284: Timer counter registers (TMR16B0TC, address 0x4000 C008 and TMR16B1TC 0x4001 0008) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 15:0 | TC | Timer counter value. | 0 |
| 31:16 | - | Reserved. | - |

### 18.7.4 Prescale Register (TMR16B0PR - address 0x4000 C00C and TMR16B1PR - address 0x4001 000C)

The 16-bit Prescale Register specifies the maximum value for the Prescale Counter.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 285: Prescale registers (TMR16B0PR, address 0x4000 C00C and TMR16B1PR 0x4001 000C) bit description

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 15:0 | PR | Prescale max value. | 0 |
| 31:16 | - | Reserved. | - |

### 18.7.5 Prescale Counter register (TMR16B0PC - address 0x4000 C010 and TMR16B1PC - address 0x4001 0010)

The 16-bit Prescale Counter controls division of PCLK by some constant value before it is applied to the Timer Counter. This allows control of the relationship between the resolution of the timer and the maximum time before the timer overflows. The Prescale Counter is incremented on every PCLK. When it reaches the value stored in the Prescale Register, the Timer Counter is incremented, and the Prescale Counter is reset on the next PCLK. This causes the TC to increment on every PCLK when PR = 0, every 2 PCLKs when PR = 1, etc.

Table 286: Prescale counter registers (TMR16B0PC, address 0x4001 C010 and TMR16B1PC 0x4000 0010) bit description

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 15:0 | PC | Prescale counter value. | 0 |
| 31:16 | - | Reserved. | - |

### 18.7.6 Match Control Register (TMR16B0MCR and TMR16B1MCR)

The Match Control Register is used to control what operations are performed when one of the Match Registers matches the Timer Counter. The function of each of the bits is shown in Table 287.

Table 287. Match Control Register (TMR16B0MCR - address 0x4000 C014 and TMR16B1MCR - address 0x4001 0014) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 0 | MR0I | | Interrupt on MR0: an interrupt is generated when MR0 matches the value in the TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 1 | MR0R | | Reset on MR0: the TC will be reset if MR0 matches it. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 2 | MR0S | | Stop on MR0: the TC and PC will be stopped and TCR[0] will be set to 0 if MR0 matches the TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 3 | MR1I | | Interrupt on MR1: an interrupt is generated when MR1 matches the value in the TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 287. Match Control Register (TMR16B0MCR - address 0x4000 C014 and TMR16B1MCR - address 0x4001 0014) bit description** *…continued*

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 4 | MR1R | | Reset on MR1: the TC will be reset if MR1 matches it. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 5 | MR1S | | Stop on MR1: the TC and PC will be stopped and TCR[0] will be set to 0 if MR1 matches the TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 6 | MR2I | | Interrupt on MR2: an interrupt is generated when MR2 matches the value in the TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 7 | MR2R | | Reset on MR2: the TC will be reset if MR2 matches it. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 8 | MR2S | | Stop on MR2: the TC and PC will be stopped and TCR[0] will be set to 0 if MR2 matches the TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 9 | MR3I | | Interrupt on MR3: an interrupt is generated when MR3 matches the value in the TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 10 | MR3R | | Reset on MR3: the TC will be reset if MR3 matches it. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 11 | MR3S | | Stop on MR3: the TC and PC will be stopped and TCR[0] will be set to 0 if MR3 matches the TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 31:12 | - | | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |

### 18.7.7 Match Registers (TMR16B0MR0/1/2/3 - addresses 0x4000 C018/1C/20/24 and TMR16B1MR0/1/2/3 - addresses 0x4001 0018/1C/20/24)

The Match register values are continuously compared to the Timer Counter value. When the two values are equal, actions can be triggered automatically. The action possibilities are to generate an interrupt, reset the Timer Counter, or stop the timer. Actions are controlled by the settings in the MCR register.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 288: Match registers (TMR16B0MR0 to 3, addresses 0x4000 C018 to 24 and TMR16B1MR0 to 3, addresses 0x4001 0018 to 24) bit description

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 15:0 | MATCH | Timer counter match value. | 0 |
| 31:16 | - | Reserved. | - |

## 18.7.8 Capture Control Register (TMR16B0CCR and TMR16B1CCR)

The Capture Control Register is used to control whether the Capture Register is loaded with the value in the Counter/timer when the capture event occurs, and whether an interrupt is generated by the capture event. Setting both the rising and falling bits at the same time is a valid configuration, resulting in a capture event for both edges. In the description below, n represents the Timer number, 0 or 1.

Table 289. Capture Control Register (TMR16B0CCR - address 0x4000 C028 and TMR16B1CCR - address 0x4001 0028) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 0 | CAP0RE | | Capture on CT16Bn_CAP0 rising edge: a sequence of 0 then 1 on CT16Bn_CAP0 will cause CR0 to be loaded with the contents of TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 1 | CAP0FE | | Capture on CT16Bn_CAP0 falling edge: a sequence of 1 then 0 on CT16Bn_CAP0 will cause CR0 to be loaded with the contents of TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 2 | CAP0I | | Interrupt on CT16Bn_CAP0 event: a CR0 load due to a CT16Bn_CAP0 event will generate an interrupt. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 31:3 | - | - | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |

## 18.7.9 Capture Register (CT16B0CR0 - address 0x4000 C02C and CT16B1CR0 - address 0x4001 002C)

Each Capture register is associated with a device pin and may be loaded with the counter/timer value when a specified event occurs on that pin. The settings in the Capture Control Register register determine whether the capture function is enabled, and whether a capture event happens on the rising edge of the associated pin, the falling edge, or on both edges.

Table 290: Capture registers (TMR16B0CR0, address 0x4000 C02C and TMR16B1CR0, address 0x4001 002C) bit description

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 15:0 | CAP | Timer counter capture value. | 0 |
| 31:16 | - | Reserved. | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 18.7.10 External Match Register (TMR16B0EMR and TMR16B1EMR)

The External Match Register provides both control and status of the external match channels and external match pins CT16B0_MAT[2:0] and CT16B1_MAT[1:0].

If the match outputs are configured as PWM output in the PWMCON registers (Section 18.7.12), the function of the external match registers is determined by the PWM rules (Section 18.7.13 “Rules for single edge controlled PWM outputs” on page 345).

**Table 291. External Match Register (TMR16B0EMR - address 0x4000 C03C and TMR16B1EMR - address 0x4001 003C) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 0 | EM0 | | External Match 0. This bit reflects the state of output CT16B0_MAT0/CT16B1_MAT0, whether or not this output is connected to its pin. When a match occurs between the TC and MR0, this bit can either toggle, go LOW, go HIGH, or do nothing. Bits EMR[5:4] control the functionality of this output. This bit is driven to the CT16B0_MAT0/CT16B1_MAT0 pins if the match function is selected in the IOCON registers (0 = LOW, 1 = HIGH). | 0 |
| 1 | EM1 | | External Match 1. This bit reflects the state of output CT16B0_MAT1/CT16B1_MAT1, whether or not this output is connected to its pin. When a match occurs between the TC and MR1, this bit can either toggle, go LOW, go HIGH, or do nothing. Bits EMR[7:6] control the functionality of this output. This bit is driven to the CT16B0_MAT1/CT16B1_MAT1 pins if the match function is selected in the IOCON registers (0 = LOW, 1 = HIGH). | 0 |
| 2 | EM2 | | External Match 2. This bit reflects the state of output match channel 2, whether or not this output is connected to its pin. When a match occurs between the TC and MR2, this bit can either toggle, go LOW, go HIGH, or do nothing. Bits EMR[9:8] control the functionality of this output. Note that on counter/timer 0 this match channel is not pinned out. This bit is driven to the CT16B1_MAT2 pin if the match function is selected in the IOCON registers (0 = LOW, 1 = HIGH). | 0 |
| 3 | EM3 | | External Match 3. This bit reflects the state of output of match channel 3. When a match occurs between the TC and MR3, this bit can either toggle, go LOW, go HIGH, or do nothing. Bits EMR[11:10] control the functionality of this output. There is no output pin available for this channel on either of the 16-bit timers. | 0 |
| 5:4 | EMC0 | | External Match Control 0. Determines the functionality of External Match 0. | 00 |
| | | 0x0 | Do Nothing. | |
| | | 0x1 | Clear the corresponding External Match bit/output to 0 (CT16Bn_MATm pin is LOW if pinned out). | |
| | | 0x2 | Set the corresponding External Match bit/output to 1 (CT16Bn_MATm pin is HIGH if pinned out). | |
| | | 0x3 | Toggle the corresponding External Match bit/output. | |
| 7:6 | EMC1 | | External Match Control 1. Determines the functionality of External Match 1. | 00 |
| | | 0x0 | Do Nothing. | |
| | | 0x1 | Clear the corresponding External Match bit/output to 0 (CT16Bn_MATm pin is LOW if pinned out). | |
| | | 0x2 | Set the corresponding External Match bit/output to 1 (CT16Bn_MATm pin is HIGH if pinned out). | |
| | | 0x3 | Toggle the corresponding External Match bit/output. | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 291. External Match Register (TMR16B0EMR - address 0x4000 C03C and TMR16B1EMR - address 0x4001 003C) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 9:8 | EMC2 | | External Match Control 2. Determines the functionality of External Match 2. | 00 |
| | | 0x0 | Do Nothing. | |
| | | 0x1 | Clear the corresponding External Match bit/output to 0 (CT16Bn_MATm pin is LOW if pinned out). | |
| | | 0x2 | Set the corresponding External Match bit/output to 1 (CT16Bn_MATm pin is HIGH if pinned out). | |
| | | 0x3 | Toggle the corresponding External Match bit/output. | |
| 11:10 | EMC3 | | External Match Control 3. Determines the functionality of External Match 3. | 00 |
| | | 0x0 | Do Nothing. | |
| | | 0x1 | Clear the corresponding External Match bit/output to 0 (CT16Bn_MATm pin is LOW if pinned out). | |
| | | 0x2 | Set the corresponding External Match bit/output to 1 (CT16Bn_MATm pin is HIGH if pinned out). | |
| | | 0x3 | Toggle the corresponding External Match bit/output. | |
| 31:12 | - | | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |

**Table 292. External match control**

| EMR[11:10], EMR[9:8], EMR[7:6], or EMR[5:4] | Function |
|---|---|
| 00 | Do Nothing. |
| 01 | Clear the corresponding External Match bit/output to 0 (CT16Bn_MATm pin is LOW if pinned out). |
| 10 | Set the corresponding External Match bit/output to 1 (CT16Bn_MATm pin is HIGH if pinned out). |
| 11 | Toggle the corresponding External Match bit/output. |

### 18.7.11 Count Control Register (TMR16B0CTCR and TMR16B1CTCR)

The Count Control Register (CTCR) is used to select between Timer and Counter mode, and in Counter mode to select the pin and edges for counting.

When Counter Mode is chosen as a mode of operation, the CAP input (selected by the CTCR bits 3:2) is sampled on every rising edge of the PCLK clock. After comparing two consecutive samples of this CAP input, one of the following four events is recognized: rising edge, falling edge, either of edges or no changes in the level of the selected CAP input. Only if the identified event occurs, and the event corresponds to the one selected by bits 1:0 in the CTCR register, will the Timer Counter register be incremented.

Effective processing of the externally supplied clock to the counter has some limitations. Since two successive rising edges of the PCLK clock are used to identify only one edge on the CAP selected input, the frequency of the CAP input can not exceed one half of the PCLK clock. Consequently, duration of the HIGH/LOW levels on the same CAP input in this case can not be shorter than $1/(2 \times \text{PCLK})$.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 293. Count Control Register (TMR16B0CTCR - address 0x4000 C070 and TMR16B1CTCR - address 0x4001 0070) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 1:0 | CTM | | Counter/Timer Mode. This field selects which rising PCLK edges can increment Timer's Prescale Counter (PC), or clear PC and increment Timer Counter (TC). | 00 |
| | | 0x0 | Timer Mode: every rising PCLK edge | |
| | | 0x1 | Counter Mode: TC is incremented on rising edges on the CAP input selected by bits 3:2. | |
| | | 0x2 | Counter Mode: TC is incremented on falling edges on the CAP input selected by bits 3:2. | |
| | | 0x3 | Counter Mode: TC is incremented on both edges on the CAP input selected by bits 3:2. | |
| 3:2 | CIS | | Count Input Select. In counter mode (when bits 1:0 in this register are not 00), these bits select which CAP pin is sampled for clocking. **Note:** If Counter mode is selected in the CTCR register, bits 2:0 in the Capture Control Register (CCR) must be programmed as 000. | 00 |
| | | 0x0 | CT16Bn_CAP0 | |
| | | 0x1 | CT16Bn_CAP1 | |
| | | 0x2 | Reserved. | |
| | | 0x3 | Reserved. | |
| 31:4 | - | - | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | - |

## 18.7.12 PWM Control register (TMR16B0PWMC and TMR16B1PWMC)

The PWM Control Register is used to configure the match outputs as PWM outputs. Each match output can be independently set to perform either as PWM output or as match output whose function is controlled by the External Match Register (EMR).

For timer 0, three single-edge controlled PWM outputs can be selected on the CT16B0_MAT[2:0] outputs. For timer 1, two single-edged PWM outputs can be selected on the CT16B1_Mat[1:0] outputs. One additional match register determines the PWM cycle length. When a match occurs in any of the other match registers, the PWM output is set to HIGH. The timer is reset by the match register that is configured to set the PWM cycle length. When the timer is reset to zero, all currently HIGH match outputs configured as PWM outputs are cleared.

**Table 294. PWM Control Register (TMR16B0PWMC - address 0x4000 C074 and TMR16B1PWMC- address 0x4001 0074) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 0 | PWMEN0 | | PWM channel0 enable | 0 |
| | | 0 | CT16Bn_MAT0 is controlled by EM0. | |
| | | 1 | PWM mode is enabled for CT16Bn_MAT0. | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 294. PWM Control Register (TMR16B0PWMC - address 0x4000 C074 and TMR16B1PWMC- address 0x4001 0074) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 1 | PWMEN1 | | PWM channel1 enable | 0 |
| | | 0 | CT16Bn_MAT1 is controlled by EM1. | |
| | | 1 | PWM mode is enabled for CT16Bn_MAT1. | |
| 2 | PWMEN2 | | PWM channel2 enable | 0 |
| | | 0 | Match channel 2 or pin CT16B0_MAT2 is controlled by EM2. Match channel 2 is not pinned out on timer 1. | |
| | | 1 | PWM mode is enabled for match channel 2 or pin CT16B0_MAT2. | |
| 3 | PWMEN3 | | PWM channel3 enable<br>**Note:** It is recommended to use match channel 3 to set the PWM cycle because it is not pinned out. | 0 |
| | | 0 | Match channel 3 match channel 3 is controlled by EM3. | |
| | | 1 | PWM mode is enabled for match channel 3match channel 3. | |
| 31:4 | - | | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |

### 18.7.13 Rules for single edge controlled PWM outputs

1. All single edge controlled PWM outputs go LOW at the beginning of each PWM cycle (timer is set to zero) unless their match value is equal to zero.
2. Each PWM output will go HIGH when its match value is reached. If no match occurs (i.e. the match value is greater than the PWM cycle length), the PWM output remains continuously LOW.
3. If a match value larger than the PWM cycle length is written to the match register, and the PWM signal is HIGH already, then the PWM signal will be cleared on the next start of the next PWM cycle.
4. If a match register contains the same value as the timer reset value (the PWM cycle length), then the PWM output will be reset to LOW on the next clock tick. Therefore, the PWM output will always consist of a one clock tick wide positive pulse with a period determined by the PWM cycle length (i.e. the timer reload value).
5. If a match register is set to zero, then the PWM output will go to HIGH the first time the timer goes back to zero and will stay HIGH continuously.

**Note:** When the match outputs are selected to serve as PWM outputs, the timer reset (MRnR) and timer stop (MRnS) bits in the Match Control Register MCR must be set to 0 except for the match register setting the PWM cycle length. For this register, set the MRnR bit to 1 to enable the timer reset when the timer value matches the value of the corresponding match register.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

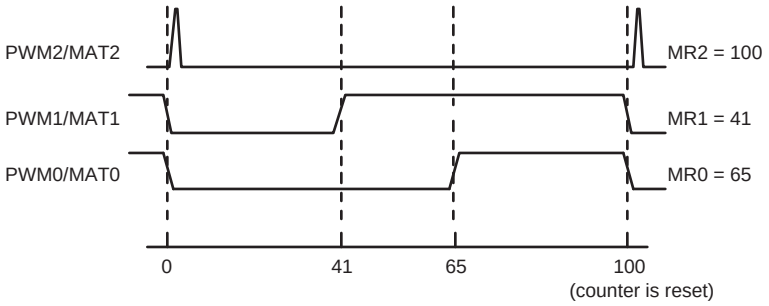


**Fig 69. Sample PWM waveforms with a PWM cycle length of 100 (selected by MR2) and MAT2:0 enabled as PWM outputs by the PWCM register.**

## 18.8 Example timer operation

Figure 70 shows a timer configured to reset the count and generate an interrupt on match. The prescaler is set to 2 and the match register set to 6. At the end of the timer cycle where the match occurs, the timer count is reset. This gives a full length cycle to the match value. The interrupt indicating that a match occurred is generated in the next clock after the timer reached the match value.

Figure 71 shows a timer configured to stop and generate an interrupt on match. The prescaler is again set to 2 and the match register set to 6. In the next clock after the timer reaches the match value, the timer enable bit in TCR is cleared, and the interrupt indicating that a match occurred is generated.

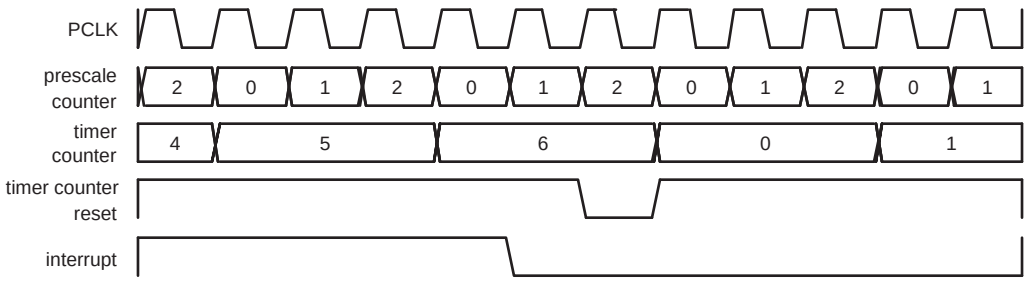


**Fig 70. A timer cycle in which PR=2, MRx=6, and both interrupt and reset on match are enabled**

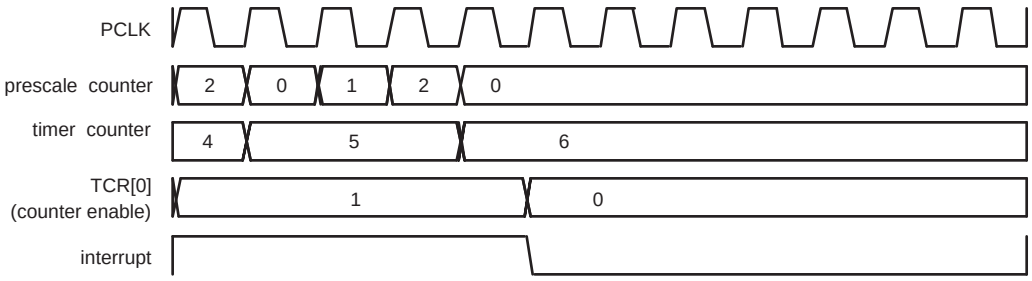


**Fig 71. A timer cycle in which PR=2, MRx=6, and both interrupt and stop on match are enabled**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 18.9 Architecture

The block diagram for counter/timer0 and counter/timer1 is shown in Figure 72.

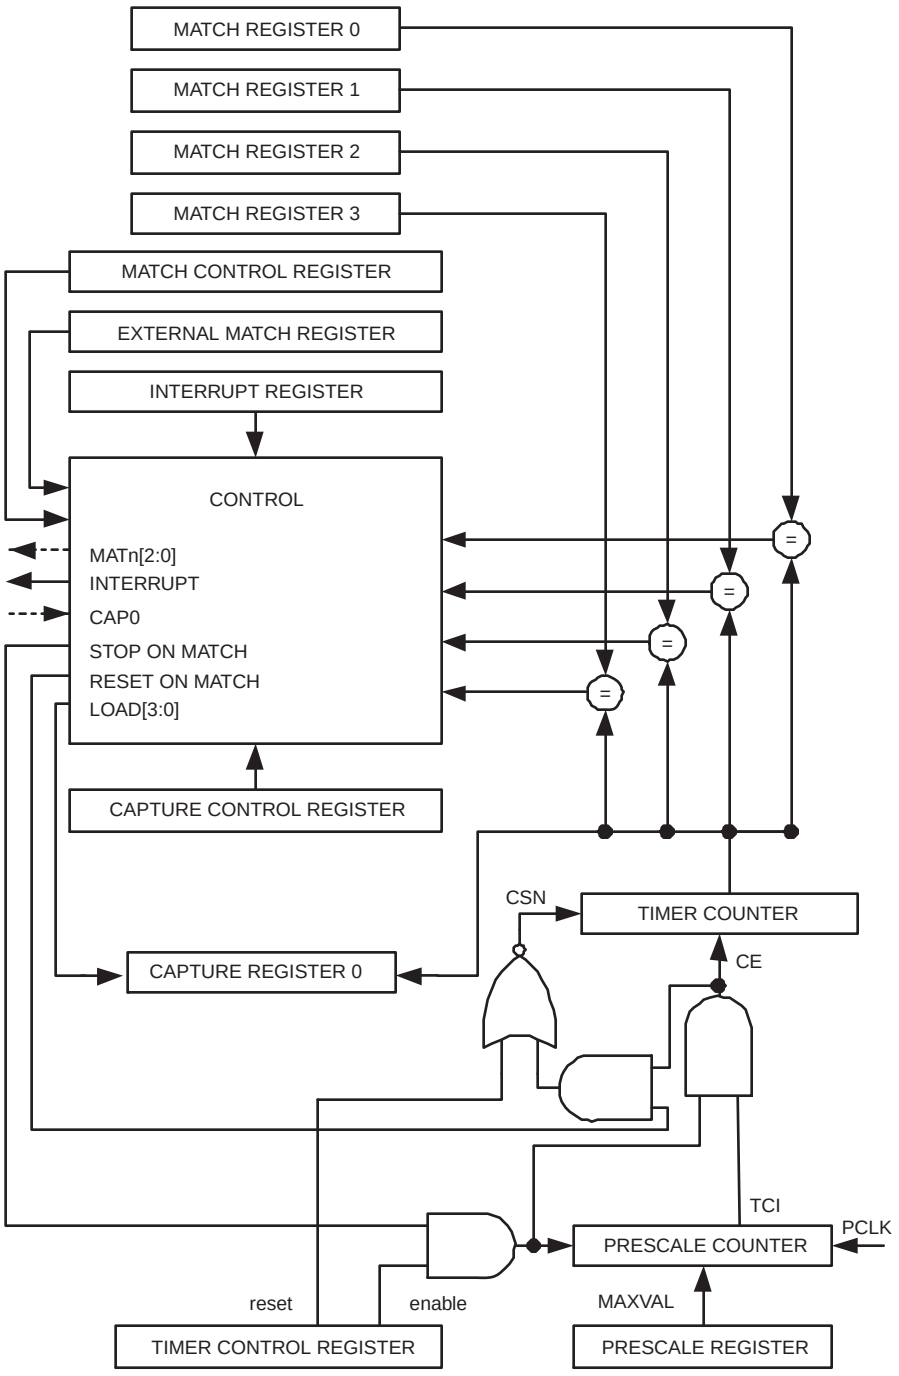


**Fig 72. 16-bit counter/timer block diagram**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 19.1 How to read this chapter

The 16-bit timer blocks are identical for all LPC1100XL parts.

Compared to the timer block for the LPC1100/LPC1100L/LPC1100C series, the following features have been added:

- One additional capture input for each timer.
- Capture-clear function for easy pulse-width measurement (see Section 19.7.11).

## 19.2 Basic configuration

The CT16B0/1 are configured using the following registers:

1. Pins: The CT16B0/1 pins must be configured in the IOCONFIG register block (Section 7.4).
2. Power and peripheral clock: In the SYSAHBCLKCTRL register, set bit 7 and bit 8 (Table 21). The peripheral clock is provided by the system clock (see Table 20).

## 19.3 Features

- Two 16-bit counter/timers with a programmable 16-bit prescaler.
- Counter or timer operation.
- The timer and prescaler may be configured to be cleared on a designated capture event. This feature permits easy pulse-width measurement by clearing the timer on the leading edge of an input pulse and capturing the timer value on the trailing edge.
- Two 16-bit capture channels that can take a snapshot of the timer value when an input signal transitions. A capture event may also optionally generate an interrupt.
- Four 16-bit match registers that allow:
  - Continuous operation with optional interrupt generation on match.
  - Stop timer on match with optional interrupt generation.
  - Reset timer on match with optional interrupt generation.
- Up to three (CT16B0) or two (CT16B1) external outputs corresponding to match registers with the following capabilities:
  - Set LOW on match.
  - Set HIGH on match.
  - Toggle on match.
  - Do nothing on match.
- For each timer, up to four match registers can be configured as PWM allowing to use up to three match outputs as single edge controlled PWM outputs.


All information provided in this document is subject to legal disclaimers.
© NXP B.V. 2016. All rights reserved.

## 19.4 Applications

- Interval timer for counting internal events
- Pulse Width Demodulator via capture input
- Free-running timer
- Pulse Width Modulator via match outputs

## 19.5 Description

Each Counter/timer is designed to count cycles of the peripheral clock (PCLK) or an externally supplied clock and can optionally generate interrupts or perform other actions at specified timer values based on four match registers. The peripheral clock is provided by the system clock (see Figure 8). Each counter/timer also includes one capture input to trap the timer value when an input signal transitions, optionally generating an interrupt.

In PWM mode, three match registers on CT16B0 and two match registers on CT16B1 can be used to provide a single-edge controlled PWM output on the match output pins. It is recommended to use the match registers that are not pinned out to control the PWM cycle length.

**Remark:** The 16-bit counter/timer0 (CT16B0) and the 16-bit counter/timer1 (CT16B1) are functionally identical except for the peripheral base address.

## 19.6 Pin description

Table 295 gives a brief summary of each of the counter/timer related pins.

**Table 295. Counter/timer pin description**

| Pin | Type | Description |
|---|---|---|
| CT16B0_CAP[1:0]<br>CT16B1_CAP0[1:0] | Input | Capture Signal:<br>A transition on a capture pin can be configured to load the Capture Register with the value in the counter/timer and optionally generate an interrupt.<br>Counter/Timer block can select a capture signal as a clock source instead of the PCLK derived clock. For more details see Section 19.7.11. |
| CT16B0_MAT[2:0]<br>CT16B1_MAT[1:0] | Output | External Match Outputs of CT16B0/1:<br>When a match register of CT16B0/1 (MR3:0) equals the timer counter (TC), this output can either toggle, go LOW, go HIGH, or do nothing. The External Match Register (EMR) and the PWM Control Register (PWMCON) control the functionality of this output. |

## 19.7 Register description

The 16-bit counter/timer0 contains the registers shown in Table 296 and the 16-bit counter/timer1 contains the registers shown in Table 297. More detailed descriptions follow.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 296. Register overview: 16-bit counter/timer 0 CT16B0 (base address 0x4000 C000)**

| Name | Access | Address offset | Description | Reset value[1] |
|---|---|---|---|---|
| TMR16B0IR | R/W | 0x000 | Interrupt Register (IR). The IR can be written to clear interrupts. The IR can be read to identify which of five possible interrupt sources are pending. | 0 |
| TMR16B0TCR | R/W | 0x004 | Timer Control Register (TCR). The TCR is used to control the Timer Counter functions. The Timer Counter can be disabled or reset through the TCR. | 0 |
| TMR16B0TC | R/W | 0x008 | Timer Counter (TC). The 16-bit TC is incremented every PR+1 cycles of PCLK. The TC is controlled through the TCR. | 0 |
| TMR16B0PR | R/W | 0x00C | Prescale Register (PR). When the Prescale Counter (below) is equal to this value, the next clock increments the TC and clears the PC. | 0 |
| TMR16B0PC | R/W | 0x010 | Prescale Counter (PC). The 16-bit PC is a counter which is incremented to the value stored in PR. When the value in PR is reached, the TC is incremented and the PC is cleared. The PC is observable and controllable through the bus interface. | 0 |
| TMR16B0MCR | R/W | 0x014 | Match Control Register (MCR). The MCR is used to control if an interrupt is generated and if the TC is reset when a Match occurs. | 0 |
| TMR16B0MR0 | R/W | 0x018 | Match Register 0 (MR0). MR0 can be enabled through the MCR to reset the TC, stop both the TC and PC, and/or generate an interrupt every time MR0 matches the TC. | 0 |
| TMR16B0MR1 | R/W | 0x01C | Match Register 1 (MR1). See MR0 description. | 0 |
| TMR16B0MR2 | R/W | 0x020 | Match Register 2 (MR2). See MR0 description. | 0 |
| TMR16B0MR3 | R/W | 0x024 | Match Register 3 (MR3). See MR0 description. | 0 |
| TMR16B0CCR | R/W | 0x028 | Capture Control Register (CCR). The CCR controls which edges of the capture inputs are used to load the Capture Registers and whether or not an interrupt is generated when a capture takes place. | 0 |
| TMR16B0CR0 | RO | 0x02C | Capture Register 0 (CR0). CR0 is loaded with the value of TC when there is an event on the CT16B0_CAP0 input. | 0 |
| TMR16B0CR1 | RO | 0x030 | Capture Register 1 (CR1). CR1 is loaded with the value of TC when there is an event on the CT16B0_CAP1 input. | 0 |
| - | - | 0x034 - 0x038 | Reserved | - |
| TMR16B0EMR | R/W | 0x03C | External Match Register (EMR). The EMR controls the match function and the external match pins CT16B0_MAT[2:0]. | 0 |
| - | - | 0x040 - 0x06C | Reserved | - |
| TMR16B0CTCR | R/W | 0x070 | Count Control Register (CTCR). The CTCR selects between Timer and Counter mode, and in Counter mode selects the signal and edge(s) for counting. | 0 |
| TMR16B0PWMC | R/W | 0x074 | PWM Control Register (PWMCON). The PWMCON enables PWM mode for the external match pins CT16B0_MAT[2:0]. | 0 |

[1] Reset value reflects the data stored in used bits only. It does not include reserved bits content.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 297. Register overview: 16-bit counter/timer 1 CT16B1 (base address 0x4001 0000)**

| Name | Access | Address offset | Description | Reset value[1] |
|---|---|---|---|---|
| TMR16B1IR | R/W | 0x000 | Interrupt Register (IR). The IR can be written to clear interrupts. The IR can be read to identify which of five possible interrupt sources are pending. | 0 |
| TMR16B1TCR | R/W | 0x004 | Timer Control Register (TCR). The TCR is used to control the Timer Counter functions. The Timer Counter can be disabled or reset through the TCR. | 0 |
| TMR16B1TC | R/W | 0x008 | Timer Counter (TC). The 16-bit TC is incremented every PR+1 cycles of PCLK. The TC is controlled through the TCR. | 0 |
| TMR16B1PR | R/W | 0x00C | Prescale Register (PR). When the Prescale Counter (below) is equal to this value, the next clock increments the TC and clears the PC. | 0 |
| TMR16B1PC | R/W | 0x010 | Prescale Counter (PC). The 16-bit PC is a counter which is incremented to the value stored in PR. When the value in PR is reached, the TC is incremented and the PC is cleared. The PC is observable and controllable through the bus interface. | 0 |
| TMR16B1MCR | R/W | 0x014 | Match Control Register (MCR). The MCR is used to control if an interrupt is generated and if the TC is reset when a Match occurs. | 0 |
| TMR16B1MR0 | R/W | 0x018 | Match Register 0 (MR0). MR0 can be enabled through the MCR to reset the TC, stop both the TC and PC, and/or generate an interrupt every time MR0 matches the TC. | 0 |
| TMR16B1MR1 | R/W | 0x01C | Match Register 1 (MR1). See MR0 description. | 0 |
| TMR16B1MR2 | R/W | 0x020 | Match Register 2 (MR2). See MR0 description. | 0 |
| TMR16B1MR3 | R/W | 0x024 | Match Register 3 (MR3). See MR0 description. | 0 |
| TMR16B1CCR | R/W | 0x028 | Capture Control Register (CCR). The CCR controls which edges of the capture inputs are used to load the Capture Registers and whether or not an interrupt is generated when a capture takes place. | 0 |
| TMR16B1CR0 | RO | 0x02C | Capture Register 0 (CR0). CR0 is loaded with the value of TC when there is an event on the CT16B1_CAP0 input. | 0 |
| TMR16B1CR1 | RO | 0x030 | Capture Register 1 (CR1). CR1 is loaded with the value of TC when there is an event on the CT16B1_CAP1 input. | 0 |
| - | - | 0x034 - 0x038 | Reserved | - |
| TMR16B1EMR | R/W | 0x03C | External Match Register (EMR). The EMR controls the match function and the external match pins CT16B1_MAT[1:0]. | 0 |
| - | - | 0x040 - 0x06C | Reserved | - |
| TMR16B1CTCR | R/W | 0x070 | Count Control Register (CTCR). The CTCR selects between Timer and Counter mode, and in Counter mode selects the signal and edge(s) for counting. | 0 |
| TMR16B1PWMC | R/W | 0x074 | PWM Control Register (PWMCON). The PWMCON enables PWM mode for the external match pins CT16B1_MAT[1:0]. | 0 |

[1] Reset value reflects the data stored in used bits only. It does not include reserved bits content.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 19.7.1 Interrupt Register (TMR16B0IR and TMR16B1IR)

The Interrupt Register (IR) consists of four bits for the match interrupts and one bit for the capture interrupt. If an interrupt is generated then the corresponding bit in the IR will be HIGH. Otherwise, the bit will be LOW. Writing a logic one to the corresponding IR bit will reset the interrupt. Writing a zero has no effect.

**Table 298. Interrupt Register (TMR16B0IR - address 0x4000 C000 and TMR16B1IR - address 0x4001 0000) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 0 | MR0INT | Interrupt flag for match channel 0. | 0 |
| 1 | MR1INT | Interrupt flag for match channel 1. | 0 |
| 2 | MR2INT | Interrupt flag for match channel 2. | 0 |
| 3 | MR3INT | Interrupt flag for match channel 3. | 0 |
| 4 | CR0INT | Interrupt flag for capture channel 0 event. | 0 |
| 5 | CR1INT | Interrupt flag for capture channel 1 event. | 0 |
| 31:6 | - | Reserved | - |

### 19.7.2 Timer Control Register (TMR16B0TCR and TMR16B1TCR)

The Timer Control Register (TCR) is used to control the operation of the counter/timer.

**Table 299. Timer Control Register (TMR16B0TCR - address 0x4000 C004 and TMR16B1TCR - address 0x4001 0004) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 0 | CEN | Counter Enable. When one, the Timer Counter and Prescale Counter are enabled for counting. When zero, the counters are disabled. | 0 |
| 1 | CRST | Counter Reset. When one, the Timer Counter and the Prescale Counter are synchronously reset on the next positive edge of PCLK. The counters remain reset until TCR[1] is returned to zero. | 0 |
| 31:2 | - | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |

### 19.7.3 Timer Counter (TMR16B0TC - address 0x4000 C008 and TMR16B1TC - address 0x4001 0008)

The 16-bit Timer Counter is incremented when the Prescale Counter reaches its terminal count. Unless it is reset before reaching its upper limit, the TC will count up through the value 0x0000 FFFF and then wrap back to the value 0x0000 0000. This event does not cause an interrupt, but a Match register can be used to detect an overflow if needed.

**Table 300: Timer counter registers (TMR16B0TC, address 0x4000 C008 and TMR16B1TC 0x4001 0008) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 15:0 | TC | Timer counter value. | 0 |
| 31:16 | - | Reserved. | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 19.7.4 Prescale Register (TMR16B0PR - address 0x4000 C00C and TMR16B1PR - address 0x4001 000C)

The 16-bit Prescale Register specifies the maximum value for the Prescale Counter.

**Table 301: Prescale registers (TMR16B0PR, address 0x4000 C00C and TMR16B1PR 0x4001 000C) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 15:0 | PR | Prescale max value. | 0 |
| 31:16 | - | Reserved. | - |

### 19.7.5 Prescale Counter register (TMR16B0PC - address 0x4000 C010 and TMR16B1PC - address 0x4001 0010)

The 16-bit Prescale Counter controls division of PCLK by some constant value before it is applied to the Timer Counter. This allows control of the relationship between the resolution of the timer and the maximum time before the timer overflows. The Prescale Counter is incremented on every PCLK. When it reaches the value stored in the Prescale Register, the Timer Counter is incremented, and the Prescale Counter is reset on the next PCLK. This causes the TC to increment on every PCLK when PR = 0, every 2 PCLKs when PR = 1, etc.

**Table 302: Prescale counter registers (TMR16B0PC, address 0x4001 C010 and TMR16B1PC 0x4000 0010) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 15:0 | PC | Prescale counter value. | 0 |
| 31:16 | - | Reserved. | - |

### 19.7.6 Match Control Register (TMR16B0MCR and TMR16B1MCR)

The Match Control Register is used to control what operations are performed when one of the Match Registers matches the Timer Counter. The function of each of the bits is shown in Table 303.

**Table 303. Match Control Register (TMR16B0MCR - address 0x4000 C014 and TMR16B1MCR - address 0x4001 0014) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 0 | MR0I | | Interrupt on MR0: an interrupt is generated when MR0 matches the value in the TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 1 | MR0R | | Reset on MR0: the TC will be reset if MR0 matches it. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 2 | MR0S | | Stop on MR0: the TC and PC will be stopped and TCR[0] will be set to 0 if MR0 matches the TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 303. Match Control Register (TMR16B0MCR - address 0x4000 C014 and TMR16B1MCR - address 0x4001 0014) bit description** *…continued*

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 3 | MR1I | | Interrupt on MR1: an interrupt is generated when MR1 matches the value in the TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 4 | MR1R | | Reset on MR1: the TC will be reset if MR1 matches it. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 5 | MR1S | | Stop on MR1: the TC and PC will be stopped and TCR[0] will be set to 0 if MR1 matches the TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 6 | MR2I | | Interrupt on MR2: an interrupt is generated when MR2 matches the value in the TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 7 | MR2R | | Reset on MR2: the TC will be reset if MR2 matches it. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 8 | MR2S | | Stop on MR2: the TC and PC will be stopped and TCR[0] will be set to 0 if MR2 matches the TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 9 | MR3I | | Interrupt on MR3: an interrupt is generated when MR3 matches the value in the TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 10 | MR3R | | Reset on MR3: the TC will be reset if MR3 matches it. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 11 | MR3S | | Stop on MR3: the TC and PC will be stopped and TCR[0] will be set to 0 if MR3 matches the TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 31:12 | - | | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |

### 19.7.7 Match Registers (TMR16B0MR0/1/2/3 - addresses 0x4000 C018/1C/20/24 and TMR16B1MR0/1/2/3 - addresses 0x4001 0018/1C/20/24)

The Match register values are continuously compared to the Timer Counter value. When the two values are equal, actions can be triggered automatically. The action possibilities are to generate an interrupt, reset the Timer Counter, or stop the timer. Actions are controlled by the settings in the MCR register.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 304: Match registers (TMR16B0MR0 to 3, addresses 0x4000 C018 to 24 and TMR16B1MR0 to 3, addresses 0x4001 0018 to 24) bit description

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 15:0 | MATCH | Timer counter match value. | 0 |
| 31:16 | - | Reserved. | - |

### 19.7.8 Capture Control Register (TMR16B0CCR and TMR16B1CCR)

The Capture Control Register is used to control whether the Capture Register is loaded with the value in the Counter/timer when the capture event occurs, and whether an interrupt is generated by the capture event. Setting both the rising and falling bits at the same time is a valid configuration, resulting in a capture event for both edges. In the description below, n represents the Timer number, 0 or 1.

Table 305. Capture Control Register (TMR16B0CCR - address 0x4000 C028 and TMR16B1CCR - address 0x4001 0028) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 0 | CAP0RE | | Capture on CT16Bn_CAP0 rising edge: a sequence of 0 then 1 on CT16Bn_CAP0 will cause CR0 to be loaded with the contents of TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 1 | CAP0FE | | Capture on CT16Bn_CAP0 falling edge: a sequence of 1 then 0 on CT16Bn_CAP0 will cause CR0 to be loaded with the contents of TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 2 | CAP0I | | Interrupt on CT16Bn_CAP0 event: a CR0 load due to a CT16Bn_CAP0 event will generate an interrupt. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 3 | CAP1RE | | Capture on CT16Bn_CAP1 rising edge: a sequence of 0 then 1 on CT16Bn_CAP1 will cause CR1 to be loaded with the contents of TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 4 | CAP1FE | | Capture on CT16Bn_CAP1 falling edge: a sequence of 1 then 0 on CT16Bn_CAP1 will cause CR1 to be loaded with the contents of TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 5 | CAP1I | | Interrupt on CT16Bn_CAP1 event: a CR1 load due to a CT16Bn_CAP1 event will generate an interrupt. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 31:6 | - | - | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 19.7.9 Capture Register (CT16B0CR0/1 - address 0x4000 C02C/30 and CT16B1CR0/1 - address 0x4001 002C/30)

Each Capture register is associated with a device pin and may be loaded with the counter/timer value when a specified event occurs on that pin. The settings in the Capture Control Register register determine whether the capture function is enabled, and whether a capture event happens on the rising edge of the associated pin, the falling edge, or on both edges.

**Table 306: Capture registers (TMR16B0CR0/1, address 0x4000 C02C/30 and TMR16B1CR0/1, address 0x4001 002C/30) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 15:0 | CAP | Timer counter capture value. | 0 |
| 31:16 | - | Reserved. | - |

### 19.7.10 External Match Register (TMR16B0EMR and TMR16B1EMR)

The External Match Register provides both control and status of the external match channels and external match pins CT16B0_MAT[2:0] and CT16B1_MAT[1:0].

If the match outputs are configured as PWM output in the PWMCON registers (Section 19.7.12), the function of the external match registers is determined by the PWM rules (Section 19.7.13 “Rules for single edge controlled PWM outputs” on page 360).

**Table 307. External Match Register (TMR16B0EMR - address 0x4000 C03C and TMR16B1EMR - address 0x4001 003C) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 0 | EM0 | | External Match 0. This bit reflects the state of output CT16B0_MAT0/CT16B1_MAT0, whether or not this output is connected to its pin. When a match occurs between the TC and MR0, this bit can either toggle, go LOW, go HIGH, or do nothing. Bits EMR[5:4] control the functionality of this output. This bit is driven to the CT16B0_MAT0/CT16B1_MAT0 pins if the match function is selected in the IOCON registers (0 = LOW, 1 = HIGH). | 0 |
| 1 | EM1 | | External Match 1. This bit reflects the state of output CT16B0_MAT1/CT16B1_MAT1, whether or not this output is connected to its pin. When a match occurs between the TC and MR1, this bit can either toggle, go LOW, go HIGH, or do nothing. Bits EMR[7:6] control the functionality of this output. This bit is driven to the CT16B0_MAT1/CT16B1_MAT1 pins if the match function is selected in the IOCON registers (0 = LOW, 1 = HIGH). | 0 |
| 2 | EM2 | | External Match 2. This bit reflects the state of output match channel 2, whether or not this output is connected to its pin. When a match occurs between the TC and MR2, this bit can either toggle, go LOW, go HIGH, or do nothing. Bits EMR[9:8] control the functionality of this output. Note that on counter/timer 0 this match channel is not pinned out. This bit is driven to the CT16B1_MAT2 pin if the match function is selected in the IOCON registers (0 = LOW, 1 = HIGH). | 0 |
| 3 | EM3 | | External Match 3. This bit reflects the state of output of match channel 3. When a match occurs between the TC and MR3, this bit can either toggle, go LOW, go HIGH, or do nothing. Bits EMR[11:10] control the functionality of this output. There is no output pin available for this channel on either of the 16-bit timers. | 0 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 307. External Match Register (TMR16B0EMR - address 0x4000 C03C and TMR16B1EMR - address 0x4001 003C) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 5:4 | EMC0 | | External Match Control 0. Determines the functionality of External Match 0. | 00 |
| | | 0x0 | Do Nothing. | |
| | | 0x1 | Clear the corresponding External Match bit/output to 0 (CT16Bn_MATm pin is LOW if pinned out). | |
| | | 0x2 | Set the corresponding External Match bit/output to 1 (CT16Bn_MATm pin is HIGH if pinned out). | |
| | | 0x3 | Toggle the corresponding External Match bit/output. | |
| 7:6 | EMC1 | | External Match Control 1. Determines the functionality of External Match 1. | 00 |
| | | 0x0 | Do Nothing. | |
| | | 0x1 | Clear the corresponding External Match bit/output to 0 (CT16Bn_MATm pin is LOW if pinned out). | |
| | | 0x2 | Set the corresponding External Match bit/output to 1 (CT16Bn_MATm pin is HIGH if pinned out). | |
| | | 0x3 | Toggle the corresponding External Match bit/output. | |
| 9:8 | EMC2 | | External Match Control 2. Determines the functionality of External Match 2. | 00 |
| | | 0x0 | Do Nothing. | |
| | | 0x1 | Clear the corresponding External Match bit/output to 0 (CT16Bn_MATm pin is LOW if pinned out). | |
| | | 0x2 | Set the corresponding External Match bit/output to 1 (CT16Bn_MATm pin is HIGH if pinned out). | |
| | | 0x3 | Toggle the corresponding External Match bit/output. | |
| 11:10 | EMC3 | | External Match Control 3. Determines the functionality of External Match 3. | 00 |
| | | 0x0 | Do Nothing. | |
| | | 0x1 | Clear the corresponding External Match bit/output to 0 (CT16Bn_MATm pin is LOW if pinned out). | |
| | | 0x2 | Set the corresponding External Match bit/output to 1 (CT16Bn_MATm pin is HIGH if pinned out). | |
| | | 0x3 | Toggle the corresponding External Match bit/output. | |
| 31:12 | - | | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |

**Table 308. External match control**

| EMR[11:10], EMR[9:8], EMR[7:6], or EMR[5:4] | Function |
|---|---|
| 00 | Do Nothing. |
| 01 | Clear the corresponding External Match bit/output to 0 (CT16Bn_MATm pin is LOW if pinned out). |
| 10 | Set the corresponding External Match bit/output to 1 (CT16Bn_MATm pin is HIGH if pinned out). |
| 11 | Toggle the corresponding External Match bit/output. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 19.7.11 Count Control Register (TMR16B0CTCR and TMR16B1CTCR)

The Count Control Register (CTCR) is used to select between Timer and Counter mode, and in Counter mode to select the pin and edge(s) for counting.

When Counter Mode is chosen as a mode of operation, the CAP input (selected by the CTCR bits 3:2) is sampled on every rising edge of the PCLK clock. After comparing two consecutive samples of this CAP input, one of the following four events is recognized: rising edge, falling edge, either of edges or no changes in the level of the selected CAP input. Only if the identified event occurs, and the event corresponds to the one selected by bits 1:0 in the CTCR register, will the Timer Counter register be incremented.

Effective processing of the externally supplied clock to the counter has some limitations. Since two successive rising edges of the PCLK clock are used to identify only one edge on the CAP selected input, the frequency of the CAP input can not exceed one half of the PCLK clock. Consequently, duration of the HIGH/LOW levels on the same CAP input in this case can not be shorter than 1/(2 × PCLK).

Bits 7:4 of this register are used to enable and configure the capture-clears-timer feature. This feature allows for a designated edge on a particular CAP input to reset the timer to all zeros. Using this mechanism to clear the timer on the leading edge of an input pulse and performing a capture on the trailing edge permits direct pulse-width measurement using a single capture input without the need to perform a subtraction operation in software.

**Table 309. Count Control Register (TMR16B0CTCR - address 0x4000 C070 and TMR16B1CTCR - address 0x4001 0070) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 1:0 | CTM | | Counter/Timer Mode. This field selects which rising PCLK edges can increment Timer's Prescale Counter (PC), or clear PC and increment Timer Counter (TC). | 00 |
| | | 0x0 | Timer Mode: every rising PCLK edge | |
| | | 0x1 | Counter Mode: TC is incremented on rising edges on the CAP input selected by bits 3:2. | |
| | | 0x2 | Counter Mode: TC is incremented on falling edges on the CAP input selected by bits 3:2. | |
| | | 0x3 | Counter Mode: TC is incremented on both edges on the CAP input selected by bits 3:2. | |
| 3:2 | CIS | | Count Input Select. In counter mode (when bits 1:0 in this register are not 00), these bits select which CAP pin is sampled for clocking. **Note:** If Counter mode is selected in the CTCR register, bits 2:0 in the Capture Control Register (CCR) must be programmed as 000. | 00 |
| | | 0x0 | CT16Bn_CAP0 | |
| | | 0x1 | CT16Bn_CAP1 | |
| | | 0x2 | Reserved. | |
| | | 0x0 | Reserved. | |
| 4 | ENCC | | Setting this bit to one enables clearing of the timer and the prescaler when the capture-edge event specified in bits 7:5 occurs. | 0 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 309. Count Control Register (TMR16B0CTCR - address 0x4000 C070 and TMR16B1CTCR - address 0x4001 0070) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 7:5 | SELCC | | When bit 4 is one, these bits select which capture input edge will cause the timer and prescaler to be cleared. These bits have no effect when bit 4 is zero. | 0 |
| | | 0x0 | Rising Edge of CAP0 clears the timer (if bit 4 is set). | |
| | | 0x1 | Falling Edge of CAP0 clears the timer (if bit 4 is set). | |
| | | 0x2 | Rising Edge of CAP1 clears the timer (if bit 4 is set). | |
| | | 0x3 | Falling Edge of CAP1 clears the timer (if bit 4 is set). | |
| | | 0x4 | Reserved. | |
| | | 0x5 | Reserved. | |
| | | 0x6 | Reserved. | |
| | | 0x7 | Reserved. | |
| 31:8 | - | - | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | - |

## 19.7.12 PWM Control register (TMR16B0PWMC and TMR16B1PWMC)

The PWM Control Register is used to configure the match outputs as PWM outputs. Each match output can be independently set to perform either as PWM output or as match output whose function is controlled by the External Match Register (EMR).

For timer 0, three single-edge controlled PWM outputs can be selected on the CT16B0_MAT[2:0] outputs. For timer 1, two single-edged PWM outputs can be selected on the CT16B1_Mat[1:0] outputs. One additional match register determines the PWM cycle length. When a match occurs in any of the other match registers, the PWM output is set to HIGH. The timer is reset by the match register that is configured to set the PWM cycle length. When the timer is reset to zero, all currently HIGH match outputs configured as PWM outputs are cleared.

**Table 310. PWM Control Register (TMR16B0PWMC - address 0x4000 C074 and TMR16B1PWMC- address 0x4001 0074) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 0 | PWMEN0 | | PWM channel0 enable | 0 |
| | | 0 | CT16Bn_MAT0 is controlled by EM0. | |
| | | 1 | PWM mode is enabled for CT16Bn_MAT0. | |
| 1 | PWMEN1 | | PWM channel1 enable | 0 |
| | | 0 | CT16Bn_MAT1 is controlled by EM1. | |
| | | 1 | PWM mode is enabled for CT16Bn_MAT1. | |
| 2 | PWMEN2 | | PWM channel2 enable | 0 |
| | | 0 | Match channel 2 or pin CT16B0_MAT2 is controlled by EM2. Match channel 2 is not pinned out on timer 1. | |
| | | 1 | PWM mode is enabled for match channel 2 or pin CT16B0_MAT2. | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 310. PWM Control Register (TMR16B0PWMC - address 0x4000 C074 and TMR16B1PWMC- address 0x4001 0074) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 3 | PWMEN3 | | PWM channel3 enable<br>**Note:** It is recommended to use match channel 3 to set the PWM cycle because it is not pinned out. | 0 |
| | | 0 | Match channel 3 match channel 3 is controlled by EM3. | |
| | | 1 | PWM mode is enabled for match channel 3match channel 3. | |
| 31:4 | - | | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |

### 19.7.13 Rules for single edge controlled PWM outputs

1. All single edge controlled PWM outputs go LOW at the beginning of each PWM cycle (timer is set to zero) unless their match value is equal to zero.
2. Each PWM output will go HIGH when its match value is reached. If no match occurs (i.e. the match value is greater than the PWM cycle length), the PWM output remains continuously LOW.
3. If a match value larger than the PWM cycle length is written to the match register, and the PWM signal is HIGH already, then the PWM signal will be cleared on the next start of the next PWM cycle.
4. If a match register contains the same value as the timer reset value (the PWM cycle length), then the PWM output will be reset to LOW on the next clock tick. Therefore, the PWM output will always consist of a one clock tick wide positive pulse with a period determined by the PWM cycle length (i.e. the timer reload value).
5. If a match register is set to zero, then the PWM output will go to HIGH the first time the timer goes back to zero and will stay HIGH continuously.

**Note:** When the match outputs are selected to serve as PWM outputs, the timer reset (MRnR) and timer stop (MRnS) bits in the Match Control Register MCR must be set to 0 except for the match register setting the PWM cycle length. For this register, set the MRnR bit to 1 to enable the timer reset when the timer value matches the value of the corresponding match register.

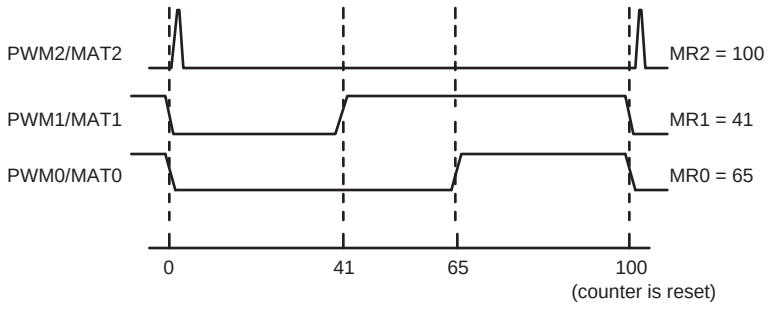


**Fig 73. Sample PWM waveforms with a PWM cycle length of 100 (selected by MR2) and MAT2:0 enabled as PWM outputs by the PWCM register.**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 19.8 Example timer operation

Figure 74 shows a timer configured to reset the count and generate an interrupt on match. The prescaler is set to 2 and the match register set to 6. At the end of the timer cycle where the match occurs, the timer count is reset. This gives a full length cycle to the match value. The interrupt indicating that a match occurred is generated in the next clock after the timer reached the match value.

Figure 75 shows a timer configured to stop and generate an interrupt on match. The prescaler is again set to 2 and the match register set to 6. In the next clock after the timer reaches the match value, the timer enable bit in TCR is cleared, and the interrupt indicating that a match occurred is generated.

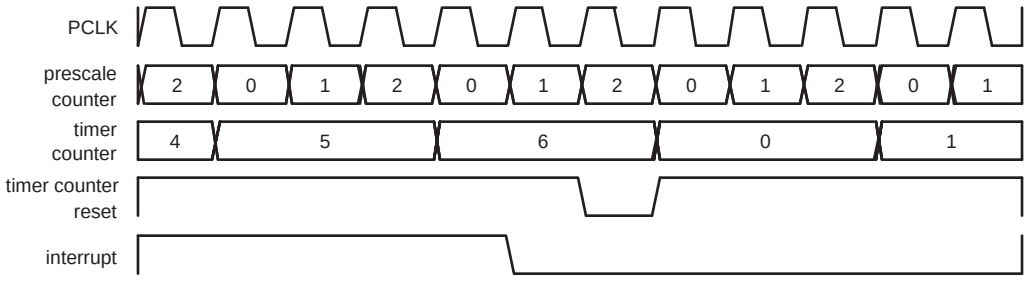


**Fig 74. A timer cycle in which PR=2, MRx=6, and both interrupt and reset on match are enabled**

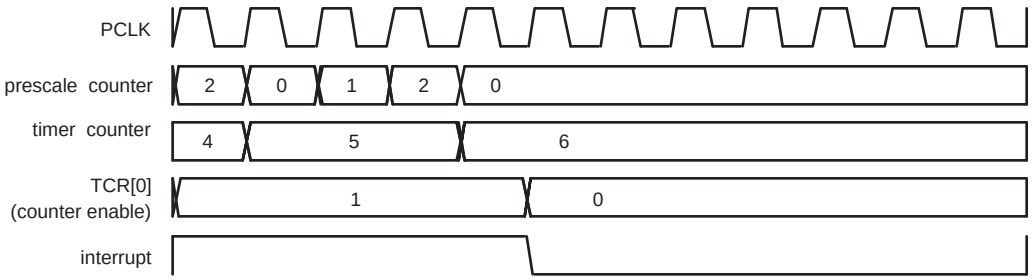


**Fig 75. A timer cycle in which PR=2, MRx=6, and both interrupt and stop on match are enabled**

## 19.9 Architecture

The block diagram for counter/timer0 and counter/timer1 is shown in Figure 76.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

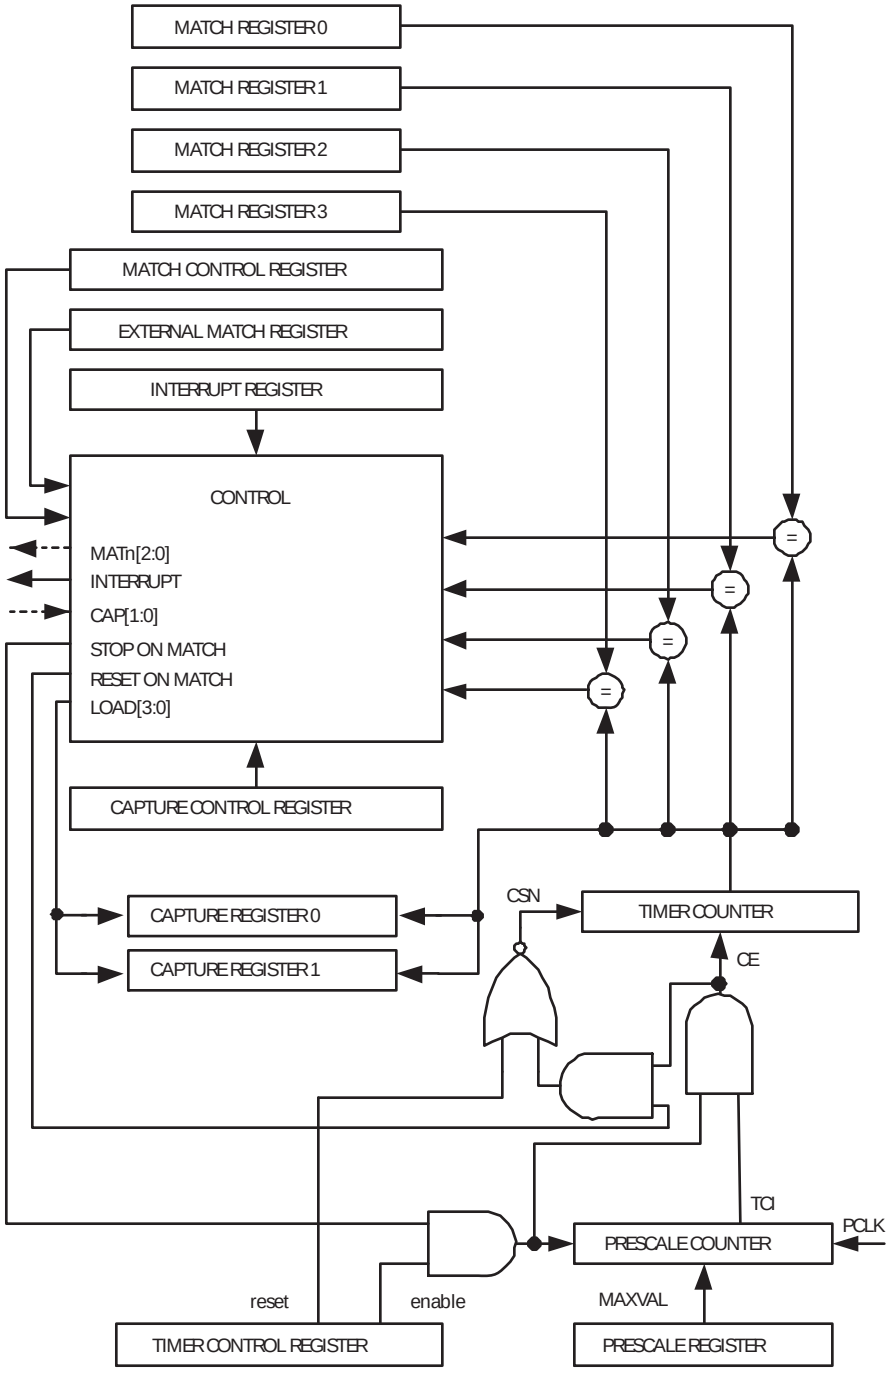


**Fig 76. 16-bit counter/timer block diagram**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 20.1 How to read this chapter

The 32-bit timer blocks are identical for all LPC111x, LPC11D14, and LPC11Cxx parts.

## 20.2 Basic configuration

The CT32B0/1 are configured using the following registers:

1. Pins: The CT32B0/1 pins must be configured in the IOCONFIG register block (Section 7.4).
2. Power and peripheral clock: In the SYSAHBCLKCTRL register, set bit 9 and bit 10 (Table 21). The peripheral clock (PCLK) is provided by the system clock (see Table 20).

## 20.3 Features

- Two 32-bit counter/timers with a programmable 32-bit prescaler.
- Counter or Timer operation.
- One 32-bit capture channel that can take a snapshot of the timer value when an input signal transitions. A capture event may also optionally generate an interrupt.
- Four 32-bit match registers that allow:
  - Continuous operation with optional interrupt generation on match.
  - Stop timer on match with optional interrupt generation.
  - Reset timer on match with optional interrupt generation.
- Four external outputs corresponding to match registers with the following capabilities:
  - Set LOW on match.
  - Set HIGH on match.
  - Toggle on match.
  - Do nothing on match.
- For each timer, up to four match registers can be configured as PWM allowing to use up to three match outputs as single edge controlled PWM outputs.

## 20.4 Applications

- Interval timer for counting internal events
- Pulse Width Demodulator via capture input
- Free running timer
- Pulse Width Modulator via match outputs


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 20.5 Description

Each Counter/timer is designed to count cycles of the peripheral clock (PCLK) or an externally supplied clock and can optionally generate interrupts or perform other actions at specified timer values based on four match registers. The peripheral clock is provided by the system clock (see Figure 8). Each counter/timer also includes one capture input to trap the timer value when an input signal transitions, optionally generating an interrupt.

In PWM mode, three match registers can be used to provide a single-edge controlled PWM output on the match output pins. One match register is used to control the PWM cycle length.

**Remark:** 32-bit counter/timer0 (CT32B0) and 32-bit counter/timer1 (CT32B1) are functionally identical except for the peripheral base address.

## 20.6 Pin description

Table 311 gives a brief summary of each of the counter/timer related pins.

**Table 311. Counter/timer pin description**

| Pin | Type | Description |
|---|---|---|
| CT32B0_CAP0<br>CT32B1_CAP0 | Input | Capture Signals:<br>A transition on a capture pin can be configured to load one of the Capture Registers with the value in the Timer Counter and optionally generate an interrupt.<br>The counter/timer block can select a capture signal as a clock source instead of the PCLK derived clock. For more details see Section 20.7.11 “Count Control Register (TMR32B0CTCR and TMR32B1TCR)” on page 372. |
| CT32B0_MAT[3:0]<br>CT32B1_MAT[3:0] | Output | External Match Output of CT32B0/1:<br>When a match register TMR32B0/1MR3:0 equals the timer counter (TC), this output can either toggle, go LOW, go HIGH, or do nothing. The External Match Register (EMR) and the PWM Control register (PWMCON) control the functionality of this output. |

## 20.7 Register description

32-bit counter/timer0 contains the registers shown in Table 312 and 32-bit counter/timer1 contains the registers shown in Table 313. More detailed descriptions follow.

**Table 312. Register overview: 32-bit counter/timer 0 CT32B0 (base address 0x4001 4000)**

| Name | Access | Address offset | Description | Reset value[1] |
|---|---|---|---|---|
| TMR32B0IR | R/W | 0x000 | Interrupt Register (IR). The IR can be written to clear interrupts. The IR can be read to identify which of five possible interrupt sources are pending. | 0 |
| TMR32B0TCR | R/W | 0x004 | Timer Control Register (TCR). The TCR is used to control the Timer Counter functions. The Timer Counter can be disabled or reset through the TCR. | 0 |
| TMR32B0TC | R/W | 0x008 | Timer Counter (TC). The 32-bit TC is incremented every PR+1 cycles of PCLK. The TC is controlled through the TCR. | 0 |
| TMR32B0PR | R/W | 0x00C | Prescale Register (PR). When the Prescale Counter (below) is equal to this value, the next clock increments the TC and clears the PC. | 0 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 312. Register overview: 32-bit counter/timer 0 CT32B0 (base address 0x4001 4000)** *…continued*

| Name | Access | Address offset | Description | Reset value[1] |
|---|---|---|---|---|
| TMR32B0PC | R/W | 0x010 | Prescale Counter (PC). The 32-bit PC is a counter which is incremented to the value stored in PR. When the value in PR is reached, the TC is incremented and the PC is cleared. The PC is observable and controllable through the bus interface. | 0 |
| TMR32B0MCR | R/W | 0x014 | Match Control Register (MCR). The MCR is used to control if an interrupt is generated and if the TC is reset when a Match occurs. | 0 |
| TMR32B0MR0 | R/W | 0x018 | Match Register 0 (MR0). MR0 can be enabled through the MCR to reset the TC, stop both the TC and PC, and/or generate an interrupt every time MR0 matches the TC. | 0 |
| TMR32B0MR1 | R/W | 0x01C | Match Register 1 (MR1). See MR0 description. | 0 |
| TMR32B0MR2 | R/W | 0x020 | Match Register 2 (MR2). See MR0 description. | 0 |
| TMR32B0MR3 | R/W | 0x024 | Match Register 3 (MR3). See MR0 description. | 0 |
| TMR32B0CCR | R/W | 0x028 | Capture Control Register (CCR). The CCR controls which edges of the capture inputs are used to load the Capture Registers and whether or not an interrupt is generated when a capture takes place. | 0 |
| TMR32B0CR0 | RO | 0x02C | Capture Register 0 (CR0). CR0 is loaded with the value of TC when there is an event on the CT32B0_CAP0 input. | 0 |
| TMR32B0EMR | R/W | 0x03C | External Match Register (EMR). The EMR controls the match function and the external match pins CT32B0_MAT[3:0]. | 0 |
| - | - | 0x040 - 0x06C | reserved | - |
| TMR32B0CTCR | R/W | 0x070 | Count Control Register (CTCR). The CTCR selects between Timer and Counter mode, and in Counter mode selects the signal and edge(s) for counting. | 0 |
| TMR32B0PWMC | R/W | 0x074 | PWM Control Register (PWMCON). The PWMCON enables PWM mode for the external match pins CT32B0_MAT[3:0]. | 0 |

[1] Reset value reflects the data stored in used bits only. It does not include reserved bits content.

**Table 313. Register overview: 32-bit counter/timer 1 CT32B1 (base address 0x4001 8000)**

| Name | Access | Address offset | Description | Reset value[1] |
|---|---|---|---|---|
| TMR32B1IR | R/W | 0x000 | Interrupt Register (IR). The IR can be written to clear interrupts. The IR can be read to identify which of five possible interrupt sources are pending. | 0 |
| TMR32B1TCR | R/W | 0x004 | Timer Control Register (TCR). The TCR is used to control the Timer Counter functions. The Timer Counter can be disabled or reset through the TCR. | 0 |
| TMR32B1TC | R/W | 0x008 | Timer Counter (TC). The 32-bit TC is incremented every PR+1 cycles of PCLK. The TC is controlled through the TCR. | 0 |
| TMR32B1PR | R/W | 0x00C | Prescale Register (PR). When the Prescale Counter (below) is equal to this value, the next clock increments the TC and clears the PC. | 0 |
| TMR32B1PC | R/W | 0x010 | Prescale Counter (PC). The 32-bit PC is a counter which is incremented to the value stored in PR. When the value in PR is reached, the TC is incremented and the PC is cleared. The PC is observable and controllable through the bus interface. | 0 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 313. Register overview: 32-bit counter/timer 1 CT32B1 (base address 0x4001 8000)** *…continued*

| Name | Access | Address offset | Description | Reset value[1] |
|---|---|---|---|---|
| TMR32B1MCR | R/W | 0x014 | Match Control Register (MCR). The MCR is used to control if an interrupt is generated and if the TC is reset when a Match occurs. | 0 |
| TMR32B1MR0 | R/W | 0x018 | Match Register 0 (MR0). MR0 can be enabled through the MCR to reset the TC, stop both the TC and PC, and/or generate an interrupt every time MR0 matches the TC. | 0 |
| TMR32B1MR1 | R/W | 0x01C | Match Register 1 (MR1). See MR0 description. | 0 |
| TMR32B1MR2 | R/W | 0x020 | Match Register 2 (MR2). See MR0 description. | 0 |
| TMR32B1MR3 | R/W | 0x024 | Match Register 3 (MR3). See MR0 description. | 0 |
| TMR32B1CCR | R/W | 0x028 | Capture Control Register (CCR). The CCR controls which edges of the capture inputs are used to load the Capture Registers and whether or not an interrupt is generated when a capture takes place. | 0 |
| TMR32B1CR0 | RO | 0x02C | Capture Register 0 (CR0). CR0 is loaded with the value of TC when there is an event on the CT32B1_CAP0 input. | 0 |
| TMR32B1EMR | R/W | 0x03C | External Match Register (EMR). The EMR controls the match function and the external match pins CT32B1_MAT[3:0]. | 0 |
| - | - | 0x040 - 0x06C | reserved | - |
| TMR32B1CTCR | R/W | 0x070 | Count Control Register (CTCR). The CTCR selects between Timer and Counter mode, and in Counter mode selects the signal and edge(s) for counting. | 0 |
| TMR32B1PWMC | R/W | 0x074 | PWM Control Register (PWMCON). The PWMCON enables PWM mode for the external match pins CT32B1_MAT[3:0]. | 0 |

[1] Reset value reflects the data stored in used bits only. It does not include reserved bits content.

### 20.7.1 Interrupt Register (TMR32B0IR and TMR32B1IR)

The Interrupt Register consists of four bits for the match interrupts and one bit for the capture interrupts. If an interrupt is generated then the corresponding bit in the IR will be HIGH. Otherwise, the bit will be LOW. Writing a logic one to the corresponding IR bit will reset the interrupt. Writing a zero has no effect.

**Table 314: Interrupt Register (TMR32B0IR - address 0x4001 4000 and TMR32B1IR - address 0x4001 8000) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 0 | MR0 Interrupt | Interrupt flag for match channel 0. | 0 |
| 1 | MR1 Interrupt | Interrupt flag for match channel 1. | 0 |
| 2 | MR2 Interrupt | Interrupt flag for match channel 2. | 0 |
| 3 | MR3 Interrupt | Interrupt flag for match channel 3. | 0 |
| 4 | CR0 Interrupt | Interrupt flag for capture channel 0 event. | 0 |
| 31:5 | - | Reserved | - |

### 20.7.2 Timer Control Register (TMR32B0TCR and TMR32B1TCR)

The Timer Control Register (TCR) is used to control the operation of the counter/timer.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 315: Timer Control Register (TMR32B0TCR - address 0x4001 4004 and TMR32B1TCR - address 0x4001 8004) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 0 | CEn | When one, the Timer Counter and Prescale Counter are enabled for counting. When zero, the counters are disabled. | 0 |
| 1 | CRst | When one, the Timer Counter and the Prescale Counter are synchronously reset on the next positive edge of PCLK. The counters remain reset until TCR[1] is returned to zero. | 0 |
| 31:2 | - | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |

### 20.7.3 Timer Counter (TMR32B0TC - address 0x4001 4008 and TMR32B1TC - address 0x4001 8008)

The 32-bit Timer Counter is incremented when the Prescale Counter reaches its terminal count. Unless it is reset before reaching its upper limit, the TC will count up through the value 0xFFFF FFFF and then wrap back to the value 0x0000 0000. This event does not cause an interrupt, but a Match register can be used to detect an overflow if needed.

**Table 316: Timer counter registers (TMR32B0TC, address 0x4001 4008 and TMR32B1TC 0x4001 8008) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 31:0 | TC | Timer counter value. | 0 |

### 20.7.4 Prescale Register (TMR32B0PR - address 0x4001 400C and TMR32B1PR - address 0x4001 800C)

The 32-bit Prescale Register specifies the maximum value for the Prescale Counter.

**Table 317: Prescale registers (TMR32B0PR, address 0x4001 400C and TMR32B1PR 0x4001 800C) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 31:0 | PR | Prescale value. | 0 |

### 20.7.5 Prescale Counter Register (TMR32B0PC - address 0x4001 4010 and TMR32B1PC - address 0x4001 8010)

The 32-bit Prescale Counter controls division of PCLK by some constant value before it is applied to the Timer Counter. This allows control of the relationship between the resolution of the timer and the maximum time before the timer overflows. The Prescale Counter is incremented on every PCLK. When it reaches the value stored in the Prescale Register, the Timer Counter is incremented, and the Prescale Counter is reset on the next PCLK. This causes the TC to increment on every PCLK when PR = 0, every 2 PCLKs when PR = 1, etc.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 318: Prescale counter registers (TMR32B0PC, address 0x4001 4010 and TMR32B1PC 0x4001 8010) bit description

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 31:0 | PC | Prescale counter value. | 0 |

### 20.7.6 Match Control Register (TMR32B0MCR and TMR32B1MCR)

The Match Control Register is used to control what operations are performed when one of the Match Registers matches the Timer Counter. The function of each of the bits is shown in Table 319.

Table 319: Match Control Register (TMR32B0MCR - address 0x4001 4014 and TMR32B1MCR - address 0x4001 8014) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 0 | MR0I | | Interrupt on MR0: an interrupt is generated when MR0 matches the value in the TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 1 | MR0R | | Reset on MR0: the TC will be reset if MR0 matches it. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 2 | MR0S | | Stop on MR0: the TC and PC will be stopped and TCR[0] will be set to 0 if MR0 matches the TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 3 | MR1I | | Interrupt on MR1: an interrupt is generated when MR1 matches the value in the TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 4 | MR1R | | Reset on MR1: the TC will be reset if MR1 matches it. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 5 | MR1S | | Stop on MR1: the TC and PC will be stopped and TCR[0] will be set to 0 if MR1 matches the TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 6 | MR2I | | Interrupt on MR2: an interrupt is generated when MR2 matches the value in the TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 7 | MR2R | | Reset on MR2: the TC will be reset if MR2 matches it. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 8 | MR2S | | Stop on MR2: the TC and PC will be stopped and TCR[0] will be set to 0 if MR2 matches the TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 319: Match Control Register (TMR32B0MCR - address 0x4001 4014 and TMR32B1MCR - address 0x4001 8014) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 9 | MR3I | | Interrupt on MR3: an interrupt is generated when MR3 matches the value in the TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 10 | MR3R | | Reset on MR3: the TC will be reset if MR3 matches it. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 11 | MR3S | | Stop on MR3: the TC and PC will be stopped and TCR[0] will be set to 0 if MR3 matches the TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 31:12 | - | | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |

### 20.7.7 Match Registers (TMR32B0MR0/1/2/3 - addresses 0x4001 4018/1C/20/24 and TMR32B1MR0/1/2/3 addresses 0x4001 8018/1C/20/24)

The Match register values are continuously compared to the Timer Counter value. When the two values are equal, actions can be triggered automatically. The action possibilities are to generate an interrupt, reset the Timer Counter, or stop the timer. Actions are controlled by the settings in the MCR register.

**Table 320: Match registers (TMR32B0MR0 to 3, addresses 0x4001 4018 to 24 and TMR32B1MR0 to 3, addresses 0x4001 8018 to 24) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 31:0 | MATCH | Timer counter match value. | 0 |

### 20.7.8 Capture Control Register (TMR32B0CCR and TMR32B1CCR)

The Capture Control Register is used to control whether the Capture Register is loaded with the value in the Timer Counter when the capture event occurs, and whether an interrupt is generated by the capture event. Setting both the rising and falling bits at the same time is a valid configuration, resulting in a capture event for both edges. In the description below, “n” represents the Timer number, 0 or 1.

**Table 321: Capture Control Register (TMR32B0CCR - address 0x4001 4028 and TMR32B1CCR - address 0x4001 8028) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 0 | CAP0RE | | Capture on CT32Bn_CAP0 rising edge: a sequence of 0 then 1 on CT32Bn_CAP0 will cause CR0 to be loaded with the contents of TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 321: Capture Control Register (TMR32B0CCR - address 0x4001 4028 and TMR32B1CCR - address 0x4001 8028) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 1 | CAP0FE | | Capture on CT32Bn_CAP0 falling edge: a sequence of 1 then 0 on CT32Bn_CAP0 will cause CR0 to be loaded with the contents of TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 2 | CAP0I | | Interrupt on CT32Bn_CAP0 event: a CR0 load due to a CT32Bn_CAP0 event will generate an interrupt. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 31:3 | - | | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |

### 20.7.9 Capture Register (TMR32B0CR0 - address 0x4001 402C and TMR32B1CR0 - address 0x4001 802C)

Each Capture register is associated with a device pin and may be loaded with the Timer Counter value when a specified event occurs on that pin. The settings in the Capture Control Register register determine whether the capture function is enabled, and whether a capture event happens on the rising edge of the associated pin, the falling edge, or on both edges.

**Table 322: Capture registers (TMR32B0CR0, addresses 0x4001 402C and TMR32B1CR0, addresses 0x4001 802C) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 31:0 | CAP | Timer counter capture value. | 0 |

### 20.7.10 External Match Register (TMR32B0EMR and TMR32B1EMR)

The External Match Register provides both control and status of the external match pins CAP32Bn_MAT[3:0].

If the match outputs are configured as PWM output, the function of the external match registers is determined by the PWM rules (Section 20.7.13 “Rules for single edge controlled PWM outputs” on page 374).


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 323: External Match Register (TMR32B0EMR - address 0x4001 403C and TMR32B1EMR - address0x4001 803C) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 0 | EM0 | | External Match 0. This bit reflects the state of output CT32Bn_MAT0, whether or not this output is connected to its pin. When a match occurs between the TC and MR0, this bit can either toggle, go LOW, go HIGH, or do nothing. Bits EMR[5:4] control the functionality of this output. This bit is driven to the CT32B0_MAT0/CT16B1_MAT0 pins if the match function is selected in the IOCON registers (0 = LOW, 1 = HIGH). | 0 |
| 1 | EM1 | | External Match 1. This bit reflects the state of output CT32Bn_MAT1, whether or not this output is connected to its pin. When a match occurs between the TC and MR1, this bit can either toggle, go LOW, go HIGH, or do nothing. Bits EMR[7:6] control the functionality of this output. This bit is driven to the CT32B0_MAT1/CT16B1_MAT1 pins if the match function is selected in the IOCON registers (0 = LOW, 1 = HIGH). | 0 |
| 2 | EM2 | | External Match 2. This bit reflects the state of output CT32Bn_MAT2, whether or not this output is connected to its pin. When a match occurs between the TC and MR2, this bit can either toggle, go LOW, go HIGH, or do nothing. Bits EMR[9:8] control the functionality of this output. This bit is driven to the CT32B0_MAT2/CT16B1_MAT2 pins if the match function is selected in the IOCON registers (0 = LOW, 1 = HIGH). | 0 |
| 3 | EM3 | | External Match 3. This bit reflects the state of output CT32Bn_MAT3, whether or not this output is connected to its pin. When a match occurs between the TC and MR3, this bit can either toggle, go LOW, go HIGH, or do nothing. Bits EMR[11:10] control the functionality of this output. This bit is driven to the CT32B0_MAT3/CT16B1_MAT3 pins if the match function is selected in the IOCON registers (0 = LOW, 1 = HIGH). | 0 |
| 5:4 | EMC0 | | External Match Control 0. Determines the functionality of External Match 0. | 00 |
| | | 0x0 | Do Nothing. | |
| | | 0x1 | Clear the corresponding External Match bit/output to 0 (CT32Bn_MATm pin is LOW if pinned out). | |
| | | 0x2 | Set the corresponding External Match bit/output to 1 (CT32Bn_MATm pin is HIGH if pinned out). | |
| | | 0x3 | Toggle the corresponding External Match bit/output. | |
| 7:6 | EMC1 | | External Match Control 1. Determines the functionality of External Match 1. | 00 |
| | | 0x0 | Do Nothing. | |
| | | 0x1 | Clear the corresponding External Match bit/output to 0 (CT32Bn_MATm pin is LOW if pinned out). | |
| | | 0x2 | Set the corresponding External Match bit/output to 1 (CT32Bn_MATm pin is HIGH if pinned out). | |
| | | 0x3 | Toggle the corresponding External Match bit/output. | |
| 9:8 | EMC2 | | External Match Control 2. Determines the functionality of External Match 2. | 00 |
| | | 0x0 | Do Nothing. | |
| | | 0x1 | Clear the corresponding External Match bit/output to 0 (CT32Bn_MATm pin is LOW if pinned out). | |
| | | 0x2 | Set the corresponding External Match bit/output to 1 (CT32Bn_MATm pin is HIGH if pinned out). | |
| | | 0x3 | Toggle the corresponding External Match bit/output. | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 323: External Match Register (TMR32B0EMR - address 0x4001 403C and TMR32B1EMR - address0x4001 803C) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 11:10 | EMC3 | | External Match Control 3. Determines the functionality of External Match 3. | 00 |
| | | 0x0 | Do Nothing. | |
| | | 0x1 | Clear the corresponding External Match bit/output to 0 (CT32Bn_MATm pin is LOW if pinned out). | |
| | | 0x2 | Set the corresponding External Match bit/output to 1 (CT32Bn_MATm pin is HIGH if pinned out). | |
| | | 0x3 | Toggle the corresponding External Match bit/output. | |
| 31:12 | - | | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |

**Table 324. External match control**

| EMR[11:10], EMR[9:8], EMR[7:6], or EMR[5:4] | Function |
|---|---|
| 00 | Do Nothing. |
| 01 | Clear the corresponding External Match bit/output to 0 (CT32Bn_MATm pin is LOW if pinned out). |
| 10 | Set the corresponding External Match bit/output to 1 (CT32Bn_MATm pin is HIGH if pinned out). |
| 11 | Toggle the corresponding External Match bit/output. |

### 20.7.11 Count Control Register (TMR32B0CTCR and TMR32B1TCR)

The Count Control Register (CTCR) is used to select between Timer and Counter mode, and in Counter mode to select the pin and edge(s) for counting.

When Counter Mode is chosen as a mode of operation, the CAP input (selected by the CTCR bits 3:2) is sampled on every rising edge of the PCLK clock. After comparing two consecutive samples of this CAP input, one of the following four events is recognized: rising edge, falling edge, either of edges or no changes in the level of the selected CAP input. Only if the identified event occurs, and the event corresponds to the one selected by bits 1:0 in the CTCR register, will the Timer Counter register be incremented.

Effective processing of the externally supplied clock to the counter has some limitations. Since two successive rising edges of the PCLK clock are used to identify only one edge on the CAP selected input, the frequency of the CAP input can not exceed one half of the PCLK clock. Consequently, duration of the HIGH/LOW levels on the same CAP input in this case can not be shorter than $1/(2 \times \text{PCLK})$.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 325: Count Control Register (TMR32B0CTCR - address 0x4001 4070 and TMR32B1TCR - address 0x4001 8070) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 1:0 | CTM | | Counter/Timer Mode. This field selects which rising PCLK edges can increment Timer's Prescale Counter (PC), or clear PC and increment Timer Counter (TC). | 00 |
| | | | Timer Mode: every rising PCLK edge | |
| | | 0x0 | Timer Mode: every rising PCLK edge | |
| | | 0x1 | Counter Mode: TC is incremented on rising edges on the CAP input selected by bits 3:2. | |
| | | 0x2 | Counter Mode: TC is incremented on falling edges on the CAP input selected by bits 3:2. | |
| | | 0x3 | Counter Mode: TC is incremented on both edges on the CAP input selected by bits 3:2. | |
| 3:2 | CIS | | Count Input Select. When bits 1:0 in this register are not 00, these bits select which CAP pin is sampled for clocking: | 00 |
| | | 0x0 | CT32Bn_CAP0 | |
| | | 0x1 | Reserved | |
| | | 0x2 | Reserved | |
| | | 0x3 | Reserved | |
| | | | **Note:** If Counter mode is selected in the TnCTCR, the 3 bits for that input in the Capture Control Register (TnCCR) must be programmed as 000. | |
| 31:4 | - | - | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |

## 20.7.12 PWM Control Register (TMR32B0PWMC and TMR32B1PWMC)

The PWM Control Register is used to configure the match outputs as PWM outputs. Each match output can be independently set to perform either as PWM output or as match output whose function is controlled by the External Match Register (EMR).

For each timer, a maximum of three-single edge controlled PWM outputs can be selected on the MATn[2:0] outputs. One additional match register determines the PWM cycle length. When a match occurs in any of the other match registers, the PWM output is set to HIGH. The timer is reset by the match register that is configured to set the PWM cycle length. When the timer is reset to zero, all currently HIGH match outputs configured as PWM outputs are cleared.

**Table 326: PWM Control Register (TMR32B0PWMC - 0x4001 4074 and TMR32B1PWMC - 0x4001 8074) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 0 | PWMEN0 | | PWM channel 0 enable | 0 |
| | | 0 | CT32Bn_MAT0 is controlled by EM0. | |
| | | 1 | PWM mode is enabled for CT32Bn_MAT0. | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 326: PWM Control Register (TMR32B0PWMC - 0x4001 4074 and TMR32B1PWMC - 0x4001 8074) bit description

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 1 | PWMEN1 | | PWM channel 1 enable | 0 |
| | | 0 | CT32Bn_MAT1 is controlled by EM1. | |
| | | 1 | PWM mode is enabled for CT32Bn_MAT1. | |
| 2 | PWMEN2 | | PWM channel 2 enable | 0 |
| | | 0 | CT32Bn_MAT2 is controlled by EM2. | |
| | | 1 | PWM mode is enabled for CT32Bn_MAT2. | |
| 3 | PWMEN3 | | PWM channel 3 enable<br>**Note:** It is recommended to use match channel 3 to set the PWM cycle. | 0 |
| | | 0 | CT32Bn_MAT3 is controlled by EM3. | |
| | | 1 | PWM mode is enabled for CT32Bn_MAT3. | |
| 31:4 | - | | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |

### 20.7.13 Rules for single edge controlled PWM outputs

1. All single edge controlled PWM outputs go LOW at the beginning of each PWM cycle (timer is set to zero) unless their match value is equal to zero.
2. Each PWM output will go HIGH when its match value is reached. If no match occurs (i.e. the match value is greater than the PWM cycle length), the PWM output remains continuously LOW.
3. If a match value larger than the PWM cycle length is written to the match register, and the PWM signal is HIGH already, then the PWM signal will be cleared with the start of the next PWM cycle.
4. If a match register contains the same value as the timer reset value (the PWM cycle length), then the PWM output will be reset to LOW on the next clock tick after the timer reaches the match value. Therefore, the PWM output will always consist of a one clock tick wide positive pulse with a period determined by the PWM cycle length (i.e. the timer reload value).
5. If a match register is set to zero, then the PWM output will go to HIGH the first time the timer goes back to zero and will stay HIGH continuously.

**Note:** When the match outputs are selected to function as PWM outputs, the timer reset (MRnR) and timer stop (MRnS) bits in the Match Control Register MCR must be set to 0 except for the match register setting the PWM cycle length. For this register, set the MRnR bit to 1 to enable the timer reset when the timer value matches the value of the corresponding match register.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

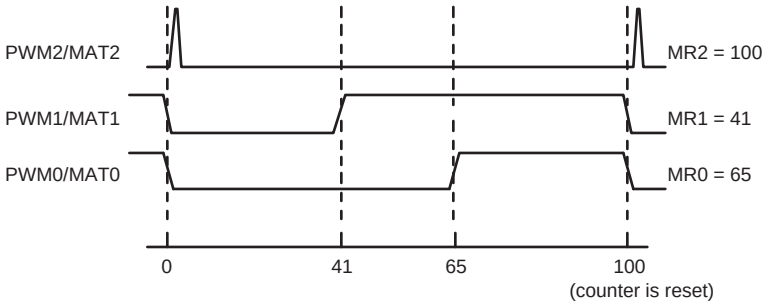


**Fig 77. Sample PWM waveforms with a PWM cycle length of 100 (selected by MR2) and MAT2:0 enabled as PWM outputs by the PWCM register.**

## 20.8 Example timer operation

Figure 78 shows a timer configured to reset the count and generate an interrupt on match. The prescaler is set to 2 and the match register set to 6. At the end of the timer cycle where the match occurs, the timer count is reset. This gives a full length cycle to the match value. The interrupt indicating that a match occurred is generated in the next clock after the timer reached the match value.

Figure 79 shows a timer configured to stop and generate an interrupt on match. The prescaler is again set to 2 and the match register set to 6. In the next clock after the timer reaches the match value, the timer enable bit in TCR is cleared, and the interrupt indicating that a match occurred is generated.

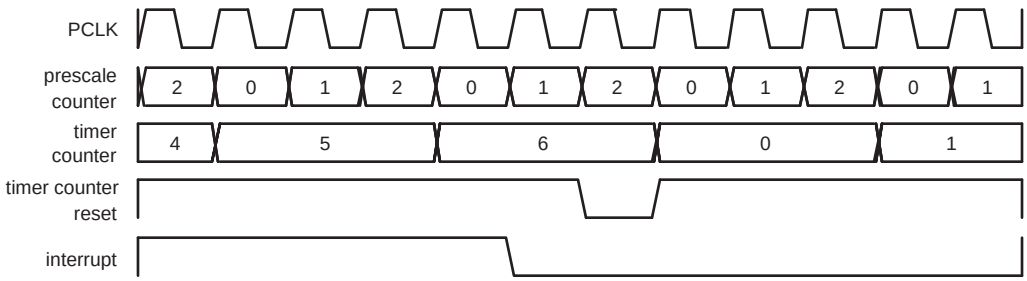


**Fig 78. A timer cycle in which PR=2, MRx=6, and both interrupt and reset on match are enabled**

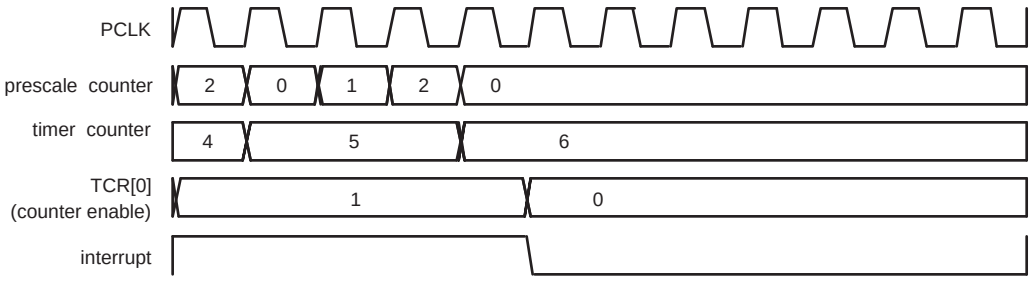


**Fig 79. A timer cycle in which PR=2, MRx=6, and both interrupt and stop on match are enabled**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 20.9 Architecture

The block diagram for 32-bit counter/timer0 and 32-bit counter/timer1 is shown in Figure 80.

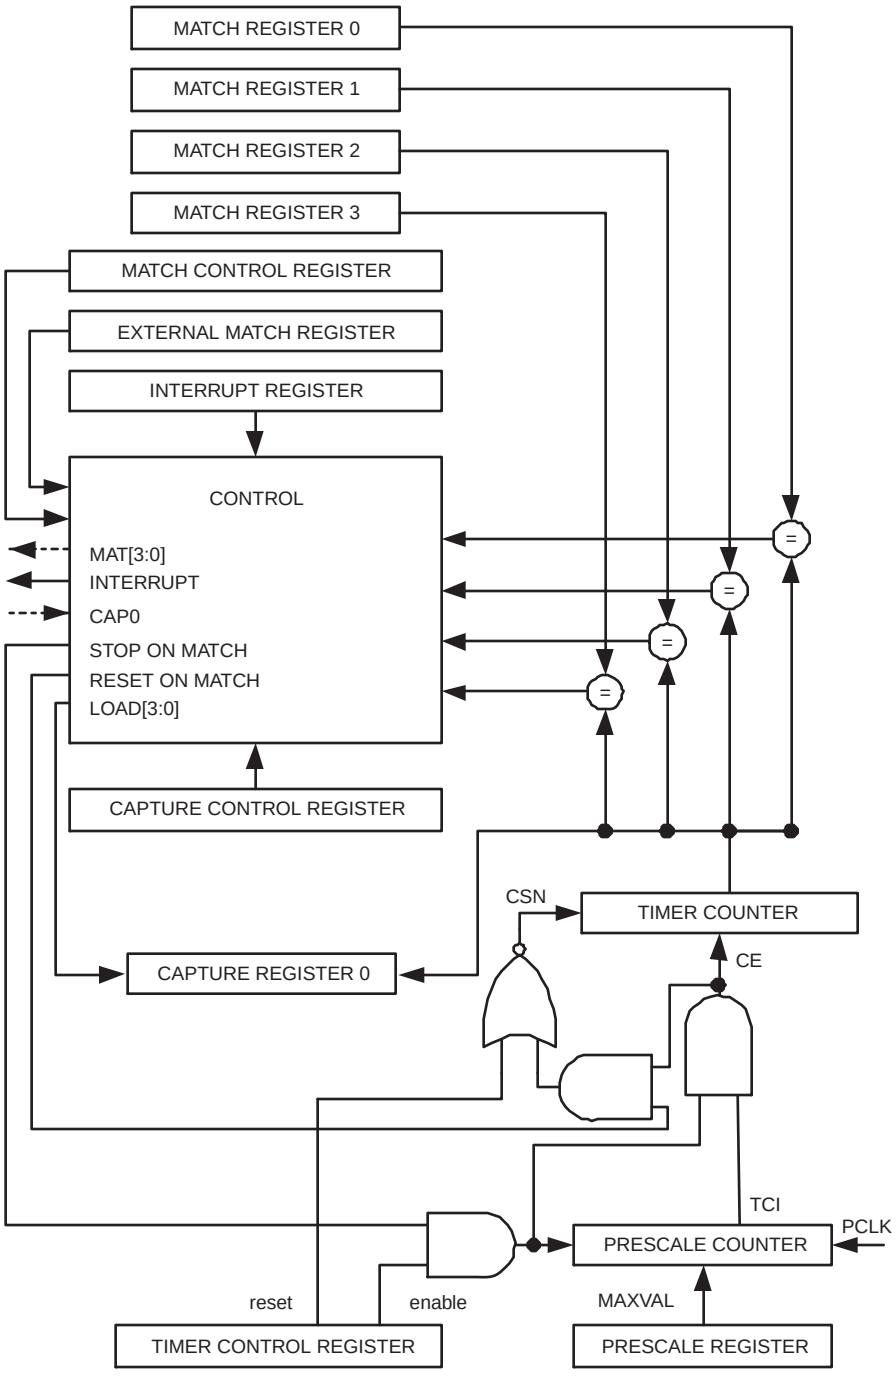


**Fig 80. 32-bit counter/timer block diagram**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 21.1 How to read this chapter

The 32-bit timer blocks are identical for all LPC1100XL parts.

Compared to the timer block for the LPC1100/LPC1100L/LPC1100C series, the following features have been added:

- One additional capture input for each timer.
- Capture-clear function for easy pulse-width measurement (see Section 21.7.11).

## 21.2 Basic configuration

The CT32B0/1 are configured using the following registers:

1. Pins: The CT32B0/1 pins must be configured in the IOCONFIG register block (Section 7.4).
2. Power and peripheral clock: In the SYSAHBCLKCTRL register, set bit 9 and bit 10 (Table 21). The peripheral clock (PCLK) is provided by the system clock (see Table 20).

## 21.3 Features

- Two 32-bit counter/timers with a programmable 32-bit prescaler.
- Counter or Timer operation.
- The timer and prescaler may be configured to be cleared on a designated capture event. This feature permits easy pulse-width measurement by clearing the timer on the leading edge of an input pulse and capturing the timer value on the trailing edge.
- Two 32-bit capture channels that can take a snapshot of the timer value when an input signal transitions. A capture event may also optionally generate an interrupt.
- Four 32-bit match registers that allow:
  - Continuous operation with optional interrupt generation on match.
  - Stop timer on match with optional interrupt generation.
  - Reset timer on match with optional interrupt generation.
- Up to four external outputs corresponding to match registers with the following capabilities:
  - Set LOW on match.
  - Set HIGH on match.
  - Toggle on match.
  - Do nothing on match.
- For each timer, up to four match registers can be configured as PWM allowing to use up to three match outputs as single edge controlled PWM outputs.


All information provided in this document is subject to legal disclaimers.
© NXP B.V. 2016. All rights reserved.

## 21.4 Applications

- Interval timer for counting internal events
- Pulse Width Demodulator via capture input
- Free running timer
- Pulse Width Modulator via match outputs

## 21.5 Description

Each Counter/timer is designed to count cycles of the peripheral clock (PCLK) or an externally supplied clock and can optionally generate interrupts or perform other actions at specified timer values based on four match registers. The peripheral clock is provided by the system clock (see Figure 8). Each counter/timer also includes one capture input to trap the timer value when an input signal transitions, optionally generating an interrupt.

In PWM mode, three match registers can be used to provide a single-edge controlled PWM output on the match output pins. One match register is used to control the PWM cycle length.

**Remark:** 32-bit counter/timer0 (CT32B0) and 32-bit counter/timer1 (CT32B1) are functionally identical except for the peripheral base address.

## 21.6 Pin description

Table 327 gives a brief summary of each of the counter/timer related pins.

**Table 327. Counter/timer pin description**

| Pin | Type | Description |
|---|---|---|
| CT32B0_CAP[1:0]<br>CT32B1_CAP[1:0] | Input | Capture Signals:<br>A transition on a capture pin can be configured to load one of the Capture Registers with the value in the Timer Counter and optionally generate an interrupt.<br>The counter/timer block can select a capture signal as a clock source instead of the PCLK derived clock. For more details see Section 21.7.11 “Count Control Register (TMR32B0CTCR and TMR32B1TCR)” on page 387. |
| CT32B0_MAT[3:0]<br>CT32B1_MAT[3:0] | Output | External Match Output of CT32B0/1:<br>When a match register TMR32B0/1MR3:0 equals the timer counter (TC), this output can either toggle, go LOW, go HIGH, or do nothing. The External Match Register (EMR) and the PWM Control register (PWMCON) control the functionality of this output. |

## 21.7 Register description

32-bit counter/timer0 contains the registers shown in Table 328 and 32-bit counter/timer1 contains the registers shown in Table 329. More detailed descriptions follow.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 328. Register overview: 32-bit counter/timer 0 CT32B0 (base address 0x4001 4000)**

| Name | Access | Address offset | Description | Reset value[1] |
|---|---|---|---|---|
| TMR32B0IR | R/W | 0x000 | Interrupt Register (IR). The IR can be written to clear interrupts. The IR can be read to identify which of five possible interrupt sources are pending. | 0 |
| TMR32B0TCR | R/W | 0x004 | Timer Control Register (TCR). The TCR is used to control the Timer Counter functions. The Timer Counter can be disabled or reset through the TCR. | 0 |
| TMR32B0TC | R/W | 0x008 | Timer Counter (TC). The 32-bit TC is incremented every PR+1 cycles of PCLK. The TC is controlled through the TCR. | 0 |
| TMR32B0PR | R/W | 0x00C | Prescale Register (PR). When the Prescale Counter (below) is equal to this value, the next clock increments the TC and clears the PC. | 0 |
| TMR32B0PC | R/W | 0x010 | Prescale Counter (PC). The 32-bit PC is a counter which is incremented to the value stored in PR. When the value in PR is reached, the TC is incremented and the PC is cleared. The PC is observable and controllable through the bus interface. | 0 |
| TMR32B0MCR | R/W | 0x014 | Match Control Register (MCR). The MCR is used to control if an interrupt is generated and if the TC is reset when a Match occurs. | 0 |
| TMR32B0MR0 | R/W | 0x018 | Match Register 0 (MR0). MR0 can be enabled through the MCR to reset the TC, stop both the TC and PC, and/or generate an interrupt every time MR0 matches the TC. | 0 |
| TMR32B0MR1 | R/W | 0x01C | Match Register 1 (MR1). See MR0 description. | 0 |
| TMR32B0MR2 | R/W | 0x020 | Match Register 2 (MR2). See MR0 description. | 0 |
| TMR32B0MR3 | R/W | 0x024 | Match Register 3 (MR3). See MR0 description. | 0 |
| TMR32B0CCR | R/W | 0x028 | Capture Control Register (CCR). The CCR controls which edges of the capture inputs are used to load the Capture Registers and whether or not an interrupt is generated when a capture takes place. | 0 |
| TMR32B0CR0 | RO | 0x02C | Capture Register 0 (CR0). CR0 is loaded with the value of TC when there is an event on the CT32B0_CAP0 input. | 0 |
| TMR32B0CR1 | RO | 0x030 | Capture Register 1 (CR1). CR1 is loaded with the value of TC when there is an event on the CT32B0_CAP1 input. | 0 |
| - | - | 0x034 - 0x038 | Reserved | - |
| TMR32B0EMR | R/W | 0x03C | External Match Register (EMR). The EMR controls the match function and the external match pins CT32B0_MAT[3:0]. | 0 |
| - | - | 0x040 - 0x06C | Reserved | - |
| TMR32B0CTCR | R/W | 0x070 | Count Control Register (CTCR). The CTCR selects between Timer and Counter mode, and in Counter mode selects the signal and edge(s) for counting. | 0 |
| TMR32B0PWMC | R/W | 0x074 | PWM Control Register (PWMCON). The PWMCON enables PWM mode for the external match pins CT32B0_MAT[3:0]. | 0 |

[1] Reset value reflects the data stored in used bits only. It does not include reserved bits content.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 329. Register overview: 32-bit counter/timer 1 CT32B1 (base address 0x4001 8000)**

| Name | Access | Address offset | Description | Reset value[1] |
|---|---|---|---|---|
| TMR32B1IR | R/W | 0x000 | Interrupt Register (IR). The IR can be written to clear interrupts. The IR can be read to identify which of five possible interrupt sources are pending. | 0 |
| TMR32B1TCR | R/W | 0x004 | Timer Control Register (TCR). The TCR is used to control the Timer Counter functions. The Timer Counter can be disabled or reset through the TCR. | 0 |
| TMR32B1TC | R/W | 0x008 | Timer Counter (TC). The 32-bit TC is incremented every PR+1 cycles of PCLK. The TC is controlled through the TCR. | 0 |
| TMR32B1PR | R/W | 0x00C | Prescale Register (PR). When the Prescale Counter (below) is equal to this value, the next clock increments the TC and clears the PC. | 0 |
| TMR32B1PC | R/W | 0x010 | Prescale Counter (PC). The 32-bit PC is a counter which is incremented to the value stored in PR. When the value in PR is reached, the TC is incremented and the PC is cleared. The PC is observable and controllable through the bus interface. | 0 |
| TMR32B1MCR | R/W | 0x014 | Match Control Register (MCR). The MCR is used to control if an interrupt is generated and if the TC is reset when a Match occurs. | 0 |
| TMR32B1MR0 | R/W | 0x018 | Match Register 0 (MR0). MR0 can be enabled through the MCR to reset the TC, stop both the TC and PC, and/or generate an interrupt every time MR0 matches the TC. | 0 |
| TMR32B1MR1 | R/W | 0x01C | Match Register 1 (MR1). See MR0 description. | 0 |
| TMR32B1MR2 | R/W | 0x020 | Match Register 2 (MR2). See MR0 description. | 0 |
| TMR32B1MR3 | R/W | 0x024 | Match Register 3 (MR3). See MR0 description. | 0 |
| TMR32B1CCR | R/W | 0x028 | Capture Control Register (CCR). The CCR controls which edges of the capture inputs are used to load the Capture Registers and whether or not an interrupt is generated when a capture takes place. | 0 |
| TMR32B1CR0 | RO | 0x02C | Capture Register 0 (CR0). CR0 is loaded with the value of TC when there is an event on the CT32B1_CAP0 input. | 0 |
| TMR32B1CR1 | RO | 0x030 | Capture Register 1 (CR1). CR1 is loaded with the value of TC when there is an event on the CT32B1_CAP1 input. | 0 |
| - | - | 0x034 - 0x038 | Reserved | - |
| TMR32B1EMR | R/W | 0x03C | External Match Register (EMR). The EMR controls the match function and the external match pins CT32B1_MAT[3:0]. | 0 |
| - | - | 0x040 - 0x06C | Reserved | - |
| TMR32B1CTCR | R/W | 0x070 | Count Control Register (CTCR). The CTCR selects between Timer and Counter mode, and in Counter mode selects the signal and edge(s) for counting. | 0 |
| TMR32B1PWMC | R/W | 0x074 | PWM Control Register (PWMCON). The PWMCON enables PWM mode for the external match pins CT32B1_MAT[3:0]. | 0 |

[1] Reset value reflects the data stored in used bits only. It does not include reserved bits content.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 21.7.1 Interrupt Register (TMR32B0IR and TMR32B1IR)

The Interrupt Register consists of four bits for the match interrupts and one bit for the capture interrupts. If an interrupt is generated then the corresponding bit in the IR will be HIGH. Otherwise, the bit will be LOW. Writing a logic one to the corresponding IR bit will reset the interrupt. Writing a zero has no effect.

**Table 330: Interrupt Register (TMR32B0IR - address 0x4001 4000 and TMR32B1IR - address 0x4001 8000) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 0 | MR0INT | Interrupt flag for match channel 0. | 0 |
| 1 | MR1INT | Interrupt flag for match channel 1. | 0 |
| 2 | MR2INT | Interrupt flag for match channel 2. | 0 |
| 3 | MR3INT | Interrupt flag for match channel 3. | 0 |
| 4 | CR0INT | Interrupt flag for capture channel 0 event. | 0 |
| 5 | CR1INT | Interrupt flag for capture channel 1 event. | 0 |
| 31:6 | - | Reserved | - |

### 21.7.2 Timer Control Register (TMR32B0TCR and TMR32B1TCR)

The Timer Control Register (TCR) is used to control the operation of the counter/timer.

**Table 331: Timer Control Register (TMR32B0TCR - address 0x4001 4004 and TMR32B1TCR - address 0x4001 8004) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 0 | CEN | When one, the Timer Counter and Prescale Counter are enabled for counting. When zero, the counters are disabled. | 0 |
| 1 | CRST | When one, the Timer Counter and the Prescale Counter are synchronously reset on the next positive edge of PCLK. The counters remain reset until TCR[1] is returned to zero. | 0 |
| 31:2 | - | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |

### 21.7.3 Timer Counter (TMR32B0TC - address 0x4001 4008 and TMR32B1TC - address 0x4001 8008)

The 32-bit Timer Counter is incremented when the Prescale Counter reaches its terminal count. Unless it is reset before reaching its upper limit, the TC will count up through the value 0xFFFF FFFF and then wrap back to the value 0x0000 0000. This event does not cause an interrupt, but a Match register can be used to detect an overflow if needed.

**Table 332: Timer counter registers (TMR32B0TC, address 0x4001 4008 and TMR32B1TC 0x4001 8008) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 31:0 | TC | Timer counter value. | 0 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 21.7.4 Prescale Register (TMR32B0PR - address 0x4001 400C and TMR32B1PR - address 0x4001 800C)

The 32-bit Prescale Register specifies the maximum value for the Prescale Counter.

**Table 333: Prescale registers (TMR32B0PR, address 0x4001 400C and TMR32B1PR 0x4001 800C) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 31:0 | PR | Prescale value. | 0 |

### 21.7.5 Prescale Counter Register (TMR32B0PC - address 0x4001 4010 and TMR32B1PC - address 0x4001 8010)

The 32-bit Prescale Counter controls division of PCLK by some constant value before it is applied to the Timer Counter. This allows control of the relationship between the resolution of the timer and the maximum time before the timer overflows. The Prescale Counter is incremented on every PCLK. When it reaches the value stored in the Prescale Register, the Timer Counter is incremented, and the Prescale Counter is reset on the next PCLK. This causes the TC to increment on every PCLK when PR = 0, every 2 PCLKs when PR = 1, etc.

**Table 334: Prescale counter registers (TMR32B0PC, address 0x4001 4010 and TMR32B1PC 0x4001 8010) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 31:0 | PC | Prescale counter value. | 0 |

### 21.7.6 Match Control Register (TMR32B0MCR and TMR32B1MCR)

The Match Control Register is used to control what operations are performed when one of the Match Registers matches the Timer Counter. The function of each of the bits is shown in Table 335.

**Table 335: Match Control Register (TMR32B0MCR - address 0x4001 4014 and TMR32B1MCR - address 0x4001 8014) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 0 | MR0I | | Interrupt on MR0: an interrupt is generated when MR0 matches the value in the TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 1 | MR0R | | Reset on MR0: the TC will be reset if MR0 matches it. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 2 | MR0S | | Stop on MR0: the TC and PC will be stopped and TCR[0] will be set to 0 if MR0 matches the TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 335: Match Control Register (TMR32B0MCR - address 0x4001 4014 and TMR32B1MCR - address 0x4001 8014) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 3 | MR1I | | Interrupt on MR1: an interrupt is generated when MR1 matches the value in the TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 4 | MR1R | | Reset on MR1: the TC will be reset if MR1 matches it. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 5 | MR1S | | Stop on MR1: the TC and PC will be stopped and TCR[0] will be set to 0 if MR1 matches the TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 6 | MR2I | | Interrupt on MR2: an interrupt is generated when MR2 matches the value in the TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 7 | MR2R | | Reset on MR2: the TC will be reset if MR2 matches it. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 8 | MR2S | | Stop on MR2: the TC and PC will be stopped and TCR[0] will be set to 0 if MR2 matches the TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 9 | MR3I | | Interrupt on MR3: an interrupt is generated when MR3 matches the value in the TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 10 | MR3R | | Reset on MR3: the TC will be reset if MR3 matches it. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 11 | MR3S | | Stop on MR3: the TC and PC will be stopped and TCR[0] will be set to 0 if MR3 matches the TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 31:12 | - | | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |

### 21.7.7 Match Registers (TMR32B0MR0/1/2/3 - addresses 0x4001 4018/1C/20/24 and TMR32B1MR0/1/2/3 addresses 0x4001 8018/1C/20/24)

The Match register values are continuously compared to the Timer Counter value. When the two values are equal, actions can be triggered automatically. The action possibilities are to generate an interrupt, reset the Timer Counter, or stop the timer. Actions are controlled by the settings in the MCR register.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 336: Match registers (TMR32B0MR0 to 3, addresses 0x4001 4018 to 24 and TMR32B1MR0 to 3, addresses 0x4001 8018 to 24) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 31:0 | MATCH | Timer counter match value. | 0 |

## 21.7.8 Capture Control Register (TMR32B0CCR and TMR32B1CCR)

The Capture Control Register is used to control whether the Capture Register is loaded with the value in the Timer Counter when the capture event occurs, and whether an interrupt is generated by the capture event. Setting both the rising and falling bits at the same time is a valid configuration, resulting in a capture event for both edges. In the description below, “n” represents the Timer number, 0 or 1.

**Table 337: Capture Control Register (TMR32B0CCR - address 0x4001 4028 and TMR32B1CCR - address 0x4001 8028) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 0 | CAP0RE | | Capture on CT32Bn_CAP0 rising edge: a sequence of 0 then 1 on CT32Bn_CAP0 will cause CR0 to be loaded with the contents of TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 1 | CAP0FE | | Capture on CT32Bn_CAP0 falling edge: a sequence of 1 then 0 on CT32Bn_CAP0 will cause CR0 to be loaded with the contents of TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 2 | CAP0I | | Interrupt on CT32Bn_CAP0 event: a CR0 load due to a CT32Bn_CAP0 event will generate an interrupt. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 3 | CAP1RE | | Capture on CT32Bn_CAP1 rising edge: a sequence of 0 then 1 on CT32Bn_CAP1 will cause CR1 to be loaded with the contents of TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 4 | CAP1FE | | Capture on CT32Bn_CAP1 falling edge: a sequence of 1 then 0 on CT32Bn_CAP1 will cause CR1 to be loaded with the contents of TC. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 5 | CAP1I | | Interrupt on CT32Bn_CAP1 event: a CR1 load due to a CT32Bn_CAP1 event will generate an interrupt. | 0 |
| | | 1 | Enabled | |
| | | 0 | Disabled | |
| 31:6 | - | | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 21.7.9 Capture Register (TMR32B0CR0/1 - address 0x4001 402C/30 and TMR32B1CR0/1 - address 0x4001 802C/30)

Each Capture register is associated with a device pin and may be loaded with the Timer Counter value when a specified event occurs on that pin. The settings in the Capture Control Register register determine whether the capture function is enabled and whether a capture event happens on the rising edge of the associated pin, the falling edge, or on both edges.

**Table 338: Capture registers (TMR32B0CR0/1, addresses 0x4001 402C/30 and TMR32B1CR0/1, addresses 0x4001 802C/30) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 31:0 | CAP | Timer counter capture value. | 0 |

### 21.7.10 External Match Register (TMR32B0EMR and TMR32B1EMR)

The External Match Register provides both control and status of the external match pins CAP32Bn_MAT[3:0].

If the match outputs are configured as PWM output, the function of the external match registers is determined by the PWM rules (Section 21.8.2 “Rules for single edge controlled PWM outputs” on page 390).

**Table 339: External Match Register (TMR32B0EMR - address 0x4001 403C and TMR32B1EMR - address0x4001 803C) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 0 | EM0 | | External Match 0. This bit reflects the state of output CT32Bn_MAT0, whether or not this output is connected to its pin. When a match occurs between the TC and MR0, this bit can either toggle, go LOW, go HIGH, or do nothing. Bits EMR[5:4] control the functionality of this output. This bit is driven to the CT32B0_MAT0/CT16B1_MAT0 pins if the match function is selected in the IOCON registers (0 = LOW, 1 = HIGH). | 0 |
| 1 | EM1 | | External Match 1. This bit reflects the state of output CT32Bn_MAT1, whether or not this output is connected to its pin. When a match occurs between the TC and MR1, this bit can either toggle, go LOW, go HIGH, or do nothing. Bits EMR[7:6] control the functionality of this output. This bit is driven to the CT32B0_MAT1/CT16B1_MAT1 pins if the match function is selected in the IOCON registers (0 = LOW, 1 = HIGH). | 0 |
| 2 | EM2 | | External Match 2. This bit reflects the state of output CT32Bn_MAT2, whether or not this output is connected to its pin. When a match occurs between the TC and MR2, this bit can either toggle, go LOW, go HIGH, or do nothing. Bits EMR[9:8] control the functionality of this output. This bit is driven to the CT32B0_MAT2/CT16B1_MAT2 pins if the match function is selected in the IOCON registers (0 = LOW, 1 = HIGH). | 0 |
| 3 | EM3 | | External Match 3. This bit reflects the state of output CT32Bn_MAT3, whether or not this output is connected to its pin. When a match occurs between the TC and MR3, this bit can either toggle, go LOW, go HIGH, or do nothing. Bits EMR[11:10] control the functionality of this output. This bit is driven to the CT32B0_MAT3/CT16B1_MAT3 pins if the match function is selected in the IOCON registers (0 = LOW, 1 = HIGH). | 0 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 339: External Match Register (TMR32B0EMR - address 0x4001 403C and TMR32B1EMR - address0x4001 803C) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 5:4 | EMC0 | | External Match Control 0. Determines the functionality of External Match 0. | 00 |
| | | 0x0 | Do Nothing. | |
| | | 0x1 | Clear the corresponding External Match bit/output to 0 (CT32Bn_MATm pin is LOW if pinned out). | |
| | | 0x2 | Set the corresponding External Match bit/output to 1 (CT32Bn_MATm pin is HIGH if pinned out). | |
| | | 0x3 | Toggle the corresponding External Match bit/output. | |
| 7:6 | EMC1 | | External Match Control 1. Determines the functionality of External Match 1. | 00 |
| | | 0x0 | Do Nothing. | |
| | | 0x1 | Clear the corresponding External Match bit/output to 0 (CT32Bn_MATm pin is LOW if pinned out). | |
| | | 0x2 | Set the corresponding External Match bit/output to 1 (CT32Bn_MATm pin is HIGH if pinned out). | |
| | | 0x3 | Toggle the corresponding External Match bit/output. | |
| 9:8 | EMC2 | | External Match Control 2. Determines the functionality of External Match 2. | 00 |
| | | 0x0 | Do Nothing. | |
| | | 0x1 | Clear the corresponding External Match bit/output to 0 (CT32Bn_MATm pin is LOW if pinned out). | |
| | | 0x2 | Set the corresponding External Match bit/output to 1 (CT32Bn_MATm pin is HIGH if pinned out). | |
| | | 0x3 | Toggle the corresponding External Match bit/output. | |
| 11:10 | EMC3 | | External Match Control 3. Determines the functionality of External Match 3. | 00 |
| | | 0x0 | Do Nothing. | |
| | | 0x1 | Clear the corresponding External Match bit/output to 0 (CT32Bn_MATm pin is LOW if pinned out). | |
| | | 0x2 | Set the corresponding External Match bit/output to 1 (CT32Bn_MATm pin is HIGH if pinned out). | |
| | | 0x3 | Toggle the corresponding External Match bit/output. | |
| 31:12 | - | | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |

**Table 340. External match control**

| EMR[11:10], EMR[9:8], EMR[7:6], or EMR[5:4] | Function |
|---|---|
| 00 | Do Nothing. |
| 01 | Clear the corresponding External Match bit/output to 0 (CT32Bn_MATm pin is LOW if pinned out). |
| 10 | Set the corresponding External Match bit/output to 1 (CT32Bn_MATm pin is HIGH if pinned out). |
| 11 | Toggle the corresponding External Match bit/output. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 21.7.11 Count Control Register (TMR32B0CTCR and TMR32B1TCR)

The Count Control Register (CTCR) is used to select between Timer and Counter mode, and in Counter mode to select the pin and edge(s) for counting.

When Counter Mode is chosen as a mode of operation, the CAP input (selected by the CTCR bits 3:2) is sampled on every rising edge of the PCLK clock. After comparing two consecutive samples of this CAP input, one of the following four events is recognized: rising edge, falling edge, either of edges or no changes in the level of the selected CAP input. Only if the identified event occurs, and the event corresponds to the one selected by bits 1:0 in the CTCR register, will the Timer Counter register be incremented.

Effective processing of the externally supplied clock to the counter has some limitations. Since two successive rising edges of the PCLK clock are used to identify only one edge on the CAP selected input, the frequency of the CAP input can not exceed one half of the PCLK clock. Consequently, duration of the HIGH/LOW levels on the same CAP input in this case can not be shorter than 1/(2 $\times$ PCLK).

Bits 7:4 of this register are used to enable and configure the capture-clears-timer feature. This feature allows for a designated edge on a particular CAP input to reset the timer to all zeros. Using this mechanism to clear the timer on the leading edge of an input pulse and performing a capture on the trailing edge permits direct pulse-width measurement using a single capture input without the need to perform a subtraction operation in software.

**Table 341: Count Control Register (TMR32B0CTCR - address 0x4001 4070 and TMR32B1TCR - address 0x4001 8070) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 1:0 | CTM | | Counter/Timer Mode. This field selects which rising PCLK edges can increment Timer's Prescale Counter (PC), or clear PC and increment Timer Counter (TC).<br>Timer Mode: every rising PCLK edge | 00 |
| | | 0x0 | Timer Mode: every rising PCLK edge | |
| | | 0x1 | Counter Mode: TC is incremented on rising edges on the CAP input selected by bits 3:2. | |
| | | 0x2 | Counter Mode: TC is incremented on falling edges on the CAP input selected by bits 3:2. | |
| | | 0x3 | Counter Mode: TC is incremented on both edges on the CAP input selected by bits 3:2. | |
| 3:2 | CIS | | Count Input Select. When bits 1:0 in this register are not 00, these bits select which CAP pin is sampled for clocking: | 00 |
| | | 0x0 | CT32Bn_CAP0 | |
| | | 0x1 | CT32Bn_CAP1 | |
| | | 0x2 | Reserved | |
| | | 0x3 | Reserved<br>**Note:** If Counter mode is selected in the TnCTCR, the 3 bits for that input in the Capture Control Register (TnCCR) must be programmed as 000. | |
| 4 | ENCC | | Setting this bit to one enables clearing of the timer and the prescaler when the capture-edge event specified in bits 7:5 occurs. | 0 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 341: Count Control Register (TMR32B0CTCR - address 0x4001 4070 and TMR32B1TCR - address 0x4001 8070) bit description** *…continued*

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 7:5 | SELCC | | When bit 4 is one, these bits select which capture input edge will cause the timer and prescaler to be cleared. These bits have no effect when bit 4 is zero. | 0 |
| | | 0x0 | Rising Edge of CAP0 clears the timer (if bit 4 is set). | |
| | | 0x1 | Falling Edge of CAP0 clears the timer (if bit 4 is set). | |
| | | 0x2 | Rising Edge of CAP1 clears the timer (if bit 4 is set). | |
| | | 0x3 | Falling Edge of CAP1 clears the timer (if bit 4 is set). | |
| | | 0x4 | Reserved. | |
| | | 0x5 | Reserved. | |
| | | 0x6 | Reserved. | |
| | | 0x7 | Reserved. | |
| 31:8 | - | - | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | - |

## 21.7.12 PWM Control Register (TMR32B0PWMC and TMR32B1PWMC)

The PWM Control Register is used to configure the match outputs as PWM outputs. Each match output can be independently set to perform either as PWM output or as match output whose function is controlled by the External Match Register (EMR).

For each timer, a maximum of three-single edge controlled PWM outputs can be selected on the MATn[2:0] outputs. One additional match register determines the PWM cycle length. When a match occurs in any of the other match registers, the PWM output is set to HIGH. The timer is reset by the match register that is configured to set the PWM cycle length. When the timer is reset to zero, all currently HIGH match outputs configured as PWM outputs are cleared.

**Table 342: PWM Control Register (TMR32B0PWMC - 0x4001 4074 and TMR32B1PWMC - 0x4001 8074) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 0 | PWMEN0 | | PWM channel 0 enable | 0 |
| | | 0 | CT32Bn_MAT0 is controlled by EM0. | |
| | | 1 | PWM mode is enabled for CT32Bn_MAT0. | |
| 1 | PWMEN1 | | PWM channel 1 enable | 0 |
| | | 0 | CT32Bn_MAT1 is controlled by EM1. | |
| | | 1 | PWM mode is enabled for CT32Bn_MAT1. | |
| 2 | PWMEN2 | | PWM channel 2 enable | 0 |
| | | 0 | CT32Bn_MAT2 is controlled by EM2. | |
| | | 1 | PWM mode is enabled for CT32Bn_MAT2. | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 342: PWM Control Register (TMR32B0PWMC - 0x4001 4074 and TMR32B1PWMC - 0x4001 8074) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 3 | PWMEN3 | | PWM channel 3 enable<br>**Note:** It is recommended to use match channel 3 to set the PWM cycle. | 0 |
| | | 0 | CT32Bn_MAT3 is controlled by EM3. | |
| | | 1 | PWM mode is enabled for CT32Bn_MAT3. | |
| 31:4 | - | | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |

## 21.8 Functional description

### 21.8.1 Example timer operation

Figure 81 shows a timer configured to reset the count and generate an interrupt on match. The prescaler is set to 2 and the match register set to 6. At the end of the timer cycle where the match occurs, the timer count is reset. This gives a full length cycle to the match value. The interrupt indicating that a match occurred is generated in the next clock after the timer reached the match value.

Figure 82 shows a timer configured to stop and generate an interrupt on match. The prescaler is again set to 2 and the match register set to 6. In the next clock after the timer reaches the match value, the timer enable bit in TCR is cleared, and the interrupt indicating that a match occurred is generated.

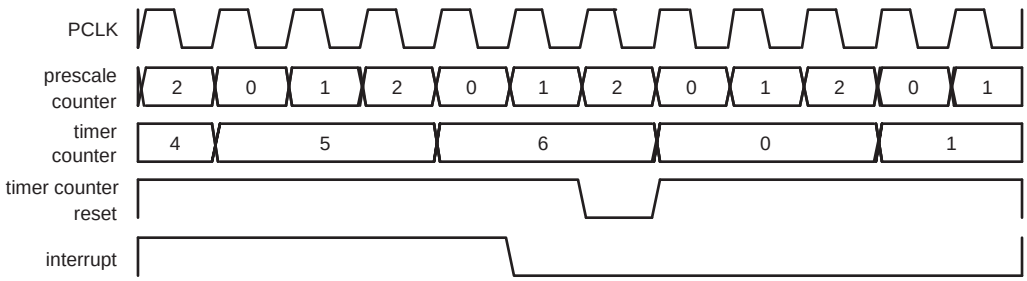


**Fig 81. A timer cycle in which PR=2, MRx=6, and both interrupt and reset on match are enabled**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

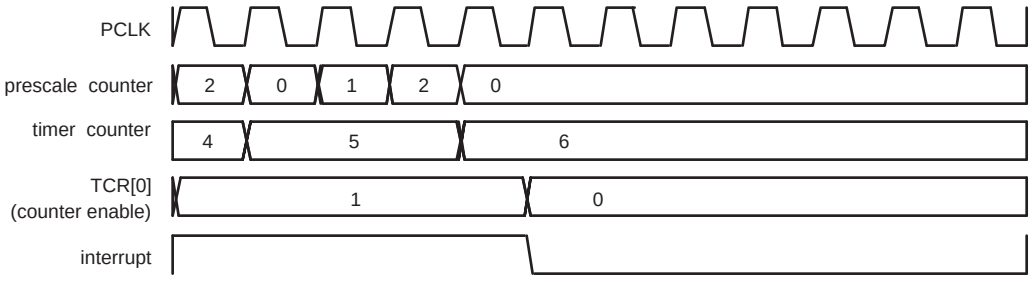


**Fig 82. A timer cycle in which PR=2, MRx=6, and both interrupt and stop on match are enabled**

### 21.8.2 Rules for single edge controlled PWM outputs

1. All single edge controlled PWM outputs go LOW at the beginning of each PWM cycle (timer is set to zero) unless their match value is equal to zero.
2. Each PWM output will go HIGH when its match value is reached. If no match occurs (i.e. the match value is greater than the PWM cycle length), the PWM output remains continuously LOW.
3. If a match value larger than the PWM cycle length is written to the match register, and the PWM signal is HIGH already, then the PWM signal will be cleared with the start of the next PWM cycle.
4. If a match register contains the same value as the timer reset value (the PWM cycle length), then the PWM output will be reset to LOW on the next clock tick after the timer reaches the match value. Therefore, the PWM output will always consist of a one clock tick wide positive pulse with a period determined by the PWM cycle length (i.e. the timer reload value).
5. If a match register is set to zero, then the PWM output will go to HIGH the first time the timer goes back to zero and will stay HIGH continuously.

**Note:** When the match outputs are selected to function as PWM outputs, the timer reset (MRnR) and timer stop (MRnS) bits in the Match Control Register MCR must be set to 0 except for the match register setting the PWM cycle length. For this register, set the MRnR bit to 1 to enable the timer reset when the timer value matches the value of the corresponding match register.

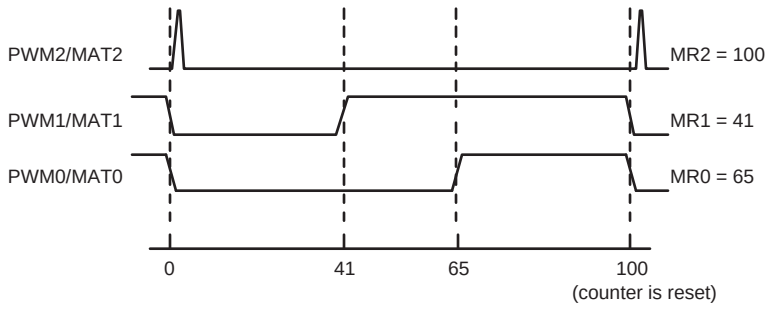


**Fig 83. Sample PWM waveforms with a PWM cycle length of 100 (selected by MR2) and MAT2:0 enabled as PWM outputs by the PWMC register.**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 21.9 Architecture

The block diagram for 32-bit counter/timer0 and 32-bit counter/timer1 is shown in Figure 84.

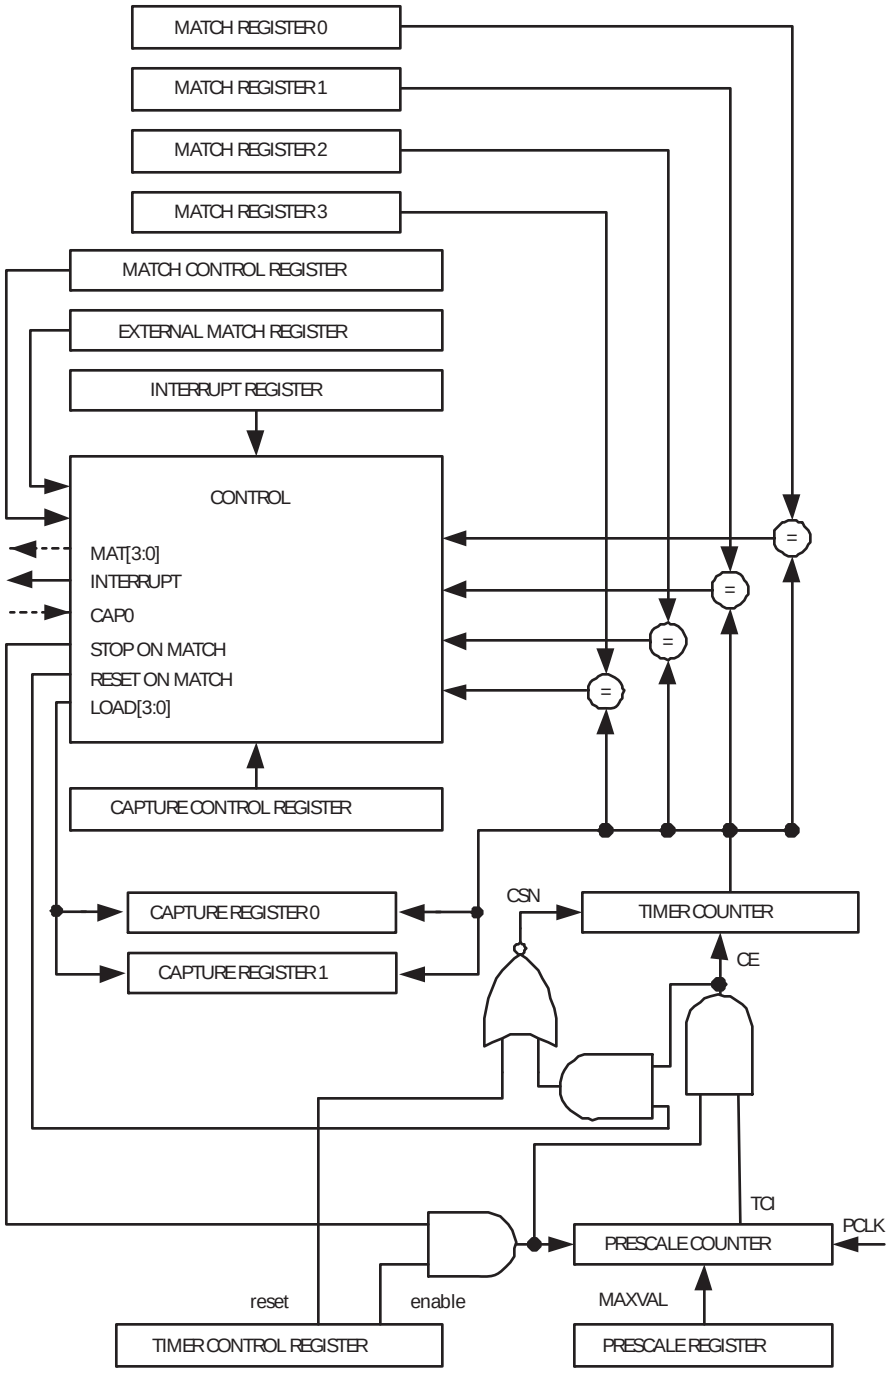


**Fig 84. 32-bit counter/timer block diagram**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

# Chapter 22: LPC111x/LPC11Cxx Windowed WatchDog Timer (WDT)

Rev. 12.4 — 22 December 2016 User manual

## 22.1 How to read this chapter

This chapter describes the Windowed WDT available on all parts of the LPC1100L and LPC1100XL series.

## 22.2 Basic configuration

The WDT is configured using the following registers:

1. Pins: The WDT uses no external pins.
2. Power: In the SYSAHBCLKCTRL register, set bit 15 (Table 21).
3. Peripheral clock: Select the WDT clock source (Table 25) and enable the WDT peripheral clock by writing to the WDTCLKDIV register (Table 27).

   **Remark:** The frequency of the watchdog oscillator is undefined after reset. The watchdog oscillator frequency must be programmed by writing to the WDTOSCCTRL register (see Table 13) before using the watchdog oscillator for the WDT.
4. Lock features: Once the watchdog timer is enabled by setting the WDEN bit in the WDMOD register, the following lock features are in effect:
   a. The WDEN bit cannot be changed to 0, that is the WDT cannot be disabled.
   b. The watch dog clock source cannot be changed. If the WDT is needed in Deep-sleep mode, select the watch dog oscillator as the clock source before setting the WDEN bit.

## 22.3 Features

- Internally resets chip if not reloaded during the programmable time-out period.
- Optional windowed operation requires reload to occur between a minimum and maximum time-out period, both programmable.
- Optional warning interrupt can be generated at a programmable time prior to watchdog time-out.
- Programmable 24-bit timer with internal fixed pre-scaler.
- Selectable time period from 1,024 watchdog clocks ($T_{WDCLK} \times 256 \times 4$) to over 67 million watchdog clocks ($T_{WDCLK} \times 2^{24} \times 4$) in increments of 4 watchdog clocks.
- “Safe” watchdog operation. Once enabled, requires a hardware reset or a Watchdog reset to be disabled.
- A dedicated on-chip watchdog oscillator provides a reliable clock source that cannot be turned off when the Watchdog Timer is running.
- Incorrect feed sequence causes immediate watchdog reset if the watchdog is enabled.
- The watchdog reload value can optionally be protected such that it can only be changed after the “warning interrupt” time is reached.


All information provided in this document is subject to legal disclaimers.
© NXP B.V. 2016. All rights reserved.

- Flag to indicate Watchdog reset.

## 22.4 Applications

The purpose of the Watchdog Timer is to reset the microcontroller within a reasonable amount of time if it enters an erroneous state. When enabled, a watchdog event will be generated if the user program fails to feed (or reload) the Watchdog within a predetermined amount of time. The Watchdog event will cause a chip reset if configured to do so.

When a watchdog window is programmed, an early watchdog feed is also treated as a watchdog event. This allows preventing situations where a system failure may still feed the watchdog. For example, application code could be stuck in an interrupt service that contains a watchdog feed. Setting the window such that this would result in an early feed will generate a watchdog event, allowing for system recovery.

.

## 22.5 General description

The Watchdog consists of a fixed divide-by-4 pre-scaler and a 24-bit counter which decrements when clocked. The minimum value from which the counter decrements is 0xFF. Setting a value lower than 0xFF causes 0xFF to be loaded in the counter. Hence the minimum Watchdog interval is ($T_{WDCLK} \times 256 \times 4$) and the maximum Watchdog interval is ($T_{WDCLK} \times 2^{24} \times 4$) in multiples of ($T_{WDCLK} \times 4$). The Watchdog should be used in the following manner:

- Set the Watchdog timer constant reload value in WDTC register.
- Setup the Watchdog timer operating mode in WDMOD register.
- Set a value for the watchdog window time in WDWINDOW register if windowed operation is required.
- Set a value for the watchdog warning interrupt in the WDWARNINT register if a warning interrupt is required.
- Enable the Watchdog by writing 0xAA followed by 0x55 to the WDFEED register.
- The Watchdog must be fed again before the Watchdog counter reaches zero in order to prevent a watchdog event. If a window value is programmed, the feed must also occur after the watchdog counter passes that value.

When the Watchdog Timer is configured so that a watchdog event will cause a reset and the counter reaches zero, the CPU will be reset, loading the stack pointer and program counter from the vector table as in the case of external reset. The Watchdog time-out flag (WDTOF) can be examined to determine if the Watchdog has caused the reset condition. The WDTOF flag must be cleared by software.

When the Watchdog Timer is configured to generate a warning interrupt, the interrupt will occur when the counter matches the value defined by the WDWARNINT register.

The block diagram of the Watchdog is shown below in the Figure 85. The synchronization logic (PCLK - WDCLK) is not shown in the block diagram.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

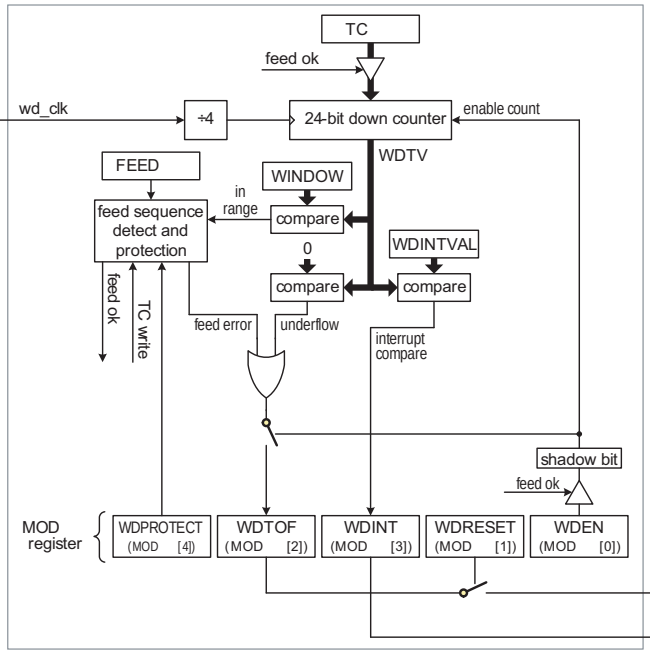


**Fig 85. Windowed Watchdog Timer (WWDT) block diagram**

## 22.6 Clock control

The watchdog timer block uses two clocks: PCLK and WDCLK. PCLK is used for the APB accesses to the watchdog registers and is derived from the system clock (see Figure 8). The WDCLK is used for the watchdog timer counting and is derived from the WDT clock divider in Figure 8. Several clocks can be used as a clock source for wdt_clk clock: the IRC, the watchdog oscillator, and the main clock. The clock source is selected in the syscon block (see Table 25). The WDCLK has its own clock divider (Table 27) which can also disable this clock.

There is some synchronization logic between these two clock domains. When the WDMOD and WDTC registers are updated by APB operations, the new value will take effect in 3 WDCLK cycles on the logic in the WDCLK clock domain. When the watchdog timer is counting on WDCLK, the synchronization logic will first lock the value of the counter on WDCLK and then synchronize it with the PCLK for reading as the WDTV register by the CPU.

The watchdog oscillator can be powered down in the PDRUNCFG register (Table 44) if it is not used. The clock to the watchdog register block (PCLK) can be disabled in the SYSAHBCLKCTRL register (Table 21) for power savings.

**Remark:** The frequency of the watchdog oscillator is undefined after reset. The watchdog oscillator frequency must be programmed by writing to the WDTOSCCTRL register (see Table 13) before using the watchdog oscillator for the WDT.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 22.7 Register description

The Watchdog contains the registers shown in Table 343.

**Table 343. Register overview: Watchdog timer (base address 0x4000 4000)**

| Name | Access | Address offset | Description | Reset value[1] |
|---|---|---|---|---|
| WDMOD | R/W | 0x000 | Watchdog mode register. This register contains the basic mode and status of the Watchdog Timer. | 0 |
| WDTC | R/W | 0x004 | Watchdog timer constant register. This register determines the time-out value. | 0xFF |
| WDFEED | WO | 0x008 | Watchdog feed sequence register. Writing 0xAA followed by 0x55 to this register reloads the Watchdog timer with the value contained in WDTC. | - |
| WDTV | RO | 0x00C | Watchdog timer value register. This register reads out the current value of the Watchdog timer. | 0xFF |
| WDWARNINT | R/W | 0x014 | Watchdog Warning Interrupt compare value. | 0 |
| WDWINDOW | R/W | 0x018 | Watchdog Window compare value. | 0xFF FFFF |

[1] Reset Value reflects the data stored in used bits only. It does not include reserved bits content.

### 22.7.1 Watchdog Mode register

The WDMOD register controls the operation of the Watchdog as per the combination of WDEN and RESET bits. Note that a watchdog feed must be performed before any changes to the WDMOD register take effect.

**Table 344: Watchdog Mode register (WDMOD - 0x4000 4000) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 0 | WDEN | | Watchdog enable bit. This bit is Set Only.<br>**Remark:** Setting this bit to one also locks the watchdog clock source. Once the watchdog timer is enabled, the watchdog timer clock source cannot be changed. If the watchdog timer is needed in Deep-sleep mode, the watchdog clock source must be changed to the watchdog oscillator before setting this bit to one. | 0 |
| | | 0 | The watchdog timer is stopped. | |
| | | 1 | The watchdog timer is running. | |
| 1 | WDRESET | | Watchdog reset enable bit. This bit is Set Only. | 0 |
| | | 0 | A watchdog timeout will not cause a chip reset. | |
| | | 1 | A watchdog timeout will cause a chip reset. | |
| 2 | WDTOF | | Watchdog time-out flag. Set when the watchdog timer times out, by a feed error, or by events associated with WDPROTECT, cleared by software. Causes a chip reset if WDRESET = 1. | 0 (Only after external reset) |
| 3 | WDINT | | Watchdog interrupt flag. Set when the timer reaches the value in WDWARNINT. Cleared by software. | 0 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 344: Watchdog Mode register (WDMOD - 0x4000 4000) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 4 | WDPROTECT | | Watchdog update mode. This bit is Set Only. | 0 |
| | | 0 | The watchdog reload value (WDTC) can be changed at any time. | |
| | | 1 | The watchdog reload value (WDTC) can be changed only after the counter is below the value of WDWARNINT and WDWINDOW. **Note**: this mode is intended for use only when WDRESET =1. | |
| 31:5 | - | | Reserved. Read value is undefined, only zero should be written. | - |

Once the **WDEN**, **WDPROTECT**, or **WDRESET** bits are set they can not be cleared by software. Both flags are cleared by an external reset or a Watchdog timer reset.

**WDTOF** The Watchdog time-out flag is set when the Watchdog times out, when a feed error occurs, or when WDPROTECT =1 and an attempt is made to write to the WDTC register. This flag is cleared by software writing a 0 to this bit.

**WDINT** The Watchdog interrupt flag is set when the Watchdog counter reaches the value specified by WDWARNINT. This flag is cleared when any reset occurs, and is cleared by software by writing a 1 to this bit.

Watchdog reset or interrupt will occur any time the watchdog is running. If a watchdog interrupt occurs in Sleep mode, it will wake up the device.

**Table 345. Watchdog operating modes selection**

| WDEN | WDRESET | Mode of Operation |
|---|---|---|
| 0 | X (0 or 1) | Debug/Operate without the Watchdog running. |
| 1 | 0 | Watchdog interrupt mode: the watchdog warning interrupt will be generated but watchdog reset will not. When this mode is selected, the watchdog counter reaching the value specified by WDWARNINT will set the WDINT flag and the Watchdog interrupt request will be generated. |
| 1 | 1 | Watchdog reset mode: both the watchdog interrupt and watchdog reset are enabled. When this mode is selected, the watchdog counter reaching the value specified by WDWARNINT will set the WDINT flag and the Watchdog interrupt request will be generated, and the watchdog counter reaching zero will reset the microcontroller. A watchdog feed prior to reaching the value of WDWINDOW will also cause a watchdog reset. |

### 22.7.2 Watchdog Timer Constant register

The WDTC register determines the time-out value. Every time a feed sequence occurs the WDTC content is reloaded in to the Watchdog timer. This is pre-loaded with the value 0x00 00FF upon reset. Writing values below 0xFF will cause 0x00 00FF to be loaded into the WDTC. Thus the minimum time-out interval is $T_{WDCLK} \times 256 \times 4$.

If the WDPROTECT bit in WDMOD = 1, an attempt to change the value of WDTC before the watchdog counter is below the values of WDWARNINT and WDWINDOW will cause a watchdog reset and set the WDTOF flag.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 346: Watchdog Timer Constant register (WDTC - 0x4000 4004) bit description

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 23:0 | Count | Watchdog time-out interval. | 0x00 00FF |
| 31:24 | - | Reserved. Read value is undefined, only zero should be written. | NA |

### 22.7.3 Watchdog Feed register

Writing 0xAA followed by 0x55 to this register will reload the Watchdog timer with the WDTC value. This operation will also start the Watchdog if it is enabled via the WDMOD register. Setting the WDEN bit in the WDMOD register is not sufficient to enable the Watchdog. A valid feed sequence must be completed after setting WDEN before the Watchdog is capable of generating a reset. Until then, the Watchdog will ignore feed errors. After writing 0xAA to WDFEED, access to any Watchdog register other than writing 0x55 to WDFEED causes an immediate reset/interrupt when the Watchdog is enabled, and sets the WDTOF flag. The reset will be generated during the second PCLK following an incorrect access to a Watchdog register during a feed sequence.

Table 347: Watchdog Feed register (WDFEED - 0x4000 4008) bit description

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 7:0 | Feed | Feed value should be 0xAA followed by 0x55. | - |
| 31:8 | - | Reserved | - |

### 22.7.4 Watchdog Timer Value register

The WDTV register is used to read the current value of Watchdog timer counter.

When reading the value of the 24-bit counter, the lock and synchronization procedure takes up to 6 WDCLK cycles plus 6 PCLK cycles, so the value of WDTV is older than the actual value of the timer when it's being read by the CPU.

Table 348: Watchdog Timer Value register (WDTV - 0x4000 400C) bit description

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 23:0 | Count | Counter timer value. | 0x00 00FF |
| 31:24 | - | Reserved. Read value is undefined, only zero should be written. | - |

### 22.7.5 Watchdog Timer Warning Interrupt register

The WDWARNINT register determines the watchdog timer counter value that will generate a watchdog interrupt. When the watchdog timer counter matches the value defined by WDWARNINT, an interrupt will be generated after the subsequent WDCLK.

A match of the watchdog timer counter to WDWARNINT occurs when the bottom 10 bits of the counter have the same value as the 10 bits of WARNINT, and the remaining upper bits of the counter are all 0. This gives a maximum time of 1,023 watchdog timer counts (4,096 watchdog clocks) for the interrupt to occur prior to a watchdog event. If WARNINT is set to 0, the interrupt will occur at the same time as the watchdog event.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 349: Watchdog Timer Warning Interrupt register (WDWARNINT - 0x4000 4014) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 9:0 | WARNINT | Watchdog warning interrupt compare value. | 0 |
| 31:10 | - | Reserved. Read value is undefined, only zero should be written. | - |

## 22.7.6 Watchdog Timer Window register

The WDWINDOW register determines the highest WDTV value allowed when a watchdog feed is performed. If a feed valid sequence completes prior to WDTV reaching the value in WDWINDOW, a watchdog event will occur.

WDWINDOW resets to the maximum possible WDTV value, so windowing is not in effect.

**Table 350: Watchdog Timer Window register (WDWINDOW - 0x4000 4018) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 23:0 | WINDOW | Watchdog window value. | 0xFF FFFF |
| 31:24 | - | Reserved. Read value is undefined, only zero should be written. | - |

## 22.7.7 Watchdog timing examples

The following figures illustrate several aspects of Watchdog Timer operation.

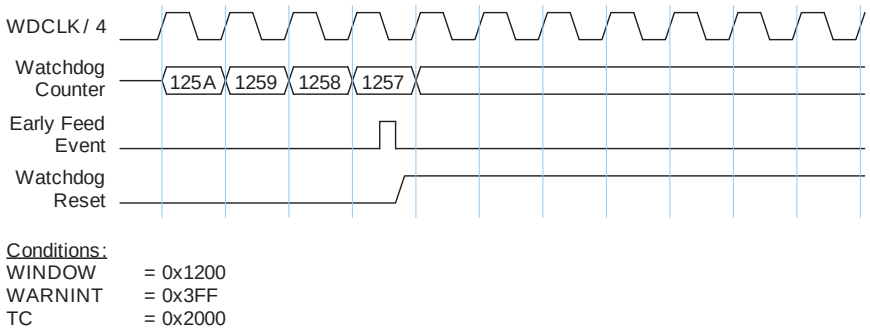


**Fig 86. Early Watchdog Feed with Windowed Mode Enabled**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

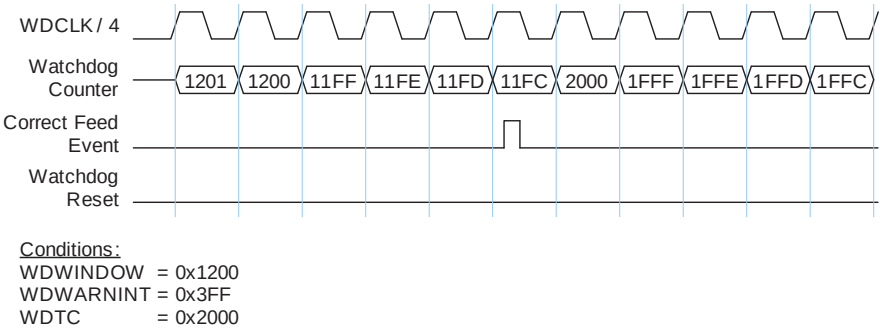


**Fig 87. Correct Watchdog Feed with Windowed Mode Enabled**

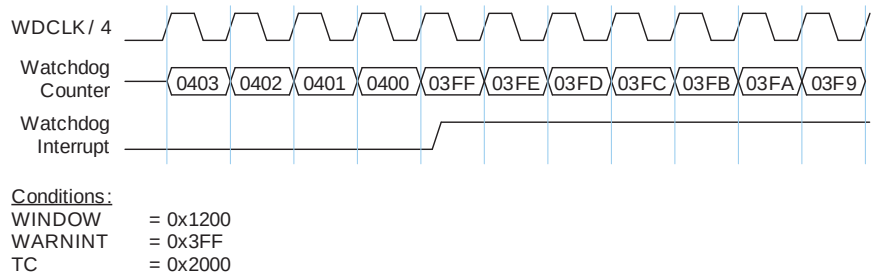


**Fig 88. Watchdog Warning Interrupt**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 23.1 How to read this chapter

The WDT block (not windowed) is available for parts LPC111x and LPC11Cxx.

For parts LPC11Cxx only, a clock source lock feature is implemented whenever the WDT is enabled.

## 23.2 Basic configuration

The WDT is configured using the following registers:

1. Pins: The WDT uses no external pins.
2. Power: In the SYSAHBCLKCTRL register, set bit 15 (Table 21).
3. Peripheral clock: Select the watchdog clock source Table 25) and enable the WDT peripheral clock by writing to the WDTCLKDIV register (Table 27).

   **Remark:** The frequency of the watchdog oscillator is undefined after reset. The watchdog oscillator frequency must be programmed by writing to the WDTOSCCTRL register (see Table 13) before using the watchdog oscillator for the WDT.
4. Lock features: Once the watchdog timer is enabled by setting the WDEN bit in the WDMOD register, the following lock features are in effect:
   a. The WDEN bit cannot be changed to 0, that is the WDT cannot be disabled (LPC111x/101/201/301 and LPC11Cxx).
   b. The watch dog clock source cannot be changed. If the WDT is needed in Deep-sleep mode, select the watch dog oscillator as the clock source before setting the WDEN bit. (LPC11Cxx only).

## 23.3 Features

- Internally resets chip if not periodically reloaded.
- Debug mode.
- Enabled by software but requires a hardware reset or a Watchdog reset/interrupt to be disabled.
- Incorrect/Incomplete feed sequence causes reset/interrupt if enabled.
- Flag to indicate Watchdog reset.
- Programmable 24 bit timer with internal pre-scaler.
- Selectable time period from ($T_{WDCLK} \times 256 \times 4$) to ($T_{WDCLK} \times 2^{24} \times 4$) in multiples of $T_{WDCLK} \times 4$.
- The Watchdog clock (WDCLK) source is selected in the syscon block from the Internal RC oscillator (IRC), the main clock, or the Watchdog oscillator, see Table 25. This gives a wide range of potential timing choices for Watchdog operation under different power reduction conditions. For increased reliability, it also provides the ability to run the Watchdog timer from an entirely internal source that is not dependent on an external crystal and its associated components and wiring.



All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 23.4 Applications

The purpose of the Watchdog is to reset the microcontroller within a reasonable amount of time if it enters an erroneous state. When enabled, the Watchdog will generate a system reset if the user program fails to feed (or reload) the Watchdog within a predetermined amount of time.

## 23.5 Description

The Watchdog consists of a divide by 4 fixed pre-scaler and a 24-bit counter. The clock is fed to the timer via a pre-scaler. The timer decrements when clocked. The minimum value from which the counter decrements is 0xFF. Setting a value lower than 0xFF causes 0xFF to be loaded in the counter. Hence the minimum Watchdog interval is ($T_{WDCLK} \times 256 \times 4$) and the maximum Watchdog interval is ($T_{WDCLK} \times 2^{24} \times 4$) in multiples of ($T_{WDCLK} \times 4$). The Watchdog should be used in the following manner:

1. Set the Watchdog timer constant reload value in WDTC register.
2. Setup the Watchdog timer operating mode in WDMOD register.
3. Enable the Watchdog by writing 0xAA followed by 0x55 to the WDFEED register.
4. The Watchdog should be fed again before the Watchdog counter underflows to prevent reset/interrupt.

When the Watchdog is in the reset mode and the counter underflows, the CPU will be reset, loading the stack pointer and program counter from the vector table as in the case of external reset. The Watchdog time-out flag (WDTOF) can be examined to determine if the Watchdog has caused the reset condition. The WDTOF flag must be cleared by software.

## 23.6 WDT clocking

The watchdog timer block uses two clocks: PCLK and WDCLK. PCLK is used for the APB accesses to the watchdog registers and is derived from the system clock (see Figure 8). The WDCLK is used for the watchdog timer counting and is derived from the wdt_clk in Figure 8. Several clocks can be used as a clock source for wdt_clk clock: the IRC, the watchdog oscillator, and the main clock. The clock source is selected in the syscon block (see Table 25). The WDCLK has its own clock divider (Section 3.5.20), which can also disable this clock.

There is some synchronization logic between these two clock domains. When the WDMOD and WDTC registers are updated by APB operations, the new value will take effect in 3 WDCLK cycles on the logic in the WDCLK clock domain. When the watchdog timer is counting on WDCLK, the synchronization logic will first lock the value of the counter on WDCLK and then synchronize it with the PCLK for reading as the WDTV register by the CPU.

**Remark:** The frequency of the watchdog oscillator is undefined after reset. The watchdog oscillator frequency must be programmed by writing to the WDTOSCCTRL register (see Table 13) before using the watchdog oscillator for the WDT.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 23.7 Register description

The Watchdog contains four registers as shown in Table 351 below.

**Table 351. Register overview: Watchdog timer (base address 0x4000 4000)**

| Name | Access | Address offset | Description | Reset Value[1] |
|---|---|---|---|---|
| WDMOD | R/W | 0x000 | Watchdog mode register. This register contains the basic mode and status of the Watchdog Timer. | 0 |
| WDTC | R/W | 0x004 | Watchdog timer constant register. This register determines the time-out value. | 0xFF |
| WDFEED | WO | 0x008 | Watchdog feed sequence register. Writing 0xAA followed by 0x55 to this register reloads the Watchdog timer with the value contained in WDTC. | NA |
| WDTV | RO | 0x00C | Watchdog timer value register. This register reads out the current value of the Watchdog timer. | 0xFF |

[1] Reset Value reflects the data stored in used bits only. It does not include reserved bits content.

### 23.7.1 Watchdog Mode register (WDMOD - 0x4000 0000)

The WDMOD register controls the operation of the Watchdog through the combination of WDEN and RESET bits. Note that a watchdog feed must be performed before any changes to the WDMOD register take effect.

**Table 352. Watchdog Mode register (WDMOD - address 0x4000 4000) bit description**

| Bit | Symbol | Description | Reset Value |
|---|---|---|---|
| 0 | WDEN | WDEN Watchdog enable bit (Set Only). When 1, the watchdog timer is running.<br>**Remark:** Setting this bit to one also locks the watchdog clock source. Once the watchdog timer is enabled, the watchdog timer clock source cannot be changed. If the watchdog timer is needed in Deep-sleep mode, the watchdog clock source must be changed to the watchdog oscillator before setting this bit to one. The clock source lock feature is not available on all parts, see Section 23.1). | 0 |
| 1 | WDRESET | WDRESET Watchdog reset enable bit (Set Only). When 1, a watchdog time-out will cause a chip reset. | 0 |
| 2 | WDTOF | WDTOF Watchdog time-out flag. Set when the watchdog timer times out, cleared by software. | 0 (Only after POR and BOD reset) |
| 3 | WDINT | WDINT Watchdog interrupt flag (Read Only, not clearable by software). | 0 |
| 7:4 | - | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |
| 31:8 | - | reserved | - |

Once the **WDEN** and/or **WDRESET** bits are set, they can not be cleared by software. Both flags are cleared by a reset or a Watchdog timer underflow.

**WDTOF** The Watchdog time-out flag is set when the Watchdog times out. This flag is cleared by software or a POR or Brown-Out-Detect reset.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**WDINT** The Watchdog interrupt flag is set when the Watchdog times out. This flag is cleared when any reset occurs. Once the watchdog interrupt is serviced, it can be disabled in the NVIC or the watchdog interrupt request will be generated indefinitely. The intent of the watchdog interrupt is to allow debugging watchdog activity without resetting the device when the watchdog overflows.

Watchdog reset or interrupt will occur any time the watchdog is running and has an operating clock source. Any clock source works in Sleep mode, and if a watchdog interrupt occurs in Sleep mode, it will wake up the device.

**Table 353. Watchdog operating modes selection**

| WDEN | WDRESET | Mode of Operation |
|---|---|---|
| 0 | X (0 or 1) | Debug/Operate without the Watchdog running. |
| 1 | 0 | Watchdog interrupt mode: debug with the Watchdog interrupt but no WDRESET enabled.<br>When this mode is selected, a watchdog counter underflow will set the WDINT flag and the Watchdog interrupt request will be generated.<br>**Remark:** In interrupt mode, check the WDINT flag. If this flag is set, the interrupt is true and can be serviced by the interrupt routine. If this flag is not set, the interrupt should be ignored. |
| 1 | 1 | Watchdog reset mode: operate with the Watchdog interrupt and WDRESET enabled.<br>When this mode is selected, a watchdog counter underflow will reset the microcontroller. Although the Watchdog interrupt is also enabled in this case (WDEN = 1) it will not be recognized since the watchdog reset will clear the WDINT flag. |

## 23.7.2 Watchdog Timer Constant register (WDTC - 0x4000 4004)

The WDTC register determines the time-out value. Every time a feed sequence occurs the WDTC content is reloaded in to the Watchdog timer. It's a 32-bit register with 8 LSB set to 1 on reset. Writing values below 0xFF will cause 0x0000 00FF to be loaded to the WDTC. Thus the minimum time-out interval is $T_{WDCLK} \times 256 \times 4$.

**Table 354. Watchdog Constant register (WDTC - address 0x4000 4004) bit description**

| Bit | Symbol | Description | Reset Value |
|---|---|---|---|
| 23:0 | Count | Watchdog time-out interval. | 0x0000 00FF |
| 31:25 | - | Reserved | - |

## 23.7.3 Watchdog Feed register (WDFEED - 0x4000 4008)

Writing 0xAA followed by 0x55 to this register will reload the Watchdog timer with the WDTC value. This operation will also start the Watchdog if it is enabled via the WDMOD register. Setting the WDEN bit in the WDMOD register is not sufficient to enable the Watchdog. A valid feed sequence must be completed after setting WDEN before the Watchdog is capable of generating a reset. Until then, the Watchdog will ignore feed errors. After writing 0xAA to WDFEED, access to any Watchdog register other than writing 0x55 to WDFEED causes an immediate reset/interrupt when the Watchdog is enabled. The reset will be generated during the second PCLK following an incorrect access to a Watchdog register during a feed sequence.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Interrupts should be disabled during the feed sequence. An abort condition will occur if an interrupt happens during the feed sequence.

**Table 355. Watchdog Feed register (WDFEED - address 0x4000 4008) bit description**

| Bit | Symbol | Description | Reset Value |
|---|---|---|---|
| 7:0 | Feed | Feed value should be 0xAA followed by 0x55. | NA |
| 31:8 | - | Reserved | - |

### 23.7.4 Watchdog Timer Value register (WDTV - 0x4000 400C)

The WDTV register is used to read the current value of Watchdog timer.

When reading the value of the 24-bit timer, the lock and synchronization procedure takes up to 6 WDCLK cycles plus 6 PCLK cycles, so the value of WDTV is older than the actual value of the timer when it's being read by the CPU.

**Table 356. Watchdog Timer Value register (WDTV - address 0x4000 000C) bit description**

| Bit | Symbol | Description | Reset Value |
|---|---|---|---|
| 23:0 | Count | Counter timer value. | 0x0000 00FF |
| 31:24 | - | Reserved | - |

## 23.8 Block diagram

The block diagram of the Watchdog is shown below in the Figure 89. The synchronization logic (PCLK/WDCLK) is not shown in the block diagram.

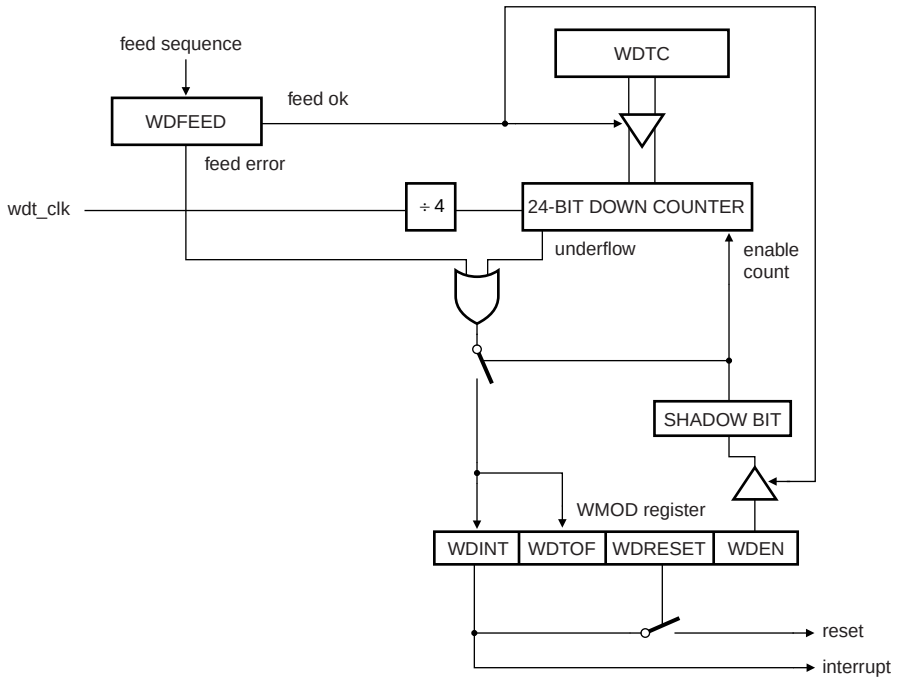


**Fig 89. Watchdog block diagram**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 24.1 How to read this chapter

The system tick timer (SysTick timer) is part of the ARM Cortex-M0 core and is identical for all LPC111x, LPC11D14, and LPC11Cxx parts.

## 24.2 Basic configuration

The system tick timer is configured using the following registers:

1. Pins: The system tick timer uses no external pins.
2. Power: The system tick timer is enabled through the SysTick control register SYST_CSR (Table 358). The SysTick control register also allows changing the clock source to the SysTick timer
3. Enable the clock source for the SysTick timer in the SYST_CSR register (Table 358).

## 24.3 Features

- Simple 24-bit timer.
- Uses dedicated exception vector.
- Clocked internally by the system clock or the system clock/2.

## 24.4 General description

The block diagram of the SysTick timer is shown below in the Figure 90.

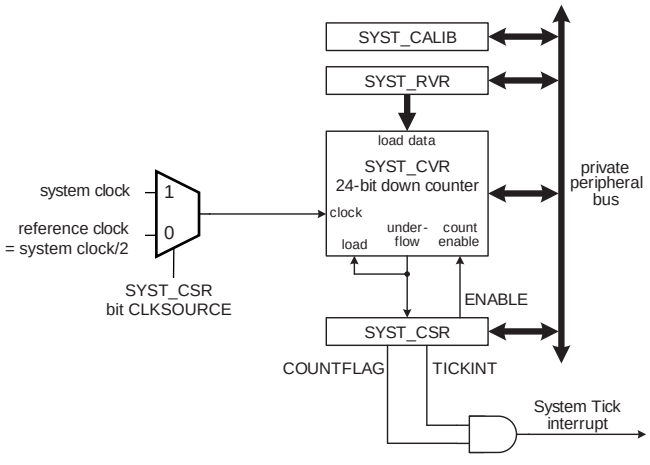


**Fig 90. System tick timer block diagram**

The SysTick timer is an integral part of the Cortex-M0. The SysTick timer is intended to generate a fixed 10 millisecond interrupt for use by an operating system or other system management software.



All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Since the SysTick timer is a part of the Cortex-M0, it facilitates porting of software by providing a standard timer that is available on Cortex-M0 based devices. The SysTick timer can be used for:

- An RTOS tick timer which fires at a programmable rate (for example 100 Hz) and invokes a SysTick routine.
- A high-speed alarm timer using the core clock.
- A simple counter. Software can use this to measure time to completion and time used.
- An internal clock source control based on missing/meeting durations. The COUNTFLAG bit-field in the control and status register can be used to determine if an action completed within a set duration, as part of a dynamic clock management control loop.

Refer to the *Cortex-M0 User Guide* for details.

## 24.5 Register description

The systick timer registers are located on the ARM Cortex-M0 private peripheral bus (see Figure 98), and are part of the ARM Cortex-M0 core peripherals. For details, see Section 28.6.4.

**Table 357. Register overview: SysTick timer (base address 0xE000 E000)**

| Name | Access | Address offset | Description | Reset value[1] |
|---|---|---|---|---|
| SYST_CSR | R/W | 0x010 | System Timer Control and status register | 0x000 0000 |
| SYST_RVR | R/W | 0x014 | System Timer Reload value register | 0 |
| SYST_CVR | R/W | 0x018 | System Timer Current value register | 0 |
| SYST_CALIB | R/W | 0x01C | System Timer Calibration value register | 0x4 |

[1] Reset Value reflects the data stored in used bits only. It does not include content of reserved bits.

### 24.5.1 System Timer Control and status register

The SYST_CSR register contains control information for the SysTick timer and provides a status flag. This register is part of the ARM Cortex-M0 core system timer register block. For a bit description of this register, see Section 28.6.4 “System timer, SysTick”.

This register determines the clock source for the system tick timer.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 358. SysTick Timer Control and status register (SYST_CSR - 0xE000 E010) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 0 | ENABLE | System Tick counter enable. When 1, the counter is enabled. When 0, the counter is disabled. | 0 |
| 1 | TICKINT | System Tick interrupt enable. When 1, the System Tick interrupt is enabled. When 0, the System Tick interrupt is disabled. When enabled, the interrupt is generated when the System Tick counter counts down to 0. | 0 |
| 2 | CLKSOURCE | System Tick clock source selection. When 1, the system clock (CPU) clock is selected. When 0, the system clock/2 is selected as the reference clock. | 0 |
| 15:3 | - | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |
| 16 | COUNTFLAG | Returns 1 if the SysTick timer counted to 0 since the last read of this register. | 0 |
| 31:17 | - | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |

### 24.5.2 System Timer Reload value register

The SYST_RVR register is set to the value that will be loaded into the SysTick timer whenever it counts down to zero. This register is loaded by software as part of timer initialization. The SYST_CALIB register may be read and used as the value for SYST_RVR register if the CPU is running at the frequency intended for use with the SYST_CALIB value.

**Table 359. System Timer Reload value register (SYST_RVR - 0xE000 E014) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 23:0 | RELOAD | This is the value that is loaded into the System Tick counter when it counts down to 0. | 0 |
| 31:24 | - | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |

### 24.5.3 System Timer Current value register

The SYST_CVR register returns the current count from the System Tick counter when it is read by software.

**Table 360. System Timer Current value register (SYST_CVR - 0xE000 E018) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 23:0 | CURRENT | Reading this register returns the current value of the System Tick counter. Writing any value clears the System Tick counter and the COUNTFLAG bit in STCTRL. | 0 |
| 31:24 | - | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 24.5.4 System Timer Calibration value register (SYST_CALIB - 0xE000 E01C)

The value of the SYST_CALIB register is driven by the value of the SYSTCKCAL register in the system configuration block (see Table 34).

**Table 361. System Timer Calibration value register (SYST_CALIB - 0xE000 E01C) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 23:0 | TENMS | | See Table 462. | 0x4 |
| 29:24 | - | | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |
| 30 | SKEW | | See Table 462. | 0 |
| 31 | NOREF | | See Table 462. | 0 |

## 24.6 Functional description

The SysTick timer is a 24-bit timer that counts down to zero and generates an interrupt. The intent is to provide a fixed 10 millisecond time interval between interrupts. The SysTick timer is clocked from the CPU clock (the system clock, see Figure 8) or from the reference clock, which is fixed to half the frequency of the CPU clock. In order to generate recurring interrupts at a specific interval, the SYST_RVR register must be initialized with the correct value for the desired interval. A default value is provided in the SYST_CALIB register and may be changed by software. The default value gives a 10 millisecond interrupt rate if the CPU clock is set to 50 MHz.

## 24.7 Example timer calculations

To use the system tick timer, do the following:

1. Program the SYST_RVR register with the reload value RELOAD to obtain the desired time interval.
2. Clear the SYST_CVR register by writing to it. This ensures that the timer will count from the SYST_RVR value rather than an arbitrary value when the timer is enabled.
3. Program the SYST_SCR register with the value 0x7 which enables the SysTick timer and the SysTick timer interrupt.

The following example illustrates selecting the SysTick timer reload value to obtain a 10 ms time interval with the LPC111x/LPC11Cxx system clock set to 50 MHz.

#### Example (system clock = 50 MHz)

The system tick clock = system clock = 50 MHz. Bit CLKSOURCE in the SYST_CSR register set to 1 (system clock).

RELOAD = (system tick clock frequency $\times$ 10 ms) $-1$ = (50 MHz $\times$ 10 ms) $-1$ = 500000 $-1$ = 499999 = 0x0007A11F.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 25.1 How to read this chapter

The ADC block is identical for all LPC111x, LPC11D14, and LPC11Cxx parts.

All HVQFN33 and LQFP48 packages support eight ADC channels. On the small packages (TSSOP28/DIP28/TSSOP20/SO20), only five or six ADC channels are pinned out (see Table 3).

## 25.2 Basic configuration

The ADC is configured using the following registers:

1. Pins: The ADC pin functions are configured in the IOCONFIG register block (Section 7.4).
2. Power and peripheral clock: In the SYSAHBCLKCTRL register, set bit 13 (Table 21). Power to the ADC at run-time is controlled through the PDRUNCFG register (Table 44).

**Remark:** Basic clocking for the A/D converters is determined by the APB clock (PCLK). A programmable divider is included in the A/D converter to scale this clock to the 4.5 MHz (max) clock needed by the successive approximation process. An accurate conversion requires 11 clock cycles.

## 25.3 Features

- 10-bit successive approximation Analog-to-Digital Converter (ADC).
- Input multiplexing among 8 pins.
- Power-down mode.
- Measurement range 0 to 3.6 V. Do not exceed the $V_{DD}$ voltage level.
- 10-bit conversion time $\geq$ 2.44 μs.
- Burst conversion mode for single or multiple inputs.
- Optional conversion on transition on input pin or Timer Match signal.
- Individual result registers for each A/D channel to reduce interrupt overhead.

## 25.4 Pin description

Table 362 gives a brief summary of the ADC related pins.



All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 362. ADC pin description**

| Pin | Type | Description |
|---|---|---|
| AD[7:0] | Input | **Analog Inputs.** The A/D converter cell can measure the voltage on any of these input signals.<br>**Remark:** While the pins are 5 V tolerant in digital mode, the maximum input voltage must not exceed $V_{DD}$ when the pins are configured as analog inputs. |
| $V_{DD}$ | Input | $V_{REF}$; Reference voltage. |

The ADC function must be selected via the IOCON registers in order to get accurate voltage readings on the monitored pin. For a pin hosting an ADC input, it is not possible to have a have a digital function selected and yet get valid ADC readings. An inside circuit disconnects ADC hardware from the associated pin whenever a digital function is selected on that pin.

## 25.5 Register description

The ADC contains registers organized as shown in Table 363.

**Table 363. Register overview: ADC (base address 0x4001 C000)**

| Name | Access | Address offset | Description | Reset Value[1] |
|---|---|---|---|---|
| AD0CR | R/W | 0x000 | A/D Control Register. The AD0CR register must be written to select the operating mode before A/D conversion can occur. | 0x0000 0000 |
| AD0GDR | R/W | 0x004 | A/D Global Data Register. Contains the result of the most recent A/D conversion. | NA |
| - | - | 0x008 | Reserved. | - |
| AD0INTEN | R/W | 0x00C | A/D Interrupt Enable Register. This register contains enable bits that allow the DONE flag of each A/D channel to be included or excluded from contributing to the generation of an A/D interrupt. | 0x0000 0100 |
| AD0DR0 | R/W | 0x010 | A/D Channel 0 Data Register. This register contains the result of the most recent conversion completed on channel 0 | NA |
| AD0DR1 | R/W | 0x014 | A/D Channel 1 Data Register. This register contains the result of the most recent conversion completed on channel 1. | NA |
| AD0DR2 | R/W | 0x018 | A/D Channel 2 Data Register. This register contains the result of the most recent conversion completed on channel 2. | NA |
| AD0DR3 | R/W | 0x01C | A/D Channel 3 Data Register. This register contains the result of the most recent conversion completed on channel 3. | NA |
| AD0DR4 | R/W | 0x020 | A/D Channel 4 Data Register. This register contains the result of the most recent conversion completed on channel 4. | NA |
| AD0DR5 | R/W | 0x024 | A/D Channel 5 Data Register. This register contains the result of the most recent conversion completed on channel 5. | NA |
| AD0DR6 | R/W | 0x028 | A/D Channel 6 Data Register. This register contains the result of the most recent conversion completed on channel 6. | NA |
| AD0DR7 | R/W | 0x02C | A/D Channel 7 Data Register. This register contains the result of the most recent conversion completed on channel 7. | NA |
| AD0STAT | RO | 0x030 | A/D Status Register. This register contains DONE and OVERRUN flags for all of the A/D channels, as well as the A/D interrupt flag. | 0 |

[1] Reset Value reflects the data stored in used bits only. It does not include reserved bits content.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 25.5.1 A/D Control Register (AD0CR - 0x4001 C000)

The A/D Control Register provides bits to select A/D channels to be converted, A/D timing, A/D modes, and the A/D start trigger.

**Table 364. A/D Control Register (AD0CR - address 0x4001 C000) bit description**

| Bit | Symbol | Value | Description | Reset Value |
|---|---|---|---|---|
| 7:0 | SEL | | Selects which of the AD7:0 pins is (are) to be sampled and converted. Bit 0 selects Pin AD0, bit 1 selects pin AD1,..., and bit 7 selects pin AD7.<br>In software-controlled mode (BURST = 0), only one channel can be selected, i.e. only one of these bits should be 1.<br>In hardware scan mode (BURST = 1), any numbers of channels can be selected, i.e any or all bits can be set to 1. If all bits are set to 0, channel 0 is selected automatically (SEL = 0x01). | 0x00 |
| 15:8 | CLKDIV | | The APB clock (PCLK) is divided by CLKDIV +1 to produce the clock for the ADC, which should be less than or equal to 4.5 MHz. Typically, software should program the smallest value in this field that yields a clock of 4.5 MHz or slightly less, but in certain cases (such as a high-impedance analog source) a slower clock may be desirable. | 0 |
| 16 | BURST | | Burst mode<br>**Remark:** If BURST is set to 1, the ADGINTEN bit in the AD0INTEN register (Table 366) must be set to 0. | 0 |
| | | 0 | Software-controlled mode: Conversions are software-controlled and require 11 clocks. | |
| | | 1 | Hardware scan mode: The AD converter does repeated conversions at the rate selected by the CLKS field, scanning (if necessary) through the pins selected by 1s in the SEL field. The first conversion after the start corresponds to the least-significant bit set to 1 in the SEL field, then the next higher bits (pins) set to 1 are scanned if applicable. Repeated conversions can be terminated by clearing this bit, but the conversion in progress when this bit is cleared will be completed.<br>**Important:** START bits must be 000 when BURST = 1 or conversions will not start. | |
| 19:17 | CLKS | | This field selects the number of clocks used for each conversion in Burst mode, and the number of bits of accuracy of the result in the LS bits of ADDR, between 11 clocks (10 bits) and 4 clocks (3 bits). | 000 |
| | | 0x0 | 11 clocks / 10 bits | |
| | | 0x1 | 10 clocks / 9 bits | |
| | | 0x2 | 9 clocks / 8 bits | |
| | | 0x3 | 8 clocks / 7 bits | |
| | | 0x4 | 7 clocks / 6 bits | |
| | | 0x5 | 6 clocks / 5 bits | |
| | | 0x6 | 5 clocks / 4 bits | |
| | | 0x7 | 4 clocks / 3 bits | |
| 23:20 | - | | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 364. A/D Control Register (AD0CR - address 0x4001 C000) bit description**

| Bit | Symbol | Value | Description | Reset Value |
|---|---|---|---|---|
| 26:24 | START | | When the BURST bit is 0, these bits control whether and when an A/D conversion is started: | 0 |
| | | 0x0 | No start (this value should be used when clearing PDN to 0). | |
| | | 0x1 | Start conversion now. | |
| | | 0x2 | Start conversion when the edge selected by bit 27 occurs on PIO0_2/SSEL/CT16B0_CAP0. | |
| | | 0x3 | Start conversion when the edge selected by bit 27 occurs on PIO1_5/DIR/CT32B0_CAP0. | |
| | | 0x4 | Start conversion when the edge selected by bit 27 occurs on CT32B0_MAT0[1]. | |
| | | 0x5 | Start conversion when the edge selected by bit 27 occurs on CT32B0_MAT1[1]. | |
| | | 0x6 | Start conversion when the edge selected by bit 27 occurs on CT16B0_MAT0[1]. | |
| | | 0x7 | Start conversion when the edge selected by bit 27 occurs on CT16B0_MAT1[1]. | |
| 27 | EDGE | | This bit is significant only when the START field contains 010-111. In these cases: | 0 |
| | | 0 | Start conversion on a rising edge on the selected CAP/MAT signal. | |
| | | 1 | Start conversion on a falling edge on the selected CAP/MAT signal. | |
| 31:28 | - | | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |

[1] Note that this does not require that the timer match function appear on a device pin.

### 25.5.2 A/D Global Data Register (AD0GDR - 0x4001 C004)

The A/D Global Data Register contains the result of the most recent A/D conversion. This includes the data, DONE, and Overrun flags, and the number of the A/D channel to which the data relates.

**Table 365. A/D Global Data Register (AD0GDR - address 0x4001 C004) bit description**

| Bit | Symbol | Description | Reset Value |
|---|---|---|---|
| 5:0 | - | Reserved. These bits always read as zeroes. | 0 |
| 15:6 | V_VREF | When DONE is 1, this field contains a binary fraction representing the voltage on the ADn pin selected by the SEL field, divided by the voltage on the $V_{DD}$ pin. Zero in the field indicates that the voltage on the ADn pin was less than, equal to, or close to that on $V_{SS}$, while 0x3FF indicates that the voltage on ADn was close to, equal to, or greater than that on $V_{REF}$. | X |
| 23:16 | - | Reserved. These bits always read as zeroes. | 0 |
| 26:24 | CHN | These bits contain the channel from which the result bits V_VREF were converted. | X |
| 29:27 | - | Reserved. These bits always read as zeroes. | 0 |
| 30 | OVERRUN | This bit is 1 in burst mode if the results of one or more conversions was (were) lost and overwritten before the conversion that produced the result in the V_VREF bits. | 0 |
| 31 | DONE | This bit is set to 1 when an A/D conversion completes. It is cleared when this register is read and when the ADCR is written. If the ADCR is written while a conversion is still in progress, this bit is set and a new conversion is started. | 0 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 25.5.3 A/D Interrupt Enable Register (AD0INTEN - 0x4001 C00C)

This register allows control over which A/D channels generate an interrupt when a conversion is complete. For example, it may be desirable to use some A/D channels to monitor sensors by continuously performing conversions on them. The most recent results are read by the application program whenever they are needed. In this case, an interrupt is not desirable at the end of each conversion for some A/D channels.

**Table 366. A/D Interrupt Enable Register (AD0INTEN - address 0x4001 C00C) bit description**

| Bit | Symbol | Description | Reset Value |
|---|---|---|---|
| 7:0 | ADINTEN | These bits allow control over which A/D channels generate interrupts for conversion completion. When bit 0 is one, completion of a conversion on A/D channel 0 will generate an interrupt, when bit 1 is one, completion of a conversion on A/D channel 1 will generate an interrupt, etc. | 0x00 |
| 8 | ADGINTEN | When 1, enables the global DONE flag in AD0DRx to generate an interrupt. When 0, only the individual A/D channels enabled by ADINTEN 7:0 will generate interrupts.<br>**Remark:** This bit must be set to 0 in burst mode (BURST = 1 in the AD0CR register). | 1 |
| 31:9 | - | Reserved. Unused, always 0. | 0 |

### 25.5.4 A/D Data Registers (AD0DR0 to AD0DR7 - 0x4001 C010 to 0x4001 C02C)

The A/D Data Register hold the result when an A/D conversion is complete, and also include the flags that indicate when a conversion has been completed and when a conversion overrun has occurred.

**Table 367. A/D Data Registers (AD0DR0 to AD0DR7 - addresses 0x4001 C010 to 0x4001 C02C) bit description**

| Bit | Symbol | Description | Reset Value |
|---|---|---|---|
| 5:0 | - | Reserved. | 0 |
| 15:6 | V_VREF | When DONE is 1, this field contains a binary fraction representing the voltage on the ADn pin, divided by the voltage on the $V_{REF}$ pin. Zero in the field indicates that the voltage on the ADn pin was less than, equal to, or close to that on $V_{REF}$, while 0x3FF indicates that the voltage on AD input was close to, equal to, or greater than that on $V_{REF}$. | NA |
| 29:16 | - | Reserved. | 0 |
| 30 | OVERRUN | This bit is 1 in burst mode if the results of one or more conversions was (were) lost and overwritten before the conversion that produced the result in the V_VREF bits.This bit is cleared by reading this register. | 0 |
| 31 | DONE | This bit is set to 1 when an A/D conversion completes. It is cleared when this register is read. | 0 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 25.5.5 A/D Status Register (AD0STAT - 0x4001 C030)

The A/D Status register allows checking the status of all A/D channels simultaneously. The DONE and OVERRUN flags appearing in the ADDRn register for each A/D channel are mirrored in ADSTAT. The interrupt flag (the logical OR of all DONE flags) is also found in ADSTAT.

**Table 368. A/D Status Register (AD0STAT - address 0x4001 C030) bit description**

| Bit | Symbol | Description | Reset Value |
|---|---|---|---|
| 7:0 | DONE | These bits mirror the DONE status flags that appear in the result register for each A/D channel n. | 0 |
| 15:8 | OVERRUN | These bits mirror the OVERRRUN status flags that appear in the result register for each A/D channel n. Reading ADSTAT allows checking the status of all A/D channels simultaneously. | 0 |
| 16 | ADINT | This bit is the A/D interrupt flag. It is one when any of the individual A/D channel Done flags is asserted and enabled to contribute to the A/D interrupt via the ADINTEN register. | 0 |
| 31:17 | - | Reserved. Unused, always 0. | 0 |

## 25.6 Operation

### 25.6.1 Hardware-triggered conversion

If the BURST bit in the ADCR0 is 0 and the START field contains 010-111, the A/D converter will start a conversion when a transition occurs on a selected pin or timer match signal.

### 25.6.2 Interrupts

An interrupt is requested to the interrupt controller when the ADINT bit in the ADSTAT register is 1. The ADINT bit is one when any of the DONE bits of A/D channels that are enabled for interrupts (via the ADINTEN register) are one. Software can use the Interrupt Enable bit in the interrupt controller that corresponds to the ADC to control whether this results in an interrupt. The result register for an A/D channel that is generating an interrupt must be read in order to clear the corresponding DONE flag.

### 25.6.3 Accuracy vs. digital receiver

While the A/D converter can be used to measure the voltage on any ADC input pin, regardless of the pin's setting in the IOCON block, selecting the ADC in the IOCON registers function improves the conversion accuracy by disabling the pin's digital receiver (see also Section 7.3.4).


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 26.1 How to read this chapter

See Table 369 for different flash configurations.

**Table 369. LPC111x/LPC11Cx flash configurations**

| Type number | Flash | Configuration | Page erase IAP command supported | ISP via UART | ISP via C_CAN |
|---|---|---|---|---|---|
| LPC1110FD20 | 4 kB | Table 370 | no | yes | no |
| LPC1111FDH20/002 | 8 kB | Table 370 | no | yes | no |
| LPC1111FHN33/101 | 8 kB | Table 370 | no | yes | no |
| LPC1111FHN33/102 | 8 kB | Table 370 | no | yes | no |
| LPC1111FHN33/103 | 8 kB | Table 371 | yes | yes | no |
| LPC1111JHN33/103 | 8 kB | Table 371 | yes | yes | no |
| LPC1111FHN33/201 | 8 kB | Table 370 | no | yes | no |
| LPC1111FHN33/202 | 8 kB | Table 370 | no | yes | no |
| LPC1111FHN33/203 | 8 kB | Table 371 | yes | yes | no |
| LPC1111JHN33/203 | 8 kB | Table 371 | yes | yes | no |
| LPC1112FD20/102 | 16 kB | Table 370 | no | yes | no |
| LPC1112FDH20/102 | 16 kB | Table 370 | no | yes | no |
| LPC1112FDH28/102 | 16 kB | Table 370 | no | yes | no |
| LPC1112FHN33/101 | 16 kB | Table 370 | no | yes | no |
| LPC1112FHN33/102 | 16 kB | Table 370 | no | yes | no |
| LPC1112FHI33/102 | 16 kB | Table 370 | no | yes | no |
| LPC1112FHN33/103 | 16 kB | Table 371 | yes | yes | no |
| LPC1112JHN33/103 | 16 kB | Table 371 | yes | yes | no |
| LPC1112FHN33/201 | 16 kB | Table 370 | no | yes | no |
| LPC1112FHN24/202 | 16 kB | Table 370 | no | yes | no |
| LPC1112FHN33/202 | 16 kB | Table 370 | no | yes | no |
| LPC1112FHN33/203 | 16 kB | Table 371 | yes | yes | no |
| LPC1112JHN33/203 | 16 kB | Table 371 | yes | yes | no |
| LPC1112FHI33/202 | 16 kB | Table 370 | no | yes | no |
| LPC1112FHI33/203 | 16 kB | Table 371 | yes | yes | no |
| LPC1112JHI33/203 | 16 kB | Table 371 | yes | yes | no |
| LPC1113FHN33/201 | 24 kB | Table 370 | no | yes | no |
| LPC1113FHN33/202 | 24 kB | Table 370 | no | yes | no |
| LPC1113FHN33/203 | 24 kB | Table 371 | yes | yes | no |
| LPC1113JHN33/203 | 24 kB | Table 371 | yes | yes | no |
| LPC1113FHN33/301 | 24 kB | Table 370 | no | yes | no |
| LPC1113FHN33/302 | 24 kB | Table 370 | no | yes | no |
| LPC1113FHN33/303 | 24 kB | Table 371 | yes | yes | no |
| LPC1113JHN33/303 | 24 kB | Table 371 | yes | yes | no |


All information provided in this document is subject to legal disclaimers.
© NXP B.V. 2016. All rights reserved.

**Table 369. LPC111x/LPC11Cx flash configurations**

| Type number | Flash | Configuration | Page erase IAP command supported | ISP via UART | ISP via C_CAN |
|---|---|---|---|---|---|
| LPC1113FBD48/301 | 24 kB | Table 370 | no | yes | no |
| LPC1113FBD48/302 | 24 kB | Table 370 | no | yes | no |
| LPC1113FBD48/303 | 24 kB | Table 371 | yes | yes | no |
| LPC1113JBD48/303 | 24 kB | Table 371 | yes | yes | no |
| LPC1114FDH28/102 | 32 kB | Table 370 | no | yes | no |
| LPC1114FN28/102 | 32 kB | Table 370 | no | yes | no |
| LPC1114FHN33/201 | 32 kB | Table 370 | no | yes | no |
| LPC1114FHN33/202 | 32 kB | Table 370 | no | yes | no |
| LPC1114FHN33/203 | 32 kB | Table 371 | yes | yes | no |
| LPC1114JHN33/203 | 32 kB | Table 371 | yes | yes | no |
| LPC1114FHN33/301 | 32 kB | Table 370 | no | yes | no |
| LPC1114FHN33/302 | 32 kB | Table 370 | no | yes | no |
| LPC1114FHN33/303 | 32 kB | Table 371 | yes | yes | no |
| LPC1114JHN33/303 | 32 kB | Table 371 | yes | yes | no |
| LPC1114FHN33/333 | 56 kB | Table 371 | yes | yes | no |
| LPC1114JHN33/333 | 56 kB | Table 371 | yes | yes | no |
| LPC1114FHI33/302 | 32 kB | Table 370 | no | yes | no |
| LPC1114FHI33/303 | 32 kB | Table 371 | yes | yes | no |
| LPC1114JHI33/303 | 32 kB | Table 371 | yes | yes | no |
| LPC1114FBD48/301 | 32 kB | Table 370 | no | yes | no |
| LPC1114FBD48/302 | 32 kB | Table 370 | no | yes | no |
| LPC1114FBD48/303 | 32 kB | Table 371 | yes | yes | no |
| LPC1114JBD48/303 | 32 kB | Table 371 | yes | yes | no |
| LPC1114FBD48/323 | 48 kB | Table 371 | yes | yes | no |
| LPC1114JBD48/323 | 48 kB | Table 371 | yes | yes | no |
| LPC1114FBD48/333 | 56 kB | Table 371 | yes | yes | no |
| LPC1114JBD48/333 | 56 kB | Table 371 | yes | yes | no |
| LPC1115FBD48/303 | 64 kB | Table 371 | yes | yes | no |
| LPC1115JBD48/303 | 64 kB | Table 371 | yes | yes | no |
| LPC1115FET48/303 | 64 kB | Table 371 | yes | yes | no |
| LPC1115JET48/303 | 64 kB | Table 371 | yes | yes | no |
| LPC11D14 | 32 kB | Table 370 | no | yes | no |
| LPC11C12/C22 | 16 kB | Table 370 | no | yes | yes |
| LPC11C14/C24 | 32 kB | Table 370 | no | yes | yes |

**Remark:** In addition to the ISP and IAP commands, a register in the flash controller block can be accessed to configure flash memory access times, see Section 26.9.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 26.2 Features

- In-System Programming: In-System programming (ISP) is programming or reprogramming the on-chip flash memory, using the bootloader software and UART serial port or the C_CAN interface. This can be done when the part resides in the end-user board.
- In-Application Programming: In-Application (IAP) programming is performing erase and write operation on the on-chip flash memory, as directed by the end-user application code.
- Flash access times can be configured through a register in the flash controller block.
- Erase time for one sector is 100 ms ± 5%. Programming time for one block of 256 bytes is 1 ms ± 5%.

## 26.3 General description

### 26.3.1 Bootloader

The bootloader controls initial operation after reset and also provides the means to accomplish programming of the flash memory via UART or C_CAN. This could be initial programming of a blank device, erasure and re-programming of a previously programmed device, or programming of the flash memory by the application program in a running system.

The bootloader code is executed every time the part is powered on or reset. The loader can execute the ISP command handler or the user application code. A LOW level after reset at the PIO0_1 pin is considered as an external hardware request to start the ISP command handler either via UART or C_CAN, if present.

**Remark:** SRAM location 0x1000 0000 to 0x1000 0050 is not used by the bootloader and the memory content in this area is retained during reset. SRAM memory is not retained when the part powers down or enters Deep power-down mode.

If the C_CAN interface is present (LPC11Cx parts), the state of pin PIO0_3 at reset together with a LOW level on pin PIO0_1 determines whether UART ISP or C_CAN ISP routines are called:

- If PIO0_3 is LOW, the bootloader configures the C_CAN interface and calls the C_CAN ISP command handler.
- PIO0_3 is HIGH, the bootloader configures the UART serial port and calls the UART ISP command handler (this is the default). PIO1_6 is ISP_RXD and PIO1_7 is ISP_TXD.

**Remark:** On parts without C_CAN interface, the state of pin PIO0_3 does not matter.

Assuming that power supply pins are on their nominal levels when the rising edge on RESET pin is generated, it may take up to 3 ms before PIO0_1 is sampled and the decision whether to continue with user code or ISP handler is made. If PIO0_1 is sampled low and the watchdog overflow flag is set, the external hardware request to start the ISP command handler is ignored. If there is no request for the ISP command handler


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

execution (PIO0_1 is sampled HIGH after reset), a search is made for a valid user program. If a valid user program is found then the execution control is transferred to it. If a valid user program is not found, the auto-baud routine is invoked.

**Remark:** The sampling of pin PIO0_1 can be disabled through programming flash location 0x0000 02FC (see Section 26.3.8.1).

### 26.3.2 Memory map after any reset

The boot block is 16 kB in size. The boot block is located in the memory region starting from the address 0x1FFF 0000. The bootloader is designed to run from this memory area, but both the ISP and IAP software use parts of the on-chip RAM. The RAM usage is described later in this chapter. The interrupt vectors residing in the boot block of the on-chip flash memory also become active after reset, i.e., the bottom 512 bytes of the boot block are also visible in the memory region starting from the address 0x0000 0000.

### 26.3.3 Criterion for Valid User Code

Criterion for valid user code: The reserved Cortex-M0 exception vector location 7 (offset 0x 0000 001C in the vector table) should contain the 2's complement of the check-sum of table entries 0 through 6. This causes the checksum of the first 8 table entries to be 0. The bootloader code checksums the first 8 locations in sector 0 of the flash. If the result is 0, then execution control is transferred to the user code.

If the signature is not valid, the auto-baud routine synchronizes with the host via serial port 0. The host should send a '?' (0x3F) as a synchronization character and wait for a response. The host side serial port settings should be 8 data bits, 1 stop bit and no parity. The auto-baud routine measures the bit time of the received synchronization character in terms of its own frequency and programs the baud rate generator of the serial port. It also sends an ASCII string ("Synchronized<CR><LF>") to the host. In response to this host should send the same string ("Synchronized<CR><LF>"). The auto-baud routine looks at the received characters to verify synchronization. If synchronization is verified then "OK<CR><LF>" string is sent to the host. The host should respond by sending the crystal frequency (in kHz) at which the part is running. For example, if the part is running at 10 MHz, the response from the host should be "10000<CR><LF>". "OK<CR><LF>" string is sent to the host after receiving the crystal frequency. If synchronization is not verified then the auto-baud routine waits again for a synchronization character. For auto-baud to work correctly in case of user invoked ISP, the CCLK frequency should be greater than or equal to 10 MHz.

Once the crystal frequency is received the part is initialized and the ISP command handler is invoked. For safety reasons an "Unlock" command is required before executing the commands resulting in flash erase/write operations and the "Go" command. The rest of the commands can be executed without the unlock command. The Unlock command is required to be executed once per ISP session. The Unlock command is explained in Section 26.5 "UART ISP commands" on page 425.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 26.3.4 Boot process flowchart

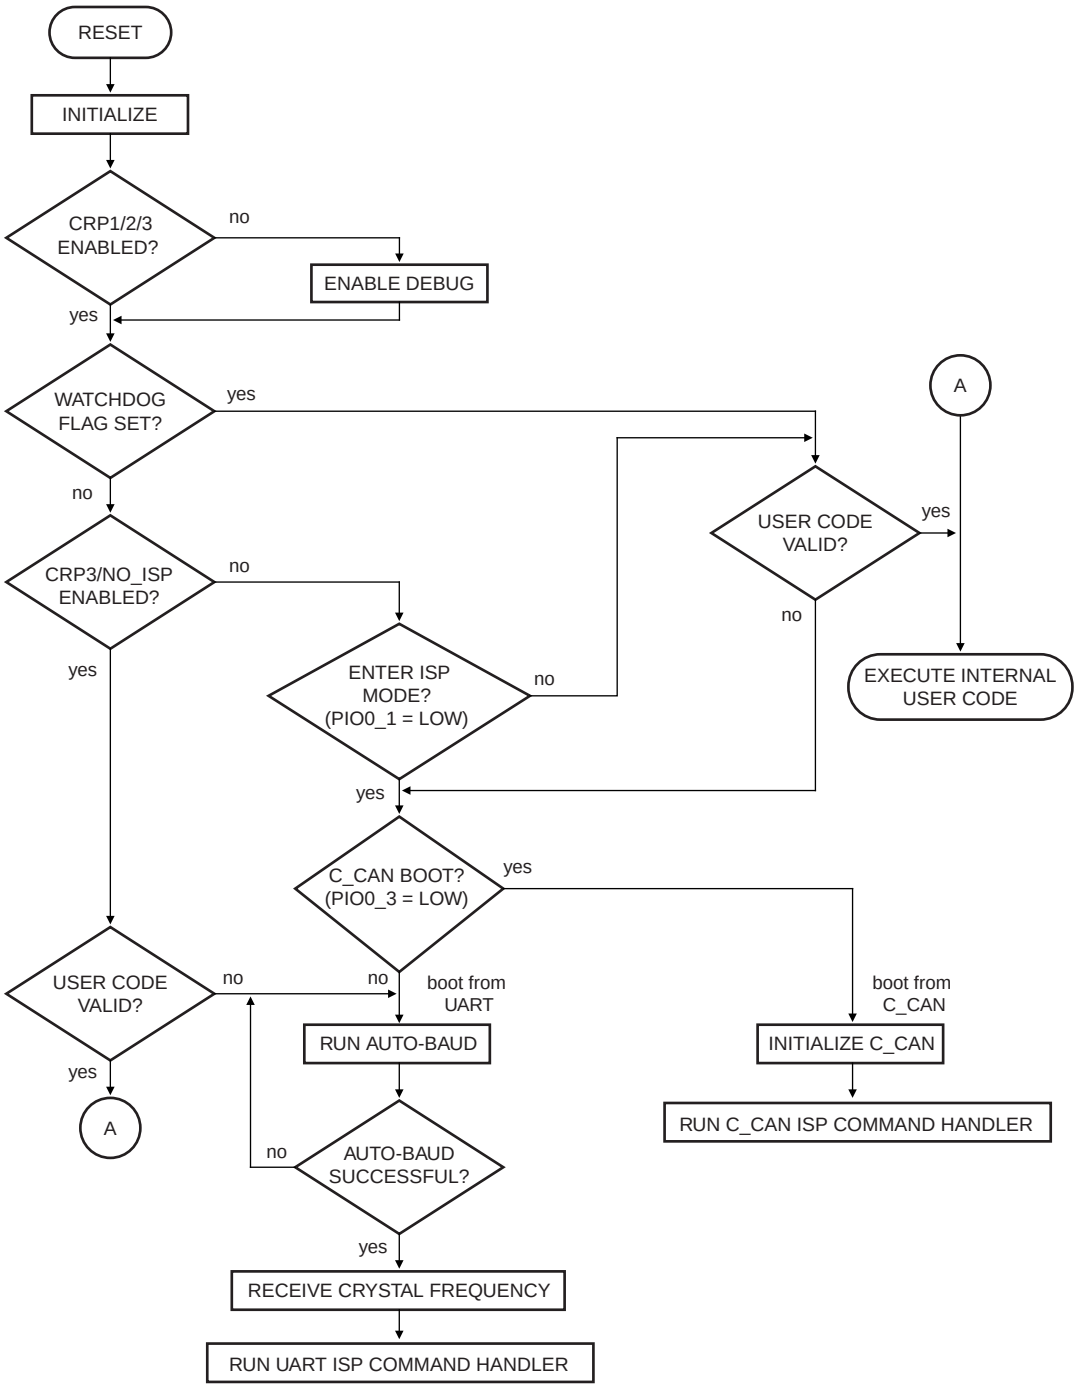


(1) For details on handling the crystal frequency, see Section 26.7.8 “Reinvoke ISP (IAP)” on page 445

**Fig 91. Boot process flowchart**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 26.3.5 Flash configuration for LPC1100, LPC1100C, LPC1100L series

Some IAP and ISP commands operate on sectors and specify sector numbers. The following table shows the correspondence between sector numbers and memory addresses for LPC111x/LPC11Cxx devices.

**Table 370. LPC111x flash configuration (LPC1100, LPC1100L, LPC1100C series)**

| Sector number | Sector size [kB] | Address range | LPC1110 (4 kB flash) | LPC1111 (8 kB flash) | LPC1112/ LPC11C12/L PC11C22 (16 kB flash) | LPC1113 (24 kB flash) | LPC1114/ LPC11C14/L PC11C24 (32 kB flash) |
|---|---|---|---|---|---|---|---|
| 0 | 4 | 0x0000 0000 - 0x0000 0FFF | yes | yes | yes | yes | yes |
| 1 | 4 | 0x0000 1000 - 0x0000 1FFF | - | yes | yes | yes | yes |
| 2 | 4 | 0x0000 2000 - 0x0000 2FFF | - | - | yes | yes | yes |
| 3 | 4 | 0x0000 3000 - 0x0000 3FFF | - | - | yes | yes | yes |
| 4 | 4 | 0x0000 4000 - 0x0000 4FFF | - | - | - | yes | yes |
| 5 | 4 | 0x0000 5000 - 0x0000 5FFF | - | - | - | yes | yes |
| 6 | 4 | 0x0000 6000 - 0x0000 6FFF | - | - | - | - | yes |
| 7 | 4 | 0x0000 7000 - 0x0000 7FFF | | | - | - | yes |

### 26.3.6 Flash configuration for LPC1100XL series

Some IAP and ISP commands operate on sectors and specify sector numbers. In addition, parts in the LPC1100XL series support a page erase command. The following table shows the correspondence between page numbers, sector numbers, and memory addresses for LPC1100XL devices.

The size of a sector is 4 kB, the size of a page is 256 Byte. One sector contains 16 pages.

**Table 371. LPC1100XL flash configuration**

| Sector number | Sector size [kB] | Page number | Address range | LPC1111 (8 kB flash) | LPC1112 (16 kB flash) | LPC1113 (24 kB flash) | LPC1114/203/303 (32 kB flash) | LPC1114/323 (48 kB flash) | LPC1114/333 (56 kB flash) | LPC1115 (64 kB flash) |
|---|---|---|---|---|---|---|---|---|---|---|
| 0 | 4 | 0 -15 | 0x0000 0000 - 0x0000 0FFF | yes | yes | yes | yes | yes | yes | yes |
| 1 | 4 | 16 - 31 | 0x0000 1000 - 0x0000 1FFF | yes | yes | yes | yes | yes | yes | yes |
| 2 | 4 | 32 - 47 | 0x0000 2000 - 0x0000 2FFF | - | yes | yes | yes | yes | yes | yes |
| 3 | 4 | 48 - 63 | 0x0000 3000 - 0x0000 3FFF | - | yes | yes | yes | yes | yes | yes |
| 4 | 4 | 64 - 79 | 0x0000 4000 - 0x0000 4FFF | - | - | yes | yes | yes | yes | yes |
| 5 | 4 | 80 - 95 | 0x0000 5000 - 0x0000 5FFF | - | - | yes | yes | yes | yes | yes |
| 6 | 4 | 96 - 111 | 0x0000 6000 - 0x0000 6FFF | - | - | - | yes | yes | yes | yes |
| 7 | 4 | 112 - 127 | 0x0000 7000 - 0x0000 7FFF | - | - | - | yes | yes | yes | yes |
| 8 | 4 | 128 - 143 | 0x0000 8000 - 0x0000 8FFF | - | - | - | - | yes | yes | yes |
| 9 | 4 | 144 - 159 | 0x0000 9000 - 0x0000 9FFF | - | - | - | - | yes | yes | yes |
| 10 | 4 | 160 - 175 | 0x0000 A000 - 0x0000 AFFF | - | - | - | - | yes | yes | yes |
| 11 | 4 | 176 - 191 | 0x0000 B000 - 0x0000 BFFF | - | - | - | - | yes | yes | yes |
| 12 | 4 | 192 - 207 | 0x0000 C000 - 0x0000 CFFF | - | - | - | - | - | yes | yes |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 371. LPC1100XL flash configuration**

| Sector number | Sector size [kB] | Page number | Address range | LPC1111 (8 kB flash) | LPC1112 (16 kB flash) | LPC1113 (24 kB flash) | LPC1114/203/303 (32 kB flash) | LPC1114/323 (48 kB flash) | LPC1114/333 (56 kB flash) | LPC1115 (64 kB flash) |
|---|---|---|---|---|---|---|---|---|---|---|
| 13 | 4 | 208 - 223 | 0x0000 D000 - 0x0000 DFFF | - | - | - | - | - | yes | yes |
| 14 | 4 | 224 - 239 | 0x0000 E000 - 0x0000 EFFF | - | - | - | - | - | - | yes |
| 15 | 4 | 240 - 255 | 0x0000 F000 - 0x0000 FFFF | - | - | - | - | - | - | yes |

### 26.3.7 Flash content protection mechanism

The LPC111x/LPC11C1x is equipped with the Error Correction Code (ECC) capable Flash memory. The purpose of an error correction module is twofold. Firstly, it decodes data words read from the memory into output data words. Secondly, it encodes data words to be written to the memory. The error correction capability consists of single bit error correction with Hamming code.

The operation of ECC is transparent to the running application. The ECC content itself is stored in a flash memory not accessible by user's code to either read from it or write into it on its own. A byte of ECC corresponds to every consecutive 128 bits of the user accessible Flash. Consequently, Flash bytes from 0x0000 0000 to 0x0000 000F are protected by the first ECC byte, Flash bytes from 0x0000 0010 to 0x0000 001F are protected by the second ECC byte, etc.

Whenever the CPU requests a read from user's Flash, both 128 bits of raw data containing the specified memory location and the matching ECC byte are evaluated. If the ECC mechanism detects a single error in the fetched data, a correction will be applied before data are provided to the CPU. When a write request into the user's Flash is made, write of user specified content is accompanied by a matching ECC value calculated and stored in the ECC memory.

When a sector of Flash memory is erased, the corresponding ECC bytes are also erased. Once an ECC byte is written, it can not be updated unless it is erased first. Therefore, for the implemented ECC mechanism to perform properly, data must be written into the flash memory in groups of 16 bytes (or multiples of 16), aligned as described above.

### 26.3.8 Code Read Protection (CRP)

Code Read Protection is a mechanism that allows the user to enable different levels of security in the system so that access to the on-chip flash and use of the ISP can be restricted. When needed, CRP is invoked by programming a specific pattern in flash location at 0x0000 02FC. IAP commands are not affected by the code read protection.

**Important: any CRP change becomes effective only after the device has gone through a power cycle.**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 372. Code Read Protection options**

| Name | Pattern programmed in 0x0000 02FC | Description |
|---|---|---|
| NO_ISP | 0x4E69 7370 | Prevents sampling of pin PIO0_1 for entering ISP mode. PIO0_1 is available for other uses. |
| CRP1 | 0x12345678 | Access to chip via the SWD pins is disabled. This mode allows partial flash update using the following ISP commands and restrictions:<br>• Write to RAM command should not access RAM below 0x1000 0300. Access to addresses below 0x1000 0200 is disabled.<br>• Copy RAM to flash command can not write to Sector 0.<br>• Erase command can erase Sector 0 only when all sectors are selected for erase.<br>• Compare command is disabled.<br>• Read Memory command is disabled.<br>This mode is useful when CRP is required and flash field updates are needed but all sectors can not be erased. Since compare command is disabled in case of partial updates the secondary loader should implement checksum mechanism to verify the integrity of the flash. |
| CRP2 | 0x87654321 | Access to chip via the SWD pins is disabled. The following ISP commands are disabled:<br>• Read Memory<br>• Write to RAM<br>• Go<br>• Copy RAM to flash<br>• Compare<br>When CRP2 is enabled the ISP erase command only allows erasure of all user sectors. |
| CRP3 | 0x43218765 | Access to chip via the SWD pins is disabled. ISP entry by pulling PIO0_1 LOW is disabled if a valid user code is present in flash sector 0.<br>This mode effectively disables ISP override using PIO0_1 pin. It is up to the user's application to provide a flash update mechanism using IAP calls or call reinvoke ISP command to enable flash update via UART.<br>**Caution: If CRP3 is selected, no future factory testing can be performed on the device.** |

**Table 373. Code Read Protection hardware/software interaction**

| CRP option | User Code Valid | PIO0_1 pin at reset | SWD enabled | LPC111x/ LPC11Cxx enters ISP mode | partial flash update in ISP mode |
|---|---|---|---|---|---|
| None | No | x | Yes | Yes | Yes |
| None | Yes | High | Yes | No | NA |
| None | Yes | Low | Yes | Yes | Yes |
| CRP1 | Yes | High | No | No | NA |
| CRP1 | Yes | Low | No | Yes | Yes |
| CRP2 | Yes | High | No | No | NA |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 373. Code Read Protection hardware/software interaction**

| CRP option | User Code Valid | PIO0_1 pin at reset | SWD enabled | LPC111x/ LPC11Cxx enters ISP mode | partial flash update in ISP mode |
|---|---|---|---|---|---|
| CRP2 | Yes | Low | No | Yes | No |
| CRP3 | Yes | x | No | No | NA |
| CRP1 | No | x | No | Yes | Yes |
| CRP2 | No | x | No | Yes | No |
| CRP3 | No | x | No | Yes | No |

**Table 374. ISP commands allowed for different CRP levels**

| ISP command | CRP1 | CRP2 | CRP3 (no entry in ISP mode allowed) |
|---|---|---|---|
| Unlock | yes | yes | n/a |
| Set Baud Rate | yes | yes | n/a |
| Echo | yes | yes | n/a |
| Write to RAM | yes; above 0x1000 0300 only | no | n/a |
| Read Memory | no | no | n/a |
| Prepare sector(s) for write operation | yes | yes | n/a |
| Copy RAM to flash | yes; not to sector 0 | no | n/a |
| Go | no | no | n/a |
| Erase sector(s) | yes; sector 0 can only be erased when all sectors are erased. | yes; all sectors only | n/a |
| Blank check sector(s) | no | no | n/a |
| Read Part ID | yes | yes | n/a |
| Read Boot code version | yes | yes | n/a |
| Compare | no | no | n/a |
| ReadUID | yes | yes | n/a |

In case a CRP mode is enabled and access to the chip is allowed via the ISP, an unsupported or restricted ISP command will be terminated with return code CODE_READ_PROTECTION_ENABLED.

#### 26.3.8.1 ISP entry protection

In addition to the three CRP modes, the user can prevent the sampling of pin PIO0_1 for entering ISP mode and thereby release pin PIO0_1 for other uses. This is called the NO_ISP mode. The NO_ISP mode can be entered by programming the pattern 0x4E69 7370 at location 0x0000 02FC.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 26.4 UART Communication protocol

All UART ISP commands should be sent as single ASCII strings. Strings should be terminated with Carriage Return (CR) and/or Line Feed (LF) control characters. Extra <CR> and <LF> characters are ignored. All ISP responses are sent as <CR><LF> terminated ASCII strings. Data is sent and received in UU-encoded format.

### 26.4.1 UART ISP command format

"Command Parameter_0 Parameter_1 ... Parameter_n<CR><LF>" "Data" (Data only for Write commands).

### 26.4.2 UART ISP response format

"Return_Code<CR><LF>Response_0<CR><LF>Response_1<CR><LF> ... Response_n<CR><LF>" "Data" (Data only for Read commands).

### 26.4.3 UART ISP data format

The data stream is in UU-encoded format. The UU-encode algorithm converts 3 bytes of binary data in to 4 bytes of printable ASCII character set. It is more efficient than Hex format which converts 1 byte of binary data in to 2 bytes of ASCII hex. The sender should send the check-sum after transmitting 20 UU-encoded lines. The length of any UU-encoded line should not exceed 61 characters (bytes) i.e. it can hold 45 data bytes. The receiver should compare it with the check-sum of the received bytes. If the check-sum matches then the receiver should respond with "OK<CR><LF>" to continue further transmission. If the check-sum does not match the receiver should respond with "RESEND<CR><LF>". In response the sender should retransmit the bytes.

### 26.4.4 UART ISP flow control

A software XON/XOFF flow control scheme is used to prevent data loss due to buffer overrun. When the data arrives rapidly, the ASCII control character DC3 (stop) is sent to stop the flow of data. Data flow is resumed by sending the ASCII control character DC1 (start). The host should also support the same flow control scheme.

### 26.4.5 UART ISP command abort

Commands can be aborted by sending the ASCII control character "ESC". This feature is not documented as a command under "ISP Commands" section. Once the escape code is received the ISP command handler waits for a new command.

### 26.4.6 Interrupts during UART ISP

The boot block interrupt vectors located in the boot block of the flash are active after any reset.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 26.4.7 Interrupts during IAP

The on-chip flash memory is not accessible during erase/write operations. When the user application code starts executing the interrupt vectors from the user flash area are active. Before making any IAP call, either disable the interrupts or ensure that the user interrupt vectors are active in RAM and that the interrupt handlers reside in RAM. The IAP code does not use or disable interrupts.

### 26.4.8 RAM used by ISP command handler (for LPC11Cxx parts)

ISP commands use on-chip RAM from 0x1000 017C to 0x1000 025B. The user could use this area, but the contents may be lost upon reset. Flash programming commands use the top 32 bytes of on-chip RAM. The stack is located at (RAM top – 32). The maximum stack usage is 256 bytes and it grows downwards.

### 26.4.9 RAM used by ISP command handler (for LPC111x parts)

ISP commands use on-chip RAM from 0x1000 0050 to 0x1000 017F. The user could use this area, but the contents may be lost upon reset. Flash programming commands use the top 32 bytes of on-chip RAM. The stack is located at (RAM top – 32). The maximum stack usage is 256 bytes and it grows downwards.

### 26.4.10 RAM used by IAP command handler

Flash programming commands use the top 32 bytes of on-chip RAM. The maximum stack usage in the user allocated stack space is 128 bytes and it grows downwards.

## 26.5 UART ISP commands

The following commands are accepted by the ISP command handler. Detailed status codes are supported for each command. The command handler sends the return code INVALID_COMMAND when an undefined command is received. Commands and return codes are in ASCII format.

CMD_SUCCESS is sent by ISP command handler only when received ISP command has been completely executed and the new ISP command can be given by the host. Exceptions from this rule are "Set Baud Rate", "Write to RAM", "Read Memory", and "Go" commands.

**Table 375. UART ISP command summary**

| ISP Command | Usage | Described in |
|---|---|---|
| Unlock | U <Unlock Code> | Table 376 |
| Set Baud Rate | B <Baud Rate> <stop bit> | Table 377 |
| Echo | A <setting> | Table 378 |
| Write to RAM | W <start address> <number of bytes> | Table 379 |
| Read Memory | R <address> <number of bytes> | Table 380 |
| Prepare sector(s) for write operation | P <start sector number> <end sector number> | Table 381 |
| Copy RAM to flash | C <Flash address> <RAM address> <number of bytes> | Table 382 |
| Go | G <address> <Mode> | Table 383 |
| Erase sector(s) | E <start sector number> <end sector number> | Table 384 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 375. UART ISP command summary**

| ISP Command | Usage | Described in |
|---|---|---|
| Blank check sector(s) | I <start sector number> <end sector number> | Table 385 |
| Read Part ID | J | Table 386 |
| Read Boot code version | K | Table 388 |
| Compare | M <address1> <address2> <number of bytes> | Table 389 |
| ReadUID | N | Table 390 |

### 26.5.1 Unlock <Unlock code> (UART ISP)

**Table 376. UART ISP Unlock command**

| Command | U |
|---|---|
| Input | Unlock code: $23130_{10}$ |
| Return Code | CMD_SUCCESS \|<br>INVALID_CODE \|<br>PARAM_ERROR |
| Description | This command is used to unlock Flash Write, Erase, and Go commands. |
| Example | "U 23130<CR><LF>" unlocks the Flash Write/Erase & Go commands. |

### 26.5.2 Set Baud Rate <Baud Rate> <stop bit> (UART ISP)

**Table 377. UART ISP Set Baud Rate command**

| Command | B |
|---|---|
| Input | Baud Rate: 9600 \| 19200 \| 38400 \| 57600 \| 115200<br>Stop bit: 1 \| 2 |
| Return Code | CMD_SUCCESS \|<br>INVALID_BAUD_RATE \|<br>INVALID_STOP_BIT \|<br>PARAM_ERROR |
| Description | This command is used to change the baud rate. The new baud rate is effective after the command handler sends the CMD_SUCCESS return code. |
| Example | "B 57600 1<CR><LF>" sets the serial port to baud rate 57600 bps and 1 stop bit. |

### 26.5.3 Echo <setting> (UART ISP)

**Table 378. UART ISP Echo command**

| Command | A |
|---|---|
| Input | Setting: ON = 1 \| OFF = 0 |
| Return Code | CMD_SUCCESS \|<br>PARAM_ERROR |
| Description | The default setting for echo command is ON. When ON the ISP command handler sends the received serial data back to the host. |
| Example | "A 0<CR><LF>" turns echo off. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 26.5.4 Write to RAM <start address> <number of bytes> (UART ISP)

The host should send the data only after receiving the CMD_SUCCESS return code. The host should send the check-sum after transmitting 20 UU-encoded lines. The checksum is generated by adding raw data (before UU-encoding) bytes and is reset after transmitting 20 UU-encoded lines. The length of any UU-encoded line should not exceed 61 characters (bytes) i.e. it can hold 45 data bytes. When the data fits in less then 20 UU-encoded lines then the check-sum should be of the actual number of bytes sent. The ISP command handler compares it with the check-sum of the received bytes. If the check-sum matches, the ISP command handler responds with "OK<CR><LF>" to continue further transmission. If the check-sum does not match, the ISP command handler responds with "RESEND<CR><LF>". In response the host should retransmit the bytes.

**Table 379. UART ISP Write to RAM command**

| Command | W |
|---|---|
| Input | **Start Address:** RAM address where data bytes are to be written. This address should be a word boundary.<br>**Number of Bytes:** Number of bytes to be written. Count should be a multiple of 4 |
| Return Code | CMD_SUCCESS \|<br>ADDR_ERROR (Address not on word boundary) \|<br>ADDR_NOT_MAPPED \|<br>COUNT_ERROR (Byte count is not multiple of 4) \|<br>PARAM_ERROR \|<br>CODE_READ_PROTECTION_ENABLED |
| Description | This command is used to download data to RAM. Data should be in UU-encoded format. This command is blocked when code read protection is enabled. |
| Example | "W 268436224 4<CR><LF>" writes 4 bytes of data to address 0x1000 0300. |

### 26.5.5 Read Memory <address> <no. of bytes> (UART ISP)

The data stream is followed by the command success return code. The check-sum is sent after transmitting 20 UU-encoded lines. The checksum is generated by adding raw data (before UU-encoding) bytes and is reset after transmitting 20 UU-encoded lines. The length of any UU-encoded line should not exceed 61 characters (bytes) i.e. it can hold 45 data bytes. When the data fits in less then 20 UU-encoded lines then the check-sum is of actual number of bytes sent. The host should compare it with the checksum of the received bytes. If the check-sum matches then the host should respond with "OK<CR><LF>" to continue further transmission. If the check-sum does not match then the host should respond with "RESEND<CR><LF>". In response the ISP command handler sends the data again.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 380. UART ISP Read Memory command**

| Command | R |
|---|---|
| Input | **Start Address:** Address from where data bytes are to be read. This address should be a word boundary.<br>**Number of Bytes:** Number of bytes to be read. Count should be a multiple of 4. |
| Return Code | CMD_SUCCESS followed by <actual data (UU-encoded)> \|<br>ADDR_ERROR (Address not on word boundary) \|<br>ADDR_NOT_MAPPED \|<br>COUNT_ERROR (Byte count is not a multiple of 4) \|<br>PARAM_ERROR \|<br>CODE_READ_PROTECTION_ENABLED |
| Description | This command is used to read data from RAM or flash memory. This command is blocked when code read protection is enabled. |
| Example | "R 268435456 4<CR><LF>" reads 4 bytes of data from address 0x1000 0000. |

### 26.5.6 Prepare sector(s) for write operation <start sector number> <end sector number> (UART ISP)

This command makes flash write/erase operation a two step process.

**Table 381. UART ISP Prepare sector(s) for write operation command**

| Command | P |
|---|---|
| Input | **Start Sector Number**<br>**End Sector Number:** Should be greater than or equal to start sector number. |
| Return Code | CMD_SUCCESS \|<br>BUSY \|<br>INVALID_SECTOR \|<br>PARAM_ERROR |
| Description | This command must be executed before executing "Copy RAM to flash" or "Erase Sector(s)" command. Successful execution of the "Copy RAM to flash" or "Erase Sector(s)" command causes relevant sectors to be protected again. The boot block can not be prepared by this command. To prepare a single sector use the same "Start" and "End" sector numbers. |
| Example | "P 0 0<CR><LF>" prepares the flash sector 0. |

### 26.5.7 Copy RAM to flash <Flash address> <RAM address> <no of bytes> (UART ISP)

When writing to the flash, the following limitations apply:

1. The smallest amount of data that can be written to flash by the copy RAM to flash command is 256 byte (equal to one page).
2. One page consists of 16 flash words (lines), and the smallest amount that can be modified per flash write is one flash word (one line). This limitation follows from the application of ECC to the flash write operation, see Section 26.3.7.
3. To avoid write disturbance (a mechanism intrinsic to flash memories), an erase should be performed after following 16 consecutive writes inside the same page. Note that the erase operation then erases the entire sector.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Remark:** Once a page has been written to 16 times, it is still possible to write to other pages within the same sector without performing a sector erase (assuming that those pages have been erased previously).

**Table 382. UART ISP Copy RAM to flash command**

| Command | C |
|---|---|
| Input | **Flash Address (DST):** Destination flash address where data bytes are to be written. The destination address should be a 256 byte boundary.<br>**RAM Address (SRC):** Source RAM address from where data bytes are to be read.<br>**Number of Bytes:** Number of bytes to be written. Should be 256 \| 512 \| 1024 \| 4096.<br>**Remark:** In parts with less than 4 kB SRAM, the number of bytes is limited to 1024 (see Table 3). |
| Return Code | CMD_SUCCESS \|<br>SRC_ADDR_ERROR (Address not on word boundary) \|<br>DST_ADDR_ERROR (Address not on correct boundary) \|<br>SRC_ADDR_NOT_MAPPED \|<br>DST_ADDR_NOT_MAPPED \|<br>COUNT_ERROR (Byte count is not 256 \| 512 \| 1024 \| 4096) \|<br>SECTOR_NOT_PREPARED_FOR WRITE_OPERATION \|<br>BUSY \|<br>CMD_LOCKED \|<br>PARAM_ERROR \|<br>CODE_READ_PROTECTION_ENABLED |
| Description | This command is used to program the flash memory. The "Prepare Sector(s) for Write Operation" command should precede this command. The affected sectors are automatically protected again once the copy command is successfully executed. The boot block cannot be written by this command. This command is blocked when code read protection is enabled. |
| Example | "C 0 268437504 512<CR><LF>" copies 512 bytes from the RAM address 0x1000 0800 to the flash address 0. |

### 26.5.8 Go <address> <mode> (UART ISP)

The GO command is usually used after the flash image has been updated. After the update a reset is required. Therefore, the GO command should point to the RESET handler. Since the device is still in ISP mode, the RESET handler should do the following:

- Re-initialize the SP pointer to the application default.
- Set the SYSMEMREMAP to either 0x01 or 0x02.

While in ISP mode, the SYSMEMREMAP is set to 0x00.

Alternatively, the following snippet can be loaded into the RAM for execution:

```
SCB->AIRCR = 0x05FA0004; //issue system reset
while(1);                //should never come here
```

This snippet will issue a system reset request to the core.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

The following ISP commands will send the system reset code loaded into 0x1000 000.

U 23130

W 268435456 16

0`4@"20%@_N<,[0#@!`#Z!0``

1462

G 268435456 T

**Table 383. UART ISP Go command**

| Command | G |
|---|---|
| Input | **Address:** Flash or RAM address from which the code execution is to be started. This address should be on a word boundary.<br>**Mode:** T (Execute program in Thumb Mode). |
| Return Code | CMD_SUCCESS \|<br>ADDR_ERROR \|<br>ADDR_NOT_MAPPED \|<br>CMD_LOCKED \|<br>PARAM_ERROR \|<br>CODE_READ_PROTECTION_ENABLED |
| Description | This command is used to execute a program residing in RAM or flash memory. It may not be possible to return to the ISP command handler once this command is successfully executed. This command is blocked when code read protection is enabled. The command must be used with an address of 0x0000 0200 or greater. |
| Example | "G 512 T<CR><LF>" branches to address 0x0000 0200 in Thumb mode. |

### 26.5.9 Erase sector(s) <start sector number> <end sector number> (UART ISP)

**Table 384. UART ISP Erase sector command**

| Command | E |
|---|---|
| Input | **Start Sector Number**<br>**End Sector Number:** Should be greater than or equal to start sector number. |
| Return Code | CMD_SUCCESS \|<br>BUSY \|<br>INVALID_SECTOR \|<br>SECTOR_NOT_PREPARED_FOR_WRITE_OPERATION \|<br>CMD_LOCKED \|<br>PARAM_ERROR \|<br>CODE_READ_PROTECTION_ENABLED |
| Description | This command is used to erase one or more sector(s) of on-chip flash memory. The boot block can not be erased using this command. This command only allows erasure of all user sectors when the code read protection is enabled. |
| Example | "E 2 3<CR><LF>" erases the flash sectors 2 and 3. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 26.5.10 Blank check sector(s) <sector number> <end sector number> (UART ISP)

**Table 385. UART ISP Blank check sector command**

| Command | I |
|---|---|
| Input | **Start Sector Number:**<br>**End Sector Number:** Should be greater than or equal to start sector number. |
| Return Code | CMD_SUCCESS \|<br>SECTOR_NOT_BLANK (followed by <Offset of the first non blank word location> <Contents of non blank word location>) \|<br>INVALID_SECTOR \|<br>PARAM_ERROR |
| Description | This command is used to blank check one or more sectors of on-chip flash memory.<br>**Blank check on sector 0 always fails as first 64 bytes are re-mapped to flash boot block.**<br>When CRP is enabled, the blank check command returns 0 for the offset and value of sectors which are not blank. Blank sectors are correctly reported irrespective of the CRP setting. |
| Example | "I 2 3<CR><LF>" blank checks the flash sectors 2 and 3. |

### 26.5.11 Read Part Identification number (UART ISP)

**Table 386. UART ISP Read Part Identification command**

| Command | J |
|---|---|
| Input | None. |
| Return Code | CMD_SUCCESS followed by part identification number in ASCII (see Table 387). |
| Description | This command is used to read the part identification number. |

**Table 387. LPC111x and LPC11Cxx part identification numbers**

| Device | Hex coding |
|---|---|
| **LPC111x** | |
| LPC1110FD20 | 0x0A07 102B; 0x1A07 102B |
| LPC1111FDH20/002 | 0x0A16 D02B; 0x1A16 D02B |
| LPC1111FHN33/101 | 0x041E 502B; 0x2516 D02B |
| LPC1111FHN33/102 | 0x2516 D02B |
| LPC1111FHN33/201 | 0x0416 502B; 0x2516 902B |
| LPC1111FHN33/202 | 0x2516 902B |
| LPC1111FHN33/103 | 0x0001 0013 |
| LPC1111JHN33/103 | 0x0001 0013 |
| LPC1111FHN33/203 | 0x0001 0012 |
| LPC1111JHN33/203 | 0x0001 0012 |
| LPC1112FD20/102 | 0x0A24 902B; 0x1A24 902B |
| LPC1112FDH20/102 | 0x0A24 902B; 0x1A24 902B |
| LPC1112FDH28/102 | 0x0A24 902B; 0x1A24 902B |
| LPC1112FHN33/101 | 0x042D 502B; 0x2524 D02B |
| LPC1112FHN33/102 | 0x2524 D02B |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 387. LPC111x and LPC11Cxx part identification numbers**

| Device | Hex coding |
|---|---|
| LPC1112FHI33/102 | 0x2524 D02B |
| LPC1112FHN33/201 | 0x0425 502B; 0x2524 902B |
| LPC1112FHN33/202 | 0x2524 902B |
| LPC1112FHN24/202 | 0x2524 902B |
| LPC1112FHI33/202 | 0x2524 902B |
| LPC1112FHN33/103 | 0x0002 0023 |
| LPC1112JHN33/103 | 0x0002 0023 |
| LPC1112FHN33/203 | 0x0002 0022 |
| LPC1112JHN33/203 | 0x0002 0022 |
| LPC1112FHI33/203 | 0x0002 0022 |
| LPC1112JHI33/203 | 0x0002 0022 |
| LPC1113FHN33/201 | 0x0434 502B; 0x2532 902B |
| LPC1113FHN33/202 | 0x2532 902B |
| LPC1113FHN33/301 | 0x0434 102B; 0x2532 102B |
| LPC1113FHN33/302 | 0x2532 102B |
| LPC1113FBD48/301 | 0x0434 102B; 0x2532 102B |
| LPC1113FBD48/302 | 0x2532 102B |
| LPC1113FBD48/303 | 0x0003 0030 |
| LPC1113JBD48/303 | 0x0003 0030 |
| LPC1113FHN33/203 | 0x0003 0032 |
| LPC1113JHN33/203 | 0x0003 0032 |
| LPC1113FHN33/303 | 0x0003 0030 |
| LPC1113JHN33/303 | 0x0003 0030 |
| LPC1114FDH28/102 | 0x0A40 902B; 0x1A40 902B |
| LPC1114FN28/102 | 0x0A40 902B; 0x1A40 902B |
| LPC1114FHN33/201 | 0x0444 502B; 0x2540 902B |
| LPC1114FHN33/202 | 0x2540 902B |
| LPC1114FHN33/301 | 0x0444 102B; 0x2540 102B |
| LPC1114FHN33/302 | 0x2540 102B |
| LPC1114FHI33/302 | 0x2540 102B |
| LPC1114FBD48/301 | 0x0444 102B; 0x2540 102B |
| LPC1114FBD48/302 | 0x2540 102B |
| LPC1114FBD48/303 | 0x0004 0040 |
| LPC1114JBD48/303 | 0x0004 0040 |
| LPC1114FHN33/203 | 0x0004 0042 |
| LPC1114JHN33/203 | 0x0004 0042 |
| LPC1114FHN33/303 | 0x0004 0040 |
| LPC1114JHN33/303 | 0x0004 0040 |
| LPC1114FBD48/323 | 0x0004 0060 |
| LPC1114JBD48/323 | 0x0004 0060 |
| LPC1114FBD48/333 | 0x0004 0070 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 387. LPC111x and LPC11Cxx part identification numbers**

| Device | Hex coding |
|---|---|
| LPC1114JBD48/333 | 0x0004 0070 |
| LPC1114FHN33/333 | 0x0004 0070 |
| LPC1114JHN33/333 | 0x0004 0070 |
| LPC1114FHI33/303 | 0x0004 0040 |
| LPC1114JHI33/303 | 0x0004 0040 |
| LPC11D14FBD100/302 | 0x2540 102B |
| LPC1115FBD48/303 | 0x0005 0080 |
| LPC1115JBD48/303 | 0x0005 0080 |
| LPC1115FET48/303 | 0x0005 0080 |
| LPC1115JET48/303 | 0x0005 0080 |
| **LPC11Cxx** | |
| LPC11C12FBD48/301 | 0x1421 102B |
| LPC11C14FBD48/301 | 0x1440 102B |
| LPC11C22FBD48/301 | 0x1431 102B |
| LPC11C24FBD48/301 | 0x1430 102B |

## 26.5.12 Read Boot code version number (UART ISP)

**Table 388. UART ISP Read Boot Code version number command**

| Command | K |
|---|---|
| Input | None |
| Return Code | CMD_SUCCESS followed by 2 bytes of boot code version number in ASCII format. It is to be interpreted as <byte1(Major)>.<byte0(Minor)>. |
| Description | This command is used to read the boot code version number. |

## 26.5.13 Compare <address1> <address2> <no of bytes> (UART ISP)

**Table 389. UART ISP Compare command**

| Command | M |
|---|---|
| Input | **Address1 (DST):** Starting flash or RAM address of data bytes to be compared. This address should be a word boundary.<br>**Address2 (SRC):** Starting flash or RAM address of data bytes to be compared. This address should be a word boundary.<br>**Number of Bytes:** Number of bytes to be compared; should be a multiple of 4. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 389. UART ISP Compare command**

| Command | M |
|---|---|
| Return Code | CMD_SUCCESS \| (Source and destination data are equal)<br>COMPARE_ERROR \| (Followed by the offset of first mismatch)<br>COUNT_ERROR (Byte count is not a multiple of 4) \|<br>ADDR_ERROR \|<br>ADDR_NOT_MAPPED \|<br>PARAM_ERROR |
| Description | This command is used to compare the memory contents at two locations.<br>**Compare result may not be correct when source or destination address contains any of the first 512 bytes starting from address zero. First 512 bytes are re-mapped to boot ROM** |
| Example | "M 8192 268468224 4<CR><LF>" compares 4 bytes from the RAM address 0x1000 8000 to the 4 bytes from the flash address 0x2000. |

## 26.5.14 ReadUID (UART ISP)

**Table 390. UART ISP ReadUID command**

| Command | N |
|---|---|
| Input | None |
| Return Code | CMD_SUCCESS followed by four 32-bit words of E-sort test information in ASCII format. The word sent at the lowest address is sent first. |
| Description | This command is used to read the unique ID. |

## 26.5.15 UART ISP Return Codes

**Table 391. UART ISP Return Codes Summary**

| Return Code | Mnemonic | Description |
|---|---|---|
| 0 | CMD_SUCCESS | Command is executed successfully. Sent by ISP handler only when command given by the host has been completely and successfully executed. |
| 1 | INVALID_COMMAND | Invalid command. |
| 2 | SRC_ADDR_ERROR | Source address is not on word boundary. |
| 3 | DST_ADDR_ERROR | Destination address is not on a correct boundary. |
| 4 | SRC_ADDR_NOT_MAPPED | Source address is not mapped in the memory map. Count value is taken in to consideration where applicable. |
| 5 | DST_ADDR_NOT_MAPPED | Destination address is not mapped in the memory map. Count value is taken in to consideration where applicable. |
| 6 | COUNT_ERROR | Byte count is not multiple of 4 or is not a permitted value. |
| 7 | INVALID_SECTOR | Sector number is invalid or end sector number is greater than start sector number. |
| 8 | SECTOR_NOT_BLANK | Sector is not blank. |
| 9 | SECTOR_NOT_PREPARED_FOR_WRITE_OPERATION | Command to prepare sector for write operation was not executed. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 391. UART ISP Return Codes Summary**

| Return Code | Mnemonic | Description |
|---|---|---|
| 10 | COMPARE_ERROR | Source and destination data not equal. |
| 11 | BUSY | Flash programming hardware interface is busy. |
| 12 | PARAM_ERROR | Insufficient number of parameters or invalid parameter. |
| 13 | ADDR_ERROR | Address is not on word boundary. |
| 14 | ADDR_NOT_MAPPED | Address is not mapped in the memory map. Count value is taken in to consideration where applicable. |
| 15 | CMD_LOCKED | Command is locked. |
| 16 | INVALID_CODE | Unlock code is invalid. |
| 17 | INVALID_BAUD_RATE | Invalid baud rate setting. |
| 18 | INVALID_STOP_BIT | Invalid stop bit setting. |
| 19 | CODE_READ_PROTECTION_ENABLED | Code read protection enabled. |

## 26.6 C_CAN communication protocol

**Remark:** The C_CAN interface is available on LPC11Cxx parts only.

The C_CAN bootloader is activated by the ROM reset handler automatically if PIO0_3 is LOW on reset and the ISP entry enabled (PIO0_1 LOW). The C_CAN bootloader initializes the on-chip oscillator and the CAN controller for a CAN bit rate of 100 kbit/s and sets its own CANopen Node ID to a fixed value. The bootloader then waits for CANopen SDO commands and responds to them. These commands allow to read and write anything in a so-called Object Dictionary (OD). The OD contains entries that are addressed via a 16-bit index and 8-bit subindex. The command interface is part of this OD.

The C_CAN ISP command handler allows to perform all functions that are otherwise available via the UART ISP commands, see Table 392.

The SDO commands are received, processed and responded to “forever” until the command to jump to a certain execution address (“Go”) has been received or the chip is reset.

The C_CAN ISP handler occupies the fixed CANopen node ID 125 (0x7D).

**Table 392. C_CAN ISP and UART ISP command summary**

| ISP Command | C_CAN usage | UART usage |
|---|---|---|
| Unlock | Section 26.6.3 | Table 376 |
| Set Baud Rate | n/a | Table 377 |
| Echo | n/a | Table 378 |
| Write to RAM | Section 26.6.4 | Table 379 |
| Read Memory | Section 26.6.5 | Table 380 |
| Prepare sector(s) for write operation | Section 26.6.6 | Table 381 |
| Copy RAM to flash | Section 26.6.7 | Table 382 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 392. C_CAN ISP and UART ISP command summary**

| ISP Command | C_CAN usage | UART usage |
|---|---|---|
| Go | Section 26.6.8 | Table 383 |
| Erase sector(s) | Section 26.6.9 | Table 384 |
| Blank check sector(s) | Section 26.6.10 | Table 385 |
| Read Part ID | Section 26.6.11 | Table 386 |
| Read Boot code version | Section 26.6.12 | Table 388 |
| ReadUID | Section 26.6.13 | Table 390 |
| Compare | Section 26.6.14 | Table 389 |

### 26.6.1 C_CAN ISP SDO communication

The CAN ISP node listens for CAN 2.0A (11-bit) messages with the identifier of 0x600 plus the Node ID 0x7D equaling to 0x67D. The node sends SDO responses with the identifier 0x580 plus Node ID equaling to 0x5FD. The SDO communication protocols “expedited” and “segmented” are supported. This means that communication is always confirmed: Each request CAN message will be followed by a response message from the ISP node.

The SDO block transfer mode is not supported.

For details regarding the SDO protocol, see the *CiA 301 specification*.

### 26.6.2 C_CAN ISP object directory

**Table 393. C_CAN ISP object directory**

| Index | Subindex | Data type | Access | Description |
|---|---|---|---|---|
| 0x1000 | 00 | UNSIGNED32 | RO | Device Type (ASCII “LPC1”) |
| 0x1001 | 00 | - | RO | Error Register (not used, 0x00) |
| 0x1018 | 00 | - | | Identity Object |
| | 01 | UNSIGNED32 | RO | Vendor ID (not used, 0x0000 0000) |
| | 02 | UNSIGNED32 | RO | Part Identification Number |
| | 03 | UNSIGNED32 | RO | Boot Code Version Number |
| 0x1F50 | 00 | - | | Program Data |
| | 01 | DOMAIN | RW | Program Area |
| 0x1F51 | 00 | - | | Program Control |
| | 01 | UNSIGNED8 | RW | Program Control |
| 0x5000 | 00 | UNSIGNED16 | WO | Unlock Code |
| 0x5010 | 00 | UNSIGNED32 | RW | Memory Read Address |
| 0x5011 | 00 | UNSIGNED32 | RW | Memory Read Length |
| 0x5015 | 00 | UNSIGNED32 | RW | RAM Write Address |
| 0x5020 | 00 | UNSIGNED16 | WO | Prepare Sectors for Write |
| 0x5030 | 00 | UNSIGNED16 | WO | Erase Sectors |
| 0x5040 | 00 | - | | Blank Check Sectors |
| | 01 | UNSIGNED16 | WO | Check sectors |
| | 02 | UNSIGNED32 | RO | Offset of the first non-blank location |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 393. C_CAN ISP object directory

| Index | Subindex | Data type | Access | Description |
|---|---|---|---|---|
| 0x5050 | 00 | - | | Copy RAM to Flash |
| | 01 | UNSIGNED32 | RW | Flash Address (DST) |
| | 02 | UNSIGNED32 | RW | RAM Address (SRC) |
| | 03 | UNSIGNED16 | RW | Number of Bytes |
| 0x5060 | 00 | - | | Compare Memory |
| | 01 | UNSIGNED32 | RW | Address 1 |
| | 02 | UNSIGNED32 | RW | Address 2 |
| | 03 | UNSIGNED16 | RW | Number of Bytes |
| | 04 | UNSIGNED32 | RO | Offset of the first mismatch |
| 0x5070 | 00 | - | | Execution Address |
| | 01 | UNSIGNED32 | RW | Execution Address |
| | 02 | UNSIGNED8 | RO | Mode (‘T’ or ‘A’), only ‘T’ supported |
| 0x5100 | 00 | - | | Serial Number |
| | 01 | UNSIGNED32 | RO | Serial Number 1 |
| | 02 | UNSIGNED32 | RO | Serial Number 2 |
| | 03 | UNSIGNED32 | RO | Serial Number 3 |
| | 04 | UNSIGNED32 | RO | Serial Number 4 |

### 26.6.3 Unlock (C_CAN ISP)

Write <Unlock Code> to [0x5000, 0]. Writing an invalid unlock code will return a dedicated abort code.

### 26.6.4 Write to RAM (C_CAN ISP)

Set RAM write address by writing to [0x5015, 0]. Then write the binary data to [0x1F50, 1]. Since this is a DOMAIN entry, the data can be continuously written. The host terminates the write. The write address in [0x5015, 0] auto-increments, so a write of a larger area may be done in multiple successive write cycles to [0x1F50, 1].

### 26.6.5 Read memory (C_CAN ISP)

Set RAM read address by writing to [0x5010, 0] and the read length by writing to [0x5011,0]. Then read the binary data from [0x1F50,1]. Since this is a DOMAIN entry, the data is continuously read. The device terminates the read when the number of bytes in the read length entry has been read. The read address in [0x5010, 0] auto-increments, so a read of a larger area may be done in multiple successive read cycles from [0x1F50,1].

### 26.6.6 Prepare sectors for write operation (C_CAN ISP)

Write a 16-bit value to [0x5020, 0] with the start sector number in the lower eight bits and the end sector number in the upper eight bits.

### 26.6.7 Copy RAM to flash (C_CAN ISP)

Write the parameters into entry [0x5050, 1 to 3]. The write of the number of bytes into [0x5050,3] starts the programming.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

See Section 26.5.4 for limitations on the write-to-flash process.

### 26.6.8 Go (C_CAN ISP)

Write the start address into [0x5070, 0]. Then trigger the “start application” command by writing the value 0x1 to [0x1F51, 1].

### 26.6.9 Erase sectors (C_CAN ISP)

Write a 16-bit value to [0x5030, 0] with the start sector number in the lower eight bits and the end sector number in the upper eight bits.

### 26.6.10 Blank check sectors (C_CAN ISP)

Write a 16-bit value to [0x5040, 1] with the start sector number in the lower eight bits and the end sector number in the upper eight bits.

If the SECTOR_NOT_BLANK abort code is returned, the entry [0x5040, 2] contains the offset of the first non-blank location.

### 26.6.11 Read PartID (C_CAN ISP)

Read [0x1018, 2]. See Table 387.

### 26.6.12 Read boot code version (C_CAN ISP)

Read [0x1018, 3]

### 26.6.13 Read serial number (C_CAN ISP)

Read [0x5100, 1 to 4]

### 26.6.14 Compare (C_CAN ISP)

Write the parameters into entry [0x5060, 1 to 3]. The write of the number of bytes into[0x5060, 3] starts the comparison.

If the COMPARE_ERROR abort code is returned, the entry [0x5060, 4] can be read to get the offset of the first mismatch.

### 26.6.15 C_CAN ISP SDO abort codes

The OD entries that trigger an action return an appropriate SDO abort code when the action returned an error. The abort code is 0x0F00 0000 plus the value of the corresponding ISP return code in the lowest byte. Table 394 shoes the list of abort codes.

In addition, the regular CANopen SDO abort codes for invalid access to OD entries are also supported.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 394. C_CAN ISP SDO abort codes

| UART ISP Error Code | SDO Abort Code | Value |
|---|---|---|
| ADDR_ERROR | SDOABORT_ADDR_ERROR | 0x0F00 000D |
| ADDR_NOT_MAPPED | SDOABORT_ADDR_ NOT_MAPPED | 0x0F00 000E |
| CMD_LOCKED | SDOABORT_CMD_LOCKED | 0x0F00 000F |
| CODE_READ_PROTECTION_ ENABLED | SDOABORT_CODE_READ _PROTECTION_ENABLED | 0x0F00 0013 |
| COMPARE_ERROR | SDOABORT_COMPARE_ERROR | 0x0F00 000A |
| COUNT_ERROR | SDOABORT_COUNT_ERROR | 0x0F00 0006 |
| DST_ADDR_ERROR | SDOABORT_DST_ADDR_ERROR | 0x0F00 0003 |
| DST_ADDR_NOT_MAPPED | SDOABORT_DST_ADDR_ NOT_MAPPED | 0x0F00 0005 |
| INVALID_CODE | SDOABORT_INVALID_CODE | 0x0F00 0010 |
| INVALID_COMMAND | SDOABORT_INVALID_COMMAND | 0x0F00 0001 |
| INVALID_SECTOR | SDOABORT_INVALID_SECTOR | 0x0F00 0007 |
| PARAM_ERROR | SDOABORT_PARAM_ERROR | 0x0F00 000C |
| SECTOR_NOT_BLANK | SDOABORT_SECTOR_ NOT_BLANK | 0x0F00 0008 |
| SECTOR_NOT_PREPARED_ FOR_WRITE_OPERATION | SDOABORT_SECTOR_NOT_ PREPARED_FOR_WRITE_ OPERATION | 0x0F00 0009 |
| SRC_ADDR_ERROR | SDOABORT_SRC_ADDR_ERROR | 0x0F00 0002 |
| SRC_ADDR_NOT_MAPPED | SDOABORT_SRC_ADDR_ NOT_MAPPED | 0x0F00 0004 |

### 26.6.16 Differences to fully-compliant CANopen

While the bootloader uses the SDO communication protocol and the Object Dictionary data organization method, it is not a fully CiA 301 standard compliant CANopen node.The following features are not available or different to the standard:

- Network Management (NMT) message processing not available.
- Heartbeat message and entry 0x1017 not available.
- Uses proprietary SDO abort codes to indicate device errors.
- To speed up communication, “empty” SDO responses during SDO segmented download/write to the node are shortened to one data byte, rather than full eight data bytes as the standard describes.
- Entry [0x1018, 1] Vendor ID reads 0x0000 0000 rather than an official CiA-assigned unique Vendor ID.
- The host must use a different method to identify the CAN ISP devices.

## 26.7 IAP commands

For in application programming the IAP routine should be called with a word pointer in register r0 pointing to memory (RAM) containing command code and parameters. Result of the IAP command is returned in the result table pointed to by register r1. The user can reuse the command table for result by passing the same pointer in registers r0 and r1. The parameter table should be big enough to hold all the results in case the number of results


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

are more than number of parameters. Parameter passing is illustrated in the Figure 92. The number of parameters and results vary according to the IAP command. The maximum number of parameters is 5, passed to the "Copy RAM to FLASH" command. The maximum number of results is 4, returned by the "ReadUID" command. The command handler sends the status code INVALID_COMMAND when an undefined command is received. The IAP routine resides at 0x1FFF 1FF0 location and it is thumb code.

Call the IAP function in the following way:

Define the IAP location entry point. Since the 0th bit of the IAP location is set there will be a change to Thumb instruction set when the program counter branches to this address.

```
#define IAP_LOCATION 0x1fff1ff1
```

Define data structure or pointers to pass IAP command table and result table to the IAP function:

```
unsigned int command_param[5];
unsigned int status_result[4];
```

or

```
unsigned int * command_param;
unsigned int * status_result;
command_param = (unsigned int *) 0x...
status_result =(unsigned int *) 0x...
```

Define pointer to function type, which takes two parameters and returns void. Note the IAP returns the result with the base address of the table residing in R1.

```
typedef void (*IAP)(unsigned int [],unsigned int[]);
IAP iap_entry;
```

Setting the function pointer:

```
iap_entry=(IAP) IAP_LOCATION;
```

To call the IAP, use the following statement.

```
iap_entry (command_param,status_result);
```

Up to 4 parameters can be passed in the r0, r1, r2 and r3 registers respectively (see the ARM Thumb Procedure Call Standard SWS ESPC 0002 A-05). Additional parameters are passed on the stack. Up to 4 parameters can be returned in the r0, r1, r2 and r3 registers respectively. Additional parameters are returned indirectly via memory. Some of the IAP calls require more than 4 parameters. If the ARM suggested scheme is used for the parameter passing/returning then it might create problems due to difference in the C compiler implementation from different vendors. The suggested parameter passing scheme reduces such risk.

The flash memory is not accessible during a write or erase operation. IAP commands, which results in a flash write/erase operation, use 32 bytes of space in the top portion of the on-chip RAM for execution. The user program should not be use this space if IAP flash programming is permitted in the application.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 395. IAP Command Summary**

| IAP Command | Command Code | Described in |
|---|---|---|
| Prepare sector(s) for write operation | 50 (decimal) | Table 396 |
| Copy RAM to flash | 51 (decimal) | Table 397 |
| Erase sector(s) | 52 (decimal) | Table 398 |
| Blank check sector(s) | 53 (decimal) | Table 399 |
| Read Part ID | 54 (decimal) | Table 400 |
| Read Boot code version | 55 (decimal) | Table 401 |
| Compare | 56 (decimal) | Table 402 |
| Reinvoke ISP | 57 (decimal) | Table 403 |
| Read UID | 58 (decimal) | Table 404 |
| Erase page | 59 (decimal) | Table 405 |

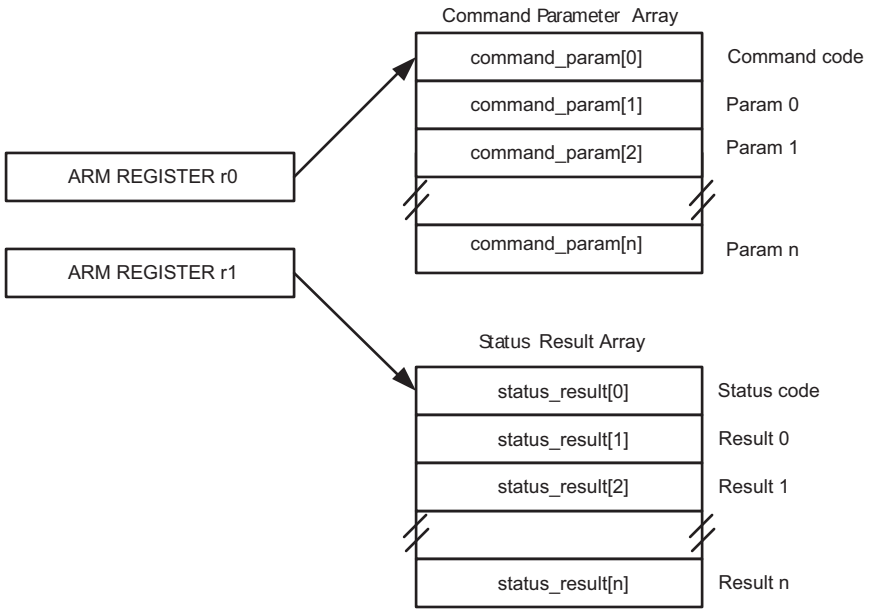


**Fig 92. IAP parameter passing**

## 26.7.1 Prepare sector(s) for write operation (IAP)

This command makes flash write/erase operation a two step process.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 396. IAP Prepare sector(s) for write operation command**

| Command | Prepare sector(s) for write operation |
|---|---|
| Input | **Command code: 50 (decimal)**<br>**Param0:** Start Sector Number<br>**Param1:** End Sector Number (should be greater than or equal to start sector number). |
| Status Code | CMD_SUCCESS \|<br>BUSY \|<br>INVALID_SECTOR |
| Result | None |
| Description | This command must be executed before executing "Copy RAM to flash" or "Erase Sector(s)" command. Successful execution of the "Copy RAM to flash" or "Erase Sector(s)" command causes relevant sectors to be protected again. The boot sector can not be prepared by this command. To prepare a single sector use the same "Start" and "End" sector numbers. |

### 26.7.2 Copy RAM to flash (IAP)

See Section 26.5.4 for limitations on the write-to-flash process.

**Table 397. IAP Copy RAM to flash command**

| Command | Copy RAM to flash |
|---|---|
| Input | **Command code: 51 (decimal)**<br>**Param0(DST):** Destination flash address where data bytes are to be written. This address should be a 256 byte boundary.<br>**Param1(SRC):** Source RAM address from which data bytes are to be read. This address should be a word boundary.<br>**Param2:** Number of bytes to be written. Should be 256 \| 512 \| 1024 \| 4096.<br>**Param3:** System Clock Frequency (CCLK) in kHz.<br>**Remark:** In parts with less than 4 kB SRAM, Param2 is limited to 1024 (see Table 3). |
| status code | CMD_SUCCESS \|<br>SRC_ADDR_ERROR (Address not a word boundary) \|<br>DST_ADDR_ERROR (Address not on correct boundary) \|<br>SRC_ADDR_NOT_MAPPED \|<br>DST_ADDR_NOT_MAPPED \|<br>COUNT_ERROR (Byte count is not 256 \| 512 \| 1024 \| 4096) \|<br>SECTOR_NOT_PREPARED_FOR_WRITE_OPERATION \|<br>BUSY |
| Result | None |
| Description | This command is used to program the flash memory. The affected sectors should be prepared first by calling "Prepare Sector for Write Operation" command. The affected sectors are automatically protected again once the copy command is successfully executed. The boot sector can not be written by this command. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 26.7.3 Erase Sector(s) (IAP)

**Table 398. IAP Erase Sector(s) command**

| Command | Erase Sector(s) |
|---|---|
| Input | **Command code: 52 (decimal)** |
| | **Param0:** Start Sector Number |
| | **Param1:** End Sector Number (should be greater than or equal to start sector number). |
| | **Param2:** System Clock Frequency (CCLK) in kHz. |
| Status Code | CMD_SUCCESS \| |
| | BUSY \| |
| | SECTOR_NOT_PREPARED_FOR_WRITE_OPERATION \| |
| | INVALID_SECTOR |
| Result | None |
| Description | This command is used to erase a sector or multiple sectors of on-chip flash memory. The boot sector can not be erased by this command. To erase a single sector use the same "Start" and "End" sector numbers. |

### 26.7.4 Blank check sector(s) (IAP)

**Table 399. IAP Blank check sector(s) command**

| Command | Blank check sector(s) |
|---|---|
| Input | **Command code: 53 (decimal)** |
| | **Param0:** Start Sector Number |
| | **Param1:** End Sector Number (should be greater than or equal to start sector number). |
| Status Code | CMD_SUCCESS \| |
| | BUSY \| |
| | SECTOR_NOT_BLANK \| |
| | INVALID_SECTOR |
| Result | **Result0:** Offset of the first non blank word location if the Status Code is SECTOR_NOT_BLANK. |
| | **Result1:** Contents of non blank word location. |
| Description | This command is used to blank check a sector or multiple sectors of on-chip flash memory. To blank check a single sector use the same "Start" and "End" sector numbers. |

### 26.7.5 Read Part Identification number (IAP)

**Table 400. IAP Read Part Identification command**

| Command | Read part identification number |
|---|---|
| Input | **Command code: 54 (decimal)** |
| | **Parameters:** None |
| Status Code | CMD_SUCCESS \| |
| Result | **Result0:** Part Identification Number. |
| Description | This command is used to read the part identification number. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 26.7.6 Read Boot code version number (IAP)

**Table 401. IAP Read Boot Code version number command**

| Command | Read boot code version number |
|---|---|
| Input | **Command code: 55 (decimal)**<br>**Parameters:** None |
| Status Code | CMD_SUCCESS \| |
| Result | **Result0:** 2 bytes of boot code version number. Read as <byte1(Major)>.<byte0(Minor)> |
| Description | This command is used to read the boot code version number. |

### 26.7.7 Compare <address1> <address2> <no of bytes> (IAP)

**Table 402. IAP Compare command**

| Command | Compare |
|---|---|
| Input | **Command code: 56 (decimal)**<br>**Param0(DST):** Starting flash or RAM address of data bytes to be compared. This address should be a word boundary.<br>**Param1(SRC):** Starting flash or RAM address of data bytes to be compared. This address should be a word boundary.<br>**Param2:** Number of bytes to be compared; should be a multiple of 4. |
| Status Code | CMD_SUCCESS \|<br>COMPARE_ERROR \|<br>COUNT_ERROR (Byte count is not a multiple of 4) \|<br>ADDR_ERROR \|<br>ADDR_NOT_MAPPED |
| Result | **Result0:** Offset of the first mismatch if the Status Code is COMPARE_ERROR. |
| Description | This command is used to compare the memory contents at two locations.<br>**The result may not be correct when the source or destination includes any of the first 512 bytes starting from address zero. The first 512 bytes can be re-mapped to RAM.** |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 26.7.8 Reinvoke ISP (IAP)

**Table 403. IAP Reinvoke ISP**

| Command | Compare |
|---|---|
| Input | **Command code: 57 (decimal)** |
| Status Code | None |
| Result | **None.** |
| Description | This command is used to invoke the bootloader in ISP mode. It maps boot vectors, sets PCLK = CCLK, configures UART pins RXD and TXD, resets counter/timer CT32B1 and resets the U0FDR (see Table 200). This command may be used when a valid user program is present in the internal flash memory and the PIO0_1 pin is not accessible to force the ISP mode.<br>If there is more than one boot source available (see Section 26.1), pin PIO0_3 must be configured correctly to select the appropriate boot source:<br>• Configure pin PIO0_3 as output.<br>• Drive the output to LOW or HIGH depending on the boot source (see Section 26.3.1). |

### 26.7.9 ReadUID (IAP)

**Table 404. IAP ReadUID command**

| Command | Compare |
|---|---|
| Input | **Command code: 58 (decimal)** |
| Status Code | CMD_SUCCESS |
| Result | **Result0:** The first 32-bit word (at the lowest address).<br>**Result1:** The second 32-bit word.<br>**Result2:** The third 32-bit word.<br>**Result3:** The fourth 32-bit word. |
| Description | This command is used to read the unique ID. |

### 26.7.10 Erase page

**Remark:** See Table 369 for list of parts that implement this command.

**Table 405. IAP Erase page command**

| Command | Erase page |
|---|---|
| Input | **Command code: 59 (decimal)**<br>**Param0:** Start page number.<br>**Param1:** End page number (should be greater than or equal to start page)<br>**Param2:** System Clock Frequency (CCLK) in kHz. |
| Status Code | CMD_SUCCESS \|<br>BUSY \|<br>SECTOR_NOT_PREPARED_FOR_WRITE_OPERATION \|<br>INVALID_SECTOR |
| Result | None |
| Description | This command is used to erase a page or multiple pages of on-chip flash memory. To erase a single page use the same "start" and "end" page numbers. See Table 369 for list of parts that implement this command. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

### 26.7.11 IAP Status Codes

**Table 406. IAP Status Codes Summary**

| Status Code | Mnemonic | Description |
|---|---|---|
| 0 | CMD_SUCCESS | Command is executed successfully. |
| 1 | INVALID_COMMAND | Invalid command. |
| 2 | SRC_ADDR_ERROR | Source address is not on a word boundary. |
| 3 | DST_ADDR_ERROR | Destination address is not on a correct boundary. |
| 4 | SRC_ADDR_NOT_MAPPED | Source address is not mapped in the memory map. Count value is taken in to consideration where applicable. |
| 5 | DST_ADDR_NOT_MAPPED | Destination address is not mapped in the memory map. Count value is taken in to consideration where applicable. |
| 6 | COUNT_ERROR | Byte count is not multiple of 4 or is not a permitted value. |
| 7 | INVALID_SECTOR | Sector number is invalid. |
| 8 | SECTOR_NOT_BLANK | Sector is not blank. |
| 9 | SECTOR_NOT_PREPARED_FOR_WRITE_OPERATION | Command to prepare sector for write operation was not executed. |
| 10 | COMPARE_ERROR | Source and destination data is not same. |
| 11 | BUSY | Flash programming hardware interface is busy. |

## 26.8 Debug notes

### 26.8.1 Comparing flash images

Depending on the debugger used and the IDE debug settings, the memory that is visible when the debugger connects might be the boot ROM, the internal SRAM, or the flash. To help determine which memory is present in the current debug environment, check the value contained at flash address 0x0000 0004. This address contains the entry point to the code in the ARM Cortex-M0 vector table, which is the bottom of the boot ROM, the internal SRAM, or the flash memory respectively.

**Table 407. Memory mapping in debug mode**

| Memory mapping mode | Memory start address visible at 0x0000 0004 |
|---|---|
| Bootloader mode | 0x1FFF 0000 |
| User flash mode | 0x0000 0000 |
| User SRAM mode | 0x1000 0000 |

### 26.8.2 Serial Wire Debug (SWD) flash programming interface

Debug tools can write parts of the flash image to RAM and then execute the IAP call "Copy RAM to flash" repeatedly with proper offset.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 26.9 Flash memory access

Depending on the system clock frequency, access to the flash memory can be configured with various access times by writing to the FLASHCFG register at address 0x4003 C010.

**Remark:** Improper setting of this register may result in incorrect operation of the LPC111x/LPC11Cxx flash memory. Do not manipulate the FLASHCFG register when using power profiles (set_power() and/or set_pll() API's).

**Table 408. Flash configuration register (FLASHCFG, address 0x4003 C010) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 1:0 | FLASHTIM | | Flash memory access time. FLASHTIM +1 is equal to the number of system clocks used for flash access. | 10 |
| | | 0x0 | 1 system clock flash access time (for system clock frequencies of up to 20 MHz). | |
| | | 0x1 | 2 system clocks flash access time (for system clock frequencies of up to 40 MHz). | |
| | | 0x2 | 3 system clocks flash access time (for system clock frequencies of up to 50 MHz). | |
| | | 0x3 | Reserved. | |
| 31:2 | - | - | Reserved. **User software must not change the value of these bits. Bits 31:2 must be written back exactly as read**. | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 26.10 Flash signature generation

The flash module contains a built-in signature generator. This generator can produce a 128-bit signature from a range of flash memory. A typical usage is to verify the flashed contents against a calculated signature (e.g. during programming).

The address range for generating a signature must be aligned on flash-word boundaries, i.e. 128-bit boundaries. Once started, signature generation completes independently. While signature generation is in progress, the flash memory cannot be accessed for other purposes, and an attempted read will cause a wait state to be asserted until signature generation is complete. Code outside of the flash (e.g. internal RAM) can be executed during signature generation. This can include interrupt services, if the interrupt vector table is re-mapped to memory other than the flash memory. The code that initiates signature generation should also be placed outside of the flash memory.

### 26.10.1 Register description for signature generation

**Table 409. Register overview: FMC (base address 0x4003 C000)**

| Name | Access | Address offset | Description | Reset value | Reference |
|---|---|---|---|---|---|
| FMSSTART | R/W | 0x020 | Signature start address register | 0 | Table 410 |
| FMSSTOP | R/W | 0x024 | Signature stop-address register | 0 | Table 411 |
| FMSW0 | R | 0x02C | Word 0 [31:0] | - | Table 412 |
| FMSW1 | R | 0x030 | Word 1 [63:32] | - | Table 413 |
| FMSW2 | R | 0x034 | Word 2 [95:64] | - | Table 414 |
| FMSW3 | R | 0x038 | Word 3 [127:96] | - | Table 415 |
| FMSTAT | R | 0xFE0 | Signature generation status register | 0 | Section 26.10.1.3 |
| FMSTATCLR | W | 0xFE8 | Signature generation status clear register | - | Section 26.10.1.4 |

#### 26.10.1.1 Signature generation address and control registers

These registers control automatic signature generation. A signature can be generated for any part of the flash memory contents. The address range to be used for generation is defined by writing the start address to the signature start address register (FMSSTART) and the stop address to the signature stop address register (FMSSTOP. The start and stop addresses must be aligned to 128-bit boundaries and can be derived by dividing the byte address by 16.

Signature generation is started by setting the SIG_START bit in the FMSSTOP register. Setting the SIG_START bit is typically combined with the signature stop address in a single write.

Table 410 and Table 411 show the bit assignments in the FMSSTART and FMSSTOP registers respectively.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 410. Flash Module Signature Start register (FMSSTART - 0x4003 C020) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 16:0 | START | Signature generation start address (corresponds to AHB byte address bits[20:4]). | 0 |
| 31:17 | - | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |

**Table 411. Flash Module Signature Stop register (FMSSTOP - 0x4003 C024) bit description**

| Bit | Symbol | Value | Description | Reset value |
|---|---|---|---|---|
| 16:0 | STOP | | BIST stop address divided by 16 (corresponds to AHB byte address [20:4]). | 0 |
| 17 | SIG_START | | Start control bit for signature generation. | 0 |
| | | 0 | Signature generation is stopped | |
| | | 1 | Initiate signature generation | |
| 31:18 | - | | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |

### 26.10.1.2 Signature generation result registers

The signature generation result registers return the flash signature produced by the embedded signature generator. The 128-bit signature is reflected by the four registers FMSW0, FMSW1, FMSW2 and FMSW3.

The generated flash signature can be used to verify the flash memory contents. The generated signature can be compared with an expected signature and thus makes saves time and code space. The method for generating the signature is described in Section 26.10.2.

Table 415 show bit assignment of the FMSW0 and FMSW1, FMSW2, FMSW3 registers respectively.

**Table 412. FMSW0 register bit description (FMSW0, address: 0x4003 C02C)**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 31:0 | SW0[31:0] | Word 0 of 128-bit signature (bits 31 to 0). | - |

**Table 413. FMSW1 register bit description (FMSW1, address: 0x4003 C030)**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 31:0 | SW1[63:32] | Word 1 of 128-bit signature (bits 63 to 32). | - |

**Table 414. FMSW2 register bit description (FMSW2, address: 0x4003 C034)**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 31:0 | SW2[95:64] | Word 2 of 128-bit signature (bits 95 to 64). | - |

**Table 415. FMSW3 register bit description (FMSW3, address: 0x4003 40C8)**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 31:0 | SW3[127:96] | Word 3 of 128-bit signature (bits 127 to 96). | - |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

#### 26.10.1.3 Flash Module Status register

The read-only FMSTAT register provides a means of determining when signature generation has completed. Completion of signature generation can be checked by polling the SIG_DONE bit in FMSTAT. SIG_DONE should be cleared via the FMSTATCLR register before starting a signature generation operation, otherwise the status might indicate completion of a previous operation.

**Table 416. Flash module Status register (FMSTAT - 0x4003 CFE0) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 1:0 | - | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |
| 2 | SIG_DONE | When 1, a previously started signature generation has completed. See FMSTATCLR register description for clearing this flag. | 0 |
| 31:3 | - | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |

#### 26.10.1.4 Flash Module Status Clear register

The FMSTATCLR register is used to clear the signature generation completion flag.

**Table 417. Flash Module Status Clear register (FMSTATCLR - 0x0x4003 CFE8) bit description**

| Bit | Symbol | Description | Reset value |
|---|---|---|---|
| 1:0 | - | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |
| 2 | SIG_DONE_CLR | Writing a 1 to this bits clears the signature generation completion flag (SIG_DONE) in the FMSTAT register. | 0 |
| 31:3 | - | Reserved, user software should not write ones to reserved bits. The value read from a reserved bit is not defined. | NA |

### 26.10.2 Algorithm and procedure for signature generation

#### Signature generation

A signature can be generated for any part of the flash contents. The address range to be used for signature generation is defined by writing the start address to the FMSSTART register, and the stop address to the FMSSTOP register.

The signature generation is started by writing a ‘1’ to the SIG_START bit in the FMSSTOP register. Starting the signature generation is typically combined with defining the stop address, which is done in the STOP bits of the same register.

The time that the signature generation takes is proportional to the address range for which the signature is generated. Reading of the flash memory for signature generation uses a self-timed read mechanism and does not depend on any configurable timing settings for the flash. A safe estimation for the duration of the signature generation is:

Duration = int((60 / tcy) + 3) x (FMSSTOP - FMSSTART + 1)


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

When signature generation is triggered via software, the duration is in AHB clock cycles, and tcy is the time in ns for one AHB clock. The SIG_DONE bit in FMSTAT can be polled by software to determine when signature generation is complete.

After signature generation, a 128-bit signature can be read from the FMSW0 to FMSW3 registers. The 128-bit signature reflects the corrected data read from the flash. The 128-bit signature reflects flash parity bits and check bit values.

### Content verification

The signature as it is read from the FMSW0 to FMSW3 registers must be equal to the reference signature. The algorithms to derive the reference signature is given in Figure 93.

```
int128 signature = 0
int128 nextSignature
FOR address = flashpage 0 TO address = flashpage max
{
        FOR i = 0 TO 126 {
                nextSignature[i] = flashword[i] XOR signature[i+1]}
        nextSignature[127] = flashword[127] XOR signature[0] XOR signature[2]
                XOR signature[27] XOR signature[29]
        signature = nextSignature
}
return signature
```

**Fig 93. Algorithm for generating a 128-bit signature**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 27.1 How to read this chapter

The debug functionality is identical for all LPC111x, LPC11D14, and LPC11Cxx parts.

## 27.2 Features

- Supports ARM Serial Wire Debug mode.
- Direct debug access to all memories, registers, and peripherals.
- No target resources are required for the debugging session.
- Four breakpoints.
- Two data watchpoints that can also be used as triggers.

## 27.3 Introduction

Debug functions are integrated into the ARM Cortex-M0. Serial wire debug functions are supported. The ARM Cortex-M0 is configured to support up to four breakpoints and two watchpoints.

## 27.4 Description

Debugging with the LPC111x/LPC11Cxx uses the Serial Wire Debug mode.

## 27.5 Pin description

The tables below indicate the various pin functions related to debug. Some of these functions share pins with other functions which therefore may not be used at the same time.

**Table 418. Serial Wire Debug pin description**

| Pin Name | Type | Description |
|---|---|---|
| SWCLK | Input | **Serial Wire Clock.** This pin is the clock for debug logic when in the Serial Wire Debug mode (SWCLK). This pin is pulled up internally. |
| SWDIO | Input / Output | **Serial wire debug data input/output.** The SWDIO pin is used by an external debug tool to communicate with and control the LPC111x/LPC11Cxx. This pin is pulled up internally. |


All information provided in this document is subject to legal disclaimers.
© NXP B.V. 2016. All rights reserved.

## 27.6 Debug notes

### 27.6.1 Debug limitations

**Important:** The user should be aware of certain limitations during debugging. The most important is that, due to limitations of the ARM Cortex-M0 integration, the LPC111x/LPC11Cxx cannot wake up in the usual manner from Deep-sleep mode. It is recommended not to use this mode during debug.

Another issue is that debug mode changes the way in which reduced power modes work internal to the ARM Cortex-M0 CPU, and this ripples through the entire system. These differences mean that power measurements should not be made while debugging, the results will be higher than during normal operation in an application.

During a debugging session, the System Tick Timer is automatically stopped whenever the CPU is stopped. Other peripherals are not affected.

### 27.6.2 Debug connections

For debugging purposes, it is useful to provide access to the ISP entry pin PIO0_1. This pin can be used to recover the part from configurations which would disable the SWD port such as improper PLL configuration, reconfiguration of SWD pins as ADC inputs, entry into Deep power-down mode out of reset, etc. This pin can be used for other functions such as GPIO, but it should not be held low on power-up or reset.

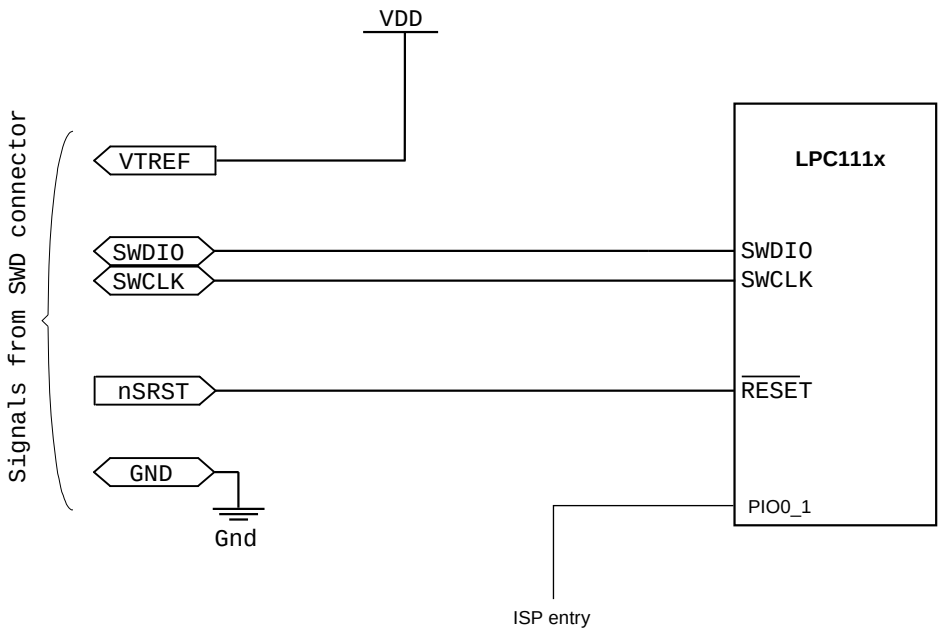


The VTREF pin on the SWD connector enables the debug connector to match the target voltage.

**Fig 94. Connecting the SWD pins to a standard SWD connector**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 28.1 How to read this chapter

The NMI is implemented on the LPC1100XL series (see Section 3.5.29). Parts on the LPC1100, LPC1100L, and LPC1100C series do not support the NMI.

## 28.2 Introduction

The following material is using the ARM *Cortex-M0 User Guide*. Minor changes have been made regarding the specific implementation of the Cortex-M0 for the LPC111x, LPC11D14, and LPC11Cxx parts.

The ARM Cortex-M0 documentation is also available in Ref. 1 and Ref. 2.

## 28.3 About the Cortex-M0 processor and core peripherals

The Cortex-M0 processor is an entry-level 32-bit ARM Cortex processor designed for a broad range of embedded applications. It offers significant benefits to developers, including:

- a simple architecture that is easy to learn and program
- ultra-low power, energy efficient operation
- excellent code density
- deterministic, high-performance interrupt handling
- upward compatibility with Cortex-M processor family.

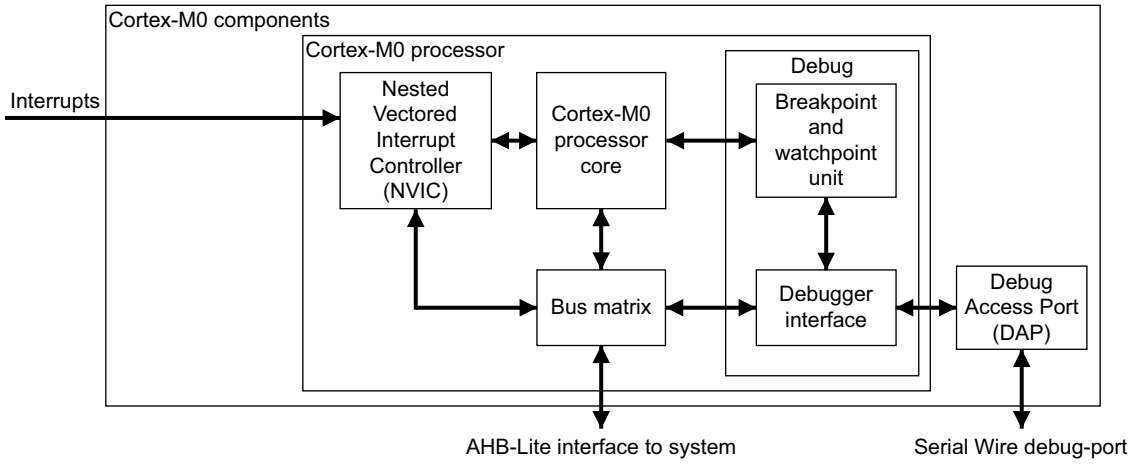


**Fig 95. Cortex-M0 implementation**



All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

The Cortex-M0 processor is built on a highly area and power optimized 32-bit processor core, with a 3-stage pipeline von Neumann architecture. The processor delivers exceptional energy efficiency through a small but powerful instruction set and extensively optimized design, providing high-end processing hardware including a single-cycle multiplier.

The Cortex-M0 processor implements the ARMv6-M architecture, which is based on the 16-bit Thumb instruction set and includes Thumb-2 technology. This provides the exceptional performance expected of a modern 32-bit architecture, with a higher code density than other 8-bit and 16-bit microcontrollers.

The Cortex-M0 processor closely integrates a configurable **Nested Vectored Interrupt Controlle**r (NVIC), to deliver industry-leading interrupt performance. The NVIC:

- includes a **non-maskable interrupt** (NMI). See Section 28.1 for implementation of the NMI for specific parts.
- provides zero jitter interrupt option
- provides four interrupt priority levels.

The tight integration of the processor core and NVIC provides fast execution of **interrupt service routines** (ISRs), dramatically reducing the interrupt latency. This is achieved through the hardware stacking of registers, and the ability to abandon and restart load-multiple and store-multiple operations. Interrupt handlers do not require any assembler wrapper code, removing any code overhead from the ISRs. Tail-chaining optimization also significantly reduces the overhead when switching from one ISR to another.

To optimize low-power designs, the NVIC integrates with the sleep modes, that include a Deep-sleep function that enables the entire device to be rapidly powered down.

### 28.3.1 System-level interface

The Cortex-M0 processor provides a single system-level interface using AMBA technology to provide high speed, low latency memory accesses.

### 28.3.2 Integrated configurable debug

The Cortex-M0 processor implements a complete hardware debug solution, with extensive hardware breakpoint and watchpoint options. This provides high system visibility of the processor, memory and peripherals through a 2-pin **Serial Wire Debug** (SWD) port that is ideal for microcontrollers and other small package devices.

### 28.3.3 Cortex-M0 processor features summary

- high code density with 32-bit performance
- tools and binary upwards compatible with Cortex-M processor family
- integrated ultra low-power sleep modes
- efficient code execution permits slower processor clock or increases sleep mode time
- single-cycle 32-bit hardware multiplier
- zero jitter interrupt handling


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

- extensive debug capabilities.

### 28.3.4 Cortex-M0 core peripherals

These are:

**NVIC —** The NVIC is an embedded interrupt controller that supports low latency interrupt processing.

**System Control Block —** The **System Control Block** (SCB) is the programmers model interface to the processor. It provides system implementation information and system control, including configuration, control, and reporting of system exceptions.

**System timer —** The system timer, SysTick, is a 24-bit count-down timer. Use this as a Real Time Operating System (RTOS) tick timer or as a simple counter.

## 28.4 Processor

### 28.4.1 Programmers model

This section describes the Cortex-M0 programmers model. In addition to the individual core register descriptions, it contains information about the processor modes and stacks.

#### 28.4.1.1 Processor modes

The processor **modes** are:

**Thread mode —** Used to execute application software. The processor enters Thread mode when it comes out of reset.

**Handler mode —** Used to handle exceptions. The processor returns to Thread mode when it has finished all exception processing.

#### 28.4.1.2 Stacks

The processor uses a full descending stack. This means the stack pointer indicates the last stacked item on the stack memory. When the processor pushes a new item onto the stack, it decrements the stack pointer and then writes the item to the new memory location. The processor implements two stacks, the main stack and the process stack, with independent copies of the stack pointer, see Section 28.4.1.3.2.

In Thread mode, the CONTROL register controls whether the processor uses the main stack or the process stack, see Section 28–28.4.1.3.7. In Handler mode, the processor always uses the main stack. The options for processor operations are:

**Table 419. Summary of processor mode and stack use options**

| Processor mode | Used to execute | Stack used |
|---|---|---|
| Thread | Applications | Main stack or process stack<br>See Section 28–28.4.1.3.7 |
| Handler | Exception handlers | Main stack |

#### 28.4.1.3 Core registers

The processor core registers are:


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

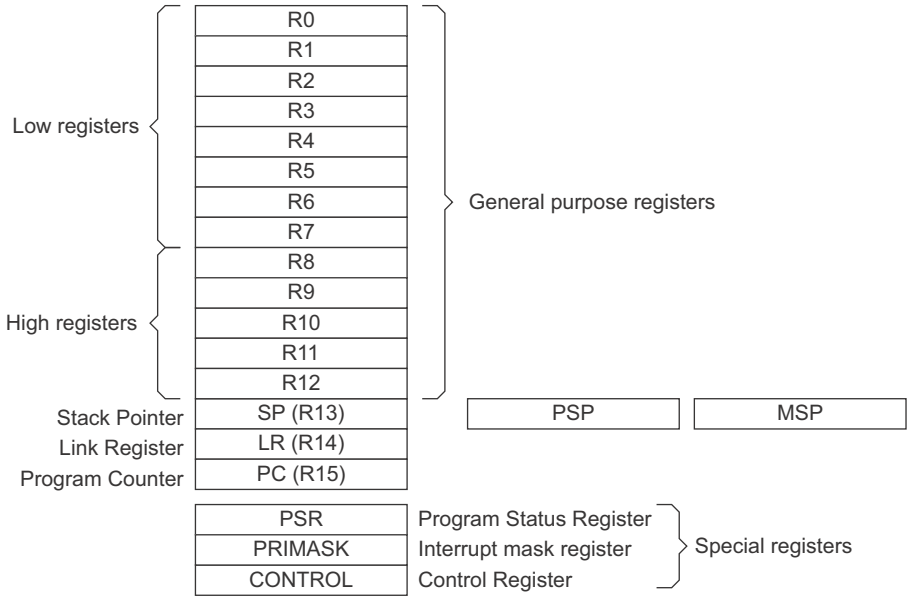


**Fig 96. Processor core register set**

**Table 420. Core register set summary**

| Name | Type[1] | Reset value | Description |
|---|---|---|---|
| R0-R12 | RW | Unknown | Section 28–28.4.1.3.1 |
| MSP | RW | See description | Section 28–28.4.1.3.2 |
| PSP | RW | Unknown | Section 28–28.4.1.3.2 |
| LR | RW | Unknown | Section 28–28.4.1.3.3 |
| PC | RW | See description | Section 28–28.4.1.3.4 |
| PSR | RW | Unknown[2] | Table 28–421 |
| APSR | RW | Unknown | Table 28–422 |
| IPSR | RO | 0x00000000 | Table 423 |
| EPSR | RO | Unknown[2] | Table 28–424 |
| PRIMASK | RW | 0x00000000 | Table 28–425 |
| CONTROL | RW | 0x00000000 | Table 28–426 |

[1] Describes access type during program execution in thread mode and Handler mode. Debug access can differ.

[2] Bit[24] is the T-bit and is loaded from bit[0] of the reset vector.

#### 28.4.1.3.1 General-purpose registers

R0-R12 are 32-bit general-purpose registers for data operations.

#### 28.4.1.3.2 Stack Pointer

The Stack Pointer (SP) is register R13. In Thread mode, bit[1] of the CONTROL register indicates the stack pointer to use:

- 0 = **Main Stack Pointer** (MSP). This is the reset value.
- 1 = **Process Stack Pointer** (PSP).


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

On reset, the processor loads the MSP with the value from address 0x00000000.

#### 28.4.1.3.3 Link Register

The **Link Register** (LR) is register R14. It stores the return information for subroutines, function calls, and exceptions. On reset, the LR value is Unknown.

#### 28.4.1.3.4 Program Counter

The **Program Counter** (PC) is register R15. It contains the current program address. On reset, the processor loads the PC with the value of the reset vector, which is at address 0x00000004. Bit[0] of the value is loaded into the EPSR T-bit at reset and must be 1.

#### 28.4.1.3.5 Program Status Register

The **Program Status Register** (PSR) combines:

- **Application Program Status Register** (APSR)
- **Interrupt Program Status Register** (IPSR)
- **Execution Program Status Register** (EPSR).

These registers are mutually exclusive bitfields in the 32-bit PSR. The PSR bit assignments are:

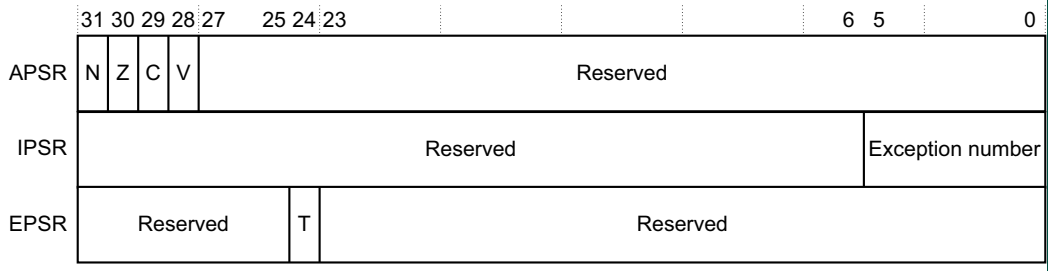


**Fig 97. APSR, IPSR, EPSR register bit assignments**

Access these registers individually or as a combination of any two or all three registers, using the register name as an argument to the MSR or MRS instructions. For example:

- read all of the registers using PSR with the MRS instruction
- write to the APSR using APSR with the MSR instruction.

The PSR combinations and attributes are:

**Table 421. PSR register combinations**

| Register | Type | Combination |
|---|---|---|
| PSR | RW[1][2] | APSR, EPSR, and IPSR |
| IEPSR | RO | EPSR and IPSR |
| IAPSR | RW[1] | APSR and IPSR |
| EAPSR | RW[2] | APSR and EPSR |

[1] The processor ignores writes to the IPSR bits.

[2] Reads of the EPSR bits return zero, and the processor ignores writes to the these bits


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

See the instruction descriptions Section 28–28.5.7.6 and Section 28–28.5.7.7 for more information about how to access the program status registers.

**Application Program Status Register:** The APSR contains the current state of the condition flags, from previous instruction executions. See the register summary in Table 28–420 for its attributes. The bit assignments are:

**Table 422. APSR bit assignments**

| Bits | Name | Function |
|---|---|---|
| [31] | N | Negative flag |
| [30] | Z | Zero flag |
| [29] | C | Carry or borrow flag |
| [28] | V | Overflow flag |
| [27:0] | - | Reserved |

See Section 28.5.4.1.4 for more information about the APSR negative, zero, carry or borrow, and overflow flags.

**Interrupt Program Status Register:** The IPSR contains the exception number of the current **Interrupt Service Routine** (ISR). See the register summary in Table 28–420 for its attributes. The bit assignments are:

**Table 423. IPSR bit assignments**

| Bits | Name | Function |
|---|---|---|
| [31:6] | - | Reserved |
| [5:0] | Exception number | This is the number of the current exception:<br>0 = Thread mode<br>1 = Reserved<br>2 = NMI<br>3 = HardFault<br>4-10 = Reserved<br>11 = SVCall<br>12, 13 = Reserved<br>14 = PendSV<br>15 = SysTick<br>16 = IRQ0<br>.<br>.<br>.<br>47 = IRQ31<br>48-63 = Reserved.<br>see Section 28–28.4.3.2 for more information. |

**Execution Program Status Register:** The EPSR contains the Thumb state bit.

See the register summary in Table 28–420 for the EPSR attributes. The bit assignments are:


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 424. EPSR bit assignments**

| Bits | Name | Function |
|---|---|---|
| [31:25] | - | Reserved |
| [24] | T | Thumb state bit |
| [23:0] | - | Reserved |

Attempts by application software to read the EPSR directly using the MRS instruction always return zero. Attempts to write the EPSR using the MSR instruction are ignored. Fault handlers can examine the EPSR value in the stacked PSR to determine the cause of the fault. See Section 28–28.4.3.6. The following can clear the T bit to 0:

- instructions BLX, BX and POP{PC}
- restoration from the stacked xPSR value on an exception return
- bit[0] of the vector value on an exception entry.

Attempting to execute instructions when the T bit is 0 results in a HardFault or lockup. See Section 28–28.4.4.1 for more information.

**Interruptible-restartable instructions:** The interruptible-restartable instructions are LDM and STM. When an interrupt occurs during the execution of one of these instructions, the processor abandons execution of the instruction.

After servicing the interrupt, the processor restarts execution of the instruction from the beginning.

#### 28.4.1.3.6 Exception mask register

The exception mask register disables the handling of exceptions by the processor. Disable exceptions where they might impact on timing critical tasks or code sequences requiring atomicity.

To disable or re-enable exceptions, use the MSR and MRS instructions, or the CPS instruction, to change the value of PRIMASK. See Section 28–28.5.7.6, Section 28–28.5.7.7, and Section 28–28.5.7.2 for more information.

**Priority Mask Register:** The PRIMASK register prevents activation of all exceptions with configurable priority. See the register summary in Table 28–420 for its attributes. The bit assignments are:

**Table 425. PRIMASK register bit assignments**

| Bits | Name | Function |
|---|---|---|
| [31:1] | - | Reserved |
| [0] | PRIMASK | 0 = no effect<br>1 = prevents the activation of all exceptions with configurable priority. |

#### 28.4.1.3.7 CONTROL register

The CONTROL register controls the stack used when the processor is in Thread mode. See the register summary in Table 28–420 for its attributes. The bit assignments are:


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 426. CONTROL register bit assignments**

| Bits | Name | Function |
|---|---|---|
| [31:2] | - | Reserved |
| [1] | Active stack pointer | Defines the current stack:<br>0 = MSP is the current stack pointer<br>1 = PSP is the current stack pointer.<br>In Handler mode this bit reads as zero and ignores writes. |
| [0] | - | Reserved. |

Handler mode always uses the MSP, so the processor ignores explicit writes to the active stack pointer bit of the CONTROL register when in Handler mode. The exception entry and return mechanisms update the CONTROL register.

In an OS environment, it is recommended that threads running in Thread mode use the process stack and the kernel and exception handlers use the main stack.

By default, Thread mode uses the MSP. To switch the stack pointer used in Thread mode to the PSP, use the `MSR` instruction to set the Active stack pointer bit to 1, see Section 28–28.5.7.6.

**Remark:** When changing the stack pointer, software must use an `ISB` instruction immediately after the `MSR` instruction. This ensures that instructions after the ISB execute using the new stack pointer. See Section 28–28.5.7.5.

### 28.4.1.4 Exceptions and interrupts

The Cortex-M0 processor supports interrupts and system exceptions. The processor and the **Nested Vectored Interrupt Controller** (NVIC) prioritize and handle all exceptions. An interrupt or exception changes the normal flow of software control. The processor uses handler mode to handle all exceptions except for reset. See Section 28–28.4.3.6.1 and Section 28–28.4.3.6.2 for more information.

The NVIC registers control interrupt handling. See Section 28–28.6.2 for more information.

### 28.4.1.5 Data types

The processor:

- supports the following data types:
  - 32-bit words
  - 16-bit halfwords
  - 8-bit bytes
- manages all data memory accesses as little-endian. Instruction memory and **Private Peripheral Bus** (PPB) accesses are always little-endian. See Section 28–28.4.2.1 for more information.

### 28.4.1.6 The Cortex Microcontroller Software Interface Standard

ARM provides the **Cortex Microcontroller Software Interface Standard** (CMSIS) for programming Cortex-M0 microcontrollers. The CMSIS is an integrated part of the device driver library.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

For a Cortex-M0 microcontroller system, CMSIS defines:

- a common way to:
  - access peripheral registers
  - define exception vectors
- the names of:
  - the registers of the core peripherals
  - the core exception vectors
- a device-independent interface for RTOS kernels.

The CMSIS includes address definitions and data structures for the core peripherals in the Cortex-M0 processor. It also includes optional interfaces for middleware components comprising a TCP/IP stack and a Flash file system.

The CMSIS simplifies software development by enabling the reuse of template code, and the combination of CMSIS-compliant software components from various middleware vendors. Software vendors can expand the CMSIS to include their peripheral definitions and access functions for those peripherals.

This document includes the register names defined by the CMSIS, and gives short descriptions of the CMSIS functions that address the processor core and the core peripherals.

**Remark:** This document uses the register short names defined by the CMSIS. In a few cases these differ from the architectural short names that might be used in other documents.

The following sections give more information about the CMSIS:

- Section 28.4.5.3 “Power management programming hints”
- Section 28.5.2 “Intrinsic functions”
- Section 28.6.2.1 “Accessing the Cortex-M0 NVIC registers using CMSIS”
- Section 28.6.2.8.1 “NVIC programming hints”.

### 28.4.2 Memory model

This section describes the processor memory map and the behavior of memory accesses. The processor has a fixed memory map that provides up to 4GB of addressable memory. The memory map is:


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

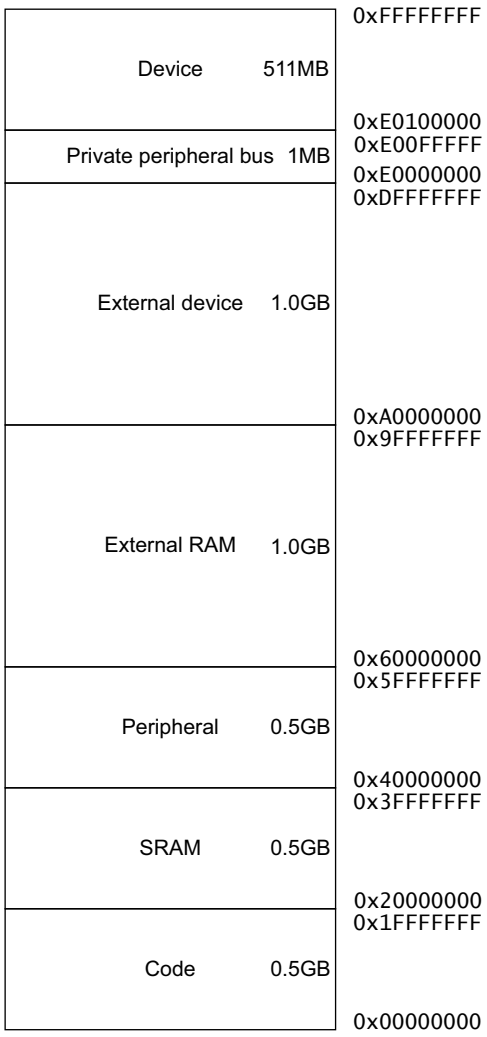


See Figure 6 for the LPC111x/LPC11Cxx specific implementation of the memory map. SRAM and code locations are different on the LPC111x/LPC11Cxx.

**Fig 98. Generic ARM Cortex-M0 memory map**

The processor reserves regions of the **Private peripheral bus** (PPB) address range for core peripheral registers, see Section 28–28.3.

#### 28.4.2.1 Memory regions, types and attributes

The memory map is split into regions. Each region has a defined memory type, and some regions have additional memory attributes. The memory type and attributes determine the behavior of accesses to the region.

The memory types are:

**Normal —** The processor can re-order transactions for efficiency, or perform speculative reads.

**Device —** The processor preserves transaction order relative to other transactions to Device or Strongly-ordered memory.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Strongly-ordered —** The processor preserves transaction order relative to all other transactions.

The different ordering requirements for Device and Strongly-ordered memory mean that the memory system can buffer a write to Device memory, but must not buffer a write to Strongly-ordered memory.

The additional memory attributes include.

**Execute Never (XN) —** Means the processor prevents instruction accesses. A HardFault exception is generated on executing an instruction fetched from an XN region of memory.

### 28.4.2.2 Memory system ordering of memory accesses

For most memory accesses caused by explicit memory access instructions, the memory system does not guarantee that the order in which the accesses complete matches the program order of the instructions, providing any re-ordering does not affect the behavior of the instruction sequence. Normally, if correct program execution depends on two memory accesses completing in program order, software must insert a memory barrier instruction between the memory access instructions, see Section 28–28.4.2.4.

However, the memory system does guarantee some ordering of accesses to Device and Strongly-ordered memory. For two memory access instructions A1 and A2, if A1 occurs before A2 in program order, the ordering of the memory accesses caused by two instructions is:

| A1 \ A2 | Normal access | Device access | | Strongly-ordered access |
|---|---|---|---|---|
| | | Non-shareable | Shareable | |
| Normal access | - | - | - | - |
| Device access, non-shareable | - | < | - | < |
| Device access, shareable | - | - | < | < |
| Strongly-ordered access | - | < | < | < |

**Fig 99. Memory ordering restrictions**

Where:

**- —** Means that the memory system does not guarantee the ordering of the accesses.

**< —** Means that accesses are observed in program order, that is, A1 is always observed before A2.

### 28.4.2.3 Behavior of memory accesses

The behavior of accesses to each region in the memory map is:


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 427. Memory access behavior**

| Address range | Memory region | Memory type[1] | XN[1] | Description |
|---|---|---|---|---|
| 0x00000000-0x1FFFFFFF | Code | Normal | - | Executable region for program code. You can also put data here. |
| 0x20000000-0x3FFFFFFF | SRAM | Normal | - | Executable region for data. You can also put code here. |
| 0x40000000-0x5FFFFFFF | Peripheral | Device | XN | External device memory. |
| 0x60000000-0x9FFFFFFF | External RAM | Normal | - | Executable region for data. |
| 0xA0000000-0xDFFFFFFF | External device | Device | XN | External device memory. |
| 0xE0000000-0xE00FFFFF | Private Peripheral Bus | Strongly-ordered | XN | This region includes the NVIC, System timer, and System Control Block. Only word accesses can be used in this region. |
| 0xE0100000-0xFFFFFFFF | Device | Device | XN | Vendor specific. |

[1] See Section 28–28.4.2.1 for more information.

The Code, SRAM, and external RAM regions can hold programs.

### 28.4.2.4 Software ordering of memory accesses

The order of instructions in the program flow does not always guarantee the order of the corresponding memory transactions. This is because:

- the processor can reorder some memory accesses to improve efficiency, providing this does not affect the behavior of the instruction sequence
- memory or devices in the memory map might have different wait states
- some memory accesses are buffered or speculative.

Section 28–28.4.2.2 describes the cases where the memory system guarantees the order of memory accesses. Otherwise, if the order of memory accesses is critical, software must include memory barrier instructions to force that ordering. The processor provides the following memory barrier instructions:

**DMB — The Data Memory Barrier** (DMB) instruction ensures that outstanding memory transactions complete before subsequent memory transactions. See Section 28–28.5.7.3.

**DSB — The Data Synchronization Barrier** (DSB) instruction ensures that outstanding memory transactions complete before subsequent instructions execute. See Section 28–28.5.7.4.

**ISB — The Instruction Synchronization Barrier** (ISB) ensures that the effect of all completed memory transactions is recognizable by subsequent instructions. See Section 28–28.5.7.5.

The following are examples of using memory barrier instructions:


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Vector table —** If the program changes an entry in the vector table, and then enables the corresponding exception, use a DMB instruction between the operations. This ensures that if the exception is taken immediately after being enabled the processor uses the new exception vector.

**Self-modifying code —** If a program contains self-modifying code, use an ISB instruction immediately after the code modification in the program. This ensures subsequent instruction execution uses the updated program.

**Memory map switching —** If the system contains a memory map switching mechanism, use a DSB instruction after switching the memory map. This ensures subsequent instruction execution uses the updated memory map.

Memory accesses to Strongly-ordered memory, such as the System Control Block, do not require the use of DMB instructions.

The processor preserves transaction order relative to all other transactions.

#### 28.4.2.5 Memory endianness

The processor views memory as a linear collection of bytes numbered in ascending order from zero. For example, bytes 0-3 hold the first stored word, and bytes 4-7 hold the second stored word. Section 28–28.4.2.5.1 describes how words of data are stored in memory.

##### 28.4.2.5.1 Little-endian format

In little-endian format, the processor stores the **least significant byte** (lsbyte) of a word at the lowest-numbered byte, and the **most significant byte** (msbyte) at the highest-numbered byte. For example:

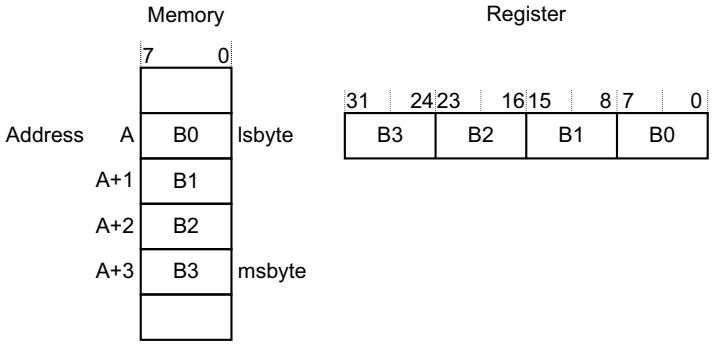


**Fig 100. Little-endian format**

### 28.4.3 Exception model

This section describes the exception model.

#### 28.4.3.1 Exception states

Each exception is in one of the following states:

**Inactive —** The exception is not active and not pending.

**Pending —** The exception is waiting to be serviced by the processor.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

An interrupt request from a peripheral or from software can change the state of the corresponding interrupt to pending.

**Active —** An exception that is being serviced by the processor but has not completed.

An exception handler can interrupt the execution of another exception handler. In this case both exceptions are in the active state.

**Active and pending —** The exception is being serviced by the processor and there is a pending exception from the same source.

### 28.4.3.2 Exception types

The exception types are:

**Remark:** See Section 28.1 for implementation of the NMI for specific parts.

**Reset —** Reset is invoked on power up or a warm reset. The exception model treats reset as a special form of exception. When reset is asserted, the operation of the processor stops, potentially at any point in an instruction. When reset is deasserted, execution restarts from the address provided by the reset entry in the vector table. Execution restarts in Thread mode.

**NMI —** A **NonMaskable Interrupt** (NMI) can be signalled by a peripheral or triggered by software. This is the highest priority exception other than reset. It is permanently enabled and has a fixed priority of –2. NMIs cannot be:

- masked or prevented from activation by any other exception
- preempted by any exception other than Reset.

**HardFault —** A HardFault is an exception that occurs because of an error during normal or exception processing. HardFaults have a fixed priority of -1, meaning they have higher priority than any exception with configurable priority.

**SVCall —** A **supervisor call** (SVC) is an exception that is triggered by the `SVC` instruction. In an OS environment, applications can use `SVC` instructions to access OS kernel functions and device drivers.

**PendSV —** PendSV is an interrupt-driven request for system-level service. In an OS environment, use PendSV for context switching when no other exception is active.

**SysTick —** A SysTick exception is an exception the system timer generates when it reaches zero. Software can also generate a SysTick exception. In an OS environment, the processor can use this exception as system tick.

**Interrupt (IRQ) —** An interrupt, or IRQ, is an exception signalled by a peripheral, or generated by a software request. All interrupts are asynchronous to instruction execution. In the system, peripherals use interrupts to communicate with the processor.

**Table 428. Properties of different exception types**

| Exception number[1] | IRQ number[1] | Exception type | Priority | Vector address[2] |
|---|---|---|---|---|
| 1 | - | Reset | -3, the highest | 0x00000004 |
| 2 | -14 | NMI | -2 | 0x00000008 |
| 3 | -13 | HardFault | -1 | 0x0000000C |
| 4-10 | - | Reserved | - | - |
| 11 | -5 | SVCall | Configurable[3] | 0x0000002C |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 428. Properties of different exception types**

| Exception number[1] | IRQ number[1] | Exception type | Priority | Vector address[2] |
|---|---|---|---|---|
| 12-13 | - | Reserved | - | - |
| 14 | -2 | PendSV | Configurable[3] | 0x00000038 |
| 15 | -1 | SysTick | Configurable[3] | 0x0000003C |
| 16 and above | 0 and above | Interrupt (IRQ) | Configurable[3] | 0x00000040 and above[4] |

[1] To simplify the software layer, the CMSIS only uses IRQ numbers and therefore uses negative values for exceptions other than interrupts. The IPSR returns the Exception number, see Table 28–423.

[2] See Section 28.4.3.4 for more information.

[3] See Section 28–28.6.2.6.

[4] Increasing in steps of 4.

For an asynchronous exception, other than reset, the processor can execute additional instructions between when the exception is triggered and when the processor enters the exception handler.

Privileged software can disable the exceptions that Table 28–428 shows as having configurable priority, see Section 28–28.6.2.3.

For more information about HardFaults, see Section 28–28.4.4.

### 28.4.3.3 Exception handlers

The processor handles exceptions using:

**Interrupt Service Routines (ISRs) —** Interrupts IRQ0 to IRQ31 are the exceptions handled by ISRs.

**Fault handler —** HardFault is the only exception handled by the fault handler.

**System handlers —** NMI, PendSV, SVCall SysTick, and HardFault are all system exceptions handled by system handlers.

### 28.4.3.4 Vector table

The vector table contains the reset value of the stack pointer, and the start addresses, also called exception vectors, for all exception handlers. Figure 28–101 shows the order of the exception vectors in the vector table. The least-significant bit of each vector must be 1, indicating that the exception handler is written in Thumb code.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

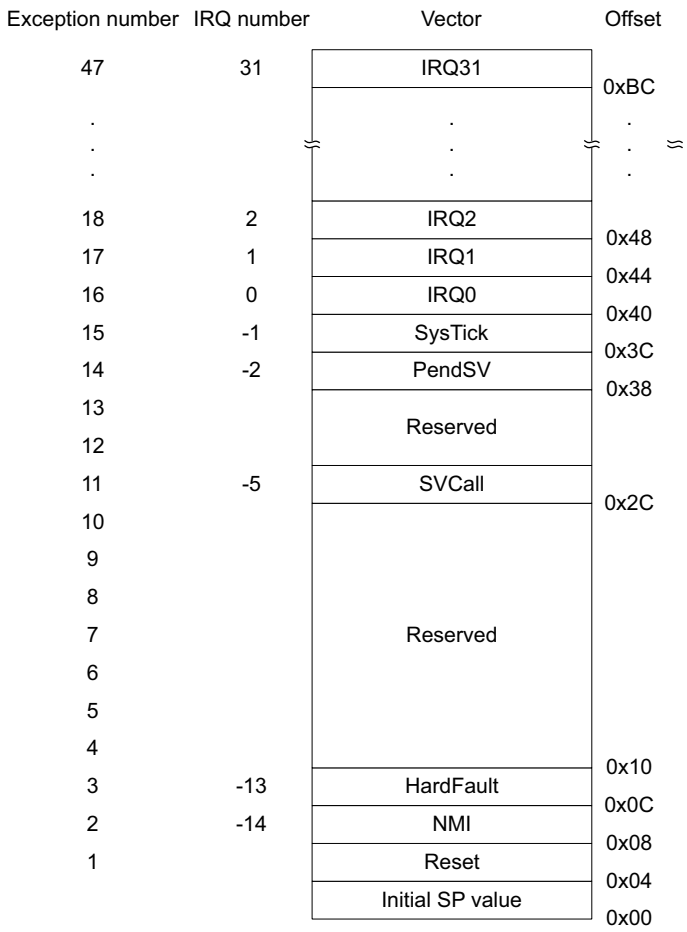


**Fig 101. Vector table**

The vector table is fixed at address 0x00000000.

### 28.4.3.5 Exception priorities

As Table 28–428 shows, all exceptions have an associated priority, with:

- a lower priority value indicating a higher priority
- configurable priorities for all exceptions except Reset, HardFault, and NMI.

If software does not configure any priorities, then all exceptions with a configurable priority have a priority of 0. For information about configuring exception priorities see

- Section 28–28.6.3.7
- Section 28–28.6.2.6.

**Remark:** Configurable priority values are in the range 0-3. The Reset, HardFault, and NMI exceptions, with fixed negative priority values, always have higher priority than any other exception.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Assigning a higher priority value to IRQ[0] and a lower priority value to IRQ[1] means that IRQ[1] has higher priority than IRQ[0]. If both IRQ[1] and IRQ[0] are asserted, IRQ[1] is processed before IRQ[0].

If multiple pending exceptions have the same priority, the pending exception with the lowest exception number takes precedence. For example, if both IRQ[0] and IRQ[1] are pending and have the same priority, then IRQ[0] is processed before IRQ[1].

When the processor is executing an exception handler, the exception handler is preempted if a higher priority exception occurs. If an exception occurs with the same priority as the exception being handled, the handler is not preempted, irrespective of the exception number. However, the status of the new interrupt changes to pending.

#### 28.4.3.6 Exception entry and return

Descriptions of exception handling use the following terms:

**Preemption —** When the processor is executing an exception handler, an exception can preempt the exception handler if its priority is higher than the priority of the exception being handled.

When one exception preempts another, the exceptions are called nested exceptions. See Section 28–28.4.3.6.1 for more information.

**Return —** This occurs when the exception handler is completed, and:

- there is no pending exception with sufficient priority to be serviced
- the completed exception handler was not handling a late-arriving exception.

The processor pops the stack and restores the processor state to the state it had before the interrupt occurred. See Section 28–28.4.3.6.2 for more information.

**Tail-chaining —** This mechanism speeds up exception servicing. On completion of an exception handler, if there is a pending exception that meets the requirements for exception entry, the stack pop is skipped and control transfers to the new exception handler.

**Late-arriving —** This mechanism speeds up preemption. If a higher priority exception occurs during state saving for a previous exception, the processor switches to handle the higher priority exception and initiates the vector fetch for that exception. State saving is not affected by late arrival because the state saved would be the same for both exceptions. On return from the exception handler of the late-arriving exception, the normal tail-chaining rules apply.

##### 28.4.3.6.1 Exception entry

Exception entry occurs when there is a pending exception with sufficient priority and either:

- the processor is in Thread mode
- the new exception is of higher priority than the exception being handled, in which case the new exception preempts the exception being handled.

When one exception preempts another, the exceptions are nested.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Sufficient priority means the exception has greater priority than any limit set by the mask register, see Section 28–28.4.1.3.6. An exception with less priority than this is pending but is not handled by the processor.

When the processor takes an exception, unless the exception is a tail-chained or a late-arriving exception, the processor pushes information onto the current stack. This operation is referred to as **stacking** and the structure of eight data words is referred to as a **stack frame**. The stack frame contains the following information:

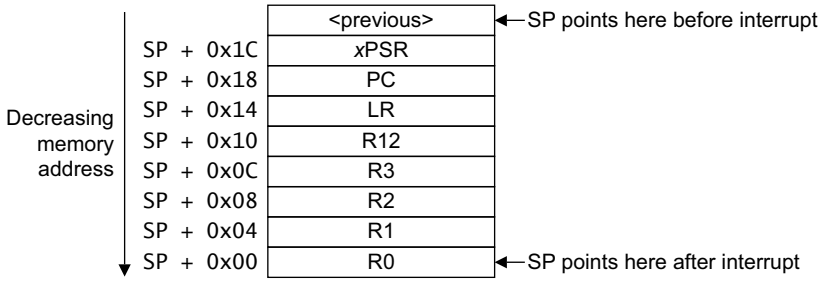


**Fig 102. Exception entry stack contents**

Immediately after stacking, the stack pointer indicates the lowest address in the stack frame. The stack frame is aligned to a double-word address.

The stack frame includes the return address. This is the address of the next instruction in the interrupted program. This value is restored to the PC at exception return so that the interrupted program resumes.

The processor performs a vector fetch that reads the exception handler start address from the vector table. When stacking is complete, the processor starts executing the exception handler. At the same time, the processor writes an EXC_RETURN value to the LR. This indicates which stack pointer corresponds to the stack frame and what operation mode the processor was in before the entry occurred.

If no higher priority exception occurs during exception entry, the processor starts executing the exception handler and automatically changes the status of the corresponding pending interrupt to active.

If another higher priority exception occurs during exception entry, the processor starts executing the exception handler for this exception and does not change the pending status of the earlier exception. This is the late arrival case.

#### 28.4.3.6.2 Exception return

Exception return occurs when the processor is in Handler mode and execution of one of the following instructions attempts to set the PC to an EXC_RETURN value:

- a `POP` instruction that loads the PC
- a `BX` instruction using any register.

The processor saves an EXC_RETURN value to the LR on exception entry. The exception mechanism relies on this value to detect when the processor has completed an exception handler. Bits[31:4] of an EXC_RETURN value are `0xFFFFFFF`. When the processor loads a value matching this pattern to the PC it detects that the operation is a


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

not a normal branch operation and, instead, that the exception is complete. Therefore, it starts the exception return sequence. Bits[3:0] of the EXC_RETURN value indicate the required return stack and processor mode, as Table 28–429 shows.

**Table 429. Exception return behavior**

| EXC_RETURN | Description |
|---|---|
| 0xFFFFFFF1 | Return to Handler mode.<br>Exception return gets state from the main stack.<br>Execution uses MSP after return. |
| 0xFFFFFFF9 | Return to Thread mode.<br>Exception return gets state from MSP.<br>Execution uses MSP after return. |
| 0xFFFFFFFD | Return to Thread mode.<br>Exception return gets state from PSP.<br>Execution uses PSP after return. |
| All other values | Reserved. |

### 28.4.4 Fault handling

Faults are a subset of exceptions, see Section 28–28.4.3. All faults result in the HardFault exception being taken or cause lockup if they occur in the NMI or HardFault handler. The faults are:

- execution of an SVC instruction at a priority equal or higher than SVCall
- execution of a BKPT instruction without a debugger attached
- a system-generated bus error on a load or store
- execution of an instruction from an XN memory address
- execution of an instruction from a location for which the system generates a bus fault
- a system-generated bus error on a vector fetch
- execution of an Undefined instruction
- execution of an instruction when not in Thumb-State as a result of the T-bit being previously cleared to 0
- an attempted load or store to an unaligned address.

**Remark:** Only Reset and NMI can preempt the fixed priority HardFault handler. A HardFault can preempt any exception other than Reset, NMI, or another hard fault.

#### 28.4.4.1 Lockup

The processor enters a lockup state if a fault occurs when executing the NMI or HardFault handlers, or if the system generates a bus error when unstacking the PSR on an exception return using the MSP. When the processor is in lockup state it does not execute any instructions. The processor remains in lockup state until one of the following occurs:

- it is reset
- a debugger halts it
- an NMI occurs and the current lockup is in the HardFault handler.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Remark:** If lockup state occurs in the NMI handler a subsequent NMI does not cause the processor to leave lockup state.

### 28.4.5 Power management

The Cortex-M0 processor sleep modes reduce power consumption:

- a sleep mode, that stops the processor clock
- a Deep-sleep mode.

The SLEEPDEEP bit of the SCR selects which sleep mode is used, see Section 28–28.6.3.5.

This section describes the mechanisms for entering sleep mode and the conditions for waking up from sleep mode.

#### 28.4.5.1 Entering sleep mode

This section describes the mechanisms software can use to put the processor into sleep mode.

The system can generate spurious wake-up events, for example a debug operation wakes up the processor. Therefore software must be able to put the processor back into sleep mode after such an event. A program might have an idle loop to put the processor back in to sleep mode.

##### 28.4.5.1.1 Wait for interrupt

The Wait For Interrupt instruction, `WFI`, causes immediate entry to sleep mode. When the processor executes a `WFI` instruction it stops executing instructions and enters sleep mode. See Section 28–28.5.7.12 for more information.

##### 28.4.5.1.2 Wait for event

**Remark:** The WFE instruction is not implemented on the LPC111x/LPC11Cxx.

The Wait For Event instruction, `WFE`, causes entry to sleep mode conditional on the value of a one-bit event register. When the processor executes a `WFE` instruction, it checks the value of the event register:

**0 —** The processor stops executing instructions and enters sleep mode

**1 —** The processor sets the register to zero and continues executing instructions without entering sleep mode.

See Section 28–28.5.7.11 for more information.

If the event register is 1, this indicates that the processor must not enter sleep mode on execution of a `WFE` instruction. Typically, this is because of the assertion of an external event, or because another processor in the system has executed a `SEV` instruction, see Section 28–28.5.7.9. Software cannot access this register directly.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

#### 28.4.5.1.3 Sleep-on-exit

If the SLEEPONEXIT bit of the SCR is set to 1, when the processor completes the execution of an exception handler and returns to Thread mode it immediately enters sleep mode. Use this mechanism in applications that only require the processor to run when an interrupt occurs.

### 28.4.5.2 Wake-up from sleep mode

The conditions for the processor to wake-up depend on the mechanism that caused it to enter sleep mode.

#### 28.4.5.2.1 Wake-up from WFI or sleep-on-exit

Normally, the processor wakes up only when it detects an exception with sufficient priority to cause exception entry.

Some embedded systems might have to execute system restore tasks after the processor wakes up, and before it executes an interrupt handler. To achieve this set the PRIMASK bit to 1. If an interrupt arrives that is enabled and has a higher priority than current exception priority, the processor wakes up but does not execute the interrupt handler until the processor sets PRIMASK to zero. For more information about PRIMASK, see Section 28–28.4.1.3.6.

#### 28.4.5.2.2 Wake-up from WFE

The processor wakes up if:

- it detects an exception with sufficient priority to cause exception entry
- in a multiprocessor system, another processor in the system executes a SEV instruction.

In addition, if the SEVONPEND bit in the SCR is set to 1, any new pending interrupt triggers an event and wakes up the processor, even if the interrupt is disabled or has insufficient priority to cause exception entry. For more information about the SCR see Section 28–28.6.3.5.

### 28.4.5.3 Power management programming hints

ISO/IEC C cannot directly generate the WFI, WFE, and SEV instructions. The CMSIS provides the following intrinsic functions for these instructions:

```
void __WFE(void) // Wait for Event

void __WFI(void) // Wait for Interrupt

void __SEV(void) // Send Event
```

## 28.5 Instruction set

### 28.5.1 Instruction set summary

The processor implements a version of the Thumb instruction set. Table 430 lists the supported instructions.

**Remark:** In Table 430


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

- angle brackets, <>, enclose alternative forms of the operand
- braces, {}, enclose optional operands and mnemonic parts
- the Operands column is not exhaustive.

For more information on the instructions and operands, see the instruction descriptions.

**Table 430. Cortex-M0 instructions**

| Mnemonic | Operands | Brief description | Flags | Reference |
|---|---|---|---|---|
| ADCS | *{Rd,} Rn, Rm* | Add with Carry | N,Z,C,V | Section 28–28.5.5.1 |
| ADD{S} | *{Rd,} Rn, <Rm\|#imm>* | Add | N,Z,C,V | Section 28–28.5.5.1 |
| ADR | *Rd, label* | PC-relative Address to Register | - | Section 28–28.5.4.1 |
| ANDS | *{Rd,} Rn, Rm* | Bitwise AND | N,Z | Section 28–28.5.5.1 |
| ASRS | *{Rd,} Rm, <Rs\|#imm>* | Arithmetic Shift Right | N,Z,C | Section 28–28.5.5.3 |
| B{cc} | *label* | Branch {conditionally} | - | Section 28–28.5.6.1 |
| BICS | *{Rd,} Rn, Rm* | Bit Clear | N,Z | Section 28–28.5.5.2 |
| BKPT | *#imm* | Breakpoint | - | Section 28–28.5.7.1 |
| BL | *label* | Branch with Link | - | Section 28–28.5.6.1 |
| BLX | *Rm* | Branch indirect with Link | - | Section 28–28.5.6.1 |
| BX | *Rm* | Branch indirect | - | Section 28–28.5.6.1 |
| CMN | *Rn, Rm* | Compare Negative | N,Z,C,V | Section 28–28.5.5.4 |
| CMP | *Rn, <Rm\|#imm>* | Compare | N,Z,C,V | Section 28–28.5.5.4 |
| CPSID | *i* | Change Processor State, Disable Interrupts | - | Section 28–28.5.7.2 |
| CPSIE | *i* | Change Processor State, Enable Interrupts | - | Section 28–28.5.7.2 |
| DMB | - | Data Memory Barrier | - | Section 28–28.5.7.3 |
| DSB | - | Data Synchronization Barrier | - | Section 28–28.5.7.4 |
| EORS | *{Rd,} Rn, Rm* | Exclusive OR | N,Z | Section 28–28.5.5.2 |
| ISB | - | Instruction Synchronization Barrier | - | Section 28–28.5.7.5 |
| LDM | *Rn{!}, reglist* | Load Multiple registers, increment after | - | Section 28–28.5.4.5 |
| LDR | *Rt, label* | Load Register from PC-relative address | - | Section 28–28.5.4 |
| LDR | *Rt, [Rn, <Rm\|#imm>]* | Load Register with word | - | Section 28–28.5.4 |
| LDRB | *Rt, [Rn, <Rm\|#imm>]* | Load Register with byte | - | Section 28–28.5.4 |
| LDRH | *Rt, [Rn, <Rm\|#imm>]* | Load Register with halfword | - | Section 28–28.5.4 |
| LDRSB | *Rt, [Rn, <Rm\|#imm>]* | Load Register with signed byte | - | Section 28–28.5.4 |
| LDRSH | *Rt, [Rn, <Rm\|#imm>]* | Load Register with signed halfword | - | Section 28–28.5.4 |
| LSLS | *{Rd,} Rn, <Rs\|#imm>* | Logical Shift Left | N,Z,C | Section 28–28.5.5.3 |
| U | *{Rd,} Rn, <Rs\|#imm>* | Logical Shift Right | N,Z,C | Section 28–28.5.5.3 |
| MOV{S} | *Rd, Rm* | Move | N,Z | Section 28–28.5.5.5 |
| MRS | *Rd, spec_reg* | Move to general register from special register | - | Section 28–28.5.7.6 |
| MSR | *spec_reg, Rm* | Move to special register from general register | N,Z,C,V | Section 28–28.5.7.7 |
| MULS | *Rd, Rn, Rm* | Multiply, 32-bit result | N,Z | Section 28–28.5.5.6 |
| MVNS | *Rd, Rm* | Bitwise NOT | N,Z | Section 28–28.5.5.5 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 430. Cortex-M0 instructions**

| Mnemonic | Operands | Brief description | Flags | Reference |
|---|---|---|---|---|
| NOP | - | No Operation | - | Section 28–28.5.7.8 |
| ORRS | *{Rd,} Rn, Rm* | Logical OR | N,Z | Section 28–28.5.5.2 |
| POP | *reglist* | Pop registers from stack | - | Section 28–28.5.4.6 |
| PUSH | *reglist* | Push registers onto stack | - | Section 28–28.5.4.6 |
| REV | *Rd, Rm* | Byte-Reverse word | - | Section 28–28.5.5.7 |
| REV16 | *Rd, Rm* | Byte-Reverse packed halfwords | - | Section 28–28.5.5.7 |
| REVSH | *Rd, Rm* | Byte-Reverse signed halfword | - | Section 28–28.5.5.7 |
| RORS | *{Rd,} Rn, Rs* | Rotate Right | N,Z,C | Section 28–28.5.5.3 |
| RSBS | *{Rd,} Rn, #0* | Reverse Subtract | N,Z,C,V | Section 28–28.5.5.1 |
| SBCS | *{Rd,} Rn, Rm* | Subtract with Carry | N,Z,C,V | Section 28–28.5.5.1 |
| SEV | - | Send Event | - | Section 28–28.5.7.9 |
| STM | *Rn!, reglist* | Store Multiple registers, increment after | - | Section 28–28.5.4.5 |
| STR | *Rt, [Rn, <Rm\|#imm>]* | Store Register as word | - | Section 28–28.5.4 |
| STRB | *Rt, [Rn, <Rm\|#imm>]* | Store Register as byte | - | Section 28–28.5.4 |
| STRH | *Rt, [Rn, <Rm\|#imm>]* | Store Register as halfword | - | Section 28–28.5.4 |
| SUB{S} | *{Rd,} Rn, <Rm\|#imm>* | Subtract | N,Z,C,V | Section 28–28.5.5.1 |
| SVC | *#imm* | Supervisor Call | - | Section 28–28.5.7.10 |
| SXTB | *Rd, Rm* | Sign extend byte | - | Section 28–28.5.5.8 |
| SXTH | *Rd, Rm* | Sign extend halfword | - | Section 28–28.5.5.8 |
| TST | *Rn, Rm* | Logical AND based test | N,Z | Section 28–28.5.5.9 |
| UXTB | *Rd, Rm* | Zero extend a byte | - | Section 28–28.5.5.8 |
| UXTH | *Rd, Rm* | Zero extend a halfword | - | Section 28–28.5.5.8 |
| WFE | - | Wait For Event | - | Section 28–28.5.7.11 |
| WFI | - | Wait For Interrupt | - | Section 28–28.5.7.12 |

### 28.5.2 Intrinsic functions

ISO/IEC C code cannot directly access some Cortex-M0 instructions. This section describes intrinsic functions that can generate these instructions, provided by the CMSIS and that might be provided by a C compiler. If a C compiler does not support an appropriate intrinsic function, you might have to use inline assembler to access the relevant instruction.

The CMSIS provides the following intrinsic functions to generate instructions that ISO/IEC C code cannot directly access:

**Table 431. CMSIS intrinsic functions to generate some Cortex-M0 instructions**

| Instruction | CMSIS intrinsic function |
|---|---|
| CPSIE i | void __enable_irq(void) |
| CPSID i | void __disable_irq(void) |
| ISB | void __ISB(void) |
| DSB | void __DSB(void) |
| DMB | void __DMB(void) |
| NOP | void __NOP(void) |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 431. CMSIS intrinsic functions to generate some Cortex-M0 instructions**

| Instruction | CMSIS intrinsic function |
|---|---|
| REV | uint32_t __REV(uint32_t int value) |
| REV16 | uint32_t __REV16(uint32_t int value) |
| REVSH | uint32_t __REVSH(uint32_t int value) |
| SEV | void __SEV(void) |
| WFE | void __WFE(void) |
| WFI | void __WFI(void) |

The CMSIS also provides a number of functions for accessing the special registers using MRS and MSR instructions:

**Table 432. CMSIS intrinsic functions to access the special registers**

| Special register | Access | CMSIS function |
|---|---|---|
| PRIMASK | Read | uint32_t __get_PRIMASK (void) |
| | Write | void __set_PRIMASK (uint32_t value) |
| CONTROL | Read | uint32_t __get_CONTROL (void) |
| | Write | void __set_CONTROL (uint32_t value) |
| MSP | Read | uint32_t __get_MSP (void) |
| | Write | void __set_MSP (uint32_t TopOfMainStack) |
| PSP | Read | uint32_t __get_PSP (void) |
| | Write | void __set_PSP (uint32_t TopOfProcStack) |

### 28.5.3 About the instruction descriptions

The following sections give more information about using the instructions:

- Section 28.5.3.1 “Operands”
- Section 28.5.3.2 “Restrictions when using PC or SP”
- Section 28.5.3.3 “Shift Operations”
- Section 28.5.3.4 “Address alignment”
- Section 28.5.3.5 “PC-relative expressions”
- Section 28.5.3.6 “Conditional execution”.

#### 28.5.3.1 Operands

An instruction operand can be an ARM register, a constant, or another instruction-specific parameter. Instructions act on the operands and often store the result in a destination register. When there is a destination register in the instruction, it is usually specified before the other operands.

#### 28.5.3.2 Restrictions when using PC or SP

Many instructions are unable to use, or have restrictions on whether you can use, the **Program Counter** (PC) or **Stack Pointer** (SP) for the operands or destination register. See instruction descriptions for more information.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Remark:** When you update the PC with a BX, BLX, or POP instruction, bit[0] of any address must be 1 for correct execution. This is because this bit indicates the destination instruction set, and the Cortex-M0 processor only supports Thumb instructions. When a BL or BLX instruction writes the value of bit[0] into the LR it is automatically assigned the value 1.

#### 28.5.3.3 Shift Operations

Register shift operations move the bits in a register left or right by a specified number of bits, the **shift length**. Register shift can be performed directly by the instructions ASR, LSR, LSL, and ROR and the result is written to a destination register.The permitted shift lengths depend on the shift type and the instruction, see the individual instruction description. If the shift length is 0, no shift occurs. Register shift operations update the carry flag except when the specified shift length is 0. The following sub-sections describe the various shift operations and how they affect the carry flag. In these descriptions, *Rm* is the register containing the value to be shifted, and *n* is the shift length.

##### 28.5.3.3.1 ASR

Arithmetic shift right by *n* bits moves the left-hand 32 -*n* bits of the register *Rm*, to the right by *n* places, into the right-hand 32 -*n* bits of the result, and it copies the original bit[31] of the register into the left-hand *n* bits of the result. See Figure 28–103.

You can use the ASR operation to divide the signed value in the register *Rm* by $2^n$, with the result being rounded towards negative-infinity.

When the instruction is ASRS the carry flag is updated to the last bit shifted out, bit[*n*-1], of the register *Rm*.

**Remark:**

- If *n* is 32 or more, then all the bits in the result are set to the value of bit[31] of *Rm*.
- If *n* is 32 or more and the carry flag is updated, it is updated to the value of bit[31] of *Rm*.

**Fig 103. ASR #3**

##### 28.5.3.3.2 LSR

Logical shift right by *n* bits moves the left-hand 32-*n* bits of the register *Rm*, to the right by *n* places, into the right-hand 32 -*n* bits of the result, and it sets the left-hand *n* bits of the result to 0. See Figure 104.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

You can use the LSR operation to divide the value in the register *Rm* by $2^n$, if the value is regarded as an unsigned integer.

When the instruction is LSRS, the carry flag is updated to the last bit shifted out, bit[*n*-1], of the register *Rm*.

**Remark:**

- If *n* is 32 or more, then all the bits in the result are cleared to 0.
- If *n* is 33 or more and the carry flag is updated, it is updated to 0.

**Fig 104. LSR #3**

#### 28.5.3.3.3 LSL

Logical shift left by *n* bits moves the right-hand 32-*n* bits of the register *Rm*, to the left by *n* places, into the left-hand 32-*n* bits of the result, and it sets the right-hand *n* bits of the result to 0. See Figure 105.

You can use the LSL operation to multiply the value in the register *Rm* by $2^n$, if the value is regarded as an unsigned integer or a two's complement signed integer. Overflow can occur without warning.

When the instruction is LSLS the carry flag is updated to the last bit shifted out, bit[32-*n*], of the register *Rm*. These instructions do not affect the carry flag when used with LSL #0.

**Remark:**

- If *n* is 32 or more, then all the bits in the result are cleared to 0.
- If *n* is 33 or more and the carry flag is updated, it is updated to 0.

**Fig 105. LSL #3**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

#### 28.5.3.3.4 ROR

Rotate right by *n* bits moves the left-hand 32-*n* bits of the register *Rm*, to the right by *n* places, into the right-hand 32-*n* bits of the result, and it moves the right-hand *n* bits of the register into the left-hand *n* bits of the result. See Figure 28–106.

When the instruction is RORS the carry flag is updated to the last bit rotation, bit[*n*-1], of the register *Rm*.

**Remark:**

- If *n* is 32, then the value of the result is same as the value in *Rm*, and if the carry flag is updated, it is updated to bit[31] of *Rm*.
- ROR

  with shift length, *n*, greater than 32 is the same as

  ROR

  with shift length *n*-32.

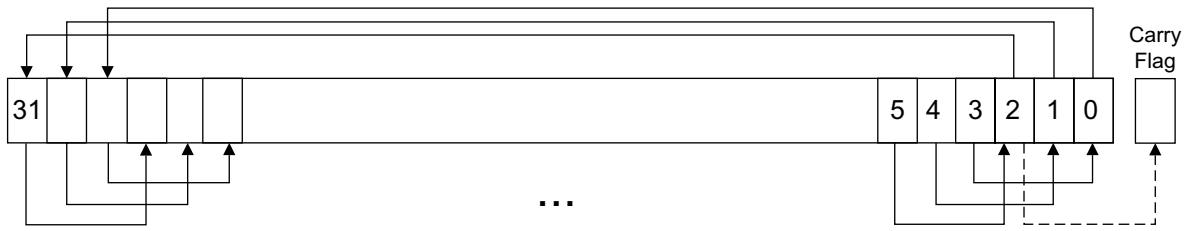


Fig 106. ROR #3

### 28.5.3.4 Address alignment

An aligned access is an operation where a word-aligned address is used for a word, or multiple word access, or where a halfword-aligned address is used for a halfword access. Byte accesses are always aligned.

There is no support for unaligned accesses on the Cortex-M0 processor. Any attempt to perform an unaligned memory access operation results in a HardFault exception.

### 28.5.3.5 PC-relative expressions

A PC-relative expression or **label** is a symbol that represents the address of an instruction or literal data. It is represented in the instruction as the PC value plus or minus a numeric offset. The assembler calculates the required offset from the label and the address of the current instruction. If the offset is too big, the assembler produces an error.

**Remark:**

- For most instructions, the value of the PC is the address of the current instruction plus 4 bytes.
- Your assembler might permit other syntaxes for PC-relative expressions, such as a label plus or minus a number, or an expression of the form [PC, #*imm*].


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

#### 28.5.3.6 Conditional execution

Most data processing instructions update the condition flags in the **Application Program Status Register** (APSR) according to the result of the operation, see Section . Some instructions update all flags, and some only update a subset. If a flag is not updated, the original value is preserved. See the instruction descriptions for the flags they affect.

You can execute a conditional branch instruction, based on the condition flags set in another instruction, either:

- immediately after the instruction that updated the flags
- after any number of intervening instructions that have not updated the flags.

On the Cortex-M0 processor, conditional execution is available by using conditional branches.

This section describes:

- Section 28.5.3.6.1 “The condition flags”
- Section 28.5.3.6.2 “Condition code suffixes”.

##### 28.5.3.6.1 The condition flags

The APSR contains the following condition flags:

**N —** Set to 1 when the result of the operation was negative, cleared to 0 otherwise.

**Z —** Set to 1 when the result of the operation was zero, cleared to 0 otherwise.

**C —** Set to 1 when the operation resulted in a carry, cleared to 0 otherwise.

**V —** Set to 1 when the operation caused overflow, cleared to 0 otherwise.

For more information about the APSR see Section 28–28.4.1.3.5.

A carry occurs:

- if the result of an addition is greater than or equal to $2^{32}$
- if the result of a subtraction is positive or zero
- as the result of a shift or rotate instruction.

Overflow occurs when the sign of the result, in bit[31], does not match the sign of the result had the operation been performed at infinite precision, for example:

- if adding two negative values results in a positive value
- if adding two positive values results in a negative value
- if subtracting a positive value from a negative value generates a positive value
- if subtracting a negative value from a positive value generates a negative value.

The Compare operations are identical to subtracting, for CMP, or adding, for CMN, except that the result is discarded. See the instruction descriptions for more information.

##### 28.5.3.6.2 Condition code suffixes

Conditional branch is shown in syntax descriptions as B{*cond*}. A branch instruction with a condition code is only taken if the condition code flags in the APSR meet the specified condition, otherwise the branch instruction is ignored.  shows the condition codes to use.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 433 also shows the relationship between condition code suffixes and the N, Z, C, and V flags.

**Table 433. Condition code suffixes**

| Suffix | Flags | Meaning |
|---|---|---|
| EQ | Z = 1 | Equal, last flag setting result was zero |
| NE | Z = 0 | Not equal, last flag setting result was non-zero |
| CS or HS | C = 1 | Higher or same, unsigned |
| CC or LO | C = 0 | Lower, unsigned |
| MI | N = 1 | Negative |
| PL | N = 0 | Positive or zero |
| VS | V = 1 | Overflow |
| VC | V = 0 | No overflow |
| HI | C = 1 and Z = 0 | Higher, unsigned |
| LS | C = 0 or Z = 1 | Lower or same, unsigned |
| GE | N = V | Greater than or equal, signed |
| LT | N != V | Less than, signed |
| GT | Z = 0 and N = V | Greater than, signed |
| LE | Z = 1 and N != V | Less than or equal, signed |
| AL | Can have any value | Always. This is the default when no suffix is specified. |

### 28.5.4 Memory access instructions

Table 434 shows the memory access instructions:

**Table 434. Access instructions**

| Mnemonic | Brief description | See |
|---|---|---|
| LDR{type} | Load Register using register offset | Section 28–28.5.4.3 |
| LDR | Load Register from PC-relative address | Section 28–28.5.4.4 |
| POP | Pop registers from stack | Section 28–28.5.4.6 |
| PUSH | Push registers onto stack | Section 28–28.5.4.6 |
| STM | Store Multiple registers | Section 28–28.5.4.5 |
| STR{type} | Store Register using immediate offset | Section 28–28.5.4.2 |
| STR{type} | Store Register using register offset | Section 28–28.5.4.3 |

#### 28.5.4.1 ADR

Generates a PC-relative address.

##### 28.5.4.1.1 Syntax

ADR *Rd*, *label*


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

where:

*Rd* is the destination register.

*label* is a PC-relative expression. See Section 28–28.5.3.5.

#### 28.5.4.1.2 Operation

ADR generates an address by adding an immediate value to the PC, and writes the result to the destination register.

ADR facilitates the generation of position-independent code, because the address is PC-relative.

If you use ADR to generate a target address for a BX or BLX instruction, you must ensure that bit[0] of the address you generate is set to 1 for correct execution.

#### 28.5.4.1.3 Restrictions

In this instruction *Rd* must specify R0-R7. The data-value addressed must be word aligned and within 1020 bytes of the current PC.

#### 28.5.4.1.4 Condition flags

This instruction does not change the flags.

#### 28.5.4.1.5 Examples

```
ADR    R1, TextMessage   ; Write address value of a location labelled as
                         ; TextMessage to R1

ADR    R3, [PC,#996]     ; Set R3 to value of PC + 996.
```

### 28.5.4.2 LDR and STR, immediate offset

Load and Store with immediate offset.

#### 28.5.4.2.1 Syntax

LDR *Rt*, [<*Rn* | SP> {, #*imm*}]

LDR<B|H> *Rt*, [*Rn* {, #*imm*}]

STR *Rt*, [<*Rn* | SP>, {,#*imm*}]

STR<B|H> *Rt*, [*Rn* {,#*imm*}]

where:

*Rt is the register to load or store.*

*Rn is the register on which the memory address is based.*

*imm* is an offset from *Rn*. If *imm* is omitted, it is assumed to be zero.

#### 28.5.4.2.2 Operation

LDR, LDRB and LDRH instructions load the register specified by *Rt* with either a word, byte or halfword data value from memory. Sizes less than word are zero extended to 32-bits before being written to the register specified by *Rt*.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

STR, STRB and STRH instructions store the word, least-significant byte or lower halfword contained in the single register specified by *Rt* in to memory. The memory address to load from or store to is the sum of the value in the register specified by either *Rn* or SP and the immediate value *imm*.

#### 28.5.4.2.3 Restrictions

In these instructions:

- *Rt* and *Rn* must only specify R0-R7.
- *imm* must be between:
  - 0 and 1020 and an integer multiple of four for LDR and STR using SP as the base register
  - 0 and 124 and an integer multiple of four for LDR and STR using R0-R7 as the base register
  - 0 and 62 and an integer multiple of two for LDRH and STRH
  - 0 and 31 for LDRB and STRB.
- The computed address must be divisible by the number of bytes in the transaction, see Section 28–28.5.3.4.

#### 28.5.4.2.4 Condition flags

These instructions do not change the flags.

#### 28.5.4.2.5 Examples

```
LDR     R4, [R7             ; Loads R4 from the address in R7.
    STR     R2, [R0,#const-struc]  ; const-struc is an expression evaluating
                                   ; to a constant in the range 0-1020.
```

### 28.5.4.3 LDR and STR, register offset

Load and Store with register offset.

#### 28.5.4.3.1 Syntax

LDR *Rt*, [*Rn*, *Rm*]

LDR<B|H> *Rt*, [*Rn*, *Rm*]

LDR<SB|SH> *Rt*, [*Rn*, *Rm*]

STR *Rt*, [*Rn*, *Rm*]

STR<B|H> *Rt*, [*Rn*, *Rm*]

where:

*Rt* is the register to load or store.

*Rn* is the register on which the memory address is based.

*Rm* is a register containing a value to be used as the offset.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

#### 28.5.4.3.2 Operation

LDR, LDRB, U, LDRSB and LDRSH load the register specified by *Rt* with either a word, zero extended byte, zero extended halfword, sign extended byte or sign extended halfword value from memory.

STR, STRB and STRH store the word, least-significant byte or lower halfword contained in the single register specified by *Rt* into memory.

The memory address to load from or store to is the sum of the values in the registers specified by *Rn* and *Rm*.

#### 28.5.4.3.3 Restrictions

In these instructions:

- *Rt*, *Rn*, and *Rm* must only specify R0-R7.
- the computed memory address must be divisible by the number of bytes in the load or store, see Section 28–28.5.3.4.

#### 28.5.4.3.4 Condition flags

These instructions do not change the flags.

#### 28.5.4.3.5 Examples

```
STR    R0, [R5, R1]        ; Store value of R0 into an address equal to
                           ; sum of R5 and R1

LDRSH  R1, [R2, R3]        ; Load a halfword from the memory address
                           ; specified by (R2 + R3), sign extend to 32-bits

                           ; and write to R1.
```

### 28.5.4.4 LDR, PC-relative

Load register (literal) from memory.

#### 28.5.4.4.1 Syntax

LDR *Rt*, *label*

where:

*Rt* is the register to load.

*label* is a PC-relative expression. See Section 28–28.5.3.5.

#### 28.5.4.4.2 Operation

Loads the register specified by *Rt* from the word in memory specified by *label*.

#### 28.5.4.4.3 Restrictions

In these instructions, *label* must be within 1020 bytes of the current PC and word aligned.

#### 28.5.4.4.4 Condition flags

These instructions do not change the flags.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

#### 28.5.4.4.5 Examples

```
LDR    R0, LookUpTable   ; Load R0 with a word of data from an address
                         ; labelled as LookUpTable.

LDR    R3, [PC, #100]    ; Load R3 with memory word at (PC + 100).
```

### 28.5.4.5 LDM and STM

Load and Store Multiple registers.

#### 28.5.4.5.1 Syntax

LDM *Rn*{!}, reglist

STM *Rn*!, reglist

where:

*Rn* is the register on which the memory addresses are based.

! writeback suffix.

*reglist* is a list of one or more registers to be loaded or stored, enclosed in braces. It can contain register ranges. It must be comma separated if it contains more than one register or register range, see Section 28–28.5.4.5.5.

LDMIA and LDMFD are synonyms for LDM. LDMIA refers to the base register being Incremented After each access. LDMFD refers to its use for popping data from Full Descending stacks.

STMIA and STMEA are synonyms for STM. STMIA refers to the base register being Incremented After each access. STMEA refers to its use for pushing data onto Empty Ascending stacks.

#### 28.5.4.5.2 Operation

LDM instructions load the registers in *reglist* with word values from memory addresses based on *Rn*.

STM instructions store the word values in the registers in *reglist* to memory addresses based on *Rn*.

The memory addresses used for the accesses are at 4-byte intervals ranging from the value in the register specified by *Rn* to the value in the register specified by *Rn* + 4 * (*n*-1), where *n* is the number of registers in *reglist*. The accesses happens in order of increasing register numbers, with the lowest numbered register using the lowest memory address and the highest number register using the highest memory address. If the writeback suffix is specified, the value in the register specified by *Rn* + 4 **n* is written back to the register specified by *Rn*.

#### 28.5.4.5.3 Restrictions

In these instructions:

- *reglist* and *Rn* are limited to R0-R7.
- the writeback suffix must always be used unless the instruction is an LDM where reglist also contains *Rn*, in which case the writeback suffix must not be used.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

- the value in the register specified by *Rn* must be word aligned. See Section 28–28.5.3.4 for more information.
- for STM, if *Rn* appears in *reglist*, then it must be the first register in the list.

#### 28.5.4.5.4 Condition flags

These instructions do not change the flags.

#### 28.5.4.5.5 Examples

```
LDM     R0,{R0,R3,R4}      ; LDMIA is a synonym for LDM
        STMIA   R1!,{R2-R4,R6}
```

#### 28.5.4.5.6 Incorrect examples

```
STM     R5!,{R4,R5,R6} ; Value stored for R5 is unpredictable
        LDM     R2,{}          ; There must be at least one register in the list
```

### 28.5.4.6 PUSH and POP

Push registers onto, and pop registers off a full-descending stack.

#### 28.5.4.6.1 Syntax

PUSH *reglist*

POP *reglist*

where:

*reglist* is a non-empty list of registers, enclosed in braces. It can contain register ranges. It must be comma separated if it contains more than one register or register range.

#### 28.5.4.6.2 Operation

PUSH stores registers on the stack, with the lowest numbered register using the lowest memory address and the highest numbered register using the highest memory address.

POP loads registers from the stack, with the lowest numbered register using the lowest memory address and the highest numbered register using the highest memory address.

PUSH uses the value in the SP register minus four as the highest memory address,

POP uses the value in the SP register as the lowest memory address, implementing a full-descending stack. On completion,

PUSH updates the SP register to point to the location of the lowest store value,

POP updates the SP register to point to the location above the highest location loaded.

If a POP instruction includes PC in its *reglist*, a branch to this location is performed when the POP instruction has completed. Bit[0] of the value read for the PC is used to update the APSR T-bit. This bit must be 1 to ensure correct operation.

#### 28.5.4.6.3 Restrictions

In these instructions:

- *reglist* must use only R0-R7.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

- The exception is LR for a PUSH and PC for a POP.

#### 28.5.4.6.4 Condition flags

These instructions do not change the flags.

#### 28.5.4.6.5 Examples

```
PUSH   {R0,R4-R7}     ; Push R0,R4,R5,R6,R7 onto the stack
       PUSH   {R2,LR}        ; Push R2 and the link-register onto the stack
       POP    {R0,R6,PC}     ; Pop r0,r6 and PC from the stack, then branch to
                             ; the new PC.
```

### 28.5.5 General data processing instructions

Table 435 shows the data processing instructions:

**Table 435. Data processing instructions**

| Mnemonic | Brief description | See |
|---|---|---|
| ADCS | Add with Carry | Section 28–28.5.5.1 |
| ADD{S} | Add | Section 28–28.5.5.1 |
| ANDS | Logical AND | Section 28–28.5.5.2 |
| ASRS | Arithmetic Shift Right | Section 28–28.5.5.3 |
| BICS | Bit Clear | Section 28–28.5.5.2 |
| CMN | Compare Negative | Section 28–28.5.5.4 |
| CMP | Compare | Section 28–28.5.5.4 |
| EORS | Exclusive OR | Section 28–28.5.5.2 |
| LSLS | Logical Shift Left | Section 28–28.5.5.3 |
| LSRS | Logical Shift Right | Section 28–28.5.5.3 |
| MOV{S} | Move | Section 28–28.5.5.5 |
| MULS | Multiply | Section 28–28.5.5.6 |
| MVNS | Move NOT | Section 28–28.5.5.5 |
| ORRS | Logical OR | Section 28–28.5.5.2 |
| REV | Reverse byte order in a word | Section 28–28.5.5.7 |
| REV16 | Reverse byte order in each halfword | Section 28–28.5.5.7 |
| REVSH | Reverse byte order in bottom halfword and sign extend | Section 28–28.5.5.7 |
| RORS | Rotate Right | Section 28–28.5.5.3 |
| RSBS | Reverse Subtract | Section 28–28.5.5.1 |
| SBCS | Subtract with Carry | Section 28–28.5.5.1 |
| SUBS | Subtract | Section 28–28.5.5.1 |
| SXTB | Sign extend a byte | Section 28–28.5.5.8 |
| SXTH | Sign extend a halfword | Section 28–28.5.5.8 |
| UXTB | Zero extend a byte | Section 28–28.5.5.8 |
| UXTH | Zero extend a halfword | Section 28–28.5.5.8 |
| TST | Test | Section 28–28.5.5.9 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

#### 28.5.5.1 ADC, ADD, RSB, SBC, and SUB

Add with carry, Add, Reverse Subtract, Subtract with carry, and Subtract.

##### 28.5.5.1.1 Syntax

ADCS {*Rd*,} *Rn*, *Rm*

ADD{S} {*Rd*,} *Rn*, *<Rm|#imm>*

RSBS {*Rd*,} *Rn*, *Rm*, *#0*

SBCS {*Rd*,} *Rn*, *Rm*

SUB{S} {*Rd*,} *Rn*,

*<Rm|#imm>*

Where:

S causes an ADD or SUB instruction to update flags

*Rd* specifies the result register

*Rn* specifies the first source register

*Rm* specifies the second source register

*imm* specifies a constant immediate value.

When the optional *Rd* register specifier is omitted, it is assumed to take the same value as *Rn*, for example ADDS R1,R2 is identical to ADDS R1,R1,R2.

##### 28.5.5.1.2 Operation

The ADCS instruction adds the value in *Rn* to the value in *Rm*, adding a further one if the carry flag is set, places the result in the register specified by *Rd* and updates the N, Z, C, and V flags.

The ADD instruction adds the value in *Rn* to the value in *Rm* or an immediate value specified by *imm* and places the result in the register specified by *Rd*.

The ADDS instruction performs the same operation as ADD and also updates the N, Z, C and V flags.

The RSBS instruction subtracts the value in *Rn* from zero, producing the arithmetic negative of the value, and places the result in the register specified by Rd and updates the N, Z, C and V flags.

The SBCS instruction subtracts the value of *Rm* from the value in *Rn*, deducts a further one if the carry flag is set. It places the result in the register specified by Rd and updates the N, Z, C and V flags.

The SUB instruction subtracts the value in *Rm* or the immediate specified by *imm*. It places the result in the register specified by *Rd*.

The SUBS instruction performs the same operation as SUB and also updates the N, Z, C and V flags.

Use ADC and SBC to synthesize multiword arithmetic, see Section 28.5.5.1.4.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

See also Section 28–28.5.4.1.

#### 28.5.5.1.3 Restrictions

Table 436 lists the legal combinations of register specifiers and immediate values that can be used with each instruction.

**Table 436. ADC, ADD, RSB, SBC and SUB operand restrictions**

| Instruction | Rd | Rn | Rm | imm | Restrictions |
|---|---|---|---|---|---|
| ADCS | R0-R7 | R0-R7 | R0-R7 | - | *Rd* and *Rn* must specify the same register. |
| ADD | R0-R15 | R0-R15 | R0-PC | - | *Rd* and *Rn* must specify the same register.<br>*Rn* and *Rm* must not both specify PC. |
| | R0-R7 | SP or PC | - | 0-1020 | Immediate value must be an integer multiple of four. |
| | SP | SP | - | 0-508 | Immediate value must be an integer multiple of four. |
| ADDS | R0-R7 | R0-R7 | - | 0-7 | - |
| | R0-R7 | R0-R7 | - | 0-255 | *Rd* and *Rn* must specify the same register. |
| | R0-R7 | R0-R7 | R0-R7 | - | - |
| RSBS | R0-R7 | R0-R7 | - | - | - |
| SBCS | R0-R7 | R0-R7 | R0-R7 | - | *Rd* and *Rn* must specify the same register. |
| SUB | SP | SP | - | 0-508 | Immediate value must be an integer multiple of four. |
| SUBS | R0-R7 | R0-R7 | - | 0-7 | - |
| | R0-R7 | R0-R7 | - | 0-255 | Rd and *Rn* must specify the same register. |
| | R0-R7 | R0-R7 | R0-R7 | - | - |

#### 28.5.5.1.4 Examples

The following shows two instructions that add a 64-bit integer contained in R0 and R1 to another 64-bit integer contained in R2 and R3, and place the result in R0 and R1.

**64-bit addition:**

```
ADDS    R0, R0, R2    ; add the least significant words
        ADCS    R1, R1, R3    ; add the most significant words with carry
```

Multiword values do not have to use consecutive registers. The following shows instructions that subtract a 96-bit integer contained in R1, R2, and R3 from another contained in R4, R5, and R6. The example stores the result in R4, R5, and R6.

**96-bit subtraction:**

```
SUBS    R4, R4, R1    ; subtract the least significant words
        SBCS    R5, R5, R2    ; subtract the middle words with carry
        SBCS    R6, R6, R3    ; subtract the most significant words with carry
```

The following shows the RSBS instruction used to perform a 1's complement of a single register.

**Arithmetic negation:**

```
RSBS    R7, R7, #0    ; subtract R7 from zero
```

### 28.5.5.2 AND, ORR, EOR, and BIC

Logical AND, OR, Exclusive OR, and Bit Clear.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

#### 28.5.5.2.1 Syntax

ANDS {*Rd,*} *Rn*, *Rm*

ORRS {*Rd,*} *Rn*, *Rm*

EORS {*Rd,*} *Rn*, *Rm*

BICS {*Rd,*} *Rn*, *Rm*

where:

*Rd* is the destination register.

*Rn* is the register holding the first operand and is the same as the destination register.

*Rm* second register.

#### 28.5.5.2.2 Operation

The AND, EOR, and ORR instructions perform bitwise AND, exclusive OR, and inclusive OR operations on the values in *Rn* and *Rm*.

The BIC instruction performs an AND operation on the bits in *Rn* with the logical negation of the corresponding bits in the value of *Rm*.

The condition code flags are updated on the result of the operation, see Section 28.5.3.6.1.

#### 28.5.5.2.3 Restrictions

In these instructions, *Rd*, *Rn*, and *Rm* must only specify R0-R7.

#### 28.5.5.2.4 Condition flags

These instructions:

- update the N and Z flags according to the result
- do not affect the C or V flag.

#### 28.5.5.2.5 Examples

```
ANDS   R2, R2, R1
       ORRS   R2, R2, R5
       ANDS   R5, R5, R8
       EORS   R7, R7, R6
       BICS   R0, R0, R1
```

### 28.5.5.3 ASR, LSL, LSR, and ROR

Arithmetic Shift Right, Logical Shift Left, Logical Shift Right, and Rotate Right.

#### 28.5.5.3.1 Syntax

ASRS {Rd,} *Rm*, *Rs*

ASRS {Rd,} *Rm*, *#imm*

LSLS {Rd,} *Rm*, *Rs*

LSLS {Rd,} *Rm*, *#imm*


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

LSRS {Rd,} *Rm*, *Rs*

LSRS {Rd,} *Rm*, #*imm*

RORS {Rd,} *Rm*, *Rs*

where:

*Rd* is the destination register. If *Rd* is omitted, it is assumed to take the same value as *Rm*.

*Rm* is the register holding the value to be shifted.

*Rs* is the register holding the shift length to apply to the value in *Rm*.

*imm* is the shift length.

The range of shift length depends on the instruction:

**ASR —** shift length from 1 to 32

**LSL —** shift length from 0 to 31

**LSR —** shift length from 1 to 32.

**Remark:** MOVS Rd, *Rm* is a pseudonym for LSLS Rd, *Rm*, #0.

#### 28.5.5.3.2 Operation

ASR, LSL, LSR, and ROR perform an arithmetic-shift-left, logical-shift-left, logical-shift-right or a right-rotation of the bits in the register *Rm* by the number of places specified by the immediate *imm* or the value in the least-significant byte of the register specified by *Rs*.

For details on what result is generated by the different instructions, see Section 28–28.5.3.3.

#### 28.5.5.3.3 Restrictions

In these instructions, *Rd*, *Rm*, and *Rs* must only specify R0-R7. For non-immediate instructions, *Rd* and *Rm* must specify the same register.

#### 28.5.5.3.4 Condition flags

These instructions update the N and Z flags according to the result.

The C flag is updated to the last bit shifted out, except when the shift length is 0, see Section 28–28.5.3.3. The V flag is left unmodified.

#### 28.5.5.3.5 Examples

```
ASRS   R7, R5, #9  ; Arithmetic shift right by 9 bits
       LSLS   R1, R2, #3  ; Logical shift left by 3 bits with flag update
       LSRS   R4, R5, #6  ; Logical shift right by 6 bits
       RORS   R4, R4, R6  ; Rotate right by the value in the bottom byte of R6.
```

### 28.5.5.4 CMP and CMN

Compare and Compare Negative.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

#### 28.5.5.4.1 Syntax

CMN *Rn*, *Rm*

CMP *Rn*, *#imm*

CMP *Rn*, *Rm*

where:

*Rn* is the register holding the first operand.

*Rm* is the register to compare with.

*imm* is the immediate value to compare with.

#### 28.5.5.4.2 Operation

These instructions compare the value in a register with either the value in another register or an immediate value. They update the condition flags on the result, but do not write the result to a register.

The CMP instruction subtracts either the value in the register specified by *Rm*, or the immediate *imm* from the value in *Rn* and updates the flags. This is the same as a SUBS instruction, except that the result is discarded.

The CMN instruction adds the value of *Rm* to the value in *Rn* and updates the flags. This is the same as an ADDS instruction, except that the result is discarded.

#### 28.5.5.4.3 Restrictions

For the:

- CMN

  instruction *Rn*, and *Rm* must only specify R0-R7.
- CMP instruction:
  - *Rn* and *Rm* can specify R0-R14
  - immediate must be in the range 0-255.

#### 28.5.5.4.4 Condition flags

These instructions update the N, Z, C and V flags according to the result.

#### 28.5.5.4.5 Examples

```
CMP    R2, R9
       CMN    R0, R2
```

### 28.5.5.5 MOV and MVN

Move and Move NOT.

#### 28.5.5.5.1 Syntax

MOV{S} *Rd*, *Rm*

MOVS *Rd*, *#imm*


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

MVNS *Rd*, *Rm*

where:

*S* is an optional suffix. If *S* is specified, the condition code flags are updated on the result of the operation, see Section 28–28.5.3.6.

*Rd* is the destination register.

*Rm* is a register.

*imm* is any value in the range 0-255.

#### 28.5.5.5.2 Operation

The MOV instruction copies the value of *Rm* into *Rd*.

The MOVS instruction performs the same operation as the MOV instruction, but also updates the N and Z flags.

The MVNS instruction takes the value of *Rm*, performs a bitwise logical negate operation on the value, and places the result into *Rd*.

#### 28.5.5.5.3 Restrictions

In these instructions, *Rd*, and *Rm* must only specify R0-R7.

When *Rd* is the PC in a MOV instruction:

- Bit[0] of the result is discarded.
- A branch occurs to the address created by forcing bit[0] of the result to 0. The T-bit remains unmodified.

**Remark:** Though it is possible to use MOV as a branch instruction, ARM strongly recommends the use of a BX or BLX instruction to branch for software portability.

#### 28.5.5.5.4 Condition flags

If *S* is specified, these instructions:

- update the N and Z flags according to the result
- do not affect the C or V flags.

#### 28.5.5.5.5 Example

```
MOVS  R0, #0x000B     ; Write value of 0x000B to R0, flags get updated
      MOVS  R1, #0x0       ; Write value of zero to R1, flags are updated
      MOV   R10, R12       ; Write value in R12 to R10, flags are not updated
      MOVS  R3, #23        ; Write value of 23 to R3
      MOV   R8, SP         ; Write value of stack pointer to R8
      MVNS  R2, R0         ; Write inverse of R0 to the R2 and update flags
```

### 28.5.5.6 MULS

Multiply using 32-bit operands, and producing a 32-bit result.

#### 28.5.5.6.1 Syntax

MULS Rd, *Rn*, *Rm*


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

where:

*Rd* is the destination register.

*Rn, Rm* are registers holding the values to be multiplied.

#### 28.5.5.6.2 Operation

The MUL instruction multiplies the values in the registers specified by *Rn* and *Rm*, and places the least significant 32 bits of the result in *Rd*. The condition code flags are updated on the result of the operation, see Section 28–28.5.3.6.

The results of this instruction does not depend on whether the operands are signed or unsigned.

#### 28.5.5.6.3 Restrictions

In this instruction:

- *Rd*, *Rn*, and *Rm* must only specify R0-R7
- *Rd* must be the same as *Rm*.

#### 28.5.5.6.4 Condition flags

This instruction:

- updates the N and Z flags according to the result
- does not affect the C or V flags.

#### 28.5.5.6.5 Examples

```
MULS    R0, R2, R0      ; Multiply with flag update, R0 = R0 x R2
```

### 28.5.5.7 REV, REV16, and REVSH

Reverse bytes.

#### 28.5.5.7.1 Syntax

REV Rd, *Rn*

REV16 Rd, *Rn*

REVSH Rd, *Rn*

where:

*Rd* is the destination register.

*Rn* is the source register.

#### 28.5.5.7.2 Operation

Use these instructions to change endianness of data:

**REV —** converts 32-bit big-endian data into little-endian data or 32-bit little-endian data into big-endian data.

**REV16 —** converts two packed 16-bit big-endian data into little-endian data or two packed 16-bit little-endian data into big-endian data.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**REVSH —** converts 16-bit signed big-endian data into 32-bit signed little-endian data or 16-bit signed little-endian data into 32-bit signed big-endian data.

#### 28.5.5.7.3 Restrictions

In these instructions, *Rd*, and *Rn* must only specify R0-R7.

#### 28.5.5.7.4 Condition flags

These instructions do not change the flags.

#### 28.5.5.7.5 Examples

```
REV    R3, R7  ; Reverse byte order of value in R7 and write it to R3
       REV16  R0, R0  ; Reverse byte order of each 16-bit halfword in R0
       REVSH  R0, R5  ; Reverse signed halfword
```

### 28.5.5.8 SXT and UXT

Sign extend and Zero extend.

#### 28.5.5.8.1 Syntax

SXTB Rd, *Rm*

SXTH Rd, *Rm*

UXTB Rd, *Rm*

UXTH Rd, *Rm*

where:

*Rd* is the destination register.

*Rm* is the register holding the value to be extended.

#### 28.5.5.8.2 Operation

These instructions extract bits from the resulting value:

- SXTB extracts bits[7:0] and sign extends to 32 bits
- UXTB extracts bits[7:0] and zero extends to 32 bits
- SXTH extracts bits[15:0] and sign extends to 32 bits
- UXTH extracts bits[15:0] and zero extends to 32 bits.

#### 28.5.5.8.3 Restrictions

In these instructions, *Rd* and *Rm* must only specify R0-R7.

#### 28.5.5.8.4 Condition flags

These instructions do not affect the flags.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

#### 28.5.5.8.5 Examples

```
SXTH  R4, R6        ; Obtain the lower halfword of the
                    ; value in R6 and then sign extend to
                    ; 32 bits and write the result to R4.
      UXTB  R3, R1        ; Extract lowest byte of the value in R10 and zero
                    ; extend it, and write the result to R3
```

### 28.5.5.9 TST

Test bits.

#### 28.5.5.9.1 Syntax

TST *Rn*, *Rm*

where:

*Rn* is the register holding the first operand.

*Rm* the register to test against.

#### 28.5.5.9.2 Operation

This instruction tests the value in a register against another register. It updates the condition flags based on the result, but does not write the result to a register.

The TST instruction performs a bitwise AND operation on the value in *Rn* and the value in *Rm*. This is the same as the ANDS instruction, except that it discards the result.

To test whether a bit of *Rn* is 0 or 1, use the TST instruction with a register that has that bit set to 1 and all other bits cleared to 0.

#### 28.5.5.9.3 Restrictions

In these instructions, *Rn* and *Rm* must only specify R0-R7.

#### 28.5.5.9.4 Condition flags

This instruction:

- updates the N and Z flags according to the result
- does not affect the C or V flags.

#### 28.5.5.9.5 Examples

```
TST   R0, R1  ; Perform bitwise AND of R0 value and R1 value,
                    ; condition code flags are updated but result is discarded
```

## 28.5.6 Branch and control instructions

Table 437 shows the branch and control instructions:

**Table 437. Branch and control instructions**

| Mnemonic | Brief description | See |
|---|---|---|
| B{cc} | Branch {conditionally} | Section 28–28.5.6.1 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 437. Branch and control instructions**

| Mnemonic | Brief description | See |
|---|---|---|
| BL | Branch with Link | Section 28–28.5.6.1 |
| BLX | Branch indirect with Link | Section 28–28.5.6.1 |
| BX | Branch indirect | Section 28–28.5.6.1 |

### 28.5.6.1 B, BL, BX, and BLX

Branch instructions.

#### 28.5.6.1.1 Syntax

B{*cond*} *label*

BL *label*

BX *Rm*

BLX *Rm*

where:

*cond* is an optional condition code, see Section 28–28.5.3.6.

*label* is a PC-relative expression. See Section 28–28.5.3.5.

*Rm* is a register providing the address to branch to.

#### 28.5.6.1.2 Operation

All these instructions cause a branch to the address indicated by *label* or contained in the register specified by *Rm*. In addition:

- The BL and BLX instructions write the address of the next instruction to LR, the link register R14.
- The BX and BLX instructions result in a HardFault exception if bit[0] of *Rm* is 0.

BL and BLX instructions also set bit[0] of the LR to 1. This ensures that the value is suitable for use by a subsequent POP {PC} or BX instruction to perform a successful return branch.

Table 438 shows the ranges for the various branch instructions.

**Table 438. Branch ranges**

| Instruction | Branch range |
|---|---|
| B *label* | –2 KB to +2 KB |
| B*cond label* | –256 bytes to +254 bytes |
| BL *label* | –16 MB to +16 MB |
| BX *Rm* | Any value in register |
| BLX *Rm* | Any value in register |

#### 28.5.6.1.3 Restrictions

In these instructions:

- Do not use SP or PC in the BX or BLX instruction.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

- For BX and BLX, bit[0] of *Rm* must be 1 for correct execution. Bit[0] is used to update the EPSR T-bit and is discarded from the target address.

**Remark:** B*cond* is the only conditional instruction on the Cortex-M0 processor.

#### 28.5.6.1.4 Condition flags

These instructions do not change the flags.

#### 28.5.6.1.5 Examples

```
B     loopA  ; Branch to loopA
      BL     funC   ; Branch with link (Call) to function funC, return address
                    ; stored in LR
      BX     LR     ; Return from function call
      BLX    R0     ; Branch with link and exchange (Call) to a address stored
                    ; in R0

BEQ   labelD ; Conditionally branch to labelD if last flag setting

             ; instruction set the Z flag, else do not branch.
```

### 28.5.7 Miscellaneous instructions

Table 439 shows the remaining Cortex-M0 instructions:

**Table 439. Miscellaneous instructions**

| Mnemonic | Brief description | See |
|---|---|---|
| BKPT | Breakpoint | Section 28–28.5.7.1 |
| CPSID | Change Processor State, Disable Interrupts | Section 28–28.5.7.2 |
| CPSIE | Change Processor State, Enable Interrupts | Section 28–28.5.7.2 |
| DMB | Data Memory Barrier | Section 28–28.5.7.3 |
| DSB | Data Synchronization Barrier | Section 28–28.5.7.4 |
| ISB | Instruction Synchronization Barrier | Section 28–28.5.7.5 |
| MRS | Move from special register to register | Section 28–28.5.7.6 |
| MSR | Move from register to special register | Section 28–28.5.7.7 |
| NOP | No Operation | Section 28–28.5.7.8 |
| SEV | Send Event | Section 28–28.5.7.9 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 439. Miscellaneous instructions**

| Mnemonic | Brief description | See |
|---|---|---|
| SVC | Supervisor Call | Section 28–28.5.7.10 |
| WFE | Wait For Event | Section 28–28.5.7.11 |
| WFI | Wait For Interrupt | Section 28–28.5.7.12 |

#### 28.5.7.1 BKPT

Breakpoint.

##### 28.5.7.1.1 Syntax

BKPT #*imm*

where:

*imm* is an integer in the range 0-255.

##### 28.5.7.1.2 Operation

The BKPT instruction causes the processor to enter Debug state. Debug tools can use this to investigate system state when the instruction at a particular address is reached. *imm* is ignored by the processor. If required, a debugger can use it to store additional information about the breakpoint.

The processor might also produce a HardFault or go in to lockup if a debugger is not attached when a BKPT instruction is executed. See Section 28–28.4.4.1 for more information.

##### 28.5.7.1.3 Restrictions

There are no restrictions.

##### 28.5.7.1.4 Condition flags

This instruction does not change the flags.

##### 28.5.7.1.5 Examples

```
BKPT #0    ; Breakpoint with immediate value set to 0x0.
```

#### 28.5.7.2 CPS

Change Processor State.

##### 28.5.7.2.1 Syntax

CPSID i

CPSIE i

##### 28.5.7.2.2 Operation

CPS changes the PRIMASK special register values. CPSID causes interrupts to be disabled by setting PRIMASK. CPSIE cause interrupts to be enabled by clearing PRIMASK.See Section 28–28.4.1.3.6 for more information about these registers.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

#### 28.5.7.2.3 Restrictions

There are no restrictions.

#### 28.5.7.2.4 Condition flags

This instruction does not change the condition flags.

#### 28.5.7.2.5 Examples

```
CPSID i ; Disable all interrupts except NMI (set PRIMASK)

CPSIE i ; Enable interrupts (clear PRIMASK)
```

### 28.5.7.3 DMB

Data Memory Barrier.

#### 28.5.7.3.1 Syntax

DMB

#### 28.5.7.3.2 Operation

DMB acts as a data memory barrier. It ensures that all explicit memory accesses that appear in program order before the DMB instruction are observed before any explicit memory accesses that appear in program order after the DMB instruction. DMB does not affect the ordering of instructions that do not access memory.

#### 28.5.7.3.3 Restrictions

There are no restrictions.

#### 28.5.7.3.4 Condition flags

This instruction does not change the flags.

#### 28.5.7.3.5 Examples

```
DMB  ; Data Memory Barrier
```

### 28.5.7.4 DSB

Data Synchronization Barrier.

#### 28.5.7.4.1 Syntax

DSB

#### 28.5.7.4.2 Operation

DSB acts as a special data synchronization memory barrier. Instructions that come after the DSB, in program order, do not execute until the DSB instruction completes. The DSB instruction completes when all explicit memory accesses before it complete.

#### 28.5.7.4.3 Restrictions

There are no restrictions.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

#### 28.5.7.4.4 Condition flags

This instruction does not change the flags.

#### 28.5.7.4.5 Examples

```
DSB ; Data Synchronisation Barrier
```

### 28.5.7.5 ISB

Instruction Synchronization Barrier.

#### 28.5.7.5.1 Syntax

ISB

#### 28.5.7.5.2 Operation

ISB acts as an instruction synchronization barrier. It flushes the pipeline of the processor, so that all instructions following the ISB are fetched from cache or memory again, after the ISB instruction has been completed.

#### 28.5.7.5.3 Restrictions

There are no restrictions.

#### 28.5.7.5.4 Condition flags

This instruction does not change the flags.

#### 28.5.7.5.5 Examples

```
ISB  ; Instruction Synchronisation Barrier
```

### 28.5.7.6 MRS

Move the contents of a special register to a general-purpose register.

#### 28.5.7.6.1 Syntax

MRS *Rd*, *spec_reg*

where:

*Rd* is the general-purpose destination register.

*spec_reg* is one of the special-purpose registers: APSR, IPSR, EPSR, IEPSR, IAPSR, EAPSR, PSR, MSP, PSP, PRIMASK, or CONTROL.

#### 28.5.7.6.2 Operation

MRS stores the contents of a special-purpose register to a general-purpose register. The MRS instruction can be combined with the MR instruction to produce read-modify-write sequences, which are suitable for modifying a specific flag in the PSR.

See Section 28–28.5.7.7.

#### 28.5.7.6.3 Restrictions

In this instruction, *Rd* must not be SP or PC.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

#### 28.5.7.6.4 Condition flags

This instruction does not change the flags.

#### 28.5.7.6.5 Examples

```
MRS  R0, PRIMASK ; Read PRIMASK value and write it to R0
```

### 28.5.7.7 MSR

Move the contents of a general-purpose register into the specified special register.

#### 28.5.7.7.1 Syntax

MSR *spec_reg*, *Rn*

where:

*Rn* is the general-purpose source register.

*spec_reg* is the special-purpose destination register: APSR, IPSR, EPSR, IEPSR, IAPSR, EAPSR, PSR, MSP, PSP, PRIMASK, or CONTROL.

#### 28.5.7.7.2 Operation

MSR updates one of the special registers with the value from the register specified by *Rn*.

See Section 28–28.5.7.6.

#### 28.5.7.7.3 Restrictions

In this instruction, *Rn* must not be SP and must not be PC.

#### 28.5.7.7.4 Condition flags

This instruction updates the flags explicitly based on the value in *Rn*.

#### 28.5.7.7.5 Examples

```
MSR  CONTROL, R1 ; Read R1 value and write it to the CONTROL register
```

### 28.5.7.8 NOP

No Operation.

#### 28.5.7.8.1 Syntax

NOP

#### 28.5.7.8.2 Operation

NOP performs no operation and is not guaranteed to be time consuming. The processor might remove it from the pipeline before it reaches the execution stage.

Use NOP for padding, for example to place the subsequent instructions on a 64-bit boundary.

#### 28.5.7.8.3 Restrictions

There are no restrictions.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

#### 28.5.7.8.4 Condition flags

This instruction does not change the flags.

#### 28.5.7.8.5 Examples

```
NOP  ; No operation
```

### 28.5.7.9 SEV

Send Event.

#### 28.5.7.9.1 Syntax

SEV

#### 28.5.7.9.2 Operation

SEV causes an event to be signaled to all processors within a multiprocessor system. It also sets the local event register, see Section 28–28.4.5.

See also Section 28–28.5.7.11.

#### 28.5.7.9.3 Restrictions

There are no restrictions.

#### 28.5.7.9.4 Condition flags

This instruction does not change the flags.

#### 28.5.7.9.5 Examples

```
SEV ; Send Event
```

### 28.5.7.10 SVC

Supervisor Call.

#### 28.5.7.10.1 Syntax

SVC #*imm*

where:

*imm* is an integer in the range 0-255.

#### 28.5.7.10.2 Operation

The SVC instruction causes the SVC exception.

*imm* is ignored by the processor. If required, it can be retrieved by the exception handler to determine what service is being requested.

#### 28.5.7.10.3 Restrictions

There are no restrictions.

#### 28.5.7.10.4 Condition flags

This instruction does not change the flags.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

#### 28.5.7.10.5 Examples

```
SVC  #0x32 ; Supervisor Call (SVC handler can extract the immediate value
           ; by locating it via the stacked PC)
```

### 28.5.7.11 WFE

Wait For Event.

**Remark:** The WFE instruction is not implemented on the LPC111x/LPC11Cxx

#### 28.5.7.11.1 Syntax

WFE

#### 28.5.7.11.2 Operation

If the event register is 0, WFE suspends execution until one of the following events occurs:

- an exception, unless masked by the exception mask registers or the current priority level
- an exception enters the Pending state, if SEVONPEND in the System Control Register is set
- a Debug Entry request, if debug is enabled
- an event signaled by a peripheral or another processor in a multiprocessor system using the SEV instruction.

If the event register is 1, WFE clears it to 0 and completes immediately.

For more information see Section 28–28.4.5.

**Remark:** WFE is intended for power saving only. When writing software assume that WFE might behave as NOP.

#### 28.5.7.11.3 Restrictions

There are no restrictions.

#### 28.5.7.11.4 Condition flags

This instruction does not change the flags.

#### 28.5.7.11.5 Examples

```
WFE  ; Wait for event
```

### 28.5.7.12 WFI

Wait for Interrupt.

#### 28.5.7.12.1 Syntax

WFI


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

#### 28.5.7.12.2 Operation

WFI

suspends execution until one of the following events occurs:

- an exception
- an interrupt becomes pending which would preempt if PRIMASK was clear
- a Debug Entry request, regardless of whether debug is enabled.

**Remark:** WFI is intended for power saving only. When writing software assume that WFI might behave as a NOP operation.

#### 28.5.7.12.3 Restrictions

There are no restrictions.

#### 28.5.7.12.4 Condition flags

This instruction does not change the flags.

#### 28.5.7.12.5 Examples

```
WFI ; Wait for interrupt
```

## 28.6 Peripherals

### 28.6.1 About the ARM Cortex-M0

The address map of the **Private peripheral bus** (PPB) is:

**Table 440. Core peripheral register regions**

| Address | Core peripheral | Description |
|---|---|---|
| 0xE000E008-0xE000E00F | System Control Block | Table 28–449 |
| 0xE000E010-0xE000E01F | System timer | Table 28–458 |
| 0xE000E100-0xE000E4EF | Nested Vectored Interrupt Controller | Table 28–441 |
| 0xE000ED00-0xE000ED3F | System Control Block | Table 28–449 |
| 0xE000EF00-0xE000EF03 | Nested Vectored Interrupt Controller | Table 28–441 |

In register descriptions, the register **type** is described as follows:

**RW —** Read and write.

**RO —** Read-only.

**WO —** Write-only.

### 28.6.2 Nested Vectored Interrupt Controller

This section describes the **Nested Vectored Interrupt Controller** (NVIC) and the registers it uses. The NVIC supports:

- 32 interrupts.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

- A programmable priority level of 0-3 for each interrupt. A higher level corresponds to a lower priority, so level 0 is the highest interrupt priority.
- Level and pulse detection of interrupt signals.
- Interrupt tail-chaining.
- An external **Non-Maskable Interrupt** (NMI). See Section 28.1 for implementation of the NMI for specific parts.

The processor automatically stacks its state on exception entry and unstacks this state on exception exit, with no instruction overhead. This provides low latency exception handling. The hardware implementation of the NVIC registers is:

**Table 441. NVIC register summary**

| Address | Name | Type | Reset value | Description |
|---|---|---|---|---|
| 0xE000E100 | ISER | RW | 0x00000000 | Section 28–28.6.2.2 |
| 0xE000E180 | ICER | RW | 0x00000000 | Section 28–28.6.2.3 |
| 0xE000E200 | ISPR | RW | 0x00000000 | Section 28–28.6.2.4 |
| 0xE000E280 | ICPR | RW | 0x00000000 | Section 28–28.6.2.5 |
| 0xE000E400-0xE000E41C | IPR0-7 | RW | 0x00000000 | Section 28–28.6.2.6 |

### 28.6.2.1 Accessing the Cortex-M0 NVIC registers using CMSIS

CMSIS functions enable software portability between different Cortex-M profile processors.

To access the NVIC registers when using CMSIS, use the following functions:

**Table 442. CMISIS access NVIC functions**

| CMSIS function | Description |
|---|---|
| void NVIC_EnableIRQ(IRQn_Type IRQn)[1] | Enables an interrupt or exception. |
| void NVIC_DisableIRQ(IRQn_Type IRQn)[1] | Disables an interrupt or exception. |
| void NVIC_SetPendingIRQ(IRQn_Type IRQn)[1] | Sets the pending status of interrupt or exception to 1. |
| void NVIC_ClearPendingIRQ(IRQn_Type IRQn)[1] | Clears the pending status of interrupt or exception to 0. |
| uint32_t NVIC_GetPendingIRQ(IRQn_Type IRQn)[1] | Reads the pending status of interrupt or exception. This function returns non-zero value if the pending status is set to 1. |
| void NVIC_SetPriority(IRQn_Type IRQn, uint32_t priority)[1] | Sets the priority of an interrupt or exception with configurable priority level to 1. |
| uint32_t NVIC_GetPriority(IRQn_Type IRQn)[1] | Reads the priority of an interrupt or exception with configurable priority level. This function returns the current priority level. |

[1] The input parameter IRQn is the IRQ number, see Table 428 for more information.

### 28.6.2.2 Interrupt Set-enable Register

The ISER enables interrupts, and shows which interrupts are enabled. See the register summary in Table 441 for the register attributes.

The bit assignments are:


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 443. ISER bit assignments**

| Bits | Name | Function |
|---|---|---|
| [31:0] | SETENA | Interrupt set-enable bits.<br>Write:<br>0 = no effect<br>1 = enable interrupt.<br>Read:<br>0 = interrupt disabled<br>1 = interrupt enabled. |

If a pending interrupt is enabled, the NVIC activates the interrupt based on its priority. If an interrupt is not enabled, asserting its interrupt signal changes the interrupt state to pending, but the NVIC never activates the interrupt, regardless of its priority.

### 28.6.2.3 Interrupt Clear-enable Register

The ICER disables interrupts, and show which interrupts are enabled. See the register summary in Table 28–441 for the register attributes.

The bit assignments are:

**Table 444. ICER bit assignments**

| Bits | Name | Function |
|---|---|---|
| [31:0] | CLRENA | Interrupt clear-enable bits.<br>Write:<br>0 = no effect<br>1 = disable interrupt.<br>Read:<br>0 = interrupt disabled<br>1 = interrupt enabled. |

### 28.6.2.4 Interrupt Set-pending Register

The ISPR forces interrupts into the pending state, and shows which interrupts are pending. See the register summary in Table 28–441 for the register attributes.

The bit assignments are:

**Table 445. ISPR bit assignments**

| Bits | Name | Function |
|---|---|---|
| [31:0] | SETPEND | Interrupt set-pending bits.<br>Write:<br>0 = no effect<br>1 = changes interrupt state to pending.<br>Read:<br>0 = interrupt is not pending<br>1 = interrupt is pending. |

**Remark:** Writing 1 to the ISPR bit corresponding to:

- an interrupt that is pending has no effect


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

- a disabled interrupt sets the state of that interrupt to pending.

### 28.6.2.5 Interrupt Clear-pending Register

The ICPR removes the pending state from interrupts, and shows which interrupts are pending. See the register summary in Table 28–441 for the register attributes.

The bit assignments are:

**Table 446. ICPR bit assignments**

| Bits | Name | Function |
|---|---|---|
| [31:0] | CLRPEND | Interrupt clear-pending bits.<br>Write:<br>0 = no effect<br>1 = removes pending state an interrupt.<br>Read:<br>0 = interrupt is not pending<br>1 = interrupt is pending. |

**Remark:** Writing 1 to an ICPR bit does not affect the active state of the corresponding interrupt.

### 28.6.2.6 Interrupt Priority Registers

The IPR0-IPR7 registers provide an 2-bit priority field for each interrupt. These registers are only word-accessible. See the register summary in Table 28–441 for their attributes. Each register holds four priority fields as shown:

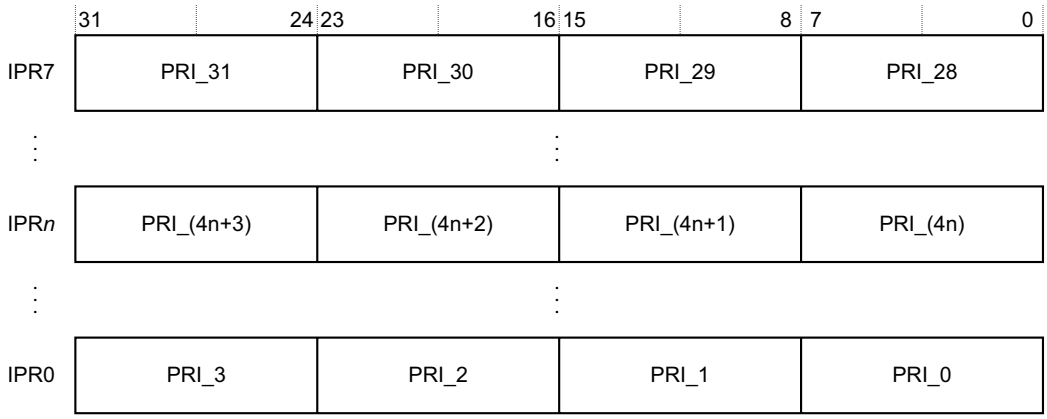


**Fig 107. IPR register**

**Table 447. IPR bit assignments**

| Bits | Name | Function |
|---|---|---|
| [31:24] | Priority, byte offset 3 | Each priority field holds a priority value, 0-3. The lower the value, the greater the priority of the corresponding interrupt. The processor implements only bits[7:6] of each field, bits [5:0] read as zero and ignore writes. |
| [23:16] | Priority, byte offset 2 | |
| [15:8] | Priority, byte offset 1 | |
| [7:0] | Priority, byte offset 0 | |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

See Section 28–28.6.2.1 for more information about the access to the interrupt priority array, which provides the software view of the interrupt priorities.

Find the IPR number and byte offset for interrupt **M** as follows:

- the corresponding IPR number, **N**, is given by **N** = **N** DIV 4
- the byte offset of the required Priority field in this register is **M** MOD 4, where:
  - byte offset 0 refers to register bits[7:0]
  - byte offset 1 refers to register bits[15:8]
  - byte offset 2 refers to register bits[23:16]
  - byte offset 3 refers to register bits[31:24].

### 28.6.2.7 Level-sensitive and pulse interrupts

The processor supports both level-sensitive and pulse interrupts. Pulse interrupts are also described as edge-triggered interrupts.

A level-sensitive interrupt is held asserted until the peripheral deasserts the interrupt signal. Typically this happens because the ISR accesses the peripheral, causing it to clear the interrupt request. A pulse interrupt is an interrupt signal sampled synchronously on the rising edge of the processor clock. To ensure the NVIC detects the interrupt, the peripheral must assert the interrupt signal for at least one clock cycle, during which the NVIC detects the pulse and latches the interrupt.

When the processor enters the ISR, it automatically removes the pending state from the interrupt, see Section 28.6.2.7.1. For a level-sensitive interrupt, if the signal is not deasserted before the processor returns from the ISR, the interrupt becomes pending again, and the processor must execute its ISR again. This means that the peripheral can hold the interrupt signal asserted until it no longer needs servicing.

#### 28.6.2.7.1 Hardware and software control of interrupts

The Cortex-M0 latches all interrupts. A peripheral interrupt becomes pending for one of the following reasons:

- the NVIC detects that the interrupt signal is active and the corresponding interrupt is not active
- the NVIC detects a rising edge on the interrupt signal
- software writes to the corresponding interrupt set-pending register bit, see Section 28–28.6.2.4.

A pending interrupt remains pending until one of the following:

- The processor enters the ISR for the interrupt. This changes the state of the interrupt from pending to active. Then:
  - For a level-sensitive interrupt, when the processor returns from the ISR, the NVIC samples the interrupt signal. If the signal is asserted, the state of the interrupt changes to pending, which might cause the processor to immediately re-enter the ISR. Otherwise, the state of the interrupt changes to inactive.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

– For a pulse interrupt, the NVIC continues to monitor the interrupt signal, and if this is pulsed the state of the interrupt changes to pending and active. In this case, when the processor returns from the ISR the state of the interrupt changes to pending, which might cause the processor to immediately re-enter the ISR.

  If the interrupt signal is not pulsed while the processor is in the ISR, when the processor returns from the ISR the state of the interrupt changes to inactive.

- Software writes to the corresponding interrupt clear-pending register bit.

  For a level-sensitive interrupt, if the interrupt signal is still asserted, the state of the interrupt does not change. Otherwise, the state of the interrupt changes to inactive.

  For a pulse interrupt, state of the interrupt changes to:

  – inactive, if the state was pending

  – active, if the state was active and pending.

#### 28.6.2.8 NVIC usage hints and tips

Ensure software uses correctly aligned register accesses. The processor does not support unaligned accesses to NVIC registers.

An interrupt can enter pending state even if it is disabled. Disabling an interrupt only prevents the processor from taking that interrupt.

##### 28.6.2.8.1 NVIC programming hints

Software uses the CPSIE i and CPSID i instructions to enable and disable interrupts. The CMSIS provides the following intrinsic functions for these instructions:

```
void __disable_irq(void) // Disable Interrupts

void __enable_irq(void) // Enable Interrupts
```

In addition, the CMSIS provides a number of functions for NVIC control, including:

**Table 448. CMSIS functions for NVIC control**

| CMSIS interrupt control function | Description |
|---|---|
| void NVIC_EnableIRQ(IRQn_t IRQn) | Enable IRQn |
| void NVIC_DisableIRQ(IRQn_t IRQn) | Disable IRQn |
| uint32_t NVIC_GetPendingIRQ (IRQn_t IRQn) | Return true (1) if IRQn is pending |
| void NVIC_SetPendingIRQ (IRQn_t IRQn) | Set IRQn pending |
| void NVIC_ClearPendingIRQ (IRQn_t IRQn) | Clear IRQn pending status |
| void NVIC_SetPriority (IRQn_t IRQn, uint32_t priority) | Set priority for IRQn |
| uint32_t NVIC_GetPriority (IRQn_t IRQn) | Read priority of IRQn |
| void NVIC_SystemReset (void) | Reset the system |

The input parameter IRQn is the IRQ number, see Table 28–428 for more information. For more information about these functions, see the CMSIS documentation.

### 28.6.3 System Control Block

The **System Control Block** (SCB) provides system implementation information, and system control. This includes configuration, control, and reporting of the system exceptions. The SCB registers are:


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 449. Summary of the SCB registers**

| Address | Name | Type | Reset value | Description |
|---|---|---|---|---|
| 0xE000ED00 | CPUID | RO | 0x410CC200 | Section 28.6.3.2 |
| 0xE000ED04 | ICSR | RW[1] | 0x00000000 | Section 28–28.6.3.3 |
| 0xE000ED0C | AIRCR | RW[1] | 0xFA050000 | Section 28–28.6.3.4 |
| 0xE000ED10 | SCR | RW | 0x00000000 | Section 28–28.6.3.5 |
| 0xE000ED14 | CCR | RO | 0x00000204 | Section 28–28.6.3.6 |
| 0xE000ED1C | SHPR2 | RW | 0x00000000 | Section 28–28.6.3.7.1 |
| 0xE000ED20 | SHPR3 | RW | 0x00000000 | Section 28–28.6.3.7.2 |

[1] See the register description for more information.

### 28.6.3.1 The CMSIS mapping of the Cortex-M0 SCB registers

To improve software efficiency, the CMSIS simplifies the SCB register presentation. In the CMSIS, the array SHP[1] corresponds to the registers SHPR2-SHPR3.

### 28.6.3.2 CPUID Register

The CPUID register contains the processor part number, version, and implementation information. See the register summary in  for its attributes. The bit assignments are:

**Table 450. CPUID register bit assignments**

| Bits | Name | Function |
|---|---|---|
| [31:24] | Implementer | Implementer code:<br>0x41 = ARM |
| [23:20] | Variant | Variant number, the r value in the r**n**p**n** product revision identifier:<br>0x0 = Revision 0 |
| [19:16] | Constant | Constant that defines the architecture of the processor:, reads as<br>0xC = ARMv6-M architecture |
| [15:4] | Partno | Part number of the processor:<br>0xC20 = Cortex-M0 |
| [3:0] | Revision | Revision number, the p value in the r**n**p**n** product revision identifier:<br>0x0 = Patch 0 |

### 28.6.3.3 Interrupt Control and State Register

The ICSR:

- provides:
  - a set-pending bit for the **Non-Maskable Interrupt** (NMI) exception
  - set-pending and clear-pending bits for the PendSV and SysTick exceptions
- indicates:
  - the exception number of the exception being processed
  - whether there are preempted active exceptions
  - the exception number of the highest priority pending exception


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

– whether any interrupts are pending.

See the register summary in Table 28–449 for the ICSR attributes. The bit assignments are:

**Table 451. ICSR bit assignments**

| Bits | Name | Type | Function |
|---|---|---|---|
| [31] | NMIPENDSET[2] | RW | NMI set-pending bit.<br>Write:<br>0 = no effect<br>1 = changes NMI exception state to pending.<br>Read:<br>0 = NMI exception is not pending<br>1 = NMI exception is pending.<br>Because NMI is the highest-priority exception, normally the processor enters the NMI exception handler as soon as it detects a write of 1 to this bit. Entering the handler then clears this bit to 0. This means a read of this bit by the NMI exception handler returns 1 only if the NMI signal is reasserted while the processor is executing that handler. |
| [30:29] | - | - | Reserved. |
| [28] | PENDSVSET | RW | PendSV set-pending bit.<br>Write:<br>0 = no effect<br>1 = changes PendSV exception state to pending.<br>Read:<br>0 = PendSV exception is not pending<br>1 = PendSV exception is pending.<br>Writing 1 to this bit is the only way to set the PendSV exception state to pending. |
| [27] | PENDSVCLR | WO | PendSV clear-pending bit.<br>Write:<br>0 = no effect<br>1 = removes the pending state from the PendSV exception. |
| [26] | PENDSTSET | RW | SysTick exception set-pending bit.<br>Write:<br>0 = no effect<br>1 = changes SysTick exception state to pending.<br>Read:<br>0 = SysTick exception is not pending<br>1 = SysTick exception is pending. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 451. ICSR bit assignments**

| Bits | Name | Type | Function |
|---|---|---|---|
| [25] | PENDSTCLR | WO | SysTick exception clear-pending bit.<br>Write:<br>0 = no effect<br>1 = removes the pending state from the SysTick exception.<br>This bit is WO. On a register read its value is Unknown. |
| [24:23] | - | - | Reserved. |
| [22] | ISRPENDING | RO | Interrupt pending flag, excluding NMI and Faults:<br>0 = interrupt not pending<br>1 = interrupt pending. |
| [21:18] | - | - | Reserved. |
| [17:12] | VECTPENDING | RO | Indicates the exception number of the highest priority pending enabled exception:<br>0 = no pending exceptions<br>Nonzero = the exception number of the highest priority pending enabled exception. |
| [11:6] | - | - | Reserved. |
| [5:0] | VECTACTIVE[1] | RO | Contains the active exception number:<br>0 = Thread mode<br>Nonzero = The exception number[1] of the currently active exception.<br>**Remark:** Subtract 16 from this value to obtain the CMSIS IRQ number that identifies the corresponding bit in the Interrupt Clear-Enable, Set-Enable, Clear-Pending, Set-pending, and Priority Register, see Table 28–423. |

[1] This is the same value as IPSR bits[5:0], see Table 28–423.

[2] See Section 28.1 for implementation of the NMI for specific parts.

When you write to the ICSR, the effect is Unpredictable if you:

- write 1 to the PENDSVSET bit and write 1 to the PENDSVCLR bit
- write 1 to the PENDSTSET bit and write 1 to the PENDSTCLR bit.

### 28.6.3.4 Application Interrupt and Reset Control Register

The AIRCR provides endian status for data accesses and reset control of the system. See the register summary in Table 28–449 and Table 28–452 for its attributes.

To write to this register, you must write 0x05FA to the VECTKEY field, otherwise the processor ignores the write.

The bit assignments are:


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 452. AIRCR bit assignments**

| Bits | Name | Type | Function |
|---|---|---|---|
| [31:16] | Read: Reserved<br>Write: VECTKEY | RW | Register key:<br>Reads as Unknown<br>On writes, write 0x05FA to VECTKEY, otherwise the write is ignored. |
| [15] | ENDIANESS | RO | Data endianness implemented:<br>0 = Little-endian<br>1 = Big-endian. |
| [14:3] | - | - | Reserved |
| [2] | SYSRESETREQ | WO | System reset request:<br>0 = no effect<br>1 = requests a system level reset.<br>This bit reads as 0. |
| [1] | VECTCLRACTIVE | WO | Reserved for debug use. This bit reads as 0. When writing to the register you must write 0 to this bit, otherwise behavior is Unpredictable. |
| [0] | - | - | Reserved. |

### 28.6.3.5 System Control Register

The SCR controls features of entry to and exit from low power state. See the register summary in Table 28–449 for its attributes. The bit assignments are:

**Table 453. SCR bit assignments**

| Bits | Name | Function |
|---|---|---|
| [31:5] | - | Reserved. |
| [4] | SEVONPEND | Send Event on Pending bit:<br>0 = only enabled interrupts or events can wake-up the processor, disabled interrupts are excluded<br>1 = enabled events and all interrupts, including disabled interrupts, can wake-up the processor.<br>When an event or interrupt enters pending state, the event signal wakes up the processor from WFE. If the processor is not waiting for an event, the event is registered and affects the next WFE.<br>The processor also wakes up on execution of an SEV instruction. |
| [3] | - | Reserved. |
| [2] | SLEEPDEEP | Controls whether the processor uses sleep or deep sleep as its low power mode:<br>0 = sleep<br>1 = deep sleep. |
| [1] | SLEEPONEXIT | Indicates sleep-on-exit when returning from Handler mode to Thread mode:<br>0 = do not sleep when returning to Thread mode.<br>1 = enter sleep, or deep sleep, on return from an ISR to Thread mode.<br>Setting this bit to 1 enables an interrupt driven application to avoid returning to an empty main application. |
| [0] | - | Reserved. |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

#### 28.6.3.6 Configuration and Control Register

The CCR is a read-only register and indicates some aspects of the behavior of the Cortex-M0 processor. See the register summary in Table 28–449 for the CCR attributes.

The bit assignments are:

**Table 454. CCR bit assignments**

| Bits | Name | Function |
|---|---|---|
| [31:10] | - | Reserved. |
| [9] | STKALIGN | Always reads as one, indicates 8-byte stack alignment on exception entry.<br>On exception entry, the processor uses bit[9] of the stacked PSR to indicate the stack alignment. On return from the exception it uses this stacked bit to restore the correct stack alignment. |
| [8:4] | - | Reserved. |
| [3] | UNALIGN_TRP | Always reads as one, indicates that all unaligned accesses generate a HardFault. |
| [2:0] | - | Reserved. |

#### 28.6.3.7 System Handler Priority Registers

The SHPR2-SHPR3 registers set the priority level, 0 to 3, of the exception handlers that have configurable priority.

SHPR2-SHPR3 are word accessible. See the register summary in Table 28–449 for their attributes.

To access to the system exception priority level using CMSIS, use the following CMSIS functions:

- uint32_t NVIC_GetPriority(IRQn_Type IRQn)
- void NVIC_SetPriority(IRQn_Type IRQn, uint32_t priority)

The input parameter IRQn is the IRQ number, see Table 28–428 for more information.

The system fault handlers, and the priority field and register for each handler are:

**Table 455. System fault handler priority fields**

| Handler | Field | Register description |
|---|---|---|
| SVCall | PRI_11 | Section 28–28.6.3.7.1 |
| PendSV | PRI_14 | Section 28–28.6.3.7.2 |
| SysTick | PRI_15 | |

Each PRI_N field is 8 bits wide, but the processor implements only bits[7:6] of each field, and bits[5:0] read as zero and ignore writes.

##### 28.6.3.7.1 System Handler Priority Register 2

The bit assignments are:


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 456. SHPR2 register bit assignments**

| Bits | Name | Function |
|---|---|---|
| [31:24] | PRI_11 | Priority of system handler 11, SVCall |
| [23:0] | - | Reserved |

#### 28.6.3.7.2 System Handler Priority Register 3

The bit assignments are:

**Table 457. SHPR3 register bit assignments**

| Bits | Name | Function |
|---|---|---|
| [31:24] | PRI_15 | Priority of system handler 15, SysTick exception |
| [23:16] | PRI_14 | Priority of system handler 14, PendSV |
| [15:0] | - | Reserved |

### 28.6.3.8 SCB usage hints and tips

Ensure software uses aligned 32-bit word size transactions to access all the SCB registers.

## 28.6.4 System timer, SysTick

When enabled, the timer counts down from the current value (SYST_CVR) to zero, reloads (wraps) to the value in the SysTick Reload Value Register (SYST_RVR) on the next clock edge, then decrements on subsequent clocks. When the counter transitions to zero, the COUNTFLAG status bit is set to 1. The COUNTFLAG bit clears on reads.

**Remark:** The SYST_CVR value is UNKNOWN on reset. Software should write to the register to clear it to zero before enabling the feature. This ensures the timer will count from the SYST_RVR value rather than an arbitrary value when it is enabled.

**Remark:** If the SYST_RVR is zero, the timer will be maintained with a current value of zero after it is reloaded with this value. This mechanism can be used to disable the feature independently from the timer enable bit.

A write to the SYST_CVR will clear the register and the COUNTFLAG status bit. The write causes the SYST_CVR to reload from the SYST_RVR on the next timer clock, however, it does not trigger the SysTick exception logic. On a read, the current value is the value of the register at the time the register is accessed.

**Remark:** When the processor is halted for debugging the counter does not decrement.

The system timer registers are:

**Table 458. System timer registers summary**

| Address | Name | Type | Reset value | Description |
|---|---|---|---|---|
| 0xE000E010 | SYST_CSR | RW | 0x00000000 | Section 28.6.4.1 |
| 0xE000E014 | SYST_RVR | RW | Unknown | Section 28–28.6.4.2 |
| 0xE000E018 | SYST_CVR | RW | Unknown | Section 28–28.6.4.3 |
| 0xE000E01C | SYST_CALIB | RO | 0x00000004 [1] | Section 28–28.6.4.4 |

[1] SysTick calibration value.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

#### 28.6.4.1 SysTick Control and Status Register

The SYST_CSR enables the SysTick features. See the register summary in  for its attributes. The bit assignments are:

**Table 459. SYST_CSR bit assignments**

| Bits | Name | Function |
|---|---|---|
| [31:17] | - | Reserved. |
| [16] | COUNTFLAG | Returns 1 if timer counted to 0 since the last read of this register. |
| [15:3] | - | Reserved. |
| [2] | CLKSOURCE | Selects the SysTick timer clock source:<br>0 = external reference clock.<br>1 = processor clock. |
| [1] | TICKINT | Enables SysTick exception request:<br>0 = counting down to zero does not assert the SysTick exception request.<br>1 = counting down to zero asserts the SysTick exception request. |
| [0] | ENABLE | Enables the counter:<br>0 = counter disabled.<br>1 = counter enabled. |

#### 28.6.4.2 SysTick Reload Value Register

The SYST_RVR specifies the start value to load into the SYST_CVR. See the register summary in Table 28–458 for its attributes. The bit assignments are:

**Table 460. SYST_RVR bit assignments**

| Bits | Name | Function |
|---|---|---|
| [31:24] | - | Reserved. |
| [23:0] | RELOAD | Value to load into the SYST_CVR when the counter is enabled and when it reaches 0, see Section 28.6.4.2.1. |

##### 28.6.4.2.1 Calculating the RELOAD value

The RELOAD value can be any value in the range 0x00000001-0x00FFFFFF. You can program a value of 0, but this has no effect because the SysTick exception request and COUNTFLAG are activated when counting from 1 to 0.

To generate a multi-shot timer with a period of N processor clock cycles, use a RELOAD value of N-1. For example, if the SysTick interrupt is required every 100 clock pulses, set RELOAD to 99.

#### 28.6.4.3 SysTick Current Value Register

The SYST_CVR contains the current value of the SysTick counter. See the register summary in Table 28–458 for its attributes. The bit assignments are:


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 461. SYST_CVR bit assignments**

| Bits | Name | Function |
|---|---|---|
| [31:24] | - | Reserved. |
| [23:0] | CURRENT | Reads return the current value of the SysTick counter.<br>A write of any value clears the field to 0, and also clears the SYST_CSR.COUNTFLAG bit to 0. |

### 28.6.4.4 SysTick Calibration Value Register

The SYST_CALIB register indicates the SysTick calibration properties. See the register summary in Table 28–458 for its attributes. The bit assignments are:

**Table 462. SYST_CALIB register bit assignments**

| Bits | Name | Function |
|---|---|---|
| [31] | NOREF | Reads as one. Indicates that no separate reference clock is provided. |
| [30] | SKEW | Reads as one. Calibration value for the 10ms inexact timing is not known because TENMS is not known. This can affect the suitability of SysTick as a software real time clock. |
| [29:24] | - | Reserved. |
| [23:0] | TENMS | Reads as zero. Indicates calibration value is not known. |

If calibration information is not known, calculate the calibration value required from the frequency of the processor clock or external clock.

### 28.6.4.5 SysTick usage hints and tips

The interrupt controller clock updates the SysTick counter. If this clock signal is stopped for low power mode, the SysTick counter stops.

Ensure software uses word accesses to access the SysTick registers.

If the SysTick counter reload and current value are undefined at reset, the correct initialization sequence for the SysTick counter is:

1. Program reload value.
2. Clear current value.
3. Program Control and Status register.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 28.7 Cortex-M0 instruction summary

**Table 463. Cortex M0- instruction summary**

| Operation | Description | Assembler | Cycles |
|---|---|---|---|
| Move | 8-bit immediate | MOVS Rd, #<imm> | 1 |
| | Lo to Lo | MOVS Rd, Rm | 1 |
| | Any to Any | MOV Rd, Rm | 1 |
| | Any to PC | MOV PC, Rm | 3 |
| Add | 3-bit immediate | ADDS Rd, Rn, #<imm> | 1 |
| | All registers Lo | ADDS Rd, Rn, Rm | 1 |
| | Any to Any | ADD Rd, Rd, Rm | 1 |
| | Any to PC | ADD PC, PC, Rm | 3 |
| Add | 8-bit immediate | ADDS Rd, Rd, #<imm> | 1 |
| | With carry | ADCS Rd, Rd, Rm | 1 |
| | Immediate to SP | ADD SP, SP, #<imm> | 1 |
| | Form address from SP | ADD Rd, SP, #<imm> | 1 |
| | Form address from PC | ADR Rd, <label> | 1 |
| Subtract | Lo and Lo | SUBS Rd, Rn, Rm | 1 |
| | 3-bit immediate | SUBS Rd, Rn, #<imm> | 1 |
| | 8-bit immediate | SUBS Rd, Rd, #<imm> | 1 |
| | With carry | SBCS Rd, Rd, Rm | 1 |
| | Immediate from SP | SUB SP, SP, #<imm> | 1 |
| | Negate | RSBS Rd, Rn, #0 | 1 |
| Multiply | Multiply | MULS Rd, Rm, Rd | 1 |
| Compare | Compare | CMP Rn, Rm | 1 |
| | Negative | CMN Rn, Rm | 1 |
| | Immediate | CMP Rn, #<imm> | 1 |
| Logical | AND | ANDS Rd, Rd, Rm | 1 |
| | Exclusive OR | EORS Rd, Rd, Rm | 1 |
| | OR | ORRS Rd, Rd, Rm | 1 |
| | Bit clear | BICS Rd, Rd, Rm | 1 |
| | Move NOT | MVNS Rd, Rm | 1 |
| | AND test | TST Rn, Rm | 1 |
| Shift | Logical shift left by immediate | LSLS Rd, Rm, #<shift> | 1 |
| | Logical shift left by register | LSLS Rd, Rd, Rs | 1 |
| | Logical shift right by immediate | LSRS Rd, Rm, #<shift> | 1 |
| | Logical shift right by register | LSRS Rd, Rd, Rs | 1 |
| | Arithmetic shift right | ASRS Rd, Rm, #<shift> | 1 |
| | Arithmetic shift right by register | ASRS Rd, Rd, Rs | 1 |
| Rotate | Rotate right by register | RORS Rd, Rd, Rs | 1 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 463. Cortex M0- instruction summary**

| Operation | Description | Assembler | Cycles |
|---|---|---|---|
| Load | Word, immediate offset | LDR Rd, [Rn, #<imm>] | 2 |
| | Halfword, immediate offset | LDRH Rd, [Rn, #<imm>] | 2 |
| | Byte, immediate offset | LDRB Rd, [Rn, #<imm>] | 2 |
| | Word, register offset | LDR Rd, [Rn, Rm] | 2 |
| | Halfword, register offset | LDRH Rd, [Rn, Rm] | 2 |
| | Signed halfword, register offset | LDRSH Rd, [Rn, Rm] | 2 |
| | Byte, register offset | LDRB Rd, [Rn, Rm] | 2 |
| | Signed byte, register offset | LDRSB Rd, [Rn, Rm] | 2 |
| | PC-relative | LDR Rd, <label> | 2 |
| | SP-relative | LDR Rd, [SP, #<imm>] | 2 |
| | Multiple, excluding base | LDM Rn!, {<loreglist>} | 1 + N[1] |
| | Multiple, including base | LDM Rn, {<loreglist>} | 1 + N[1] |
| Store | Word, immediate offset | STR Rd, [Rn, #<imm>] | 2 |
| Store | Halfword, immediate offset | STRH Rd, [Rn, #<imm>] | 2 |
| | Byte, immediate offset | STRB Rd, [Rn, #<imm>] | 2 |
| | Word, register offset | STR Rd, [Rn, Rm] | 2 |
| | Halfword, register offset | STRH Rd, [Rn, Rm] | 2 |
| | Byte, register offset | STRB Rd, [Rn, Rm] | 2 |
| | SP-relative | STR Rd, [SP, #<imm>] | 2 |
| | Multiple | STM Rn!, {<loreglist>} | 1 + N[1] |
| Push | Push | PUSH {<loreglist>} | 1 + N[1] |
| | Push with link register | PUSH {<loreglist>, LR} | 1 + N[1] |
| Pop | Pop | POP {<loreglist>} | 1 + N[1] |
| | Pop and return | POP {<loreglist>, PC} | 4 + N[2] |
| Branch | Conditional | B<cc> <label> | 1 or 3[3] |
| | Unconditional | B <label> | 3 |
| | With link | BL <label> | 4 |
| | With exchange | BX Rm | 3 |
| | With link and exchange | BLX Rm | 3 |
| Extend | Signed halfword to word | SXTH Rd, Rm | 1 |
| | Signed byte to word | SXTB Rd, Rm | 1 |
| | Unsigned halfword | UXTH Rd, Rm | 1 |
| | Unsigned byte | UXTB Rd, Rm | 1 |
| Reverse | Bytes in word | REV Rd, Rm | 1 |
| | Bytes in both halfwords | REV16 Rd, Rm | 1 |
| | Signed bottom half word | REVSH Rd, Rm | 1 |
| State change | Supervisor Call | SVC <imm> | -[4] |
| | Disable interrupts | CPSID i | 1 |
| | Enable interrupts | CPSIE i | 1 |
| | Read special register | MRS Rd, <specreg> | 4 |
| | Write special register | MSR <specreg>, Rn | 4 |


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**Table 463. Cortex M0- instruction summary**

| Operation | Description | Assembler | Cycles |
|---|---|---|---|
| Hint | Send event | SEV | 1 |
| | Wait for event | WFE | 2[5] |
| | Wait for interrupt | WFI | 2[5] |
| | Yield | YIELD[6] | 1 |
| | No operation | NOP | 1 |
| Barriers | Instruction synchronization | ISB | 4 |
| | Data memory | DMB | 4 |
| | Data synchronization | DSB | 4 |

[1] N is the number of elements.

[2] N is the number of elements in the stack-pop list including PC and assumes load or store does not generate a HardFault exception.

[3] 3 if taken, 1 if not taken.

[4] Cycle count depends on core and debug configuration.

[5] Excludes time spend waiting for an interrupt or event.

[6] Executes as NOP.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 29.1 Abbreviations

**Table 464. Abbreviations**

| Acronym | Description |
|---|---|
| ADC | Analog-to-Digital Converter |
| AHB | Advanced High-performance Bus |
| AMBA | Advanced Microcontroller Bus Architecture |
| APB | Advanced Peripheral Bus |
| BOD | BrownOut Detection |
| GPIO | General Purpose Input/Output |
| PLL | Phase-Locked Loop |
| SPI | Serial Peripheral Interface |
| SSI | Serial Synchronous Interface |
| TTL | Transistor-Transistor Logic |
| UART | Universal Asynchronous Receiver/Transmitter |

## 29.2 References

**[1]** **ARM DUI 0497A —** Cortex-M0 Devices Generic User Guide

**[2]** **ARM DDI 0432C —** Cortex-M0 Revision r0p0 Technical Reference Manual

**[3]** **PCF8576D —** PCF8576D Data sheet.

[4] LPC111x data sheet:
http://www.nxp.com/documents/data_sheet/LPC111X.pdf

[5] LPC11Cx2/Cx4 data sheet:
http://www.nxp.com/documents/data_sheet/LPC11CX2_CX4.pdf

[6] LPC11D14 data sheet:
http://www.nxp.com/documents/data_sheet/LPC11D14.pdf

[7] LPC111x Errata sheet:
http://www.nxp.com/documents/errata_sheet/ES_LPC111X.pdf

[8] LPC11Cxx Errata sheet:
http://www.nxp.com/documents/errata_sheet/ES_LPC11CXX.pdf

[9] LPC11D14 Errata sheet:
http://www.nxp.com/documents/errata_sheet/ES_LPC11D14.pdf


All information provided in this document is subject to legal disclaimers.
© NXP B.V. 2016. All rights reserved.

# 29.3 Legal information

## 29.3.1 Definitions

**Draft —** The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

## 29.3.2 Disclaimers

**Limited warranty and liability —** Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. NXP Semiconductors takes no responsibility for the content in this document if provided by an information source outside of NXP Semiconductors.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of NXP Semiconductors.

**Right to make changes —** NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Suitability for use —** NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors and its suppliers accept no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications —** Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

**Export control —** This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

## 29.3.3 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

**$I^2C$-bus —** logo is a trademark of NXP B.V.


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 29.4 Tables

Table 1. LPC111x/LPC11Cxx feature changes . . . . . 5
Table 2. Ordering information . . . . . 8
Table 3. Ordering options . . . . . 11
Table 4. LPC111x memory configuration . . . . . 19
Table 5. LPC11Cxx memory configuration . . . . . 19
Table 6. Pin summary . . . . . 23
Table 7. Register overview: system control block (base address 0x4004 8000) . . . . . 24
Table 8. System memory remap register (SYSMEMREMAP, address 0x4004 8000) bit description . . . . . 26
Table 9. Peripheral reset control register (PRESETCTRL, address 0x4004 8004) bit description . . . . . 27
Table 10. System PLL control register (SYSPLLCTRL, address 0x4004 8008) bit description . . . . . 27
Table 11. System PLL status register (SYSPLLSTAT, address 0x4004 800C) bit description . . . . . 28
Table 12. System oscillator control register (SYSOSCCTRL, address 0x4004 8020) bit description . . . . . 28
Table 13. Watchdog oscillator control register (WDTOSCCTRL, address 0x4004 8024) bit description . . . . . 29
Table 14. Internal resonant crystal control register (IRCCTRL, address 0x4004 8028) bit description . . . . . 29
Table 15. System reset status register (SYSRSTSTAT, address 0x4004 8030) bit description . . . . . 30
Table 16. System PLL clock source select register (SYSPLLCLKSEL, address 0x4004 8040) bit description . . . . . 30
Table 17. System PLL clock source update enable register (SYSPLLCLKUEN, address 0x4004 8044) bit description . . . . . 31
Table 18. Main clock source select register (MAINCLKSEL, address 0x4004 8070) bit description . . . . . 31
Table 19. Main clock source update enable register (MAINCLKUEN, address 0x4004 8074) bit description . . . . . 32
Table 20. System AHB clock divider register (SYSAHBCLKDIV, address 0x4004 8078) bit description . . . . . 32
Table 21. System AHB clock control register (SYSAHBCLKCTRL, address 0x4004 8080) bit description . . . . . 32
Table 22. SPI0 clock divider register (SSP0CLKDIV, address 0x4004 8094) bit description . . . . . 34
Table 23. UART clock divider register (UARTCLKDIV, address 0x4004 8098) bit description . . . . . 34
Table 24. SPI1 clock divider register (SSP1CLKDIV, address 0x4004 809C) bit description . . . . . 35
Table 25. WDT clock source select register (WDTCLKSEL, address 0x4004 80D0) bit description . . . . . 35
Table 26. WDT clock source update enable register (WDTCLKUEN, address 0x4004 80D4) bit description . . . . . 35
Table 27. WDT clock divider register (WDTCLKDIV, address 0x4004 80D8) bit description . . . . . 36
Table 28. CLKOUT clock source select register (CLKOUTCLKSEL, address 0x4004 80E0) bit description . . . . . 36
Table 29. CLKOUT clock source update enable register (CLKOUTUEN, address 0x4004 80E4) bit description . . . . . 36
Table 30. CLKOUT clock divider registers (CLKOUTCLKDIV, address 0x4004 80E8) bit description . . . . . 37
Table 31. POR captured PIO status registers 0 (PIOPORCAP0, address 0x4004 8100) bit description . . . . . 37
Table 32. POR captured PIO status registers 1 (PIOPORCAP1, address 0x4004 8104) bit description . . . . . 37
Table 33. BOD control register (BODCTRL, address 0x4004 8150) bit description . . . . . 38
Table 34. System tick timer calibration register (SYSTCKCAL, address 0x4004 8154) bit description . . . . . 38
Table 35. IRQ latency register (IRQLATENCY, address 0x4004 8170) bit description . . . . . 39
Table 36. NMI source selection register (NMISRC, address 0x4004 8174) bit description . . . . . 39
Table 37. Start logic edge control register 0 (STARTAPRP0, address 0x4004 8200) bit description . . . . . 40
Table 38. Start logic signal enable register 0 (STARTERP0, address 0x4004 8204) bit description . . . . . 40
Table 39. Start logic reset register 0 (STARTRSRP0CLR, address 0x4004 8208) bit description . . . . . 40
Table 40. Start logic status register 0 (STARTSRP0, address 0x4004 820C) bit description . . . . . 41
Table 41. Allowed values for PDSLEEPCFG register . . . 41
Table 42. Deep-sleep configuration register (PDSLEEPCFG, address 0x4004 8230) bit description . . . . . 42
Table 43. Wake-up configuration register (PDAWAKECFG, address 0x4004 8234) bit description . . . . . 42
Table 44. Power-down configuration register (PDRUNCFG, address 0x4004 8238) bit description . . . . . 43
Table 45. Device ID register (DEVICE_ID, address 0x4004 83F4) bit description . . . . . 45
Table 46. PLL frequency parameters . . . . . 54
Table 47. PLL configuration examples . . . . . 55
Table 48. Flash configuration register (FLASHCFG, address 0x4003 C010) bit description . . . . . 56
Table 49. Register overview: PMU (base address 0x4003 8000) . . . . . 57
Table 50. Power control register (PCON, address 0x4003 8000) bit description . . . . . 57
Table 51. General purpose registers 0 to 3 (GPREG0 - GPREG3, address 0x4003 8004 to 0x4003 8010) bit description . . . . . 58
Table 52. General purpose register 4 (GPREG4, address 0x4003 8014) bit description . . . . . 58


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 53. set_pll routine . . . . . 62
Table 54. set_power routine . . . . . 66
Table 55. Connection of interrupt sources to the Vectored Interrupt Controller . . . . . 69
Table 56. Register overview: I/O configuration (base address 0x4004 4000) . . . . . 74
Table 57. I/O configuration registers ordered by port number . . . . . 76
Table 58. IOCON_PIO2_6 register (IOCON_PIO2_6, address 0x4004 4000) bit description . . . . . 77
Table 59. IOCON_PIO2_0 register (IOCON_PIO2_0, address 0x4004 4008) bit description . . . . . 78
Table 60. IOCON_RESET_PIO0_0 register (IOCON_RESET_PIO0_0, address 0x4004 400C) bit description. . . . . 78
Table 61. IOCON_PIO0_1 register (IOCON_PIO0_1, address 0x4004 4010) bit description . . . . . 79
Table 62. IOCON_PIO1_8 register (IOCON_PIO1_8, address 0x4004 4014) bit description . . . . . 80
Table 63. IOCON_PIO0_2 register (IOCON_PIO0_2, address 0x4004 401C) bit description . . . . . 80
Table 64. IOCON_PIO2_7 register (IOCON_PIO2_7, address 0x4004 4020) bit description . . . . . 81
Table 65. IOCON_PIO2_8 register (IOCON_PIO2_8, address 0x4004 4024) bit description . . . . . 81
Table 66. IOCON_PIO2_1 register (IOCON_PIO2_1, address 0x4004 4028) bit description . . . . . 82
Table 67. IOCON_PIO0_3 register (IOCON_PIO0_3, address 0x4004 402C) bit description . . . . . 83
Table 68. IOCON_PIO0_4 register (IOCON_PIO0_4, address 0x4004 4030) bit description . . . . . 83
Table 69. IOCON_PIO0_5 register (IOCON_PIO0_5, address 0x4004 4034) bit description . . . . . 84
Table 70. IOCON_PIO1_9 register (IOCON_PIO1_9, address 0x4004 4038) bit description . . . . . 84
Table 71. IOCON_PIO3_4 register (IOCON_PIO3_4, address 0x4004 403C) bit description . . . . . 85
Table 72. IOCON_PIO2_4 register (IOCON_PIO2_4, address 0x4004 4040) bit description . . . . . 85
Table 73. IOCON_PIO2_5 register (IOCON_PIO2_5, address 0x4004 4044) bit description . . . . . 86
Table 74. IOCON_PIO3_5 register (IOCON_PIO3_5, address 0x4004 4048) bit description . . . . . 86
Table 75. IOCON_PIO0_6 register (IOCON_PIO0_6, address 0x4004 404C) bit description . . . . . 87
Table 76. IOCON_PIO0_7 register (IOCON_PIO0_7, address 0x4004 4050) bit description. . . . . 87
Table 77. IOCON_PIO2_9 register (IOCON_PIO2_9, address 0x4004 4054) bit description . . . . . 88
Table 78. IOCON_PIO2_10 register (IOCON_PIO2_10, address 0x4004 4058) bit description . . . . . 89
Table 79. IOCON_PIO2_2 register (IOCON_PIO2_2, address 0x4004 405C) bit description . . . . . 89
Table 80. IOCON_PIO0_8 register (IOCON_PIO0_8, address 0x4004 4060) bit description . . . . . 90
Table 81. IOCON_PIO0_9 register (IOCON_PIO0_9, address 0x4004 4064) bit description . . . . . 90
Table 82. IOCON_SWCLK_PIO0_10 register (IOCON_SWCLK_PIO0_10, address 0x4004 4068) bit description . . . . . 91
Table 83. IOCON_PIO1_10 register (IOCON_PIO1_10, address 0x4004 406C) bit description . . . . . 92
Table 84. IOCON_PIO2_11 register (IOCON_PIO2_11, address 0x4004 4070) bit description . . . . . 93
Table 85. IOCON_R_PIO0_11 register (IOCON_R_PIO0_11, address 0x4004 4074) bit description . . . . . 93
Table 86. IOCON_R_PIO1_0 register (IOCON_R_PIO1_0, address 0x4004 4078) bit description . . . . . 94
Table 87. IOCON_R_PIO1_1 register (IOCON_R_PIO1_1, address 0x4004 407C) bit description . . . . . 95
Table 88. IOCON_R_PIO1_2 register (IOCON_R_PIO1_2, address 0x4004 4080) bit description . . . . . 95
Table 89. IOCON_PIO3_0 register (IOCON_PIO3_0, address 0x4004 4084) bit description . . . . . 96
Table 90. IOCON_PIO3_1 register (IOCON_PIO3_1, address 0x4004 4088) bit description . . . . . 97
Table 91. IOCON_PIO2_3 register (IOCON_PIO2_3, address 0x4004 408C) bit description . . . . . 97
Table 92. IOCON_SWDIO_PIO1_3 register (IOCON_SWDIO_PIO1_3, address 0x4004 4090) bit description . . . . . 98
Table 93. IOCON_PIO1_4 register (IOCON_PIO1_4, address 0x4004 4094) bit description . . . . . 99
Table 94. IOCON_PIO1_11 register (IOCON_PIO1_11, address 0x4004 4098) bit description . . . . . 100
Table 95. IOCON_PIO3_2 register (IOCON_PIO3_2, address 0x4004 409C) bit description . . . . . 100
Table 96. IOCON_PIO1_5 register (IOCON_PIO1_5, address 0x4004 40A0) bit description . . . . . 101
Table 97. IOCON_PIO1_6 register (IOCON_PIO1_6, address 0x4004 40A4) bit description . . . . . 101
Table 98. IOCON_PIO1_7 register (IOCON_PIO1_7, address 0x4004 40A8) bit description . . . . . 102
Table 99. IOCON_PIO3_3 register (IOCON_PIO3_3, address 0x4004 40AC) bit description . . . . . 103
Table 100. IOCON SCK location register (IOCON_SCK_LOC, address 0x4004 40B0) bit description . . . . . 103
Table 101. IOCON $\overline{\text{DSR}}$ location register (IOCON_DSR_LOC, address 0x4004 40B4) bit description . . . . . 104
Table 102. IOCON $\overline{\text{DCD}}$ location register (IOCON_DCD_LOC, address 0x4004 40B8) bit description . . . . . 104
Table 103. IOCON $\overline{\text{RI}}$ location register (IOCON_RI_LOC, address 0x4004 40BC) bit description . . . . . 104
Table 104. Register overview: I/O configuration (base address 0x4004 4000) . . . . . 108
Table 105. I/O configuration registers ordered by port number. . . . . 110
Table 106. IOCON_PIO2_6 register (IOCON_PIO2_6, address 0x4004 4000) bit description . . . . . 111
Table 107. IOCON_PIO2_0 register (IOCON_PIO2_0, address 0x4004 4008) bit description . . . . . 112
Table 108. IOCON_RESET_PIO0_0 register


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

(IOCON_RESET_PIO0_0, address 0x4004 400C) bit description . . . . . 112
Table 109. IOCON_PIO0_1 register (IOCON_PIO0_1, address 0x4004 4010) bit description . . . . . 113
Table 110. IOCON_PIO1_8 register (IOCON_PIO1_8, address 0x4004 4014) bit description . . . . . 114
Table 111. IOCON_PIO0_2 register (IOCON_PIO0_2, address 0x4004 401C) bit description . . . . . 114
Table 112. IOCON_PIO2_7 register (IOCON_PIO2_7, address 0x4004 4020) bit description . . . . . 115
Table 113. IOCON_PIO2_8 register (IOCON_PIO2_8, address 0x4004 4024) bit description . . . . . 115
Table 114. IOCON_PIO2_1 register (IOCON_PIO2_1, address 0x4004 4028) bit description . . . . . 116
Table 115. IOCON_PIO0_3 register (IOCON_PIO0_3, address 0x4004 402C) bit description . . . . . 117
Table 116. IOCON_PIO0_4 register (IOCON_PIO0_4, address 0x4004 4030) bit description . . . . . 117
Table 117. IOCON_PIO0_5 register (IOCON_PIO0_5, address 0x4004 4034) bit description . . . . . 118
Table 118. IOCON_PIO1_9 register (IOCON_PIO1_9, address 0x4004 4038) bit description . . . . . 118
Table 119. IOCON_PIO3_4 register (IOCON_PIO3_4, address 0x4004 403C) bit description . . . . . 119
Table 120. IOCON_PIO2_4 register (IOCON_PIO2_4, address 0x4004 4040) bit description . . . . . 119
Table 121. IOCON_PIO2_5 register (IOCON_PIO2_5, address 0x4004 4044) bit description . . . . . 120
Table 122. IOCON_PIO3_5 register (IOCON_PIO3_5, address 0x4004 4048) bit description . . . . . 120
Table 123. IOCON_PIO0_6 register (IOCON_PIO0_6, address 0x4004 404C) bit description . . . . . 121
Table 124. IOCON_PIO0_7 register (IOCON_PIO0_7, address 0x4004 4050) bit description. . . . . 122
Table 125. IOCON_PIO2_9 register (IOCON_PIO2_9, address 0x4004 4054) bit description . . . . . 122
Table 126. IOCON_PIO2_10 register (IOCON_PIO2_10, address 0x4004 4058) bit description . . . . . 123
Table 127. IOCON_PIO2_2 register (IOCON_PIO2_2, address 0x4004 405C) bit description . . . . . 123
Table 128. IOCON_PIO0_8 register (IOCON_PIO0_8, address 0x4004 4060) bit description . . . . . 124
Table 129. IOCON_PIO0_9 register (IOCON_PIO0_9, address 0x4004 4064) bit description . . . . . 124
Table 130. IOCON_SWCLK_PIO0_10 register (IOCON_SWCLK_PIO0_10, address 0x4004 4068) bit description . . . . . 125
Table 131. IOCON_PIO1_10 register (IOCON_PIO1_10, address 0x4004 406C) bit description . . . . . 126
Table 132. IOCON_PIO2_11 register (IOCON_PIO2_11, address 0x4004 4070) bit description . . . . . 126
Table 133. IOCON_R_PIO0_11 register (IOCON_R_PIO0_11, address 0x4004 4074) bit description . . . . . 127
Table 134. IOCON_R_PIO1_0 register (IOCON_R_PIO1_0, address 0x4004 4078) bit description . . . . . 128
Table 135. IOCON_R_PIO1_1 register (IOCON_R_PIO1_1, address 0x4004 407C) bit description . . . . . 128
Table 136. IOCON_R_PIO1_2 register (IOCON_R_PIO1_2, address 0x4004 4080) bit description . . . . . 129
Table 137. IOCON_PIO3_0 register (IOCON_PIO3_0, address 0x4004 4084) bit description . . . . . 130
Table 138. IOCON_PIO3_1 register (IOCON_PIO3_1, address 0x4004 4088) bit description . . . . . 131
Table 139. IOCON_PIO2_3 register (IOCON_PIO2_3, address 0x4004 408C) bit description . . . . . 131
Table 140. IOCON_SWDIO_PIO1_3 register (IOCON_SWDIO_PIO1_3, address 0x4004 4090) bit description . . . . . 132
Table 141. IOCON_PIO1_4 register (IOCON_PIO1_4, address 0x4004 4094) bit description . . . . . 133
Table 142. IOCON_PIO1_11 register (IOCON_PIO1_11, address 0x4004 4098) bit description . . . . . 133
Table 143. IOCON_PIO3_2 register (IOCON_PIO3_2, address 0x4004 409C) bit description . . . . . 134
Table 144. IOCON_PIO1_5 register (IOCON_PIO1_5, address 0x4004 40A0) bit description . . . . . 135
Table 145. IOCON_PIO1_6 register (IOCON_PIO1_6, address 0x4004 40A4) bit description . . . . . 135
Table 146. IOCON_PIO1_7 register (IOCON_PIO1_7, address 0x4004 40A8) bit description . . . . . 136
Table 147. IOCON_PIO3_3 register (IOCON_PIO3_3, address 0x4004 40AC) bit description . . . . . 136
Table 148. IOCON SCK0 location register (IOCON_SCK0_LOC, address 0x4004 40B0) bit description . . . . . 137
Table 149. IOCON $\overline{\text{DSR}}$ location register (IOCON_DSR_LOC, address 0x4004 40B4) bit description . . . . . 138
Table 150. IOCON $\overline{\text{DCD}}$ location register (IOCON_DCD_LOC, address 0x4004 40B8) bit description . . . . . 138
Table 151. IOCON $\overline{\text{RI}}$ location register (IOCON_RI_LOC, address 0x4004 40BC) bit description . . . . . 138
Table 152. IOCON SSEL1 location register (IOCON_SSEL1_LOC, address 0x4004 4018) bit description . . . . . 139
Table 153. IOCON CT16B0_CAP0 location register (IOCON_CT16B0_CAP0_LOC, address 0x4004 40C0) bit description . . . . . 139
Table 154. IOCON SCK1 location register (IOCON_SCK1_LOC, address 0x4004 40C4) bit description . . . . . 139
Table 155. IOCON MISO1 location register (IOCON_MISO1_LOC, address 0x4004 40C8) bit description . . . . . 140
Table 156. IOCON MOSI1 location register (IOCON_MOSI1_LOC, address 0x4004 40CC) bit description . . . . . 140
Table 157. IOCON CT32B0_CAP0 location register (IOCON_CT32B0_CAP0_LOC, address 0x4004 40D0) bit description . . . . . 140
Table 158. IOCON RXD location register (IOCON_RXD_LOC, address 0x4004 40D4) bit description . . . . . 141
Table 159. LPC11(D)1x/LPC11Cxx pin configurations . . 142


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 160. LPC1113/14 and LPC11C12/C14 pin description table (LQFP48 package) . . . . . 148
Table 161. LPC1111/12/13/14 pin description table (HVQFN33 package) . . . . . 152
Table 162. LPC1112FHN24 Pin description table (HVQFN24 package) . . . . . 155
Table 163. LPC11C24/C22 pin description table (LQFP48 package) . . . . . 157
Table 164. LPC11D14 pin description table (LQFP100 package) . . . . . 161
Table 165. LPC11xx pin configurations for 20-pin and 28-pin packages . . . . . 167
Table 166. LPC1110/11/12 pin description table (SO20 and TSSOP20 package with $I^2C$-bus pins) . . . . . 168
Table 167. LPC1112 pin description table (TSSOP20 with $V_{DDA}$ and $V_{SSA}$ pins) . . . . . 171
Table 168. LPC1112/14 pin description table (TSSOP28 and DIP28 packages) . . . . . 174
Table 169. LPC1100XL pin configurations . . . . . 177
Table 170. LPC1100XL series: LPC1113/14/15 pin description table (LQFP48 and TFBGA48 package) . . . . . 181
Table 171. LPC1111/12/13/14XL pin description table (HVQFN33 package) . . . . . 186
Table 172. GPIO configuration . . . . . 190
Table 173. Register overview: GPIO (base address port 0: 0x5000 0000; port 1: 0x5001 0000, port 2: 0x5002 0000; port 3: 0x5003 0000) . . . . . 191
Table 174. GPIOnDATA register (GPIO0DATA, address 0x5000 0000 to 0x5000 3FFC; GPIO1DATA, address 0x5001 0000 to 0x5001 3FFC; GPIO2DATA, address 0x5002 0000 to 0x5002 3FFC; GPIO3DATA, address 0x5003 0000 to 0x5003 3FFC) bit description . . . . . 191
Table 175. GPIOnDIR register (GPIO0DIR, address 0x5000 8000 to GPIO3DIR, address 0x5003 8000) bit description . . . . . 192
Table 176. GPIOnIS register (GPIO0IS, address 0x5000 8004 to GPIO3IS, address 0x5003 8004) bit description . . . . . 192
Table 177. GPIOnIBE register (GPIO0IBE, address 0x5000 8008 to GPIO3IBE, address 0x5003 8008) bit description . . . . . 193
Table 178. GPIOnIEV register (GPIO0IEV, address 0x5000 800C to GPIO3IEV, address 0x5003 800C) bit description . . . . . 193
Table 179. GPIOnIE register (GPIO0IE, address 0x5000 8010 to GPIO3IE, address 0x5003 8010) bit description . . . . . 193
Table 180. GPIOnRIS register (GPIO0RIS, address 0x5000 8014 to GPIO3RIS, address 0x5003 8014) bit description . . . . . 194
Table 181. GPIOnMIS register (GPIO0MIS, address 0x5000 8018 to GPIO3MIS, address 0x5003 8018) bit description . . . . . 194
Table 182. GPIOnIC register (GPIO0IC, address 0x5000 801C to GPIO3IC, address 0x5003 801C) bit description . . . . . 194
Table 183. UART pin description . . . . . 198
Table 184. Register overview: UART (base address: 0x4000 8000) . . . . . 198
Table 185. UART Receiver Buffer Register (U0RBR - address 0x4000 8000 when DLAB = 0, Read Only) bit description . . . . . 200
Table 186. UART Transmitter Holding Register (U0THR - address 0x4000 8000 when DLAB = 0, Write Only) bit description . . . . . 200
Table 187. UART Divisor Latch LSB Register (U0DLL - address 0x4000 8000 when DLAB = 1) bit description . . . . . 201
Table 188. UART Divisor Latch MSB Register (U0DLM - address 0x4000 8004 when DLAB = 1) bit description . . . . . 201
Table 189. UART Interrupt Enable Register (U0IER - address 0x4000 8004 when DLAB = 0) bit description . . . . . 201
Table 190. UART Interrupt Identification Register (U0IIR - address 0x4004 8008, Read Only) bit description . . . . . 202
Table 191. UART Interrupt Handling . . . . . 203
Table 192. UART FIFO Control Register (U0FCR - address 0x4000 8008, Write Only) bit description . . . . 205
Table 193. UART Line Control Register (U0LCR - address 0x4000 800C) bit description . . . . . 205
Table 194. UART0 Modem Control Register (U0MCR - address 0x4000 8010) bit description . . . . . 206
Table 195. Modem status interrupt generation . . . . . 208
Table 196. UART Line Status Register (U0LSR - address 0x4000 8014, Read Only) bit description . . . 209
Table 197. UART Modem Status Register (U0MSR - address 0x4000 8018) bit description . . . . . 211
Table 198. UART Scratch Pad Register (U0SCR - address 0x4000 801C) bit description . . . . . 211
Table 199. Auto baud Control Register (U0ACR - address 0x4000 8020) bit description . . . . . 212
Table 200. UART Fractional Divider Register (U0FDR - address 0x4000 8028) bit description . . . . . 215
Table 201. Fractional Divider setting look-up table . . . . . 218
Table 202. UART Transmit Enable Register (U0TER - address 0x4000 8030) bit description . . . . . 219
Table 203. UART RS485 Control register (U0RS485CTRL - address 0x4000 804C) bit description . . . . . 219
Table 204. UART RS485 Address Match register (U0RS485ADRMATCH - address 0x4000 8050) bit description . . . . . 220
Table 205. UART RS485 Delay value register (U0RS485DLY - address 0x4000 8054) bit description . . . . . 220
Table 206. SPI pin descriptions . . . . . 225
Table 207. Register overview: SPI0 (base address 0x4004 0000) . . . . . 226
Table 208. Register overview: SPI1 (base address 0x4005 8000) . . . . . 226
Table 209: SPI/SSP Control Register 0 (SSP0CR0 - address 0x4004 0000, SSP1CR0 - address 0x4005 8000) bit description . . . . . 227
Table 210: SPI/SSP Control Register 1 (SSP0CR1 - address


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

0x4004 0004, SSP1CR1 - address 0x4005 8004) bit description . . . . . 228
Table 211: SPI/SSP Data Register (SSP0DR - address 0x4004 0008, SSP1DR - address 0x4005 8008) bit description . . . . . 228
Table 212: SPI/SSP Status Register (SSP0SR - address 0x4004 000C, SSP1SR - address 0x4005 800C) bit description . . . . . 229
Table 213: SPI/SSP Clock Prescale Register (SSP0CPSR - address 0x4004 0010, SSP1CPSR - address 0x4005 8010) bit description . . . . . 229
Table 214: SPI/SSP Interrupt Mask Set/Clear register (SSP0IMSC - address 0x4004 0014, SSP1IMSC - address 0x4005 8014) bit description. . . . . 230
Table 215: SPI/SSP Raw Interrupt Status register (SSP0RIS - address 0x4004 0018, SSP1RIS - address 0x4005 8018) bit description . . . . . 230
Table 216: SPI/SSP Masked Interrupt Status register (SSP0MIS - address 0x4004 001C, SSP1MIS - address 0x4005 801C) bit description . . . . . 231
Table 217: SPI/SSP interrupt Clear Register (SSP0ICR - address 0x4004 0020, SSP1ICR - address 0x4005 8020) bit description . . . . . 231
Table 218. I2C-bus pin description. . . . . 241
Table 219. Register overview: I2C (base address 0x4000 0000) . . . . . 241
Table 220. I2C Control Set register (I2C0CONSET - address 0x4000 0000) bit description . . . . . 242
Table 221. I2C Status register (I2C0STAT - 0x4000 0004) bit description . . . . . 244
Table 222. I2C Data register (I2C0DAT - 0x4000 0008) bit description . . . . . 244
Table 223. I2C Slave Address register 0 (I2C0ADR0- 0x4000 000C) bit description . . . . . 245
Table 224. I2C SCL HIGH Duty Cycle register (I2C0SCLH - address 0x4000 0010) bit description. . . . . 245
Table 225. I2C SCL Low duty cycle register (I2C0SCLL - 0x4000 0014) bit description . . . . . 245
Table 226. SCLL + SCLH values for selected I2C clock values . . . . . 245
Table 227. I2C Control Clear register (I2C0CONCLR - 0x4000 0018) bit description . . . . . 246
Table 228. I2C Monitor mode control register (I2C0MMCTRL - 0x4000 001C) bit description . . . . . 247
Table 229. I2C Slave Address registers (I2C0ADR[1, 2, 3]- 0x4000 00[20, 24, 28]) bit description . . . . . 248
Table 230. I2C Data buffer register (I2C0DATA_BUFFER - 0x4000 002C) bit description . . . . . 249
Table 231. I2C Mask registers (I2C0MASK[0, 1, 2, 3] - 0x4000 00[30, 34, 38, 3C]) bit description . . . 249
Table 232. I2C0CONSET and I2C1CONSET used to configure Master mode. . . . . 250
Table 233. I2C0CONSET and I2C1CONSET used to configure Slave mode. . . . . 251
Table 234. Abbreviations used to describe an I2C operation. . . . . 257
Table 235. I2C0CONSET used to initialize Master Transmitter mode . . . . . 257
Table 236. Master Transmitter mode . . . . . 259
Table 237. Master Receiver mode . . . . . 262
Table 238. I2C0ADR and I2C1ADR usage in Slave Receiver mode . . . . . 264
Table 239. I2C0CONSET and I2C1CONSET used to initialize Slave Receiver mode . . . . . 264
Table 240. Slave Receiver mode . . . . . 265
Table 241. Slave Transmitter mode . . . . . 269
Table 242. Miscellaneous States . . . . . 271
Table 243. CAN pin description (LPC11C12/C14) . . . . . 284
Table 244. CAN pin description (LPC11C22/C24) . . . . . 284
Table 245. Register overview: CCAN (base address 0x4005 0000) . . . . . 284
Table 246. CAN control registers (CANCNTL, address 0x4005 0000) bit description . . . . . 286
Table 247. CAN status register (CANSTAT, address 0x4005 0004) bit description . . . . . 288
Table 248. CAN error counter (CANEC, address 0x4005 0008) bit description . . . . . 289
Table 249. CAN bit timing register (CANBT, address 0x4005 000C) bit description . . . . . 290
Table 250. CAN interrupt register (CANINT, address 0x4005 0010) bit description . . . . . 291
Table 251. CAN test register (CANTEST, address 0x4005 0014) bit description . . . . . 291
Table 252. CAN baud rate prescaler extension register (CANBRPE, address 0x4005 0018) bit description . . . . . 292
Table 253. Message interface registers . . . . . 293
Table 254. Structure of a message object in the message RAM. . . . . 293
Table 255. CAN message interface command request registers (CANIF1_CMDREQ, address 0x4005 0020 and CANIF2_CMDREQ, address 0x4005 0080) bit description . . . . . 294
Table 256. CAN message interface command mask registers (CANIF1_CMDMSK_W, address 0x4005 0024 and CANIF2_CMDMSK_W, address 0x4005 0084) bit description for write direction . . . . . 294
Table 257. CAN message interface command mask registers (CANIF1_CMDMSK_R, address 0x4005 0024 and CANIF2_CMDMSK_R, address 0x4005 0084) bit description for read direction . 295
Table 258. CAN message interface mask 1 registers (CANIF1_MSK1, address 0x4005 0028 and CANIF2_MASK1, address 0x4005 0088) bit description . . . . . 297
Table 259. CAN message interface mask 2 registers (CANIF1_MSK2, address 0x4005 002C and CANIF2_MASK2, address 0x4005 008C) bit description . . . . . 297
Table 260. CAN message interface arbitration 1 registers (CANIF1_ARB1, address 0x4005 0030 and


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

CANIF2_ARB1, address 0x4005 0090) bit description . . . . . 298
Table 261. CAN message interface arbitration 2 registers (CANIF1_ARB2, address 0x4005 0034 and CANIF2_ARB2, address 0x4005 0094) bit description . . . . . 298
Table 262. CAN message interface message control registers (CANIF1_MCTRL, address 0x4005 0038 and CANIF2_MCTRL, address 0x4005 0098) bit description . . . . . 299
Table 263. CAN message interface data A1 registers (CANIF1_DA1, address 0x4005 003C and CANIF2_DA1, address 0x4005 009C) bit description . . . . . 300
Table 264. CAN message interface data A2 registers (CANIF1_DA2, address 0x4005 0040 and CANIF2_DA2, address 0x4005 00A0) bit description . . . . . 300
Table 265. CAN message interface data B1 registers (CANIF1_DB1, address 0x4005 0044 and CANIF2_DB1, address 0x4005 00A4) bit description . . . . . 301
Table 266. CAN message interface data B2 registers (CANIF1_DB2, address 0x4005 0048 and CANIF2_DB2, address 0x4005 00A8) bit description . . . . . 301
Table 267. CAN transmission request 1 register (CANTXREQ1, address 0x4005 0100) bit description . . . . . 301
Table 268. CAN transmission request 2 register (CANTXREQ2, address 0x4005 0104) bit description . . . . . 302
Table 269. CAN new data 1 register (CANND1, address 0x4005 0120) bit description . . . . . 302
Table 270. CAN new data 2 register (CANND2, address 0x4005 0124) bit description . . . . . 302
Table 271. CAN interrupt pending 1 register (CANIR1, address 0x4005 0140) bit description. . . . . 303
Table 272. CAN interrupt pending 2 register (CANIR2, addresses 0x4005 0144) bit description. . . . . 303
Table 273. CAN message valid 1 register (CANMSGV1, addresses 0x4005 0160) bit description. . . . . 303
Table 274. CAN message valid 2 register (CANMSGV2, address 0x4005 0164) bit description. . . . . 304
Table 275. CAN clock divider register (CANCLKDIV, address 0x4005 0180) bit description . . . . . 304
Table 276. Initialization of a transmit object. . . . . 313
Table 277. Initialization of a receive object . . . . . 314
Table 278. Parameters of the C_CAN bit time. . . . . 318
Table 279. Counter/timer pin description. . . . . 334
Table 280. Register overview: 16-bit counter/timer 0 CT16B0 (base address 0x4000 C000) . . . . . 335
Table 281. Register overview: 16-bit counter/timer 1 CT16B1 (base address 0x4001 0000) . . . . . 336
Table 282. Interrupt Register (TMR16B0IR - address 0x4000 C000 and TMR16B1IR - address 0x4001 0000) bit description . . . . . 337
Table 283. Timer Control Register (TMR16B0TCR - address 0x4000 C004 and TMR16B1TCR - address 0x4001 0004) bit description . . . . . 337
Table 284: Timer counter registers (TMR16B0TC, address 0x4000 C008 and TMR16B1TC 0x4001 0008) bit description . . . . . 337
Table 285: Prescale registers (TMR16B0PR, address 0x4000 C00C and TMR16B1PR 0x4001 000C) bit description . . . . . 338
Table 286: Prescale counter registers (TMR16B0PC, address 0x4001 C010 and TMR16B1PC 0x4000 0010) bit description . . . . . 338
Table 287. Match Control Register (TMR16B0MCR - address 0x4000 C014 and TMR16B1MCR - address 0x4001 0014) bit description . . . . . 338
Table 288: Match registers (TMR16B0MR0 to 3, addresses 0x4000 C018 to 24 and TMR16B1MR0 to 3, addresses 0x4001 0018 to 24) bit description 340
Table 289. Capture Control Register (TMR16B0CCR - address 0x4000 C028 and TMR16B1CCR - address 0x4001 0028) bit description . . . . . 340
Table 290: Capture registers (TMR16B0CR0, address 0x4000 C02C and TMR16B1CR0, address 0x4001 002C) bit description . . . . . 340
Table 291. External Match Register (TMR16B0EMR - address 0x4000 C03C and TMR16B1EMR - address 0x4001 003C) bit description . . . . . 341
Table 292. External match control . . . . . 342
Table 293. Count Control Register (TMR16B0CTCR - address 0x4000 C070 and TMR16B1CTCR - address 0x4001 0070) bit description . . . . . 343
Table 294. PWM Control Register (TMR16B0PWMC - address 0x4000 C074 and TMR16B1PWMC- address 0x4001 0074) bit description . . . . . 343
Table 295. Counter/timer pin description . . . . . 348
Table 296. Register overview: 16-bit counter/timer 0 CT16B0 (base address 0x4000 C000) . . . . . 349
Table 297. Register overview: 16-bit counter/timer 1 CT16B1 (base address 0x4001 0000) . . . . . 350
Table 298. Interrupt Register (TMR16B0IR - address 0x4000 C000 and TMR16B1IR - address 0x4001 0000) bit description . . . . . 351
Table 299. Timer Control Register (TMR16B0TCR - address 0x4000 C004 and TMR16B1TCR - address 0x4001 0004) bit description . . . . . 351
Table 300: Timer counter registers (TMR16B0TC, address 0x4000 C008 and TMR16B1TC 0x4001 0008) bit description . . . . . 351
Table 301: Prescale registers (TMR16B0PR, address 0x4000 C00C and TMR16B1PR 0x4001 000C) bit description . . . . . 352
Table 302: Prescale counter registers (TMR16B0PC, address 0x4001 C010 and TMR16B1PC 0x4000 0010) bit description . . . . . 352
Table 303. Match Control Register (TMR16B0MCR - address 0x4000 C014 and TMR16B1MCR - address 0x4001 0014) bit description . . . . . 352
Table 304: Match registers (TMR16B0MR0 to 3, addresses 0x4000 C018 to 24 and TMR16B1MR0 to 3,


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

addresses 0x4001 0018 to 24) bit description 354
Table 305. Capture Control Register (TMR16B0CCR - address 0x4000 C028 and TMR16B1CCR - address 0x4001 0028) bit description. . . . . .354
Table 306: Capture registers (TMR16B0CR0/1, address 0x4000 C02C/30 and TMR16B1CR0/1, address 0x4001 002C/30) bit description. . . . . .355
Table 307. External Match Register (TMR16B0EMR - address 0x4000 C03C and TMR16B1EMR - address 0x4001 003C) bit description . . . . . .355
Table 308. External match control. . . . . .356
Table 309. Count Control Register (TMR16B0CTCR - address 0x4000 C070 and TMR16B1CTCR - address 0x4001 0070) bit description. . . . . .357
Table 310. PWM Control Register (TMR16B0PWMC - address 0x4000 C074 and TMR16B1PWMC- address 0x4001 0074) bit description. . . . . .358
Table 311. Counter/timer pin description . . . . . .363
Table 312. Register overview: 32-bit counter/timer 0 CT32B0 (base address 0x4001 4000) . . . . . .363
Table 313. Register overview: 32-bit counter/timer 1 CT32B1 (base address 0x4001 8000) . . . . . .364
Table 314: Interrupt Register (TMR32B0IR - address 0x4001 4000 and TMR32B1IR - address 0x4001 8000) bit description . . . . . .365
Table 315: Timer Control Register (TMR32B0TCR - address 0x4001 4004 and TMR32B1TCR - address 0x4001 8004) bit description . . . . . .366
Table 316: Timer counter registers (TMR32B0TC, address 0x4001 4008 and TMR32B1TC 0x4001 8008) bit description . . . . . .366
Table 317: Prescale registers (TMR32B0PR, address 0x4001 400C and TMR32B1PR 0x4001 800C) bit description . . . . . .366
Table 318: Prescale counter registers (TMR32B0PC, address 0x4001 4010 and TMR32B1PC 0x4001 8010) bit description . . . . . .367
Table 319: Match Control Register (TMR32B0MCR - address 0x4001 4014 and TMR32B1MCR - address 0x4001 8014) bit description. . . . . .367
Table 320: Match registers (TMR32B0MR0 to 3, addresses 0x4001 4018 to 24 and TMR32B1MR0 to 3, addresses 0x4001 8018 to 24) bit description 368
Table 321: Capture Control Register (TMR32B0CCR - address 0x4001 4028 and TMR32B1CCR - address 0x4001 8028) bit description. . . . . .368
Table 322: Capture registers (TMR32B0CR0, addresses 0x4001 402C and TMR32B1CR0, addresses 0x4001 802C) bit description . . . . . .369
Table 323: External Match Register (TMR32B0EMR - address 0x4001 403C and TMR32B1EMR - address0x4001 803C) bit description. . . . . .370
Table 324. External match control. . . . . .371
Table 325: Count Control Register (TMR32B0CTCR - address 0x4001 4070 and TMR32B1TCR - address 0x4001 8070) bit description . . . . . .372
Table 326: PWM Control Register (TMR32B0PWMC - 0x4001 4074 and TMR32B1PWMC - 0x4001 8074) bit description. . . . . .372
Table 327. Counter/timer pin description . . . . . .377
Table 328. Register overview: 32-bit counter/timer 0 CT32B0 (base address 0x4001 4000) . . . . . .378
Table 329. Register overview: 32-bit counter/timer 1 CT32B1 (base address 0x4001 8000) . . . . . .379
Table 330: Interrupt Register (TMR32B0IR - address 0x4001 4000 and TMR32B1IR - address 0x4001 8000) bit description . . . . . .380
Table 331: Timer Control Register (TMR32B0TCR - address 0x4001 4004 and TMR32B1TCR - address 0x4001 8004) bit description . . . . . .380
Table 332: Timer counter registers (TMR32B0TC, address 0x4001 4008 and TMR32B1TC 0x4001 8008) bit description . . . . . .380
Table 333: Prescale registers (TMR32B0PR, address 0x4001 400C and TMR32B1PR 0x4001 800C) bit description . . . . . .381
Table 334: Prescale counter registers (TMR32B0PC, address 0x4001 4010 and TMR32B1PC 0x4001 8010) bit description . . . . . .381
Table 335: Match Control Register (TMR32B0MCR - address 0x4001 4014 and TMR32B1MCR - address 0x4001 8014) bit description . . . . . .381
Table 336: Match registers (TMR32B0MR0 to 3, addresses 0x4001 4018 to 24 and TMR32B1MR0 to 3, addresses 0x4001 8018 to 24) bit description 383
Table 337: Capture Control Register (TMR32B0CCR - address 0x4001 4028 and TMR32B1CCR - address 0x4001 8028) bit description . . . . . .383
Table 338: Capture registers (TMR32B0CR0/1, addresses 0x4001 402C/30 and TMR32B1CR0/1, addresses 0x4001 802C/30) bit description . . . . . .384
Table 339: External Match Register (TMR32B0EMR - address 0x4001 403C and TMR32B1EMR - address0x4001 803C) bit description . . . . . .384
Table 340. External match control . . . . . .385
Table 341: Count Control Register (TMR32B0CTCR - address 0x4001 4070 and TMR32B1TCR - address 0x4001 8070) bit description . . . . . .386
Table 342: PWM Control Register (TMR32B0PWMC - 0x4001 4074 and TMR32B1PWMC - 0x4001 8074) bit description. . . . . .387
Table 343. Register overview: Watchdog timer (base address 0x4000 4000) . . . . . .394
Table 344: Watchdog Mode register (WDMOD - 0x4000 4000) bit description . . . . . .394
Table 345. Watchdog operating modes selection . . . . . .395
Table 346: Watchdog Timer Constant register (WDTC - 0x4000 4004) bit description . . . . . .396
Table 347: Watchdog Feed register (WDFEED - 0x4000 4008) bit description . . . . . .396
Table 348: Watchdog Timer Value register (WDTV - 0x4000 400C) bit description . . . . . .396
Table 349: Watchdog Timer Warning Interrupt register (WDWARNINT - 0x4000 4014) bit description397
Table 350: Watchdog Timer Window register (WDWINDOW - 0x4000 4018) bit description . . . . . .397


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 351. Register overview: Watchdog timer (base address 0x4000 4000) . . . . . 401
Table 352. Watchdog Mode register (WDMOD - address 0x4000 4000) bit description . . . . . 401
Table 353. Watchdog operating modes selection . . . . . 402
Table 354. Watchdog Constant register (WDTC - address 0x4000 4004) bit description . . . . . 402
Table 355. Watchdog Feed register (WDFEED - address 0x4000 4008) bit description . . . . . 403
Table 356. Watchdog Timer Value register (WDTV - address 0x4000 000C) bit description . . . . . 403
Table 357. Register overview: SysTick timer (base address 0xE000 E000) . . . . . 405
Table 358. SysTick Timer Control and status register (SYST_CSR - 0xE000 E010) bit description . 406
Table 359. System Timer Reload value register (SYST_RVR - 0xE000 E014) bit description . . . . . 406
Table 360. System Timer Current value register (SYST_CVR - 0xE000 E018) bit description . . . . . 406
Table 361. System Timer Calibration value register (SYST_CALIB - 0xE000 E01C) bit description . . . . . 407
Table 362. ADC pin description . . . . . 409
Table 363. Register overview: ADC (base address 0x4001 C000) . . . . . 409
Table 364. A/D Control Register (AD0CR - address 0x4001 C000) bit description . . . . . 410
Table 365. A/D Global Data Register (AD0GDR - address 0x4001 C004) bit description . . . . . 411
Table 366. A/D Interrupt Enable Register (AD0INTEN - address 0x4001 C00C) bit description . . . . . 412
Table 367. A/D Data Registers (AD0DR0 to AD0DR7 - addresses 0x4001 C010 to 0x4001 C02C) bit description . . . . . 412
Table 368. A/D Status Register (AD0STAT - address 0x4001 C030) bit description . . . . . 413
Table 369. LPC111x/LPC11Cx flash configurations. . . . . 414
Table 370. LPC111x flash configuration (LPC1100, LPC1100L, LPC1100C series) . . . . . 419
Table 371. LPC1100XL flash configuration . . . . . 419
Table 372. Code Read Protection options . . . . . 421
Table 373. Code Read Protection hardware/software interaction . . . . . 421
Table 374. ISP commands allowed for different CRP levels . . . . . 422
Table 375. UART ISP command summary . . . . . 424
Table 376. UART ISP Unlock command . . . . . 425
Table 377. UART ISP Set Baud Rate command . . . . . 425
Table 378. UART ISP Echo command . . . . . 425
Table 379. UART ISP Write to RAM command . . . . . 426
Table 380. UART ISP Read Memory command . . . . . 427
Table 381. UART ISP Prepare sector(s) for write operation command . . . . . 427
Table 382. UART ISP Copy RAM to flash command . . . 428
Table 383. UART ISP Go command . . . . . 429
Table 384. UART ISP Erase sector command . . . . . 429
Table 385. UART ISP Blank check sector command . . . 430
Table 386. UART ISP Read Part Identification command 430
Table 387. LPC111x and LPC11Cxx part identification numbers . . . . . 430
Table 388. UART ISP Read Boot Code version number command . . . . . 432
Table 389. UART ISP Compare command . . . . . 432
Table 390. UART ISP ReadUID command . . . . . 433
Table 391. UART ISP Return Codes Summary . . . . . 433
Table 392. C_CAN ISP and UART ISP command summary . . . . . 434
Table 393. C_CAN ISP object directory . . . . . 435
Table 394. C_CAN ISP SDO abort codes. . . . . 438
Table 395. IAP Command Summary . . . . . 440
Table 396. IAP Prepare sector(s) for write operation command . . . . . 441
Table 397. IAP Copy RAM to flash command. . . . . 441
Table 398. IAP Erase Sector(s) command . . . . . 442
Table 399. IAP Blank check sector(s) command . . . . . 442
Table 400. IAP Read Part Identification command . . . . . 442
Table 401. IAP Read Boot Code version number command . . . . . 443
Table 402. IAP Compare command . . . . . 443
Table 403. IAP Reinvoke ISP . . . . . 444
Table 404. IAP ReadUID command . . . . . 444
Table 405. IAP Erase page command . . . . . 444
Table 406. IAP Status Codes Summary . . . . . 445
Table 407. Memory mapping in debug mode . . . . . 445
Table 408. Flash configuration register (FLASHCFG, address 0x4003 C010) bit description . . . . . 446
Table 409. Register overview: FMC (base address 0x4003 C000) . . . . . 447
Table 410. Flash Module Signature Start register (FMSSTART - 0x4003 C020) bit description . 448
Table 411. Flash Module Signature Stop register (FMSSTOP - 0x4003 C024) bit description . . . . . 448
Table 412. FMSW0 register bit description (FMSW0, address: 0x4003 C02C) . . . . . 448
Table 413. FMSW1 register bit description (FMSW1, address: 0x4003 C030) . . . . . 448
Table 414. FMSW2 register bit description (FMSW2, address: 0x4003 C034) . . . . . 448
Table 415. FMSW3 register bit description (FMSW3, address: 0x4003 40C8) . . . . . 448
Table 416. Flash module Status register (FMSTAT - 0x4003 CFE0) bit description . . . . . 449

continued >>


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Table 417. Flash Module Status Clear register (FMSTATCLR - 0x0x4003 CFE8) bit description . . . . . .449
Table 418. Serial Wire Debug pin description . . . . . .451
Table 419. Summary of processor mode and stack use options . . . . . .455
Table 420. Core register set summary. . . . . .456
Table 421. PSR register combinations . . . . . .457
Table 422. APSR bit assignments . . . . . .458
Table 423. IPSR bit assignments. . . . . .458
Table 424. EPSR bit assignments . . . . . .459
Table 425. PRIMASK register bit assignments . . . . . .459
Table 426. CONTROL register bit assignments . . . . . .460
Table 427. Memory access behavior . . . . . .464
Table 428. Properties of different exception types. . . . . .466
Table 429. Exception return behavior . . . . . .471
Table 430. Cortex-M0 instructions . . . . . .474
Table 431. CMSIS intrinsic functions to generate some Cortex-M0 instructions . . . . . .475
Table 432. CMSIS intrinsic functions to access the special registers . . . . . .476
Table 433. Condition code suffixes . . . . . .481
Table 434. Access instructions . . . . . .481
Table 435. Data processing instructions . . . . . .487
Table 436. ADC, ADD, RSB, SBC and SUB operand restrictions . . . . . .489
Table 437. Branch and control instructions . . . . . .496
Table 438. Branch ranges . . . . . .497
Table 439. Miscellaneous instructions . . . . . .498
Table 440. Core peripheral register regions . . . . . .505
Table 441. NVIC register summary . . . . . .506
Table 442. CMISIS access NVIC functions . . . . . .506
Table 443. ISER bit assignments. . . . . .507
Table 444. ICER bit assignments . . . . . .507
Table 445. ISPR bit assignments. . . . . .507
Table 446. ICPR bit assignments . . . . . .508
Table 447. IPR bit assignments . . . . . .508
Table 448. CMSIS functions for NVIC control . . . . . .510
Table 449. Summary of the SCB registers . . . . . .511
Table 450. CPUID register bit assignments. . . . . .511
Table 451. ICSR bit assignments . . . . . .512
Table 452. AIRCR bit assignments . . . . . .514
Table 453. SCR bit assignments . . . . . .514
Table 454. CCR bit assignments . . . . . .515
Table 455. System fault handler priority fields . . . . . .515
Table 456. SHPR2 register bit assignments . . . . . .516
Table 457. SHPR3 register bit assignments . . . . . .516
Table 458. System timer registers summary . . . . . .516
Table 459. SYST_CSR bit assignments . . . . . .517
Table 460. SYST_RVR bit assignments . . . . . .517
Table 461. SYST_CVR bit assignments . . . . . .518
Table 462. SYST_CALIB register bit assignments . . . . . .518
Table 463. Cortex M0- instruction summary . . . . . .519
Table 464. Abbreviations . . . . . .522


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 29.5 Figures

Fig 1. LPC111x block diagram (LPC1100 and LPC1100L series) . . . . . 14
Fig 2. LPC111x block diagram (LPC1100XL series) . . . 15
Fig 3. LPC11Cxx/LPC11D14 block diagram (LPC1100C series and LPC11D14) . . . . . 16
Fig 4. LPC11D14 block diagram . . . . . 17
Fig 5. PCF8576D block diagram . . . . . 17
Fig 6. LPC111x/LPC11Cxx memory map (LPC1100 and LPC1100L series) . . . . . 20
Fig 7. LPC111x memory map (LPC1100XL series) . . . . 21
Fig 8. LPC111x/LPC11Cxx CGU block diagram . . . . . 24
Fig 9. Start-up timing . . . . . 47
Fig 10. System PLL block diagram . . . . . 53
Fig 11. Power profiles pointer structure . . . . . 61
Fig 12. LPC111x/102/202/302 clock configuration for power API use . . . . . 61
Fig 13. Power profiles usage . . . . . 66
Fig 14. Standard I/O pin configuration . . . . . 72
Fig 15. Standard I/O pin configuration . . . . . 106
Fig 16. Pin configuration LQFP48 package . . . . . 143
Fig 17. Pin configuration HVQFN33 package . . . . . 144
Fig 18. Pin configuration HVQFN24 package . . . . . 144
Fig 19. Pin configuration LQFP48 package . . . . . 145
Fig 20. Pin configuration (LPC11C22/C24) . . . . . 146
Fig 21. Pin configuration LQFP100 package . . . . . 147
Fig 22. Pin configuration SO20 package . . . . . 167
Fig 23. Pin configuration TSSOP20 package with $I^2C$-bus pins . . . . . 168
Fig 24. Pin configuration TSSOP20 package with $V_{DDA}$ and $V_{SSA}$ pins . . . . . 170
Fig 25. Pin configuration TSSOP28 package . . . . . 173
Fig 26. Pin configuration DIP28 package . . . . . 173
Fig 27. Pin configuration LQFP48 package . . . . . 178
Fig 28. LPC1100XL series pin configuration TFBGA48 package . . . . . 179
Fig 29. Pin configuration HVQFN33 package . . . . . 180
Fig 30. Masked write operation to the GPIODATA register . . . . . 195
Fig 31. Masked read operation . . . . . 196
Fig 32. Auto-RTS Functional Timing . . . . . 208
Fig 33. Auto-CTS Functional Timing . . . . . 209
Fig 34. Auto-baud a) mode 0 and b) mode 1 waveform 214
Fig 35. Algorithm for setting UART dividers . . . . . 217
Fig 36. UART block diagram . . . . . 223
Fig 37. Texas Instruments Synchronous Serial Frame Format: a) Single and b) Continuous/back-to-back Two Frames Transfer . . . . . 232
Fig 38. SPI frame format with CPOL=0 and CPHA=0 (a) Single and b) Continuous Transfer) . . . . . 233
Fig 39. SPI frame format with CPOL=0 and CPHA=1 . . 234
Fig 40. SPI frame format with CPOL = 1 and CPHA = 0 (a) Single and b) Continuous Transfer) . . . . . 235
Fig 41. SPI Frame Format with CPOL = 1 and CPHA = 1 . . . . . 236
Fig 42. Microwire frame format (single transfer) . . . . . 237
Fig 43. Microwire frame format (continuous transfers) . 237
Fig 44. Microwire frame format setup and hold details . 238
Fig 45. $I^2C$-bus configuration . . . . . 240
Fig 46. Format in the Master Transmitter mode . . . . . 250
Fig 47. Format of Master Receiver mode . . . . . 251
Fig 48. A Master Receiver switches to Master Transmitter after sending Repeated START . . . . . 251
Fig 49. Format of Slave Receiver mode . . . . . 252
Fig 50. Format of Slave Transmitter mode . . . . . 252
Fig 51. $I^2C$ serial interface block diagram . . . . . 253
Fig 52. Arbitration procedure . . . . . 255
Fig 53. Serial clock synchronization . . . . . 255
Fig 54. Format and states in the Master Transmitter mode . . . . . 260
Fig 55. Format and states in the Master Receiver mode . . . . . 263
Fig 56. Format and states in the Slave Receiver mode 267
Fig 57. Format and states in the Slave Transmitter mode . . . . . 270
Fig 58. Simultaneous Repeated START conditions from two masters . . . . . 272
Fig 59. Forced access to a busy $I^2C$-bus . . . . . 272
Fig 60. Recovering from a bus obstruction caused by a LOW level on SDA . . . . . 273
Fig 61. C_CAN block diagram . . . . . 283
Fig 62. CAN core in Silent mode . . . . . 307
Fig 63. CAN core in Loop-back mode . . . . . 307
Fig 64. CAN core in Loop-back mode combined with Silent mode . . . . . 308
Fig 65. Block diagram of a message object transfer . . 310
Fig 66. Reading a message from the FIFO buffer to the message buffer . . . . . 316
Fig 67. Bit timing . . . . . 319
Fig 68. CAN API pointer structure . . . . . 321
Fig 69. Sample PWM waveforms with a PWM cycle length of 100 (selected by MR2) and MAT2:0 enabled as PWM outputs by the PWCM register. . . . . 345
Fig 70. A timer cycle in which PR=2, MRx=6, and both interrupt and reset on match are enabled . . . . . 345
Fig 71. A timer cycle in which PR=2, MRx=6, and both interrupt and stop on match are enabled . . . . . 345
Fig 72. 16-bit counter/timer block diagram . . . . . 346
Fig 73. Sample PWM waveforms with a PWM cycle length of 100 (selected by MR2) and MAT2:0 enabled as PWM outputs by the PWCM register. . . . . 359
Fig 74. A timer cycle in which PR=2, MRx=6, and both interrupt and reset on match are enabled . . . . . 360
Fig 75. A timer cycle in which PR=2, MRx=6, and both interrupt and stop on match are enabled . . . . . 360
Fig 76. 16-bit counter/timer block diagram . . . . . 361
Fig 77. Sample PWM waveforms with a PWM cycle length of 100 (selected by MR2) and MAT2:0 enabled as PWM outputs by the PWCM register. . . . . 374
Fig 78. A timer cycle in which PR=2, MRx=6, and both interrupt and reset on match are enabled . . . . . 374
Fig 79. A timer cycle in which PR=2, MRx=6, and both interrupt and stop on match are enabled . . . . . 374


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

Fig 80. 32-bit counter/timer block diagram. . . . . .375
Fig 81. A timer cycle in which PR=2, MRx=6, and both interrupt and reset on match are enabled . . . . .388
Fig 82. A timer cycle in which PR=2, MRx=6, and both interrupt and stop on match are enabled . . . . . .389
Fig 83. Sample PWM waveforms with a PWM cycle length of 100 (selected by MR2) and MAT2:0 enabled as PWM outputs by the PWMC register. . . . . .389
Fig 84. 32-bit counter/timer block diagram. . . . . .390
Fig 85. Windowed Watchdog Timer (WWDT) block diagram . . . . . .393
Fig 86. Early Watchdog Feed with Windowed Mode Enabled . . . . . .397
Fig 87. Correct Watchdog Feed with Windowed Mode Enabled . . . . . .398
Fig 88. Watchdog Warning Interrupt . . . . . .398
Fig 89. Watchdog block diagram . . . . . .403
Fig 90. System tick timer block diagram . . . . . .404
Fig 91. Boot process flowchart . . . . . .418
Fig 92. IAP parameter passing . . . . . .440
Fig 93. Algorithm for generating a 128-bit signature . . .450
Fig 94. Connecting the SWD pins to a standard SWD connector . . . . . .452
Fig 95. Cortex-M0 implementation. . . . . .453
Fig 96. Processor core register set . . . . . .456
Fig 97. APSR, IPSR, EPSR register bit assignments . .457
Fig 98. Generic ARM Cortex-M0 memory map . . . . . .462
Fig 99. Memory ordering restrictions . . . . . .463
Fig 100. Little-endian format . . . . . .465
Fig 101. Vector table . . . . . .468
Fig 102. Exception entry stack contents . . . . . .470
Fig 103. ASR #3 . . . . . .477
Fig 104. LSR #3 . . . . . .478
Fig 105. LSL #3 . . . . . .478
Fig 106. ROR #3 . . . . . .479
Fig 107. IPR register . . . . . .508


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## 29.6 Contents

### Chapter 1: LPC111x/LPC11Cxx Introductory information

**1.1 Introduction . . . . . 4**
**1.2 Features . . . . . 6**
**1.3 Ordering information . . . . . 8**
**1.4 Block diagram . . . . . 14**
**1.5 ARM Cortex-M0 processor . . . . . 18**

### Chapter 2: LPC111x/LPC11Cxx Memory mapping

**2.1 How to read this chapter . . . . . 19**
**2.2 Memory map . . . . . 19**

### Chapter 3: LPC111x/LPC11Cxx System configuration (SYSCON)

**3.1 How to read this chapter . . . . . 22**
DEVICE_ID register . . . . . 22
C_CAN controller . . . . . 22
Entering Deep power-down mode . . . . . 22
Enabling sequence for UART clock . . . . . 22
NMI source selection register . . . . . 22
**3.2 General description . . . . . 22**
**3.3 Pin description . . . . . 22**
**3.4 Clock generation . . . . . 23**
**3.5 Register description . . . . . 24**
3.5.1 System memory remap register . . . . . 26
3.5.2 Peripheral reset control register . . . . . 26
3.5.3 System PLL control register . . . . . 27
3.5.4 System PLL status register . . . . . 27
3.5.5 System oscillator control register . . . . . 28
3.5.6 Watchdog oscillator control register . . . . . 28
3.5.7 Internal resonant crystal control register . . . . . 29
3.5.8 System reset status register . . . . . 29
3.5.9 System PLL clock source select register . . . . 30
3.5.10 System PLL clock source update enable register . . . . . 31
3.5.11 Main clock source select register . . . . . 31
3.5.12 Main clock source update enable register . . . 31
3.5.13 System AHB clock divider register . . . . . 32
3.5.14 System AHB clock control register . . . . . 32
3.5.15 SPI0 clock divider register . . . . . 34
3.5.16 UART clock divider register . . . . . 34
3.5.17 SPI1 clock divider register . . . . . 34
3.5.18 WDT clock source select register . . . . . 35
3.5.19 WDT clock source update enable register . . . 35
3.5.20 WDT clock divider register . . . . . 35
3.5.21 CLKOUT clock source select register . . . . . 36
3.5.22 CLKOUT clock source update enable register 36
3.5.23 CLKOUT clock divider register . . . . . 37
3.5.24 POR captured PIO status register 0 . . . . . 37
3.5.25 POR captured PIO status register 1 . . . . . 37
3.5.26 BOD control register . . . . . 38
3.5.27 System tick counter calibration register . . . . . 38
3.5.28 IRQ latency register . . . . . 38
3.5.29 NMI source selection register . . . . . 39
3.5.30 Start logic edge control register 0 . . . . . 39
3.5.31 Start logic signal enable register 0 . . . . . 40
3.5.32 Start logic reset register 0 . . . . . 40
3.5.33 Start logic status register 0 . . . . . 41
3.5.34 Deep-sleep mode configuration register . . . . 41
3.5.35 Wake-up configuration register . . . . . 42
3.5.36 Power-down configuration register . . . . . 43
3.5.37 Device ID register . . . . . 44
**3.6 Reset . . . . . 46**
**3.7 Start-up behavior . . . . . 46**
**3.8 Brown-out detection . . . . . 47**
**3.9 Power management . . . . . 47**
3.9.1 Active mode . . . . . 47
3.9.1.1 Power configuration in Active mode . . . . . 48
3.9.2 Sleep mode . . . . . 48
3.9.2.1 Power configuration in Sleep mode . . . . . 48
3.9.2.2 Programming Sleep mode . . . . . 48
3.9.2.3 Wake-up from Sleep mode . . . . . 49
3.9.3 Deep-sleep mode . . . . . 49
3.9.3.1 Power configuration in Deep-sleep mode . . . 49
3.9.3.2 Programming Deep-sleep mode . . . . . 49
3.9.3.3 Wake-up from Deep-sleep mode . . . . . 50
3.9.4 Deep power-down mode . . . . . 50
3.9.4.1 Power configuration in Deep power-down mode . . . . . 50
3.9.4.2 Programming Deep power-down mode . . . . . 50
3.9.4.3 Wake-up from Deep power-down mode . . . . 51
**3.10 Deep-sleep mode details . . . . . 51**
3.10.1 IRC oscillator . . . . . 51
3.10.2 Start logic . . . . . 51
3.10.3 Using the general purpose counter/timers to create a self-wake-up event . . . . . 52
**3.11 System PLL functional description . . . . . 52**
3.11.1 Lock detector . . . . . 53
3.11.2 Power-down control . . . . . 53
3.11.3 Divider ratio programming . . . . . 54
Post divider . . . . . 54
Feedback divider . . . . . 54
Changing the divider values . . . . . 54
3.11.4 Frequency selection . . . . . 54
3.11.4.1 Normal mode . . . . . 54
3.11.4.2 Power-down mode . . . . . 55
**3.12 Flash memory access . . . . . 55**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## Chapter 4: LPC111x/LPC11Cxx Power Monitor Unit (PMU)

**4.1 How to read this chapter . . . . . 57**
**4.2 Introduction . . . . . 57**
**4.3 Register description . . . . . 57**
4.3.1 Power control register . . . . . 57
4.3.2 General purpose registers 0 to 3 . . . . . 58
4.3.3 General purpose register 4 . . . . . 58
**4.4 Functional description . . . . . 59**

## Chapter 5: LPC111x/LPC11Cxx Power profiles

**5.1 How to read this chapter . . . . . 60**
**5.2 Basic configuration . . . . . 60**
**5.3 Features . . . . . 60**
**5.4 Description . . . . . 60**
**5.5 Definitions . . . . . 61**
**5.6 Clocking routine . . . . . 62**
5.6.1 set_pll . . . . . 62
5.6.1.1 Param0: system PLL input frequency and Param1: expected system clock . . . . . 63
5.6.1.2 Param2: mode . . . . . 63
5.6.1.3 Param3: system PLL lock time-out . . . . . 63
5.6.1.4 Code examples . . . . . 64
5.6.1.4.1 Invalid frequency (device maximum clock rate exceeded) . . . . . 64
5.6.1.4.2 Invalid frequency selection (system clock divider restrictions) . . . . . 64
5.6.1.4.3 Exact solution cannot be found (PLL) . . . . . 64
5.6.1.4.4 System clock less than or equal to the expected value . . . . . 65
5.6.1.4.5 System clock greater than or equal to the expected value . . . . . 65
5.6.1.4.6 System clock approximately equal to the expected value . . . . . 65
**5.7 Power routine . . . . . 65**
5.7.1 set_power . . . . . 65
5.7.1.1 Param0: main clock . . . . . 67
5.7.1.2 Param1: mode . . . . . 67
5.7.1.3 Param2: system clock . . . . . 67
5.7.1.4 Code examples . . . . . 67
5.7.1.4.1 Invalid frequency (device maximum clock rate exceeded) . . . . . 67
5.7.1.4.2 An applicable power setup . . . . . 67

## Chapter 6: LPC111x/LPC11Cxx Nested Vectored Interrupt Controller (NVIC)

**6.1 How to read this chapter . . . . . 69**
**6.2 Introduction . . . . . 69**
**6.3 Features . . . . . 69**
**6.4 Interrupt sources . . . . . 69**

## Chapter 7: LPC1100/LPC1100C/LPC1100L series: I/O configuration (IOCONFIG)

**7.1 How to read this chapter . . . . . 71**
Pin configuration . . . . . 71
C_CAN pins . . . . . 71
Pseudo open-drain function . . . . . 71
Pull-up level . . . . . 71
**7.2 Features . . . . . 71**
**7.3 General description . . . . . 72**
7.3.1 Pin function . . . . . 72
7.3.2 Pin mode . . . . . 73
7.3.3 Hysteresis . . . . . 73
7.3.4 A/D-mode . . . . . 73
7.3.5 $I^2C$ mode . . . . . 73
7.3.6 Open-drain Mode . . . . . 74
**7.4 Register description . . . . . 74**
7.4.1 IOCON_PIO2_6 . . . . . 77
7.4.2 IOCON_PIO2_0 . . . . . 78
7.4.3 IOCON_PIO_RESET_PIO0_0 . . . . . 78
7.4.4 IOCON_PIO0_1 . . . . . 79
7.4.5 IOCON_PIO1_8 . . . . . 80
7.4.6 IOCON_PIO0_2 . . . . . 80
7.4.7 IOCON_PIO2_7 . . . . . 81
7.4.8 IOCON_PIO2_8 . . . . . 81
7.4.9 IOCON_PIO2_1 . . . . . 82
7.4.10 IOCON_PIO0_3 . . . . . 83
7.4.11 IOCON_PIO0_4 . . . . . 83
7.4.12 IOCON_PIO0_5 . . . . . 84
7.4.13 IOCON_PIO1_9 . . . . . 84
7.4.14 IOCON_PIO3_4 . . . . . 84
7.4.15 IOCON_PIO2_4 . . . . . 85
7.4.16 IOCON_PIO2_5 . . . . . 86
7.4.17 IOCON_PIO3_5 . . . . . 86
7.4.18 IOCON_PIO0_6 . . . . . 87
7.4.19 IOCON_PIO0_7 . . . . . 87
7.4.20 IOCON_PIO2_9 . . . . . 88
7.4.21 IOCON_PIO2_10 . . . . . 89
7.4.22 IOCON_PIO2_2 . . . . . 89
7.4.23 IOCON_PIO0_8 . . . . . 90
7.4.24 IOCON_PIO0_9 . . . . . 90
7.4.25 IOCON_SWCLK_PIO0_10 . . . . . 91
7.4.26 IOCON_PIO1_10 . . . . . 92
7.4.27 IOCON_PIO2_11 . . . . . 93
7.4.28 IOCON_R_PIO0_11 . . . . . 93
7.4.29 IOCON_R_PIO1_0 . . . . . 94
7.4.30 IOCON_R_PIO1_1 . . . . . 95
7.4.31 IOCON_R_PIO1_2 . . . . . 95
7.4.32 IOCON_PIO3_0 . . . . . 96
7.4.33 IOCON_PIO3_1 . . . . . 97
7.4.34 IOCON_PIO2_3 . . . . . 97
7.4.35 IOCON_SWDIO_PIO1_3 . . . . . 98


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

7.4.36 IOCON_PIO1_4 . . . . . 99
7.4.37 IOCON_PIO1_11 . . . . . 100
7.4.38 IOCON_PIO3_2 . . . . . 100
7.4.39 IOCON_PIO1_5 . . . . . 101
7.4.40 IOCON_PIO1_6 . . . . . 101
7.4.41 IOCON_PIO1_7 . . . . . 102
7.4.42 IOCON_PIO3_3 . . . . . 103
7.4.43 IOCON_SCK_LOC . . . . . 103
7.4.44 IOCON_DSR_LOC . . . . . 104
7.4.45 IOCON_DCD_LOC . . . . . 104
7.4.46 IOCON_RI_LOC . . . . . 104

## Chapter 8: LPC1100XL series: I/O configuration (IOCONFIG)

**8.1 How to read this chapter . . . . . 105**
**8.2 Features . . . . . 105**
**8.3 General description . . . . . 105**
8.3.1 Pin function . . . . . 106
8.3.2 Pin mode . . . . . 106
8.3.3 Hysteresis . . . . . 107
8.3.4 A/D-mode . . . . . 107
8.3.5 $I^2C$ mode . . . . . 107
8.3.6 Open-drain Mode . . . . . 107
**8.4 Register description . . . . . 107**
8.4.1 IOCON_PIO2_6 . . . . . 111
8.4.2 IOCON_PIO2_0 . . . . . 112
8.4.3 IOCON_PIO_RESET_PIO0_0 . . . . . 112
8.4.4 IOCON_PIO0_1 . . . . . 113
8.4.5 IOCON_PIO1_8 . . . . . 114
8.4.6 IOCON_PIO0_2 . . . . . 114
8.4.7 IOCON_PIO2_7 . . . . . 115
8.4.8 IOCON_PIO2_8 . . . . . 115
8.4.9 IOCON_PIO2_1 . . . . . 116
8.4.10 IOCON_PIO0_3 . . . . . 117
8.4.11 IOCON_PIO0_4 . . . . . 117
8.4.12 IOCON_PIO0_5 . . . . . 118
8.4.13 IOCON_PIO1_9 . . . . . 118
8.4.14 IOCON_PIO3_4 . . . . . 118
8.4.15 IOCON_PIO2_4 . . . . . 119
8.4.16 IOCON_PIO2_5 . . . . . 120
8.4.17 IOCON_PIO3_5 . . . . . 120
8.4.18 IOCON_PIO0_6 . . . . . 121
8.4.19 IOCON_PIO0_7 . . . . . 122
8.4.20 IOCON_PIO2_9 . . . . . 122
8.4.21 IOCON_PIO2_10 . . . . . 123
8.4.22 IOCON_PIO2_2 . . . . . 123
8.4.23 IOCON_PIO0_8 . . . . . 124
8.4.24 IOCON_PIO0_9 . . . . . 124
8.4.25 IOCON_SWCLK_PIO0_10 . . . . . 125
8.4.26 IOCON_PIO1_10 . . . . . 126
8.4.27 IOCON_PIO2_11 . . . . . 126
8.4.28 IOCON_R_PIO0_11 . . . . . 127
8.4.29 IOCON_R_PIO1_0 . . . . . 128
8.4.30 IOCON_R_PIO1_1 . . . . . 128
8.4.31 IOCON_R_PIO1_2 . . . . . 129
8.4.32 IOCON_PIO3_0 . . . . . 130
8.4.33 IOCON_PIO3_1 . . . . . 131
8.4.34 IOCON_PIO2_3 . . . . . 131
8.4.35 IOCON_SWDIO_PIO1_3 . . . . . 132
8.4.36 IOCON_PIO1_4 . . . . . 133
8.4.37 IOCON_PIO1_11 . . . . . 133
8.4.38 IOCON_PIO3_2 . . . . . 134
8.4.39 IOCON_PIO1_5 . . . . . 135
8.4.40 IOCON_PIO1_6 . . . . . 135
8.4.41 IOCON_PIO1_7 . . . . . 136
8.4.42 IOCON_PIO3_3 . . . . . 136
8.4.43 IOCON_SCK0_LOC . . . . . 137
8.4.44 IOCON_DSR_LOC . . . . . 138
8.4.45 IOCON_DCD_LOC . . . . . 138
8.4.46 IOCON_RI_LOC . . . . . 138
8.4.47 IOCON_SSEL1_LOC . . . . . 139
8.4.48 IOCON_CT16B0_CAP0_LOC . . . . . 139
8.4.49 IOCON_SCK1_LOC . . . . . 139
8.4.50 IOCON_MISO1_LOC . . . . . 140
8.4.51 IOCON_MOSI1_LOC . . . . . 140
8.4.52 IOCON_CT32B0_CAP0_LOC . . . . . 140
8.4.53 IOCON_RXD_LOC . . . . . 141

## Chapter 9: LPC111x/LPC11Cxx Pin configuration (LPC1100, LPC1100C, and LPC1100L series, HVQFN/LQFP packages)

**9.1 How to read this chapter . . . . . 142**
**9.2 LPC111x Pin configuration . . . . . 143**
**9.3 LPC11Cxx Pin configuration . . . . . 145**
**9.4 LPC11D14 Pin configuration . . . . . 147**
**9.5 LPC111x/LPC11Cxx Pin description . . . . . 148**

## Chapter 10: LPC111x Pin configuration (LPC1100L series, TSSOP, DIP, SO packages)

**10.1 How to read this chapter . . . . . 167**
**10.2 Pin configuration (LPC1110/11/12) . . . . . 167**
**10.3 Pin configuration (LPC1112) . . . . . 170**
**10.4 Pin configuration (LPC1112/14) . . . . . 173**

## Chapter 11: LPC111x Pin configuration (LPC1100XL series, HVQFN/LQFP/TFBGA48 packages)

**11.1 How to read this chapter . . . . . 177**
**11.2 LPC111x Pin configuration . . . . . 178**
**11.3 LPC1100XL Pin description . . . . . 181**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## Chapter 12: LPC111x/LPC11Cxx General Purpose I/O (GPIO)

**12.1 How to read this chapter . . . . . 190**
**12.2 Introduction . . . . . 190**
12.2.1 Features . . . . . 190
**12.3 Register description . . . . . 191**
12.3.1 GPIO data register . . . . . 191
12.3.2 GPIO data direction register . . . . . 192
12.3.3 GPIO interrupt sense register . . . . . 192
12.3.4 GPIO interrupt both edges sense register . . 193
12.3.5 GPIO interrupt event register . . . . . 193
12.3.6 GPIO interrupt mask register . . . . . 193
12.3.7 GPIO raw interrupt status register . . . . . 193
12.3.8 GPIO masked interrupt status register . . . . . 194
12.3.9 GPIO interrupt clear register . . . . . 194
**12.4 Functional description . . . . . 195**
12.4.1 Write/read data operation . . . . . 195
Write operation . . . . . 195
Read operation . . . . . 196

## Chapter 13: LPC111x/LPC11Cxx UART

**13.1 How to read this chapter . . . . . 197**
**13.2 Basic configuration . . . . . 197**
**13.3 Features . . . . . 197**
**13.4 Pin description . . . . . 198**
**13.5 Register description . . . . . 198**
13.5.1 UART Receiver Buffer Register (U0RBR - 0x4000 8000, when DLAB = 0, Read Only) . 200
13.5.2 UART Transmitter Holding Register (U0THR - 0x4000 8000 when DLAB = 0, Write Only) . . 200
13.5.3 UART Divisor Latch LSB and MSB Registers (U0DLL - 0x4000 8000 and U0DLM - 0x4000 8004, when DLAB = 1) . . . . . 200
13.5.4 UART Interrupt Enable Register (U0IER - 0x4000 8004, when DLAB = 0) . . . . . 201
13.5.5 UART Interrupt Identification Register (U0IIR - 0x4004 8008, Read Only) . . . . . 202
13.5.6 UART FIFO Control Register (U0FCR - 0x4000 8008, Write Only) . . . . . 204
13.5.7 UART Line Control Register (U0LCR - 0x4000 800C) . . . . . 205
13.5.8 UART Modem Control Register . . . . . 206
13.5.8.1 Auto-flow control . . . . . 207
13.5.8.1.1 Auto-RTS . . . . . 207
13.5.8.1.2 Auto-CTS . . . . . 208
13.5.9 UART Line Status Register (U0LSR - 0x4000 8014, Read Only) . . . . . 209
13.5.10 UART Modem Status Register . . . . . 211
13.5.11 UART Scratch Pad Register (U0SCR - 0x4000 801C) . . . . . 211
13.5.12 UART Auto-baud Control Register (U0ACR - 0x4000 8020) . . . . . 212
13.5.13 Auto-baud . . . . . 212
13.5.14 Auto-baud modes . . . . . 213
13.5.15 UART Fractional Divider Register (U0FDR - 0x4000 8028) . . . . . 215
13.5.15.1 Baud rate calculation . . . . . 216
13.5.15.1.1 Example 1: UART_PCLK = 14.7456 MHz, BR = 9600 . . . . . 218
13.5.15.1.2 Example 2: UART_PCLK = 12 MHz, BR = 115200 . . . . . 218
13.5.16 UART Transmit Enable Register (U0TER - 0x4000 8030) . . . . . 218
13.5.17 UART RS485 Control register (U0RS485CTRL - 0x4000 804C) . . . . . 219
13.5.18 UART RS485 Address Match register (U0RS485ADRMATCH - 0x4000 8050) . . . . 220
13.5.19 UART1 RS485 Delay value register (U0RS485DLY - 0x4000 8054) . . . . . 220
13.5.20 RS-485/EIA-485 modes of operation . . . . . 220
RS-485/EIA-485 Normal Multidrop Mode (NMM) 221
RS-485/EIA-485 Auto Address Detection (AAD) mode . . . . . 221
RS-485/EIA-485 Auto Direction Control . . . . . 221
RS485/EIA-485 driver delay time . . . . . 222
RS485/EIA-485 output inversion . . . . . 222
**13.6 Architecture . . . . . 222**

## Chapter 14: LPC111x/LPC11Cxx SPI0/1 with SSP

**14.1 How to read this chapter . . . . . 224**
**14.2 Basic configuration . . . . . 224**
**14.3 Features . . . . . 224**
**14.4 General description . . . . . 224**
**14.5 Pin description . . . . . 225**
**14.6 Register description . . . . . 226**
14.6.1 SPI/SSP Control Register 0 . . . . . 226
14.6.2 SPI/SSP0 Control Register 1 . . . . . 227
14.6.3 SPI/SSP Data Register . . . . . 228
14.6.4 SPI/SSP Status Register . . . . . 229
14.6.5 SPI/SSP Clock Prescale Register . . . . . 229
14.6.6 SPI/SSP Interrupt Mask Set/Clear Register 229
14.6.7 SPI/SSP Raw Interrupt Status Register . . . 230
14.6.8 SPI/SSP Masked Interrupt Status Register . 230
14.6.9 SPI/SSP Interrupt Clear Register . . . . . 231
**14.7 Functional description . . . . . 231**
14.7.1 Texas Instruments synchronous serial frame format . . . . . 231
14.7.2 SPI frame format . . . . . 232
14.7.2.1 Clock Polarity (CPOL) and Phase (CPHA) control . . . . . 232
14.7.2.2 SPI format with CPOL=0,CPHA=0 . . . . . 233


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

14.7.2.3 SPI format with CPOL=0,CPHA=1 . . . . . 234
14.7.2.4 SPI format with CPOL = 1,CPHA = 0 . . . . . 234
14.7.2.5 SPI format with CPOL = 1,CPHA = 1 . . . . . 236
14.7.3 Semiconductor Microwire frame format . . . . 236
14.7.3.1 Setup and hold time requirements on CS with respect to SK in Microwire mode . . . . . 238

## Chapter 15: LPC111x/LPC11Cxx I2C-bus controller

**15.1 How to read this chapter . . . . . 239**
**15.2 Basic configuration . . . . . 239**
**15.3 Features . . . . . 239**
**15.4 Applications . . . . . 239**
**15.5 General description . . . . . 240**
15.5.1 I²C Fast-mode Plus . . . . . 240
**15.6 Pin description . . . . . 241**
**15.7 Register description . . . . . 241**
15.7.1 I²C Control Set register (I2C0CONSET - 0x4000 0000) . . . . . 242
15.7.2 I²C Status register (I2C0STAT - 0x4000 0004) . . . . . 244
15.7.3 I²C Data register (I2C0DAT - 0x4000 0008) . 244
15.7.4 I²C Slave Address register 0 (I2C0ADR0- 0x4000 000C) . . . . . 244
15.7.5 I²C SCL HIGH and LOW duty cycle registers (I2C0SCLH - 0x4000 0010 and I2C0SCLL- 0x4000 0014) . . . . . 245
15.7.5.1 Selecting the appropriate I²C data rate and duty cycle . . . . . 245
15.7.6 I²C Control Clear register (I2C0CONCLR - 0x4000 0018) . . . . . 246
15.7.7 I²C Monitor mode control register (I2C0MMCTRL - 0x4000 001C) . . . . . 246
15.7.7.1 Interrupt in Monitor mode . . . . . 247
15.7.7.2 Loss of arbitration in Monitor mode . . . . . 248
15.7.8 I²C Slave Address registers (I2C0ADR[1, 2, 3] - 0x4000 00[20, 24, 28]) . . . . . 248
15.7.9 I²C Data buffer register (I2C0DATA_BUFFER - 0x4000 002C) . . . . . 248
15.7.10 I²C Mask registers (I2C0MASK[0, 1, 2, 3] - 0x4000 00[30, 34, 38, 3C]) . . . . . 249
**15.8 I²C operating modes . . . . . 249**
15.8.1 Master Transmitter mode . . . . . 249
15.8.2 Master Receiver mode . . . . . 250
15.8.3 Slave Receiver mode . . . . . 251
15.8.4 Slave Transmitter mode . . . . . 252
**15.9 I²C implementation and operation . . . . . 252**
15.9.1 Input filters and output stages . . . . . 253
15.9.2 Address Registers, ADDR0 to ADDR3 . . . . . 254
15.9.3 Address mask registers, MASK0 to MASK3 . 254
15.9.4 Comparator . . . . . 254
15.9.5 Shift register, DAT . . . . . 254
15.9.6 Arbitration and synchronization logic . . . . . 254
15.9.7 Serial clock generator . . . . . 255
15.9.8 Timing and control . . . . . 256
15.9.9 Control register, CONSET and CONCLR . . . 256
15.9.10 Status decoder and status register . . . . . 256
**15.10 Details of I²C operating modes . . . . . 256**
15.10.1 Master Transmitter mode . . . . . 257
15.10.2 Master Receiver mode . . . . . 261
15.10.3 Slave Receiver mode . . . . . 264
15.10.4 Slave Transmitter mode . . . . . 268
15.10.5 Miscellaneous states . . . . . 270
15.10.5.1 STAT = 0xF8 . . . . . 270
15.10.5.2 STAT = 0x00 . . . . . 270
15.10.6 Some special cases . . . . . 271
15.10.6.1 Simultaneous Repeated START conditions from two masters . . . . . 271
15.10.6.2 Data transfer after loss of arbitration . . . . . 272
15.10.6.3 Forced access to the I²C-bus . . . . . 272
15.10.6.4 I²C-bus obstructed by a LOW level on SCL or SDA . . . . . 273
15.10.6.5 Bus error . . . . . 273
15.10.7 I²C state service routines . . . . . 273
15.10.8 Initialization . . . . . 274
15.10.9 I²C interrupt service . . . . . 274
15.10.10 The state service routines . . . . . 274
15.10.11 Adapting state services to an application . . . 274
**15.11 Software example . . . . . 274**
15.11.1 Initialization routine . . . . . 274
15.11.2 Start Master Transmit function . . . . . 274
15.11.3 Start Master Receive function . . . . . 275
15.11.4 I²C interrupt routine . . . . . 275
15.11.5 Non mode specific states . . . . . 275
15.11.5.1 State: 0x00 . . . . . 275
15.11.5.2 Master States . . . . . 275
15.11.5.3 State: 0x08 . . . . . 275
15.11.5.4 State: 0x10 . . . . . 276
15.11.6 Master Transmitter states . . . . . 276
15.11.6.1 State: 0x18 . . . . . 276
15.11.6.2 State: 0x20 . . . . . 276
15.11.6.3 State: 0x28 . . . . . 276
15.11.6.4 State: 0x30 . . . . . 277
15.11.6.5 State: 0x38 . . . . . 277
15.11.7 Master Receive states . . . . . 277
15.11.7.1 State: 0x40 . . . . . 277
15.11.7.2 State: 0x48 . . . . . 277
15.11.7.3 State: 0x50 . . . . . 277
15.11.7.4 State: 0x58 . . . . . 278
15.11.8 Slave Receiver states . . . . . 278
15.11.8.1 State: 0x60 . . . . . 278
15.11.8.2 State: 0x68 . . . . . 278
15.11.8.3 State: 0x70 . . . . . 278
15.11.8.4 State: 0x78 . . . . . 279
15.11.8.5 State: 0x80 . . . . . 279
15.11.8.6 State: 0x88 . . . . . 279
15.11.8.7 State: 0x90 . . . . . 279
15.11.8.8 State: 0x98 . . . . . 280
15.11.8.9 State: 0xA0 . . . . . 280
15.11.9 Slave Transmitter states . . . . . 280
15.11.9.1 State: 0xA8 . . . . . 280
15.11.9.2 State: 0xB0 . . . . . 280


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

15.11.9.3 State: 0xB8 . . . . . 280
15.11.9.4 State: 0xC0 . . . . . 281
15.11.9.5 State: 0xC8 . . . . . 281

## Chapter 16: LPC111x/LPC11Cxx C_CAN controller

**16.1 How to read this chapter . . . . . 282**
**16.2 Basic configuration . . . . . 282**
**16.3 Features . . . . . 282**
**16.4 General description . . . . . 283**
**16.5 Pin description . . . . . 284**
**16.6 Register description . . . . . 284**
16.6.1 CAN protocol registers . . . . . 286
16.6.1.1 CAN control register . . . . . 286
16.6.1.2 CAN status register . . . . . 287
16.6.1.3 CAN error counter . . . . . 289
16.6.1.4 CAN bit timing register . . . . . 290
Baud rate prescaler . . . . . 290
Time segments 1 and 2 . . . . . 290
Synchronization jump width . . . . . 290
16.6.1.5 CAN interrupt register . . . . . 291
16.6.1.6 CAN test register . . . . . 291
16.6.1.7 CAN baud rate prescaler extension register 292
16.6.2 Message interface registers . . . . . 292
16.6.2.1 Message objects . . . . . 293
16.6.2.2 CAN message interface command request registers . . . . . 293
16.6.2.3 CAN message interface command mask registers . . . . . 294
16.6.2.4 IF1 and IF2 message buffer registers . . . . . 296
16.6.2.4.1 CAN message interface mask 1 registers . . 297
16.6.2.4.2 CAN message interface mask 2 registers . . 297
16.6.2.4.3 CAN message interface c arbitration 1 registers . . . . . 298
16.6.2.4.4 CAN message interface arbitration 2 registers . . . . . 298
16.6.2.4.5 CAN message interface message control registers . . . . . 299
16.6.2.4.6 CAN message interface data A1 registers . 300
16.6.2.4.7 CAN message interface data A2 registers . . 300
16.6.2.4.8 CAN message interface data B1 registers . 301
16.6.2.4.9 CAN message interface data B2 registers . 301
16.6.3 Message handler registers . . . . . 301
16.6.3.1 CAN transmission request 1 register . . . . . 301
16.6.3.2 CAN transmission request 2 register . . . . . 301
16.6.3.3 CAN new data 1 register . . . . . 302
16.6.3.4 CAN new data 2 register . . . . . 302
16.6.3.5 CAN interrupt pending 1 register . . . . . 303
16.6.3.6 CAN interrupt pending 2 register . . . . . 303
16.6.3.7 CAN message valid 1 register . . . . . 303
16.6.3.8 CAN message valid 2 register . . . . . 304
16.6.4 CAN timing register . . . . . 304
16.6.4.1 CAN clock divider register . . . . . 304
**16.7 Functional description . . . . . 304**
16.7.1 C_CAN controller state after reset . . . . . 304
16.7.2 C_CAN operating modes . . . . . 305
16.7.2.1 Software initialization . . . . . 305
16.7.2.2 CAN message transfer . . . . . 305
16.7.2.3 Disabled Automatic Retransmission (DAR) . 306
16.7.2.4 Test modes . . . . . 306
16.7.2.4.1 Silent mode . . . . . 306
16.7.2.4.2 Loop-back mode . . . . . 307
16.7.2.4.3 Loop-back mode combined with Silent mode 307
16.7.2.4.4 Basic mode . . . . . 308
16.7.2.4.5 Software control of pin CAN_TXD . . . . . 308
16.7.3 CAN message handler . . . . . 309
16.7.3.1 Management of message objects . . . . . 310
16.7.3.2 Data Transfer between IFx Registers and the Message RAM . . . . . 311
16.7.3.3 Transmission of messages between the shift registers in the CAN core and the Message buffer . . . . . 311
16.7.3.4 Acceptance filtering of received messages . . 311
16.7.3.4.1 Reception of a data frame . . . . . 312
16.7.3.4.2 Reception of a remote frame . . . . . 312
16.7.3.5 Receive/transmit priority . . . . . 312
16.7.3.6 Configuration of a transmit object . . . . . 312
16.7.3.7 Updating a transmit object . . . . . 313
16.7.3.8 Configuration of a receive object . . . . . 313
16.7.3.9 Handling of received messages . . . . . 314
16.7.3.10 Configuration of a FIFO buffer . . . . . 315
16.7.3.10.1 Reception of messages with FIFO buffers . 315
16.7.3.10.2 Reading from a FIFO buffer . . . . . 315
16.7.4 Interrupt handling . . . . . 316
16.7.5 Bit timing . . . . . 317
16.7.5.1 Bit time and bit rate . . . . . 318
16.7.5.2 Calculating the C_CAN bit rate . . . . . 319

## Chapter 17: LPC11Cxx C_CAN on-chip drivers

**17.1 How to read this chapter . . . . . 320**
**17.2 Features . . . . . 320**
**17.3 General description . . . . . 320**
17.3.1 Differences to fully-compliant CANopen . . . . 320
**17.4 API description . . . . . 321**
17.4.1 Calling the C_CAN API . . . . . 321
17.4.2 CAN initialization . . . . . 322
17.4.3 CAN interrupt handler . . . . . 322
17.4.4 CAN Rx message object configuration . . . . 322
17.4.5 CAN receive . . . . . 323
17.4.6 CAN transmit . . . . . 323
17.4.7 CANopen configuration . . . . . 324
17.4.8 CANopen handler . . . . . 326
17.4.9 CAN/CANopen callback functions . . . . . 326
17.4.10 CAN message received callback . . . . . 327
17.4.11 CAN message transmit callback . . . . . 327
17.4.12 CAN error callback . . . . . 328


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

17.4.13 CANopen SDO expedited read callback. . . . 328
17.4.14 CANopen SDO expedited write callback . . . 329
17.4.15 CANopen SDO segmented read callback . . 329
17.4.16 CANopen SDO segmented write callback . . 330
17.4.17 CANopen fall-back SDO handler callback . . 332

## Chapter 18: LPC1100/LPC1100C/LPC1100L series: 16-bit counter/timer CT16B0/1

**18.1 How to read this chapter . . . . . 333**
Pin-out variations . . . . . 333
**18.2 Basic configuration . . . . . 333**
**18.3 Features . . . . . 333**
**18.4 Applications . . . . . 334**
**18.5 Description . . . . . 334**
**18.6 Pin description . . . . . 334**
**18.7 Register description . . . . . 334**
18.7.1 Interrupt Register (TMR16B0IR and TMR16B1IR). . . . . 336
18.7.2 Timer Control Register (TMR16B0TCR and TMR16B1TCR). . . . . 337
18.7.3 Timer Counter (TMR16B0TC - address 0x4000 C008 and TMR16B1TC - address 0x4001 0008) . . . . . 337
18.7.4 Prescale Register (TMR16B0PR - address 0x4000 C00C and TMR16B1PR - address 0x4001 000C). . . . . 337
18.7.5 Prescale Counter register (TMR16B0PC - address 0x4000 C010 and TMR16B1PC - address 0x4001 0010) . . . . . 338
18.7.6 Match Control Register (TMR16B0MCR and TMR16B1MCR) . . . . . 338
18.7.7 Match Registers (TMR16B0MR0/1/2/3 - addresses 0x4000 C018/1C/20/24 and TMR16B1MR0/1/2/3 - addresses 0x4001 0018/1C/20/24) . . . . . 339
18.7.8 Capture Control Register (TMR16B0CCR and TMR16B1CCR) . . . . . 340
18.7.9 Capture Register (CT16B0CR0 - address 0x4000 C02C and CT16B1CR0 - address 0x4001 002C) . . . . . 340
18.7.10 External Match Register (TMR16B0EMR and TMR16B1EMR) . . . . . 341
18.7.11 Count Control Register (TMR16B0CTCR and TMR16B1CTCR) . . . . . 342
18.7.12 PWM Control register (TMR16B0PWMC and TMR16B1PWMC) . . . . . 343
18.7.13 Rules for single edge controlled PWM outputs . . . . . 344
**18.8 Example timer operation . . . . . 345**
**18.9 Architecture . . . . . 346**

## Chapter 19: LPC1100XL series: 16-bit counter/timer CT16B0/1

**19.1 How to read this chapter . . . . . 347**
**19.2 Basic configuration . . . . . 347**
**19.3 Features . . . . . 347**
**19.4 Applications . . . . . 348**
**19.5 Description . . . . . 348**
**19.6 Pin description . . . . . 348**
**19.7 Register description . . . . . 348**
19.7.1 Interrupt Register (TMR16B0IR and TMR16B1IR). . . . . 351
19.7.2 Timer Control Register (TMR16B0TCR and TMR16B1TCR). . . . . 351
19.7.3 Timer Counter (TMR16B0TC - address 0x4000 C008 and TMR16B1TC - address 0x4001 0008) . . . . . 351
19.7.4 Prescale Register (TMR16B0PR - address 0x4000 C00C and TMR16B1PR - address 0x4001 000C). . . . . 352
19.7.5 Prescale Counter register (TMR16B0PC - address 0x4000 C010 and TMR16B1PC - address 0x4001 0010) . . . . . 352
19.7.6 Match Control Register (TMR16B0MCR and TMR16B1MCR) . . . . . 352
19.7.7 Match Registers (TMR16B0MR0/1/2/3 - addresses 0x4000 C018/1C/20/24 and TMR16B1MR0/1/2/3 - addresses 0x4001 0018/1C/20/24) . . . . . 353
19.7.8 Capture Control Register (TMR16B0CCR and TMR16B1CCR) . . . . . 354
19.7.9 Capture Register (CT16B0CR0/1 - address 0x4000 C02C/30 and CT16B1CR0/1 - address 0x4001 002C/30) . . . . . 355
19.7.10 External Match Register (TMR16B0EMR and TMR16B1EMR) . . . . . 355
19.7.11 Count Control Register (TMR16B0CTCR and TMR16B1CTCR) . . . . . 357
19.7.12 PWM Control register (TMR16B0PWMC and TMR16B1PWMC) . . . . . 358
19.7.13 Rules for single edge controlled PWM outputs . . . . . 359
**19.8 Example timer operation . . . . . 360**
**19.9 Architecture . . . . . 360**

## Chapter 20: LPC1100/LPC1100C/LPC1100L series: 32-bit counter/timer CT32B0/1

**20.1 How to read this chapter . . . . . 362**
**20.2 Basic configuration . . . . . 362**
**20.3 Features . . . . . 362**
**20.4 Applications . . . . . 362**
**20.5 Description . . . . . 363**
**20.6 Pin description . . . . . 363**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**20.7 Register description . . . . . 363**
20.7.1 Interrupt Register (TMR32B0IR and TMR32B1IR) . . . . . 365
20.7.2 Timer Control Register (TMR32B0TCR and TMR32B1TCR) . . . . . 365
20.7.3 Timer Counter (TMR32B0TC - address 0x4001 4008 and TMR32B1TC - address 0x4001 8008) . . . . . 366
20.7.4 Prescale Register (TMR32B0PR - address 0x4001 400C and TMR32B1PR - address 0x4001 800C) . . . . . 366
20.7.5 Prescale Counter Register (TMR32B0PC - address 0x4001 4010 and TMR32B1PC - address 0x4001 8010) . . . . . 366
20.7.6 Match Control Register (TMR32B0MCR and TMR32B1MCR) . . . . . 367
20.7.7 Match Registers (TMR32B0MR0/1/2/3 - addresses 0x4001 4018/1C/20/24 and TMR32B1MR0/1/2/3 addresses 0x4001 8018/1C/20/24) . . . . . 368
20.7.8 Capture Control Register (TMR32B0CCR and TMR32B1CCR) . . . . . 368
20.7.9 Capture Register (TMR32B0CR0 - address 0x4001 402C and TMR32B1CR0 - address 0x4001 802C) . . . . . 369
20.7.10 External Match Register (TMR32B0EMR and TMR32B1EMR) . . . . . 369
20.7.11 Count Control Register (TMR32B0CTCR and TMR32B1TCR) . . . . . 371
20.7.12 PWM Control Register (TMR32B0PWMC and TMR32B1PWMC) . . . . . 372
20.7.13 Rules for single edge controlled PWM outputs . . . . . 373
**20.8 Example timer operation . . . . . 374**
**20.9 Architecture . . . . . 375**

## Chapter 21: LPC1100XL series: 32-bit counter/timer CT32B0/1

**21.1 How to read this chapter . . . . . 376**
**21.2 Basic configuration . . . . . 376**
**21.3 Features . . . . . 376**
**21.4 Applications . . . . . 377**
**21.5 Description . . . . . 377**
**21.6 Pin description . . . . . 377**
**21.7 Register description . . . . . 377**
21.7.1 Interrupt Register (TMR32B0IR and TMR32B1IR) . . . . . 380
21.7.2 Timer Control Register (TMR32B0TCR and TMR32B1TCR) . . . . . 380
21.7.3 Timer Counter (TMR32B0TC - address 0x4001 4008 and TMR32B1TC - address 0x4001 8008) . . . . . 380
21.7.4 Prescale Register (TMR32B0PR - address 0x4001 400C and TMR32B1PR - address 0x4001 800C) . . . . . 381
21.7.5 Prescale Counter Register (TMR32B0PC - address 0x4001 4010 and TMR32B1PC - address 0x4001 8010) . . . . . 381
21.7.6 Match Control Register (TMR32B0MCR and TMR32B1MCR) . . . . . 381
21.7.7 Match Registers (TMR32B0MR0/1/2/3 - addresses 0x4001 4018/1C/20/24 and TMR32B1MR0/1/2/3 addresses 0x4001 8018/1C/20/24) . . . . . 382
21.7.8 Capture Control Register (TMR32B0CCR and TMR32B1CCR) . . . . . 383
21.7.9 Capture Register (TMR32B0CR0/1 - address 0x4001 402C/30 and TMR32B1CR0/1 - address 0x4001 802C/30) . . . . . 384
21.7.10 External Match Register (TMR32B0EMR and TMR32B1EMR) . . . . . 384
21.7.11 Count Control Register (TMR32B0CTCR and TMR32B1TCR) . . . . . 386
21.7.12 PWM Control Register (TMR32B0PWMC and TMR32B1PWMC) . . . . . 387
**21.8 Functional description . . . . . 388**
21.8.1 Example timer operation . . . . . 388
21.8.2 Rules for single edge controlled PWM outputs . . . . . 389
**21.9 Architecture . . . . . 390**

## Chapter 22: LPC111x/LPC11Cxx Windowed WatchDog Timer (WDT)

**22.1 How to read this chapter . . . . . 391**
**22.2 Basic configuration . . . . . 391**
**22.3 Features . . . . . 391**
**22.4 Applications . . . . . 392**
**22.5 General description . . . . . 392**
**22.6 Clock control . . . . . 393**
**22.7 Register description . . . . . 394**
22.7.1 Watchdog Mode register . . . . . 394
22.7.2 Watchdog Timer Constant register . . . . . 395
22.7.3 Watchdog Feed register . . . . . 396
22.7.4 Watchdog Timer Value register . . . . . 396
22.7.5 Watchdog Timer Warning Interrupt register 396
22.7.6 Watchdog Timer Window register . . . . . 397
22.7.7 Watchdog timing examples . . . . . 397

## Chapter 23: LPC111x/LPC11Cxx WatchDog Timer (WDT)

**23.1 How to read this chapter . . . . . 399**
**23.2 Basic configuration . . . . . 399**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

**23.3 Features . . . . . 399**
**23.4 Applications . . . . . 400**
**23.5 Description . . . . . 400**
**23.6 WDT clocking . . . . . 400**
**23.7 Register description . . . . . 401**
23.7.1 Watchdog Mode register (WDMOD - 0x4000 0000) . . . . . 401
23.7.2 Watchdog Timer Constant register (WDTC - 0x4000 4004) . . . . . 402
23.7.3 Watchdog Feed register (WDFEED - 0x4000 4008) . . . . . 402
23.7.4 Watchdog Timer Value register (WDTV - 0x4000 400C) . . . . . 403
**23.8 Block diagram . . . . . 403**

## Chapter 24: LPC111x/LPC11Cxx System tick timer (SysTick)

**24.1 How to read this chapter . . . . . 404**
**24.2 Basic configuration . . . . . 404**
**24.3 Features . . . . . 404**
**24.4 General description . . . . . 404**
**24.5 Register description . . . . . 405**
24.5.1 System Timer Control and status register . . 405
24.5.2 System Timer Reload value register . . . . . 406
24.5.3 System Timer Current value register . . . . . 406
24.5.4 System Timer Calibration value register (SYST_CALIB - 0xE000 E01C) . . . . . 407
**24.6 Functional description . . . . . 407**
**24.7 Example timer calculations . . . . . 407**
Example (system clock = 50 MHz). . . . . 407

## Chapter 25: LPC111x/LPC11Cxx ADC

**25.1 How to read this chapter . . . . . 408**
**25.2 Basic configuration . . . . . 408**
**25.3 Features . . . . . 408**
**25.4 Pin description . . . . . 408**
**25.5 Register description . . . . . 409**
25.5.1 A/D Control Register (AD0CR - 0x4001 C000) . . . . . 410
25.5.2 A/D Global Data Register (AD0GDR - 0x4001 C004) . . . . . 411
25.5.3 A/D Interrupt Enable Register (AD0INTEN - 0x4001 C00C) . . . . . 412
25.5.4 A/D Data Registers (AD0DR0 to AD0DR7 - 0x4001 C010 to 0x4001 C02C) . . . . . 412
25.5.5 A/D Status Register (AD0STAT - 0x4001 C030) . . . . . 413
**25.6 Operation . . . . . 413**
25.6.1 Hardware-triggered conversion . . . . . 413
25.6.2 Interrupts . . . . . 413
25.6.3 Accuracy vs. digital receiver . . . . . 413

## Chapter 26: LPC111x/LPC11Cxx Flash programming firmware

**26.1 How to read this chapter . . . . . 414**
**26.2 Features . . . . . 416**
**26.3 General description . . . . . 416**
26.3.1 Bootloader . . . . . 416
26.3.2 Memory map after any reset. . . . . 417
26.3.3 Criterion for Valid User Code . . . . . 417
26.3.4 Boot process flowchart . . . . . 418
26.3.5 Flash configuration for LPC1100, LPC1100C, LPC1100L series . . . . . 419
26.3.6 Flash configuration for LPC1100XL series . . 419
26.3.7 Flash content protection mechanism . . . . . 420
26.3.8 Code Read Protection (CRP) . . . . . 420
26.3.8.1 ISP entry protection . . . . . 422
**26.4 UART Communication protocol . . . . . 423**
26.4.1 UART ISP command format . . . . . 423
26.4.2 UART ISP response format . . . . . 423
26.4.3 UART ISP data format . . . . . 423
26.4.4 UART ISP flow control . . . . . 423
26.4.5 UART ISP command abort . . . . . 423
26.4.6 Interrupts during UART ISP . . . . . 423
26.4.7 Interrupts during IAP. . . . . 424
26.4.8 RAM used by ISP command handler (for LPC11Cxx parts). . . . . 424
26.4.9 RAM used by ISP command handler (for LPC111x parts) . . . . . 424
26.4.10 RAM used by IAP command handler. . . . . 424
**26.5 UART ISP commands . . . . . 424**
26.5.1 Unlock <Unlock code> (UART ISP) . . . . . 425
26.5.2 Set Baud Rate <Baud Rate> <stop bit> (UART ISP) . . . . . 425
26.5.3 Echo <setting> (UART ISP) . . . . . 425
26.5.4 Write to RAM <start address> <number of bytes> (UART ISP) . . . . . 426
26.5.5 Read Memory <address> <no. of bytes> (UART ISP) . . . . . 426
26.5.6 Prepare sector(s) for write operation <start sector number> <end sector number> (UART ISP) 427
26.5.7 Copy RAM to flash <Flash address> <RAM address> <no of bytes> (UART ISP) . . . . . 427
26.5.8 Go <address> <mode> (UART ISP) . . . . . 428
26.5.9 Erase sector(s) <start sector number> <end sector number> (UART ISP) . . . . . 429
26.5.10 Blank check sector(s) <sector number> <end sector number> (UART ISP) . . . . . 430
26.5.11 Read Part Identification number (UART ISP) 430
26.5.12 Read Boot code version number (UART ISP) 432


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

26.5.13 Compare <address1> <address2> <no of bytes> (UART ISP) . . . 432
26.5.14 ReadUID (UART ISP) . . . 433
26.5.15 UART ISP Return Codes . . . 433
**26.6 C_CAN communication protocol . . . 434**
26.6.1 C_CAN ISP SDO communication . . . 435
26.6.2 C_CAN ISP object directory . . . 435
26.6.3 Unlock (C_CAN ISP) . . . 436
26.6.4 Write to RAM (C_CAN ISP) . . . 436
26.6.5 Read memory (C_CAN ISP) . . . 436
26.6.6 Prepare sectors for write operation (C_CAN ISP) . . . 436
26.6.7 Copy RAM to flash (C_CAN ISP) . . . 436
26.6.8 Go (C_CAN ISP) . . . 437
26.6.9 Erase sectors (C_CAN ISP) . . . 437
26.6.10 Blank check sectors (C_CAN ISP) . . . 437
26.6.11 Read PartID (C_CAN ISP) . . . 437
26.6.12 Read boot code version (C_CAN ISP) . . . 437
26.6.13 Read serial number (C_CAN ISP) . . . 437
26.6.14 Compare (C_CAN ISP) . . . 437
26.6.15 C_CAN ISP SDO abort codes . . . 437
26.6.16 Differences to fully-compliant CANopen . . . 438
**26.7 IAP commands . . . 438**
26.7.1 Prepare sector(s) for write operation (IAP) . . . 440
26.7.2 Copy RAM to flash (IAP) . . . 441
26.7.3 Erase Sector(s) (IAP) . . . 442
26.7.4 Blank check sector(s) (IAP) . . . 442
26.7.5 Read Part Identification number (IAP) . . . 442
26.7.6 Read Boot code version number (IAP) . . . 443
26.7.7 Compare <address1> <address2> <no of bytes> (IAP) . . . 443
26.7.8 Reinvoke ISP (IAP) . . . 444
26.7.9 ReadUID (IAP) . . . 444
26.7.10 Erase page . . . 444
26.7.11 IAP Status Codes . . . 445
**26.8 Debug notes . . . 445**
26.8.1 Comparing flash images . . . 445
26.8.2 Serial Wire Debug (SWD) flash programming interface . . . 445
**26.9 Flash memory access . . . 446**
**26.10 Flash signature generation . . . 447**
26.10.1 Register description for signature generation 447
26.10.1.1 Signature generation address and control registers . . . 447
26.10.1.2 Signature generation result registers . . . 448
26.10.1.3 Flash Module Status register . . . 449
26.10.1.4 Flash Module Status Clear register . . . 449
26.10.2 Algorithm and procedure for signature generation . . . 449
Signature generation . . . 449
Content verification . . . 450

## Chapter 27: LPC111x/LPC11Cxx Serial Wire Debug (SWD)

**27.1 How to read this chapter . . . 451**
**27.2 Features . . . 451**
**27.3 Introduction . . . 451**
**27.4 Description . . . 451**
**27.5 Pin description . . . 451**
**27.6 Debug notes . . . 452**
27.6.1 Debug limitations . . . 452
27.6.2 Debug connections . . . 452

## Chapter 28: LPC111x/LPC11Cxx Appendix: ARM Cortex-M0 reference

**28.1 How to read this chapter . . . 453**
**28.2 Introduction . . . 453**
**28.3 About the Cortex-M0 processor and core peripherals . . . 453**
28.3.1 System-level interface . . . 454
28.3.2 Integrated configurable debug . . . 454
28.3.3 Cortex-M0 processor features summary . . . 454
28.3.4 Cortex-M0 core peripherals . . . 455
**28.4 Processor . . . 455**
28.4.1 Programmers model . . . 455
28.4.1.1 Processor modes . . . 455
28.4.1.2 Stacks . . . 455
28.4.1.3 Core registers . . . 455
28.4.1.3.1 General-purpose registers . . . 456
28.4.1.3.2 Stack Pointer . . . 456
28.4.1.3.3 Link Register . . . 457
28.4.1.3.4 Program Counter . . . 457
28.4.1.3.5 Program Status Register . . . 457
28.4.1.3.6 Exception mask register . . . 459
28.4.1.3.7 CONTROL register . . . 459
28.4.1.4 Exceptions and interrupts . . . 460
28.4.1.5 Data types . . . 460
28.4.1.6 The Cortex Microcontroller Software Interface Standard . . . 460
28.4.2 Memory model . . . 461
28.4.2.1 Memory regions, types and attributes . . . 462
28.4.2.2 Memory system ordering of memory accesses . . . 463
28.4.2.3 Behavior of memory accesses . . . 463
28.4.2.4 Software ordering of memory accesses . . . 464
28.4.2.5 Memory endianness . . . 465
28.4.2.5.1 Little-endian format . . . 465
28.4.3 Exception model . . . 465
28.4.3.1 Exception states . . . 465
28.4.3.2 Exception types . . . 466
28.4.3.3 Exception handlers . . . 467
28.4.3.4 Vector table . . . 467
28.4.3.5 Exception priorities . . . 468
28.4.3.6 Exception entry and return . . . 469
28.4.3.6.1 Exception entry . . . 469
28.4.3.6.2 Exception return . . . 470
28.4.4 Fault handling . . . 471
28.4.4.1 Lockup . . . 471


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

28.4.5 Power management . . . . . 472
28.4.5.1 Entering sleep mode . . . . . 472
28.4.5.1.1 Wait for interrupt . . . . . 472
28.4.5.1.2 Wait for event . . . . . 472
28.4.5.1.3 Sleep-on-exit . . . . . 473
28.4.5.2 Wake-up from sleep mode . . . . . 473
28.4.5.2.1 Wake-up from WFI or sleep-on-exit . . . . . 473
28.4.5.2.2 Wake-up from WFE . . . . . 473
28.4.5.3 Power management programming hints . . . . 473
**28.5 Instruction set . . . . . 473**
28.5.1 Instruction set summary . . . . . 473
28.5.2 Intrinsic functions . . . . . 475
28.5.3 About the instruction descriptions . . . . . 476
28.5.3.1 Operands . . . . . 476
28.5.3.2 Restrictions when using PC or SP . . . . . 476
28.5.3.3 Shift Operations . . . . . 477
28.5.3.3.1 ASR . . . . . 477
28.5.3.3.2 LSR . . . . . 477
28.5.3.3.3 LSL . . . . . 478
28.5.3.3.4 ROR . . . . . 479
28.5.3.4 Address alignment . . . . . 479
28.5.3.5 PC-relative expressions . . . . . 479
28.5.3.6 Conditional execution . . . . . 480
28.5.3.6.1 The condition flags . . . . . 480
28.5.3.6.2 Condition code suffixes . . . . . 480
28.5.4 Memory access instructions . . . . . 481
28.5.4.1 ADR . . . . . 481
28.5.4.1.1 Syntax . . . . . 481
28.5.4.1.2 Operation . . . . . 482
28.5.4.1.3 Restrictions . . . . . 482
28.5.4.1.4 Condition flags . . . . . 482
28.5.4.1.5 Examples . . . . . 482
28.5.4.2 LDR and STR, immediate offset . . . . . 482
28.5.4.2.1 Syntax . . . . . 482
28.5.4.2.2 Operation . . . . . 482
28.5.4.2.3 Restrictions . . . . . 483
28.5.4.2.4 Condition flags . . . . . 483
28.5.4.2.5 Examples . . . . . 483
28.5.4.3 LDR and STR, register offset . . . . . 483
28.5.4.3.1 Syntax . . . . . 483
28.5.4.3.2 Operation . . . . . 484
28.5.4.3.3 Restrictions . . . . . 484
28.5.4.3.4 Condition flags . . . . . 484
28.5.4.3.5 Examples . . . . . 484
28.5.4.4 LDR, PC-relative . . . . . 484
28.5.4.4.1 Syntax . . . . . 484
28.5.4.4.2 Operation . . . . . 484
28.5.4.4.3 Restrictions . . . . . 484
28.5.4.4.4 Condition flags . . . . . 484
28.5.4.4.5 Examples . . . . . 485
28.5.4.5 LDM and STM . . . . . 485
28.5.4.5.1 Syntax . . . . . 485
28.5.4.5.2 Operation . . . . . 485
28.5.4.5.3 Restrictions . . . . . 485
28.5.4.5.4 Condition flags . . . . . 486
28.5.4.5.5 Examples . . . . . 486
28.5.4.5.6 Incorrect examples . . . . . 486
28.5.4.6 PUSH and POP . . . . . 486
28.5.4.6.1 Syntax . . . . . 486
28.5.4.6.2 Operation . . . . . 486
28.5.4.6.3 Restrictions . . . . . 486
28.5.4.6.4 Condition flags . . . . . 487
28.5.4.6.5 Examples . . . . . 487
28.5.5 General data processing instructions . . . . . 487
28.5.5.1 ADC, ADD, RSB, SBC, and SUB . . . . . 488
28.5.5.1.1 Syntax . . . . . 488
28.5.5.1.2 Operation . . . . . 488
28.5.5.1.3 Restrictions . . . . . 489
28.5.5.1.4 Examples . . . . . 489
28.5.5.2 AND, ORR, EOR, and BIC . . . . . 489
28.5.5.2.1 Syntax . . . . . 490
28.5.5.2.2 Operation . . . . . 490
28.5.5.2.3 Restrictions . . . . . 490
28.5.5.2.4 Condition flags . . . . . 490
28.5.5.2.5 Examples . . . . . 490
28.5.5.3 ASR, LSL, LSR, and ROR . . . . . 490
28.5.5.3.1 Syntax . . . . . 490
28.5.5.3.2 Operation . . . . . 491
28.5.5.3.3 Restrictions . . . . . 491
28.5.5.3.4 Condition flags . . . . . 491
28.5.5.3.5 Examples . . . . . 491
28.5.5.4 CMP and CMN . . . . . 491
28.5.5.4.1 Syntax . . . . . 492
28.5.5.4.2 Operation . . . . . 492
28.5.5.4.3 Restrictions . . . . . 492
28.5.5.4.4 Condition flags . . . . . 492
28.5.5.4.5 Examples . . . . . 492
28.5.5.5 MOV and MVN . . . . . 492
28.5.5.5.1 Syntax . . . . . 492
28.5.5.5.2 Operation . . . . . 493
28.5.5.5.3 Restrictions . . . . . 493
28.5.5.5.4 Condition flags . . . . . 493
28.5.5.5.5 Example . . . . . 493
28.5.5.6 MULS . . . . . 493
28.5.5.6.1 Syntax . . . . . 493
28.5.5.6.2 Operation . . . . . 494
28.5.5.6.3 Restrictions . . . . . 494
28.5.5.6.4 Condition flags . . . . . 494
28.5.5.6.5 Examples . . . . . 494
28.5.5.7 REV, REV16, and REVSH . . . . . 494
28.5.5.7.1 Syntax . . . . . 494
28.5.5.7.2 Operation . . . . . 494
28.5.5.7.3 Restrictions . . . . . 495
28.5.5.7.4 Condition flags . . . . . 495
28.5.5.7.5 Examples . . . . . 495
28.5.5.8 SXT and UXT . . . . . 495
28.5.5.8.1 Syntax . . . . . 495
28.5.5.8.2 Operation . . . . . 495
28.5.5.8.3 Restrictions . . . . . 495
28.5.5.8.4 Condition flags . . . . . 495
28.5.5.8.5 Examples . . . . . 496
28.5.5.9 TST . . . . . 496
28.5.5.9.1 Syntax . . . . . 496
28.5.5.9.2 Operation . . . . . 496
28.5.5.9.3 Restrictions . . . . . 496
28.5.5.9.4 Condition flags . . . . . 496


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

28.5.5.9.5 Examples . . . . . 496
28.5.6 Branch and control instructions . . . . . 496
28.5.6.1 B, BL, BX, and BLX . . . . . 497
28.5.6.1.1 Syntax. . . . . 497
28.5.6.1.2 Operation . . . . . 497
28.5.6.1.3 Restrictions. . . . . 497
28.5.6.1.4 Condition flags . . . . . 498
28.5.6.1.5 Examples . . . . . 498
28.5.7 Miscellaneous instructions . . . . . 498
28.5.7.1 BKPT . . . . . 499
28.5.7.1.1 Syntax. . . . . 499
28.5.7.1.2 Operation . . . . . 499
28.5.7.1.3 Restrictions. . . . . 499
28.5.7.1.4 Condition flags . . . . . 499
28.5.7.1.5 Examples . . . . . 499
28.5.7.2 CPS . . . . . 499
28.5.7.2.1 Syntax. . . . . 499
28.5.7.2.2 Operation . . . . . 499
28.5.7.2.3 Restrictions. . . . . 500
28.5.7.2.4 Condition flags . . . . . 500
28.5.7.2.5 Examples . . . . . 500
28.5.7.3 DMB . . . . . 500
28.5.7.3.1 Syntax. . . . . 500
28.5.7.3.2 Operation . . . . . 500
28.5.7.3.3 Restrictions. . . . . 500
28.5.7.3.4 Condition flags . . . . . 500
28.5.7.3.5 Examples . . . . . 500
28.5.7.4 DSB . . . . . 500
28.5.7.4.1 Syntax. . . . . 500
28.5.7.4.2 Operation . . . . . 500
28.5.7.4.3 Restrictions. . . . . 500
28.5.7.4.4 Condition flags . . . . . 501
28.5.7.4.5 Examples . . . . . 501
28.5.7.5 ISB . . . . . 501
28.5.7.5.1 Syntax. . . . . 501
28.5.7.5.2 Operation . . . . . 501
28.5.7.5.3 Restrictions. . . . . 501
28.5.7.5.4 Condition flags . . . . . 501
28.5.7.5.5 Examples . . . . . 501
28.5.7.6 MRS . . . . . 501
28.5.7.6.1 Syntax. . . . . 501
28.5.7.6.2 Operation . . . . . 501
28.5.7.6.3 Restrictions. . . . . 501
28.5.7.6.4 Condition flags . . . . . 502
28.5.7.6.5 Examples . . . . . 502
28.5.7.7 MSR . . . . . 502
28.5.7.7.1 Syntax. . . . . 502
28.5.7.7.2 Operation . . . . . 502
28.5.7.7.3 Restrictions. . . . . 502
28.5.7.7.4 Condition flags . . . . . 502
28.5.7.7.5 Examples . . . . . 502
28.5.7.8 NOP . . . . . 502
28.5.7.8.1 Syntax. . . . . 502
28.5.7.8.2 Operation . . . . . 502
28.5.7.8.3 Restrictions. . . . . 502
28.5.7.8.4 Condition flags . . . . . 503
28.5.7.8.5 Examples . . . . . 503
28.5.7.9 SEV . . . . . 503
28.5.7.9.1 Syntax . . . . . 503
28.5.7.9.2 Operation . . . . . 503
28.5.7.9.3 Restrictions . . . . . 503
28.5.7.9.4 Condition flags . . . . . 503
28.5.7.9.5 Examples . . . . . 503
28.5.7.10 SVC . . . . . 503
28.5.7.10.1 Syntax . . . . . 503
28.5.7.10.2 Operation . . . . . 503
28.5.7.10.3 Restrictions . . . . . 503
28.5.7.10.4 Condition flags . . . . . 503
28.5.7.10.5 Examples . . . . . 504
28.5.7.11 WFE . . . . . 504
28.5.7.11.1 Syntax . . . . . 504
28.5.7.11.2 Operation . . . . . 504
28.5.7.11.3 Restrictions . . . . . 504
28.5.7.11.4 Condition flags . . . . . 504
28.5.7.11.5 Examples . . . . . 504
28.5.7.12 WFI . . . . . 504
28.5.7.12.1 Syntax . . . . . 504
28.5.7.12.2 Operation . . . . . 505
28.5.7.12.3 Restrictions . . . . . 505
28.5.7.12.4 Condition flags . . . . . 505
28.5.7.12.5 Examples . . . . . 505
**28.6 Peripherals. . . . . 505**
28.6.1 About the ARM Cortex-M0. . . . . 505
28.6.2 Nested Vectored Interrupt Controller . . . . . 505
28.6.2.1 Accessing the Cortex-M0 NVIC registers using CMSIS . . . . . 506
28.6.2.2 Interrupt Set-enable Register. . . . . 506
28.6.2.3 Interrupt Clear-enable Register . . . . . 507
28.6.2.4 Interrupt Set-pending Register. . . . . 507
28.6.2.5 Interrupt Clear-pending Register . . . . . 508
28.6.2.6 Interrupt Priority Registers . . . . . 508
28.6.2.7 Level-sensitive and pulse interrupts. . . . . 509
28.6.2.7.1 Hardware and software control of interrupts 509
28.6.2.8 NVIC usage hints and tips . . . . . 510
28.6.2.8.1 NVIC programming hints . . . . . 510
28.6.3 System Control Block. . . . . 510
28.6.3.1 The CMSIS mapping of the Cortex-M0 SCB registers . . . . . 511
28.6.3.2 CPUID Register . . . . . 511
28.6.3.3 Interrupt Control and State Register . . . . . 511
28.6.3.4 Application Interrupt and Reset Control Register . . . . . 513
28.6.3.5 System Control Register . . . . . 514
28.6.3.6 Configuration and Control Register . . . . . 515
28.6.3.7 System Handler Priority Registers. . . . . 515
28.6.3.7.1 System Handler Priority Register 2 . . . . . 515
28.6.3.7.2 System Handler Priority Register 3 . . . . . 516
28.6.3.8 SCB usage hints and tips. . . . . 516
28.6.4 System timer, SysTick . . . . . 516
28.6.4.1 SysTick Control and Status Register . . . . . 517
28.6.4.2 SysTick Reload Value Register . . . . . 517
28.6.4.2.1 Calculating the RELOAD value . . . . . 517
28.6.4.3 SysTick Current Value Register . . . . . 517
28.6.4.4 SysTick Calibration Value Register . . . . . 518
28.6.4.5 SysTick usage hints and tips . . . . . 518
**28.7 Cortex-M0 instruction summary . . . . . 519**


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2016. All rights reserved.

## Chapter 29: Supplementary information

**29.1 Abbreviations . . . . . 522**
**29.2 References . . . . . 522**
**29.3 Legal information . . . . . 523**
29.3.1 Definitions . . . . . 523
29.3.2 Disclaimers . . . . . 523
29.3.3 Trademarks . . . . . 523
**29.4 Tables . . . . . 524**
**29.5 Figures . . . . . 533**
**29.6 Contents . . . . . 535**

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

**© NXP B.V. 2016.** **All rights reserved.**

For more information, please visit: http://www.nxp.com
For sales office addresses, please send an email to: salesaddresses@nxp.com

**Date of release: 22 December 2016**
**Document identifier: UM10398**

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- View LPC1114FBD48/303,1 on WIN SOURCE
- NXP / Nexperia Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

- Global Sourcing Solution
- Obsolete Management
- Cost Control Management
- Shortage Management
- Alternative Solution
- Excess Inventory Management