


# Product Configuration System

## Plastic Mold Crystals (AT Strip Crystal)

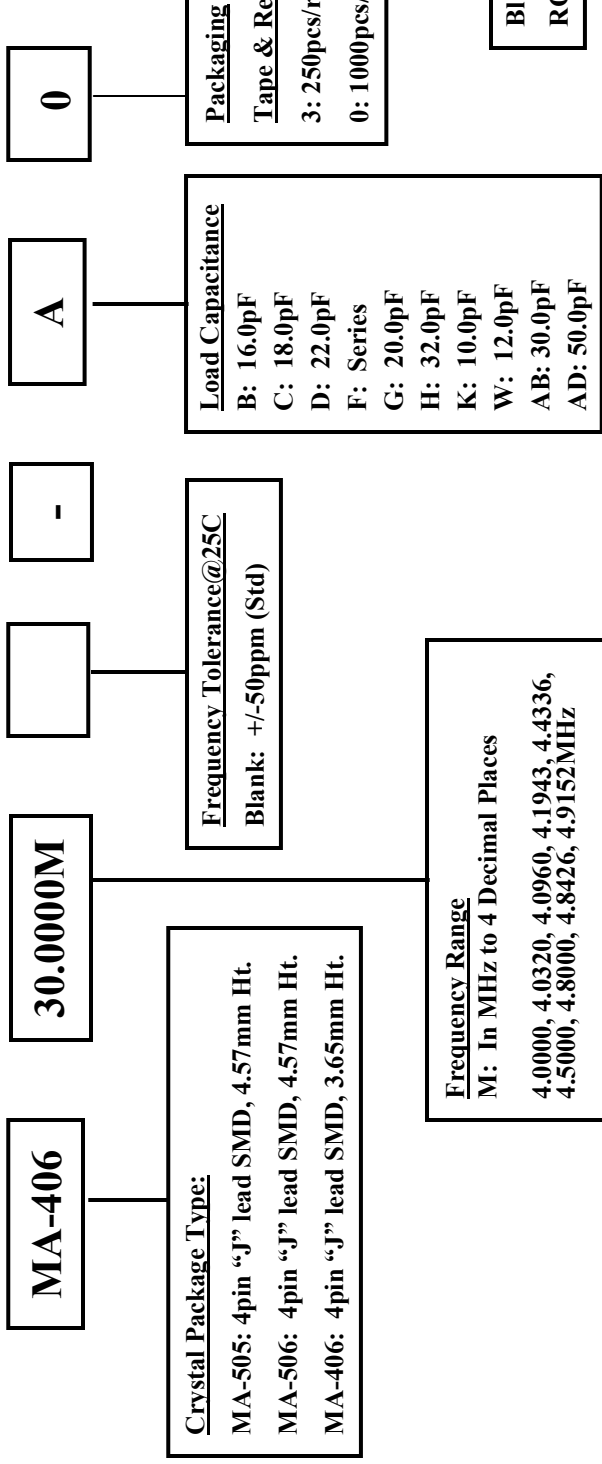

NOTES:

- 1) If you require a load capacitance other than that listed, please contact your EEA representative for assistance.
- 2) For frequencies between 26.0000MHz and 29.9999MHz please specify if 3<sup>rd</sup> Overtone is required.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View MA-505 32.0000M-C0 on WIN SOURCE](#)
- ⊖ [Epson Electronics America Inc-Semiconductor Div Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management