



THE DATASHEET OF
2322 661 93043



DATA SHEET

Overload protection
for telecommunication
PTC thermistors

2000 Oct 10

Supersedes data of 17th May 1999
File under BCcomponents, BC02

PTC thermistors

Overload protection for telecommunication

FEATURES

- Wide resistance range in telecom area 4... to 70 Ω
- Fast protection against power contact faults
- Withstand high overload currents of up to 10 A
- High voltage withstanding capabilities for the larger sized thermistors
- Good tracking over a wide temperature range for all matched or binned types
- UL1434 approved types available (XGPU2)
- Excellent stability over extended time
- All telecom PTCs are coated with a high temperature silicon lacquer (UL94V0) to protect them from any harsh environments and to improve their lifetime.

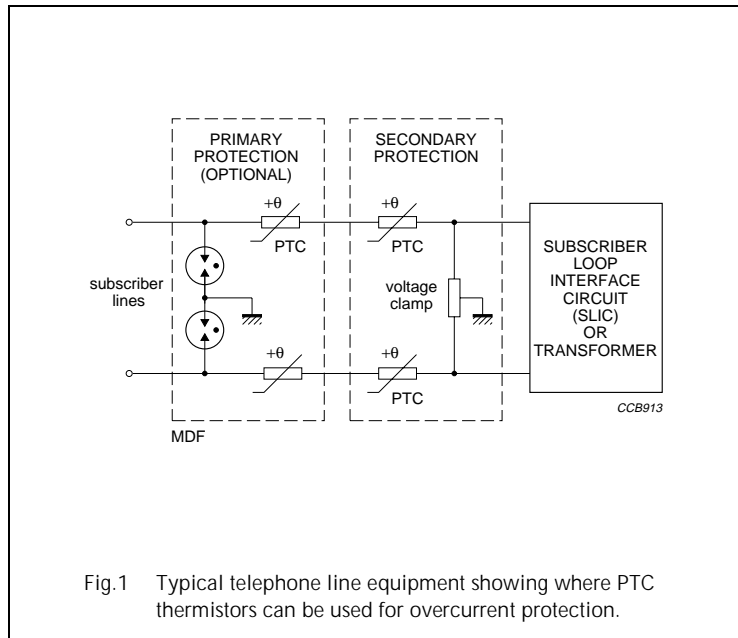


Fig.1 Typical telephone line equipment showing where PTC thermistors can be used for overcurrent protection.

APPLICATIONS

- Main Distribution Frame (MDF)
- Central Office Switching (C.O.)
- Subscriber Terminal Equipment (T.E.)
- Set-top box (S.B.).

DESCRIPTION

Advanced developments in telephony equipment in recent years have radically altered the protection requirements for both exchange and subscriber equipment. The BC Components range of Positive Temperature Coefficient (PTC) thermistors includes devices specially designed to provide overcurrent protection.

PTC thermistors

Overload protection for telecommunication

OVERCURRENT PROTECTION OF TELECOMMUNICATION LINES

The PTC thermistor must protect the telephone line circuit against overcurrent which may be caused by the following examples:

- Surges due to lightning strikes on or near to the line plant.
- Short-term induction of alternating voltages from adjacent power lines or railway systems, usually caused when these lines or systems develop faults.
- Direct contact between telephone lines and power lines.

To provide good protection under such conditions a PTC thermistor is connected in series with each line, usually as secondary protection; see Fig.1. However, even with primary line protection (usually a gas discharge tube), the PTC thermistor must fulfil severe requirements.

Surge pulses of up to 2 kV can occur and in order to withstand short-term power induction the PTC thermistor must withstand high voltages. If the line has primary protection a 220 V to 300 V PTC thermistor is adequate. Without primary protection, however, a 600 V PTC device is necessary. BCcomponents manufactures a range of PTC thermistors (see Table 2) covering both requirements.

In the case of direct contact between the telephone line and a power line, the PTC thermistor must withstand very high inrush power at normal mains voltage. Under such conditions, overload currents of up to 10 A on a 230 V

mains could occur for up to several hours. To handle this power, the resistance/temperature characteristic of the thermistor must have a very steep slope and the ceramic must be extremely homogeneous.

In case of overcurrent due to short-term induction of alternating voltages, currents of several AMPs with voltages as high as 650 V_{RMS} can be present for several seconds

For standard high voltage applications, resistance values from 25 to 50 Ω are available. However, ISDN networks which carry high-frequency sound and vision, need lower line impedance.

Telecommunication designers are therefore demanding high voltage thermistors with much lower R₂₅ values, which places even greater demands on the manufacture of PTC thermistors. For these applications PTC thermistors which have a R₂₅ value of 10 Ω with voltages in the 300 to 600 V_{RMS} range are available.

In a typical telephone line application, two PTC thermistors are used, one each for the tip and ring (or A and B) wire together with their series resistors. For good line balance it is important that the thermistor and resistor pairs are matched.

On request, BCcomponents can supply matched or binned PTC thermistors with R₂₅ values matched to as close as 0.5 Ω .

PTC thermistors

Overload protection
for telecommunication

MECHANICAL DATA

Table 1 Specific physical dimensions and packaging for catalogue numbers as listed; see Fig.2


D MAX. (mm)	T MAX. (mm)	H ₂ (mm)	L ₁ (mm)	H ₃ MAX. (mm)	PACKAGING ⁽¹⁾⁽²⁾	CATALOGUE NUMBER 2322
7.0	4.0	3.5 ±0.5	–	11.0	taped H ₀ = 16 mm	661 91066
8.5	5.0	1.5 to 3.0	–	11.5	taped H ₀ = 16 mm	661 93048
7.0	4.0	2.0 ±0.5	–	9.8	taped H ₀ = 18 mm	661 93147
6.7	4.0	1.5 to 3.0	–	10.0	taped H ₀ = 18 mm	661 93025
7.0	5.0	1.5 to 3	–	10.0	taped H ₀ = 16 mm	661 93037
8.3	4.0	1.5 to 3.0	–	11.0	taped H ₀ = 18 mm	661 93043 ⁽³⁾
6.8	4.3	1.5 to 3.0	–	10.1	taped H ₀ = 16 mm	661 93142
11	4.5	4 ±1.0	–	15.5	taped H ₀ = 16 mm	662 93081
11	4.5	4 ±1.0	–	15.5	taped H ₀ = 16 mm	662 93074 ⁽³⁾
6.7	1.8	–	–	–	disc on tray	661 93118
7.0	4.0	2.0 ±0.5	–	9.8	taped H ₀ = 18 mm	661 93148
13.6	6.0	4 ±1.0	20 ±4.0	18.6	bulk	663 93025 ⁽³⁾
8.3	5.0	1.5 ±0.5	20 ±3.0	10.3	bulk	661 93078
7.0	4.0	2.5 ±0.5	–	10.0	taped H ₀ = 16 mm	661 93121
8.5	4.0	2.5 ±0.5	4.1 ±0.5	11.5	bulk	661 93124
8.5	4.0	2.5 ±0.5	–	11.5	taped H ₀ = 16 mm	661 93146
8.5	4.0	2.5 ±0.5	4.1 ±0.5	11.5	bulk	661 93135
8.0	5.0	2.5 ±0.5	–	11.0	taped H ₀ = 16 mm	661 93056
8.5	4.0	2 ±0.5	–	11.0	taped H ₀ = 16 mm	661 93139
10.5	5.0	2 ±0.5	–	12.6	taped H ₀ = 16 mm	662 93129
13	5.5	4 ±1.0	20 min.	18.0	bulk	662 93114
13	5.5	4 ±1.0	20 min.	18.0	bulk	662 93131

Notes

1. Taped in accordance with "IEC 60286-2"; standard packaging: 1500 units/reel.
2. Naked disc ceramic for substrate mounting, available on request.
3. Insulated version is also available.

PTC thermistors

**Overload protection
for telecommunication**

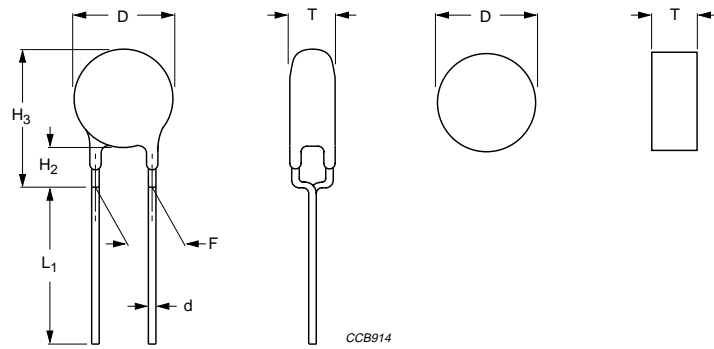

For dimensions see Table 1.
Lead pitch $F = 5 \text{ mm} +0.6/-0.1$.
Lead thickness $d = 0.6 \text{ mm} \pm 10\%$.

Fig.2 Component outline.

ELECTRICAL DATA

Table 2 Electrical data for catalogue numbers as listed

V MAX. (V)	NON-TRIP CURRENT		RESISTANCE		MATCHED PAIRS	TRIP CURRENT		MAX. TRIP TIME at 25 °C		APPLICATION AREA (1)	COMPATIBILITY
	I _{nt} (mA)	at T (°C)	R ₂₅ (Ω)	TOL (%)		I _t (mA)	at T (°C)	t _t (s)	at I _t (mA)		
100	85	65	4	±25	0.5 Ω	280	25	4.0	1000	MDF; ISDN	—
220	70	70	25	±20	1 Ω	200	25	2.5	1000	C.O.	K20/21
230	100	70	10	±20	1 Ω	250	25	3	1000	MDF; ISDN	K20/21
245	60	70	70	+10/-15	no	180	25	60	220	C.O.	—
245	75	70	33	±20	±5%	150	10	1.2	1000	C.O.	—
245	70	70	25	±15	1 Ω	200	25	20	400	C.O.	K20/21; FTCSE I31-2;
245	65	85	25	±20	2%	200	25	3.40	650	C.O.	K20/21
245	140	55	16	±20	no	270	25	8	1000	T.E.	K20/21; FTCSE I31-2;
245	140	55	10	±20	no	270	25	8	1000	T.E.	K20/21; FTCSE I31-2;
250	100	40	20	+10/-20	1 Ω	220	25	1	1000	MDF	—
250	70	70	25	±20	1 Ω	175	25	1.3	1000	MDF; C.O.	K20/21
250	100	70	10	±20	no	450	0	0.30	8000	T.E.	K20/21
285	135	95	8	±25	0.5 Ω	400	25	6	1000	MDF; ISDN	K20/21
300	100	70	16	±25	no	250	25	2.0	1000	MDF; T.E.	K20/21
350	100	70	10	±20	no	270	25	4.0	1000	T.E.; S.B.	K20/21
350	100	70	10	±20	1 Ω	270	25	4.0	1000	C.O.	K20/21
600	50	70	50	±20	1 Ω	140	25	1	1000	C.O.	K20/21
600	70	70	35	±20	3 Ω	600	0	3	1000	C.O.	K20/21
600	70	70	25	±20	2%	170	25	4	700	C.o.	K20/21
600	70	70	25	±20	2%	170	25	8	700	C.O.	K20/21
600	175	25	10	±20	0.5 Ω	400	25	7	1000	C.O.	UL1459/GRT1089
600	175	25	10	±20	no	400	25	7	1000	T.E.; S.B.	UL1459/GRT1089

Notes

1. MDF: Main Distribution Frame; C.O.: Central Office Switching; T.E.: Subscriber Terminal Equipment; S.B.: Set-top Box.
2. UL 1434 approved types.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 2322 661 93043 on WIN SOURCE](#)

 [Vishay Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management