




Multilayer ceramic capacitor

X7R

Series/Type: Chip
Ordering code: B37921...
Date: 2005-12-05

Features

- High volumetric efficiency
- Non-linear capacitance change
- High insulation resistance
- High pulse strength


Applications

- Blocking and coupling
- Decoupling
- Interference suppression


Termination

- For soldering: Nickel-barrier termination (Ni) for case sizes 0402 to 1210
Silver-palladium termination (AgPd) for case sizes 1812 and 2220
(capacitance values $\leq 1 \mu\text{F}$)
- For conductive adhesion: Silver-palladium termination (AgPd) for all case sizes on request

Options

- Alternative capacitance tolerances available on request

Delivery mode

- Cardboard and blister tape (blister tape for chip thickness $\geq 1.2 \pm 0.1 \text{ mm}$ and case sizes ≥ 1210),
180-mm and 330-mm reel available
- Bulk case for case sizes 0603 (16 V, 25 V, 50 V) and 0805 (50 V)

Electrical data

Temperature characteristic		X7R	
Climatic category (IEC 60068-1)		55/125/56	
Standard		EIA	
Dielectric		Class 2	
Rated voltage ¹⁾	V_R	10, 16, 25, 50, 100, 200, 500	VDC
Test voltage	V_{test}	$2.5 \cdot V_R / 5 \text{ s}$	VDC
Capacitance range ²⁾ / E series	C_R	100 pF ... 1 μF (E3/E6)	
Max. relative capacitance change	$\Delta C/C$	± 15	%
Dissipation factor (limit value)	$\tan \delta$	$< 25 \cdot 10^{-3}$ $< 35 \cdot 10^{-3}$ for 16 V	
Insulation resistance ³⁾ at + 25 °C	R_{ins}	$> 10^5$	M Ω
Insulation resistance ³⁾ at +125 °C	R_{ins}	$> 10^4$	M Ω
Time constant ³⁾ at + 25 °C	τ	> 1000	s
Time constant ³⁾ at +125 °C	τ	> 100	s
Operating temperature range	T_{op}	-55 ... +125	°C
Ageing ⁴⁾		yes	

1) Note: No operation on AC line.


2) See also HighCap series in data book or Internet

3) For $C_R > 10 \text{ nF}$ the time constant $\tau = C \cdot R_{\text{ins}}$ is given.

4) Refer to data book 2003 "General Techn. Inform.", page 197.


Capacitance tolerances

Code letter	J	K (standard)	M
Tolerance	±5%	±10%	±20%

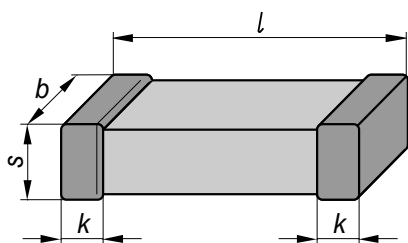Dimensional drawing


KKE0329-N

Dimensions (mm)


Case size (inch) (mm)	0402 1005	0603 1608	0805 2012	1206 3216
l	1.0 ±0.10	1.6 ±0.15	2.0 ±0.20	3.2 ±0.20
b	0.5 ±0.05	0.8 ±0.10	1.25 ±0.15	1.6 ±0.15
s	0.5 ±0.05	0.8 ±0.10	1.35 max.	1.30 max.
k	0.1 –0.4	0.1 –0.4	0.13 –0.75	0.25 –0.75

Case size (inch) (mm)	1210 3225	1812 4532	2220 5750
l	3.2 ±0.30	4.5 ±0.30	5.7 ±0.40
b	2.5 ±0.30	3.2 ±0.30	5.0 ±0.40
s	1.70 max.	1.30 max.	1.30 max.
k	0.25 –0.75	0.25 –1.0	0.25 –1.0


Tolerances to CECC 32101-801

Multilayer ceramic capacitors

X7R




Recommended solder pad



Maximum dimensions (mm)

Case size (inch/mm)	Type	A	C	D
0402/1005	single chip	0.6	1.7	0.6
0603/1608	single chip	1.0	3.0	1.0
0805/2012	single chip	1.2	3.4	1.3
1206/3216	single chip	1.2	4.5	1.8
1210/3225	single chip	1.2	4.5	2.8
1812/4532	single chip	1.5	6.0	3.6
2220/5750	single chip	1.5	7.2	5.5

Termination

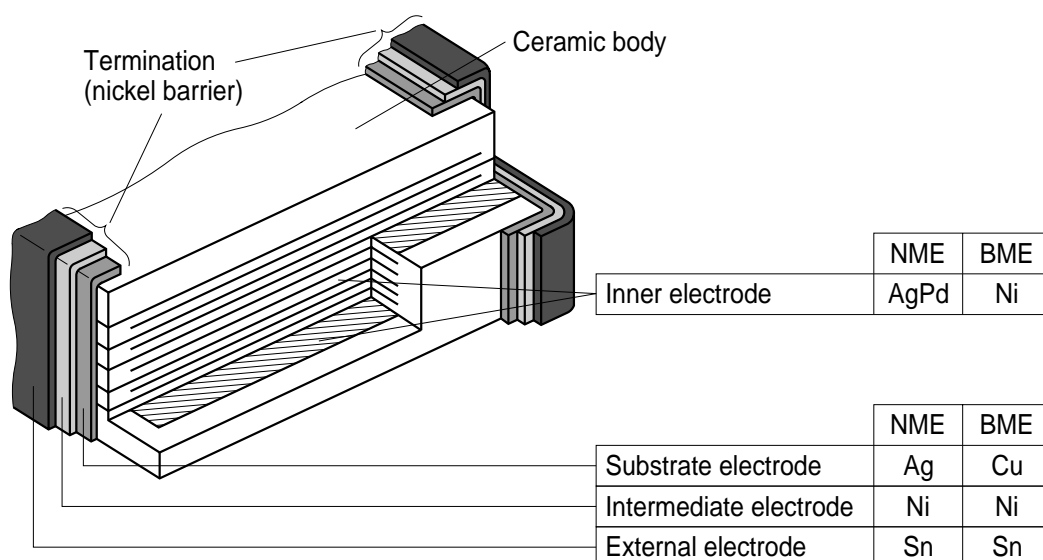

NME: Noble Metal Electrode
BME: Base Metal Electrode


KKE0485-5-E



Product range chip capacitors

		X7R								
Size ¹⁾ inch mm	0402 1005				0603 1608					
	B37921				B37931					
Type										
V_R (VDC)	10	16	25	50	10	16	25	50	100	
C_R										
100 pF										
150 pF										
220 pF										
330 pF										
470 pF										
680 pF										
1.0 nF										
1.5 nF										
2.2 nF										
3.3 nF										
4.7 nF										
6.8 nF										
10 nF										
15 nF										
22 nF										
33 nF										
47 nF										
68 nF										
100 nF								2)		
150 nF										
220 nF						2)	2)			

1) $l \times b$ (inch) / $l \times b$ (mm)
2) See HighCV product range.

Multilayer ceramic capacitors
X7R

Product range chip capacitors

X7R											
Size ¹⁾ inch mm	0805 2012					1206 3216					
	B37941					B37872					
Type											
V_R (VDC)	16	25	50	100	200	16	25	50	100	200	500
C_R											
100 pF											
220 pF											
330 pF											
470 pF											
680 pF											
820 pF											
1.0 nF											
1.5 nF											
2.2 nF											
3.3 nF											
4.7 nF											
6.8 nF											
10 nF											
15 nF											
22 nF											
33 nF											
47 nF											
68 nF											
100 nF											
150 nF											
220 nF	2)	2)	2)								
330 nF	2)	2)									
470 nF	2)	2)									
1.0 µF	2)	2)				2)	2)	2)			
2.2 µF						2)	2)				

1) $l \times b$ (inch) / $l \times b$ (mm)


2) See HighCV product range.



Product range chip capacitors

		X7R						
Size ¹⁾ inch mm	1210 3225					1812 4532	2220 5750	
	B37950					B37953	B37956	
Type								
V_R (VDC)	25	50	100	200	500	50	50	
C_R								
1.0 nF								
1.5 nF								
2.2 nF								
3.3 nF								
3.9 nF								
4.7 nF								
6.8 nF								
10 nF								
15 nF								
22 nF								
33 nF								
47 nF								
68 nF								
100 nF								
150 nF								
220 nF								
330 nF								
470 nF								

1) $l \times b$ (inch) / $l \times b$ (mm)
2) See HighCV product range.

Multilayer ceramic capacitors
X7R; 0402

Ordering codes and packing for X7R, 10, 16, 25 and 50 VDC, nickel-barrier terminations

C _R ¹⁾	Ordering code ²⁾	Chip thickness mm	Cardboard tape, Ø 180-mm reel	Cardboard tape, Ø 330-mm reel
			** \triangleq 60	** \triangleq 70
			pcs./reel	pcs./reel
Case size 0402, 10 VDC				
33 nF	B37921K8333K0**	0.5 ± 0.05	10000	50000
47 nF	B37921K8473K0**	0.5 ± 0.05	10000	50000
Case size 0402, 16 VDC				
10 nF	B37921K9103K0**	0.5 ± 0.05	10000	50000
22 nF	B37921K9223K0**	0.5 ± 0.05	10000	50000
Case size 0402, 25 VDC				
4.7 nF	B37921K0472K0**	0.5 ± 0.05	10000	50000
6.8 nF	B37921K0682K0**	0.5 ± 0.05	10000	50000
Case size 0402, 50 VDC				
220 pF	B37921K5221K0**	0.5 ± 0.05	10000	50000
470 pF	B37921K5471K0**	0.5 ± 0.05	10000	50000
1.0 nF	B37921K5102K0**	0.5 ± 0.05	10000	50000
2.2 nF	B37921K5222K0**	0.5 ± 0.05	10000	50000
3.3 nF	B37921K5332K0**	0.5 ± 0.05	10000	50000

1) Other capacitance values on request.

2) The table contains the ordering codes for the standard capacitance tolerance.
For other available capacitance tolerances see page 3.


Ordering codes and packing for X7R, 16 and 25 VDC, nickel-barrier terminations

C _R ¹⁾	Ordering code ²⁾	Chip thickness mm	Cardboard tape, Ø 180-mm reel	Cardboard tape, Ø 330-mm reel	Bulk case
			** Δ 60	** Δ 70	** Δ 01
			pcs./reel	pcs./reel	pcs.

Case size 0603, 16 VDC


22 nF	B37931K9223K0**	0.8 ± 0.1	4000	16000	15000
33 nF	B37931K9333K0**	0.8 ± 0.1	4000	16000	15000
47 nF	B37931K9473K0**	0.8 ± 0.1	4000	16000	15000
68 nF	B37931K9683K0**	0.8 ± 0.1	4000	16000	15000
100 nF	B37931K9104K0**	0.8 ± 0.1	4000	16000	15000

Case size 0603, 25 VDC

10 nF	B37931K0103K0**	0.8 ± 0.1	4000	16000	15000
15 nF	B37931K0153K0**	0.8 ± 0.1	4000	16000	15000
22 nF	B37931K0223K0**	0.8 ± 0.1	4000	16000	15000
33 nF	B37931K0333K0**	0.8 ± 0.1	4000	16000	15000
47 nF	B37931K0473K0**	0.8 ± 0.1	4000	16000	15000
68 nF	B37931K0683K0**	0.8 ± 0.1	4000	16000	15000
100 nF	B37931K0104K0**	0.8 ± 0.1	4000	16000	15000

1) Other capacitance values on request.

2) The table contains the ordering codes for the standard capacitance tolerance.
For other available capacitance tolerances see page 3.

Multilayer ceramic capacitors
X7R; 0603

Ordering codes and packing for X7R, 50 and 100 VDC, nickel-barrier terminations

C _R ¹⁾	Ordering code ²⁾	Chip thickness mm	Cardboard tape, ∅ 180-mm reel	Cardboard tape, ∅ 330-mm reel	Bulk case
			** \triangleq 60	** \triangleq 70	** \triangleq 01
			pcs./reel	pcs./reel	pcs.

Case size 0603, 50 VDC

220 pF	B37931K5221K0**	0.8 ± 0.1	4000	16000	15000
330 pF	B37931K5331K0**	0.8 ± 0.1	4000	16000	15000
470 pF	B37931K5471K0**	0.8 ± 0.1	4000	16000	15000
680 pF	B37931K5681K0**	0.8 ± 0.1	4000	16000	15000
1.0 nF	B37931K5102K0**	0.8 ± 0.1	4000	16000	15000
1.5 nF	B37931K5152K0**	0.8 ± 0.1	4000	16000	15000
2.2 nF	B37931K5222K0**	0.8 ± 0.1	4000	16000	15000
3.3 nF	B37931K5332K0**	0.8 ± 0.1	4000	16000	15000
4.7 nF	B37931K5472K0**	0.8 ± 0.1	4000	16000	15000
6.8 nF	B37931K5682K0**	0.8 ± 0.1	4000	16000	15000
10 nF	B37931K5103K0**	0.8 ± 0.1	4000	16000	15000
15 nF	B37931K5153K0**	0.8 ± 0.1	4000	16000	15000
22 nF	B37931K5223K0**	0.8 ± 0.1	4000	16000	15000
33 nF	B37931K5333K0**	0.8 ± 0.1	4000	16000	15000
47 nF	B37931K5473K0**	0.8 ± 0.1	4000	16000	15000

Case size 0603, 100 VDC

100 pF	B37931K1101K0**	0.8 ± 0.1	4000	16000	—
150 pF	B37931K1151K0**	0.8 ± 0.1	4000	16000	—
220 pF	B37931K1221K0**	0.8 ± 0.1	4000	16000	—
330 pF	B37931K1331K0**	0.8 ± 0.1	4000	16000	—
470 pF	B37931K1471K0**	0.8 ± 0.1	4000	16000	—
680 pF	B37931K1681K0**	0.8 ± 0.1	4000	16000	—
1.0 nF	B37931K1102K0**	0.8 ± 0.1	4000	16000	—
1.5 nF	B37931K1152K0**	0.8 ± 0.1	4000	16000	—
2.2 nF	B37931K1222K0**	0.8 ± 0.1	4000	16000	—
3.3 nF	B37931K1332K0**	0.8 ± 0.1	4000	16000	—
4.7 nF	B37931K1472K0**	0.8 ± 0.1	4000	16000	—

1) Other capacitance values on request.

2) The table contains the ordering codes for the standard capacitance tolerance.
For other available capacitance tolerances see page 3.


Ordering codes and packing for X7R, 25 and 50 VDC, nickel-barrier terminations

C _R ¹⁾	Ordering code ²⁾	Chip thickness mm	Cardboard tape, ∅ 180-mm reel	Cardboard tape, ∅ 330-mm reel	Bulk case
			** \triangle 60	** \triangle 70	** \triangle 01
			pcs./reel	pcs./reel	pcs.

Case size 0805, 25 VDC

100 nF	B37941K0104K0**	1.25 ± 0.1	3000 ³⁾	12000 ⁴⁾	–
--------	-----------------	------------	--------------------	---------------------	---

Case size 0805, 50 VDC


470 pF	B37941K5471K0**	0.6 ± 0.1	5000	20000	10000
680 pF	B37941K5681K0**	0.6 ± 0.1	5000	20000	10000
1.0 nF	B37941K5102K0**	0.6 ± 0.1	5000	20000	10000
1.5 nF	B37941K5152K0**	0.6 ± 0.1	5000	20000	10000
2.2 nF	B37941K5222K0**	0.6 ± 0.1	5000	20000	10000
3.3 nF	B37941K5332K0**	0.6 ± 0.1	5000	20000	10000
4.7 nF	B37941K5472K0**	0.6 ± 0.1	5000	20000	10000
6.8 nF	B37941K5682K0**	0.6 ± 0.1	5000	20000	10000
10 nF	B37941K5103K0**	0.6 ± 0.1	5000	20000	10000
15 nF	B37941K5153K0**	0.6 ± 0.1	5000	20000	10000
22 nF	B37941K5223K0**	0.6 ± 0.1	5000	20000	10000
33 nF	B37941K5333K0**	0.6 ± 0.1	5000	20000	10000
47 nF	B37941K5473K0**	0.6 ± 0.1	5000	20000	10000
68 nF	B37941K5683K0**	0.8 ± 0.1	4000	16000	–
68 nF	B37941K5683K0**	1.25 ± 0.1	3000 ³⁾	12000 ⁴⁾	–
100 nF	B37941K5104K0**	0.8 ± 0.1	4000	16000	–
100 nF	B37941K5104K0**	1.25 ± 0.1	3000 ³⁾	12000 ⁴⁾	–

1) Other capacitance values on request.

2) The table contains the ordering codes for the standard capacitance tolerance.
For other available capacitance tolerances see page 3.

3) Blister tape, 180-mm reel, ordering code ** \triangle 62

4) Blister tape, 330-mm reel, ordering code ** \triangle 72

Multilayer ceramic capacitors
X7R; 0805

Ordering codes and packing for X7R, 100 and 200 VDC, nickel-barrier terminations

C _R ¹⁾	Ordering code ²⁾	Chip thickness mm	Cardboard tape, Ø 180-mm reel	Cardboard tape, Ø 330-mm reel
			** \triangleq 60	** \triangleq 70
			pcs./reel	pcs./reel

Case size 0805, 100 VDC

470 pF	B37941K1471K0**	0.6 ± 0.1	5000	20000
680 pF	B37941K1681K0**	0.6 ± 0.1	5000	20000
1.0 nF	B37941K1102K0**	0.6 ± 0.1	5000	20000
1.5 nF	B37941K1152K0**	0.6 ± 0.1	5000	20000
2.2 nF	B37941K1222K0**	0.6 ± 0.1	5000	20000
3.3 nF	B37941K1332K0**	0.6 ± 0.1	5000	20000
4.7 nF	B37941K1472K0**	0.6 ± 0.1	5000	20000
6.8 nF	B37941K1682K0**	0.6 ± 0.1	5000	20000
10 nF	B37941K1103K0**	0.6 ± 0.1	5000	20000
15 nF	B37941K1153K0**	0.6 ± 0.1	5000	20000
22 nF	B37941K1223K0**	0.8 ± 0.1	4000	16000

Case size 0805, 200 VDC

220 pF	B37941K2221K0**	0.8 ± 0.1	4000	16000
330 pF	B37941K2331K0**	0.8 ± 0.1	4000	16000
470 pF	B37941K2471K0**	0.8 ± 0.1	4000	16000
680 pF	B37941K2681K0**	0.8 ± 0.1	4000	16000
1.0 nF	B37941K2102K0**	0.8 ± 0.1	4000	16000
1.5 nF	B37941K2152K0**	0.8 ± 0.1	4000	16000
2.2 nF	B37941K2222K0**	0.8 ± 0.1	4000	16000
3.3 nF	B37941K2332K0**	0.8 ± 0.1	4000	16000
4.7 nF	B37941K2472K0**	1.2 ± 0.1	3000 ³⁾	12000 ⁴⁾
6.8 nF	B37941K2682K0**	1.2 ± 0.1	3000 ³⁾	12000 ⁴⁾

1) Other capacitance values on request.

2) The table contains the ordering codes for the standard capacitance tolerance.
For other available capacitance tolerances see page 3.

3) Blister tape, 180-mm reel, ordering code ** \triangleq 62

4) Blister tape, 330-mm reel, ordering code ** \triangleq 72


Ordering codes and packing for X7R, 50 and 100 VDC, nickel-barrier terminations

C _R ¹⁾	Ordering code ²⁾	Chip thickness mm	Cardboard tape, Ø 180-mm reel	Cardboard tape, Ø 330-mm reel
			** \triangle 60	** \triangle 70
			pcs./reel	pcs./reel

Case size 1206, 50 VDC

1.0 nF	B37872K5102K0**	0.8 ± 0.1	4000	16000
1.5 nF	B37872K5152K0**	0.8 ± 0.1	4000	16000
2.2 nF	B37872K5222K0**	0.8 ± 0.1	4000	16000
3.3 nF	B37872K5332K0**	0.8 ± 0.1	4000	16000
4.7 nF	B37872K5472K0**	0.8 ± 0.1	4000	16000
6.8 nF	B37872K5682K0**	0.8 ± 0.1	4000	16000
10 nF	B37872K5103K0**	0.8 ± 0.1	4000	16000
15 nF	B37872K5153K0**	0.8 ± 0.1	4000	16000
22 nF	B37872K5223K0**	0.8 ± 0.1	4000	16000
33 nF	B37872K5333K0**	0.8 ± 0.1	4000	16000
47 nF	B37872K5473K0**	0.8 ± 0.1	4000	16000
68 nF	B37872K5683K0**	0.8 ± 0.1	4000	16000
100 nF	B37872K5104K0**	0.8 ± 0.1	4000	16000
220 nF	B37872K5224K0**	1.2 ± 0.1	3000 ³⁾	12000 ⁴⁾
330 nF	B37872K5334K0**	1.2 ± 0.1	3000 ³⁾	12000 ⁴⁾
470 nF	B37872K5474K0**	1.2 ± 0.1	3000 ³⁾	12000 ⁴⁾

Case size 1206, 100 VDC


1.0 nF	B37872K1102K0**	0.8 ± 0.1	4000	16000
1.5 nF	B37872K1152K0**	0.8 ± 0.1	4000	16000
2.2 nF	B37872K1222K0**	0.8 ± 0.1	4000	16000
3.3 nF	B37872K1332K0**	0.8 ± 0.1	4000	16000
4.7 nF	B37872K1472K0**	0.8 ± 0.1	4000	16000
6.8 nF	B37872K1682K0**	0.8 ± 0.1	4000	16000
10 nF	B37872K1103K0**	0.8 ± 0.1	4000	16000
15 nF	B37872K1153K0**	0.8 ± 0.1	4000	16000
22 nF	B37872K1223K0**	0.8 ± 0.1	4000	16000
33 nF	B37872K1333K0**	0.8 ± 0.1	4000	16000
47 nF	B37872K1473K0**	0.8 ± 0.1	4000	16000
68 nF	B37872K1683K0**	1.2 ± 0.1	3000 ³⁾	12000 ⁴⁾
100 nF	B37872K1104K0**	1.2 ± 0.1	3000 ³⁾	12000 ⁴⁾

1) Other capacitance values on request.

2) The table contains the ordering codes for the standard capacitance tolerance.
For other available capacitance tolerances see page 3.

3) Blister tape, 180-mm reel, ordering code ** \triangle 62

4) Blister tape, 330-mm reel, ordering code ** \triangle 72

Multilayer ceramic capacitors
X7R; 1206

Ordering codes and packing for X7R, 200 and 500 VDC, nickel-barrier terminations

C _R ¹⁾	Ordering code ²⁾	Chip thickness mm	Cardboard tape, Ø 180-mm reel	Cardboard tape, Ø 330-mm reel
			** \triangle 60	** \triangle 70
			pcs./reel	pcs./reel

Case size 1206, 200 VDC

820 pF	B37872K2821K0**	0.8 ± 0.1	4000	16000
1.0 nF	B37872K2102K0**	0.8 ± 0.1	4000	16000
1.5 nF	B37872K2152K0**	0.8 ± 0.1	4000	16000
2.2 nF	B37872K2222K0**	0.8 ± 0.1	4000	16000
3.3 nF	B37872K2332K0**	0.8 ± 0.1	4000	16000
4.7 nF	B37872K2472K0**	0.8 ± 0.1	4000	16000
6.8 nF	B37872K2682K0**	0.8 ± 0.1	4000	16000
10 nF	B37872K2103K0**	0.8 ± 0.1	4000	16000
15 nF	B37872K2153K0**	1.2 ± 0.1	3000 ³⁾	12000 ⁴⁾
22 nF	B37872K2223K0**	1.2 ± 0.1	3000 ³⁾	12000 ⁴⁾

Case size 1206, 500 VDC

470 pF	B37872K3471K0**	0.8 ± 0.1	4000	16000
680 pF	B37872K3681K0**	0.8 ± 0.1	4000	16000
1.0 nF	B37872K3102K0**	0.8 ± 0.1	4000	16000
1.5 nF	B37872K3152K0**	0.8 ± 0.1	4000	16000
2.2 nF	B37872K3222K0**	0.8 ± 0.1	4000	16000
3.3 nF	B37872K3332K0**	1.2 ± 0.1	3000 ³⁾	12000 ⁴⁾
4.7 nF	B37872K3472K0**	1.2 ± 0.1	3000 ³⁾	12000 ⁴⁾

1) Other capacitance values on request.

2) The table contains the ordering codes for the standard capacitance tolerance.
For other available capacitance tolerances see page 3.

3) Blister tape, 180-mm reel, ordering code ** \triangle 62

4) Blister tape, 330-mm reel, ordering code ** \triangle 72


Ordering codes and packing for X7R, 50, 100, 200 and 500 VDC, nickel-barrier terminations

C _R ¹⁾	Ordering code ²⁾	Chip thickness mm	Blister tape, Ø 180-mm reel	Blister tape, Ø 330-mm reel
			** \triangleq 62	** \triangleq 72
			pcs./reel	pcs./reel

Case size 1210, 50 VDC

10 nF	B37950K5103K0**	0.8 ± 0.1	4000	16000
22 nF	B37950K5223K0**	0.8 ± 0.1	4000	16000
47 nF	B37950K5473K0**	0.8 ± 0.1	4000	16000
100 nF	B37950K5104K0**	0.8 ± 0.1	4000	16000
220 nF	B37950K5224K0**	1.2 ± 0.1	3000	12000
470 nF	B37950K5474K0**	1.2 ± 0.1	3000	12000

Case size 1210, 100 VDC

10 nF	B37950K1103K0**	0.8 ± 0.1	4000	16000
15 nF	B37950K1153K0**	0.8 ± 0.1	4000	16000
22 nF	B37950K1223K0**	0.8 ± 0.1	4000	16000
33 nF	B37950K1333K0**	0.8 ± 0.1	4000	16000
47 nF	B37950K1473K0**	0.8 ± 0.1	4000	16000
68 nF	B37950K1683K0**	0.8 ± 0.1	4000	16000
100 nF	B37950K1104K0**	0.8 ± 0.1	4000	16000
150 nF	B37950K1154K0**	1.2 ± 0.1	3000	12000

Case size 1210, 200 VDC


3.9 nF	B37950K2392K0**	0.8 ± 0.1	4000	16000
4.7 nF	B37950K2472K0**	0.8 ± 0.1	4000	16000
6.8 nF	B37950K2682K0**	0.8 ± 0.1	4000	16000
10 nF	B37950K2103K0**	0.8 ± 0.1	4000	16000
15 nF	B37950K2153K0**	0.8 ± 0.1	4000	16000
22 nF	B37950K2223K0**	1.2 ± 0.1	3000	12000
33 nF	B37950K2333K0**	1.2 ± 0.1	3000	12000
47 nF	B37950K2473K0**	1.6 ± 0.1	2000	8000

Case size 1210, 500 VDC

1.0 nF	B37950K3102K0**	0.8 ± 0.1	4000	16000
1.5 nF	B37950K3152K0**	0.8 ± 0.1	4000	16000
2.2 nF	B37950K3222K0**	0.8 ± 0.1	4000	16000
3.3 nF	B37950K3332K0**	0.8 ± 0.1	4000	16000
4.7 nF	B37950K3472K0**	1.2 ± 0.1	3000	12000
6.8 nF	B37950K3682K0**	1.2 ± 0.1	3000	12000
10 nF	B37950K3103K0**	1.6 ± 0.1	2000	8000

1) Other capacitance values on request.

2) The table contains the ordering codes for the standard capacitance tolerance.
For other available capacitance tolerances see page 3.

Multilayer ceramic capacitors
X7R; 1812 and 2220

Ordering codes and packing for X7R, 50 VDC, silver-palladium terminations

C_R ¹⁾	Ordering code ²⁾	Chip thickness mm	Blister tape, Ø 180-mm reel	Blister tape, Ø 330-mm reel
			** \triangle 62	** \triangle 72
			pcs./reel	pcs./reel

Case size 1812, 50 VDC

100 nF	B37953J5104K0**	1.2 ± 0.1	1500	5000
220 nF	B37953J5224K0**	1.2 ± 0.1	1500	5000
470 nF	B37953J5474K0**	1.2 ± 0.1	1500	5000

Case size 2220, 50 VDC

470 nF	B37956J5474K0**	1.2 ± 0.1	1500	5000
1.0 µF	B37956J5105K0**	1.2 ± 0.1	1500	5000


1) Other capacitance values on request.

2) The table contains the ordering codes for the standard capacitance tolerance.
For other available capacitance tolerances see page 3.




Typical characteristics


Capacitance change $\Delta C/C_{25}$ versus temperature T

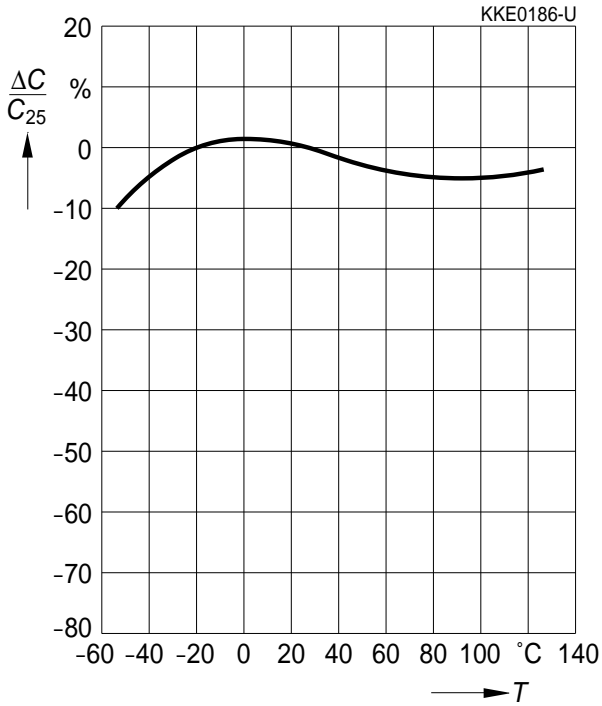


Capacitance change $\Delta C/C_0$ versus superimposed DC voltage V

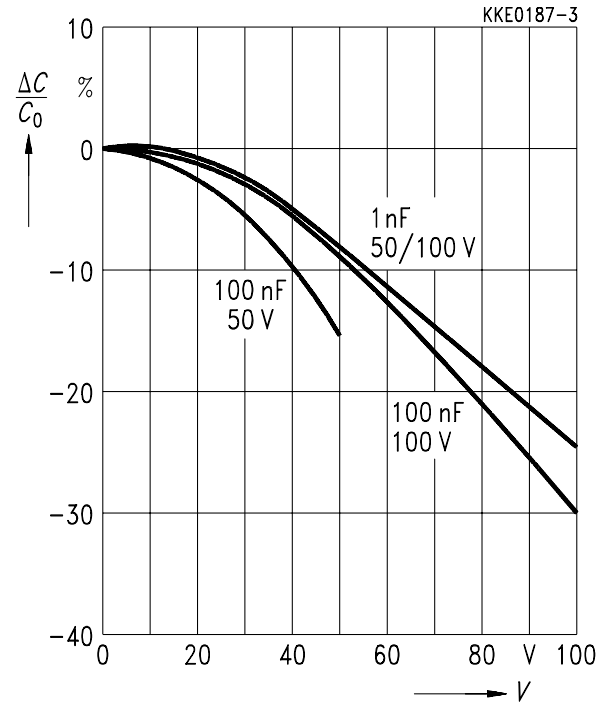


Impedance $|Z|$ versus frequency f

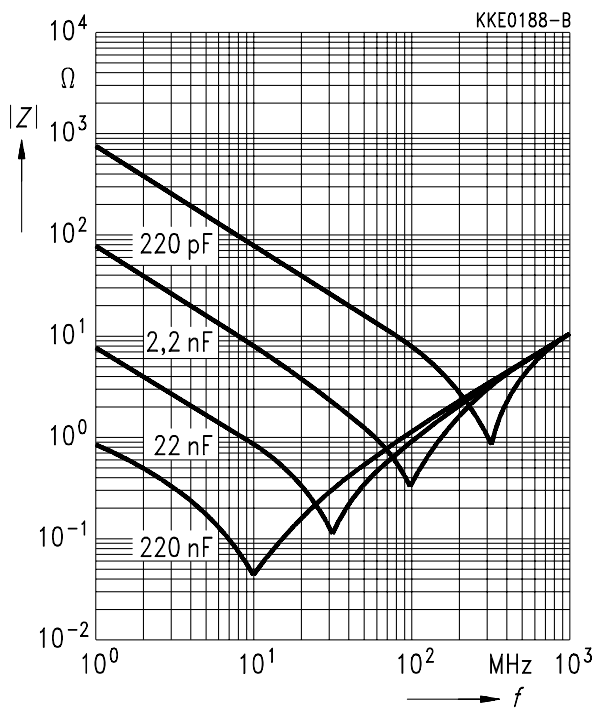


Dissipation factor $\tan \delta$ versus temperature T

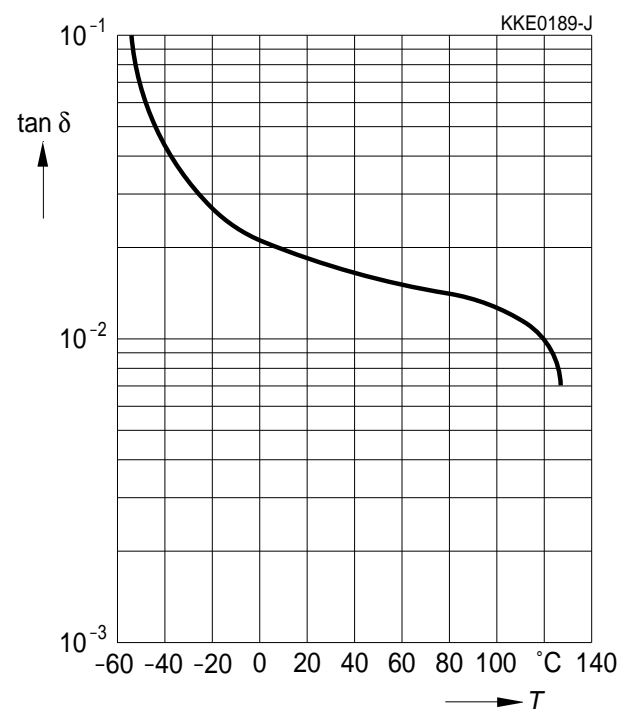




Typical characteristics

Insulation resistance R_{ins} versus temperature T

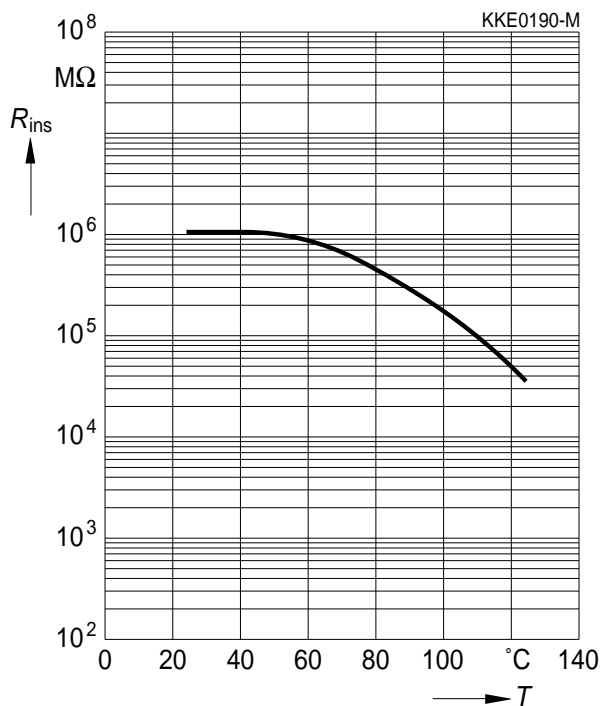

Capacitance change $\Delta C/C_1$ versus time t

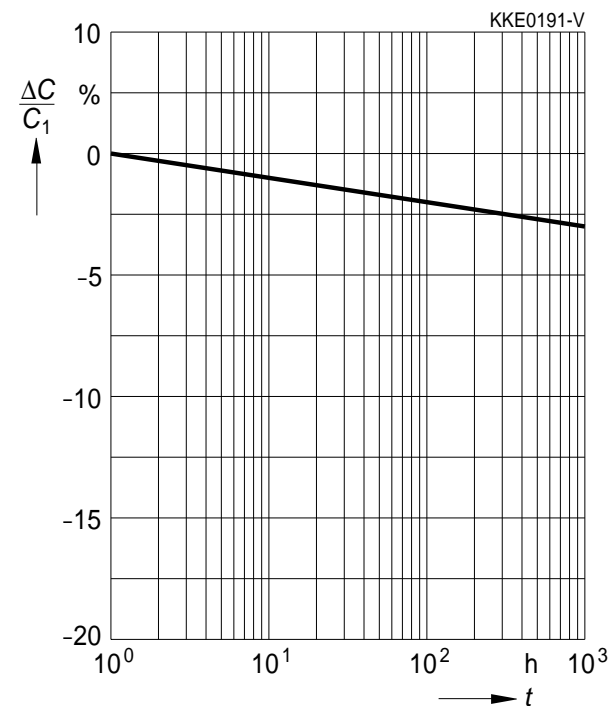

Further information

Please see General Technical Information at www.epcos.com/ceramic_capacitors or the data book "Multilayer Ceramic Capacitors" for further information on:

- Soldering directions
- Taping and packing
- Surface mounting instructions
- Effects of mechanical stress

Cautions and warnings

- Derating: A "state of the art" application design is essential to achieve failures rates at ppb level. Do not use designs based on 100% of specified rated values.
- AC applications may damage MLSC on a much lower level than DC voltage due to power dissipation losses.
- Mechanical stress - Please note EPCOS "General Technical Information", "Surface mounting instructions" and information about the effect of mechanical stress.
- ESD - EPCOS recommends the use of varistors.
- Further processing - care must be taken using moulding processes.
- Combined stresses - the total stress (e.g. DC voltage, AC ripple, pulses and temperature) has to be taken into account to estimate reliability of MLSC.

Important notes



The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of passive electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of a passive electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of a passive electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as “hazardous”)**. Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order.

We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the “General Terms of Delivery for Products and Services in the Electrical Industry” published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, CeraDiode, CSSP, PhaseCap, PhaseMod, SIFI, SIKOREL, SilverCap, SIMID, SIOV, SIP5D, SIP5K, TOPcap, UltraCap, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View B37950K1104K062 on WIN SOURCE](#)
-  [EPCOS \(TDK\) Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management