




**THE DATASHEET OF
PESC-02-12-02-01-L-VT**





POWER STRIP 40

PESC-02-40-02-01-L-VT

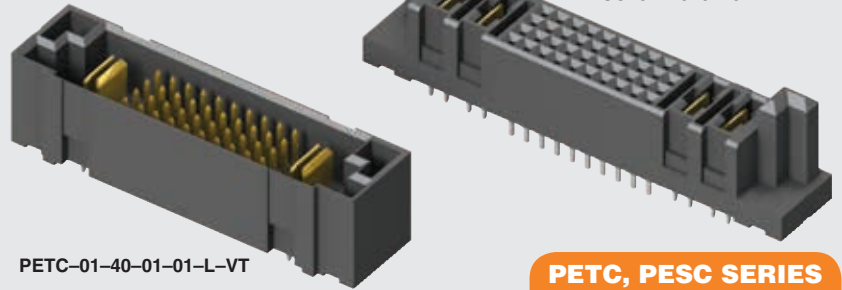

PETC-01-40-01-01-L-VT

PETC, PESC SERIES

(6.35 mm) .250" (PWR) (2.54 mm) .100" (SIG)

40 A SIGNAL/POWER COMBO SYSTEM

SPECIFICATIONS

For complete specifications see www.samtec.com?PETC or www.samtec.com?PESC

- Insulator Material:** Black LCP
- Terminal Material:** Copper Alloy
- Plating:** Sn or Au over 50 μ" (1.27 μm) Ni
- Current Rating (Signal Pin):** 5.7 A per pin (4 pins powered)
- Insertion Depth (Power Pin):** (5.00 mm) .197" to (8.46 mm) .333"
- Wiping Distance:** Signal: (1.5 mm) .059" Max Power: (4.14 mm) .163" Max
- Operating Temp Range:** -55 °C to +125 °C for Au -55 °C to +105 °C for Sn
- Voltage Rating:** Signal: 450 VAC/636 VDC Power: 650 VAC/919 VDC
- Standard Creepage:** (3.66 mm) .144" (power)
- Standard Clearance:** (3.31 mm) .130" (power)
- RoHS Compliant:** Yes
- Lead-Free Solderable:** Yes

PETC/PESC	
POWER PINS	CURRENT RATING (PER CONTACT)
1	31.4 A
2	28.0 A
3	24.4 A
4	22.9 A

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality



FILE NO. E111594

ALSO AVAILABLE (MOQ Required)

- Other signal pins
- Power pins
- Asymmetric power pin placement
- Other platings

Notes:
The number of power pins on each end must equal.
Some sizes, styles and options are non-standard, non-returnable.

PETC

POWER PINS

SIGNAL PINS

POWER PINS

01

PLATING OPTION

TAIL

OTHER OPTION

-01, -02, -04

-12

-40

-01, -02, -04

-L

= 10 μ" (0.25 μm) Gold on contact area, Matte Tin on tail

-T

= Matte Tin

-VT

= Vertical

-RA

= Right-angle

-SD

= Screw Down (Right-angle only)

-LC

= Locking Clip (Manual placement required)

Dimensions: (11.43) .450, (2.54) .100, (0.64) .025 SQ, (6.35) .250 TYP, (14.50) .571, (14.62) .575, (2.54) .100, (0.50) .020

POWER PINS/END	A	
	12 SIGNAL PINS	40 SIGNAL PINS
-01	(39.37) 1.550	(57.15) 2.250
-02	(52.07) 2.050	(69.85) 2.750
-04	(77.47) 3.050	(95.25) 3.750

CREEPAGE AND CLEARANCE

Selectively loading contacts achieves customer specific creepage and clearance requirements.
Contact asp@samtec.com

PESC

POWER PINS

SIGNAL PINS

POWER PINS

01

PLATING OPTION

TAIL

OTHER OPTION

-01, -02, -04

-12

-40

-01, -02, -04

-L

= 10 μ" (0.25 μm) Gold on contact area, Matte Tin on tail

-T

= Matte Tin

-VT

= Vertical

-RA

= Right-angle

-SD

= Screw Down (Right-angle only)

-LC

= Locking Clip (Manual placement required)

Dimensions: (11.43) .450, (2.54) .100, (0.64) .025 SQ, (6.35) .250 TYP, (12.00) .472, (4.40) .173, (12.64) .497, (2.47) .097, (2.54) .100, (0.79) .031 X (0.41) .016, (0.50) .020

Additional dimensions: (25.20) .992, (3.81) .150 DIA, (4.29) .169

POWER PINS/END	A	
	12 SIGNAL PINS	40 SIGNAL PINS
-01	(39.37) 1.550	(57.15) 2.250
-02	(52.07) 2.050	(69.85) 2.750
-04	(77.47) 3.050	(95.25) 3.750



Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

All parts within this catalog are built to Samtec's specifications. Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View PESC-02-12-02-01-L-VT on WIN SOURCE](#)
-  [Samtec Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management