






THE DATASHEET OF SM8S16A



SPECIFICATION SHEET

| | |
|--------------------------------|--|
| SPECIFICATION SHEET NO. | N1115 - DO218ABSM8S16A |
| DATE | Nov. 15, 2021 |
| REVISION | A0 |
| DESCRIPTION | <p>SMD Transient Voltage Suppressor (TVS) Diodes, DO-218AB series, SM8S16A Type, 2 Pads, Uni-directional Stand-off Voltage 16V. Reverse Surge Current. 254A Max. Operating Temp. Range -55°C ~+175°C Package in Tape/Reel, 750pcs/13" Reel RoHS/RoHS III compliant</p> |
| CUSTOMER | |
| CUSTOMER PART NUMBER | |
| CROSS REF. PART NUMBER | |
| ORIGINAL PART NUMBER | MDD SM8S16A |
| PART CODE | DO218ABSM8S16A |

| | | | |
|-------------------------|---|--|---|
| VENDOR APPROVE | | | |
| Issued/Checked/Approved |  |  |  |
| DATE: Nov. 15, 2021 | | | |

| | |
|-------------------------|--|
| CUSTOMER APPROVE | |
| | |
| DATE: | |

SMD TRANSIENT VOLTAGE SUPPRESSORS DO-218AB SERIES



MAIN FEATURE

- Round Chip Produced By Chemical Method
- Junction Passivated By Polyimide
- T J – 175 °C Capability Suitable For High Reliability And Automotive Requirement
- Available In both Uni-directional and Bi-directional Polarity
- Low Leakage Current
- Low Forward Voltage Drop
- High Surge Capability
- Meet ISO7637-2 Surge Specification (Varied By Test Condition)
- Meet MSL Level 1, Per J-STD_020, LF Max. Peak Of 245 °C
- AEC – Q101 Quality

APPLICATION

- Use In Sensitive Electronics Protection Against Voltage Transients Included By Inductive Load Switching And Lighting, Especially For Automotive Load Dump Protection Application

RFQ

[Request For Quotation](#)

PART CODE GUIDE

| DO218AB | SM8S16A |
|----------------|----------------|
| 1 | 2 |


1) **DO218AB**: SMD Transient Voltage Suppressor (TVs) Diodes, DO218AB series

2) **SM8S16A**: Type code for original part number SM8S16A

SMD TRANSIENT VOLTAGE SUPPRESSORS DO-218AB SERIES




DIMENSION (Unit: mm)

Image for reference

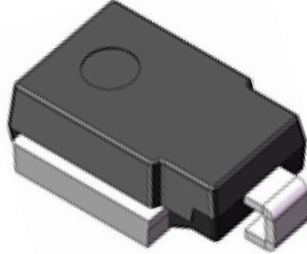


Marking: SM8S16A

DO-218AB

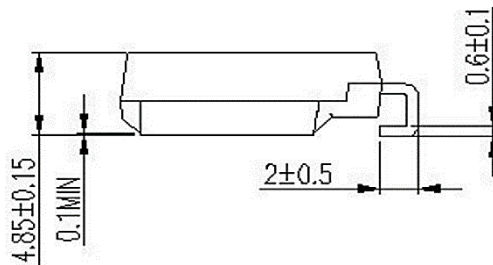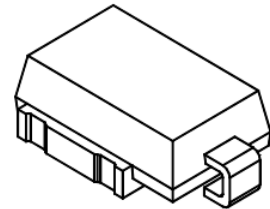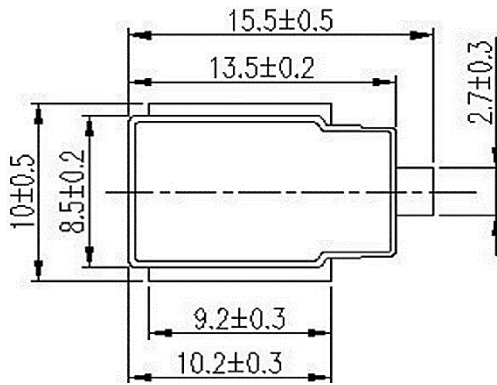

Recommend Pad Layout

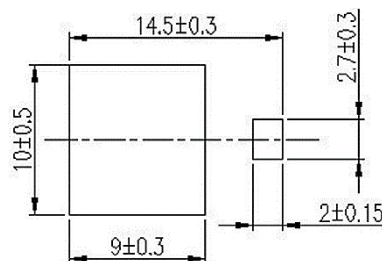

SMD TRANSIENT VOLTAGE SUPPRESSORS DO-218AB SERIES
MECHANICAL DATA

| Case | Terminals | Polarity | Mounting Position | Unit Weight |
|-------------------------------|--|-------------------|---|-------------|
| JEDEC DO-218AB molded plastic | Matte tin plated leads, solderable per J-STD-002 & JESD22-B102 | Heatsink is Anode | Meets UL 94 V-0 flammability rating base P/NHE3_X – RoHS Compliant & AEC – Q101 qualified (X: denotes revision code e. g A, B...) | 2.60 g/pc |

MAX. RATING & CHARACTERISTICS - Ratings at 25°C ambient temperature unless otherwise specified.

| Parameter | SYMBOLS | VALUE | | | UNITS |
|---|------------------|-------|---------|------|-------|
| | | Min. | Typical | Max. | |
| Peak Pulse Power Dissipation @10/1000µs Waveform | P _{ppm} | | 6600 | | W |
| Peak Pulse Power Dissipation @10/1000µs Waveform | P _{ppm} | | 5200 | | W |
| Power Dissipation On Infinite Heatsink @ T _c = 25 °C (Fig. 1) | P _D | | 8.0 | | W |
| Peak Pulse Current On 10/1000µs Waveform (Note 1) | I _{ppm} | | | 254 | A |
| Peak Forward Surge Current 8.3 Ms Single Half Sine- Wave | I _{FSM} | | 700 | | A |
| Thermal Resistance Junction To Case | R _{θJA} | | 0.90 | | °C/W |
| Operating Junction Temperature Range | T _J | -55 | | +175 | °C |
| Storage Temperature Range | T _{STG} | -55 | | +175 | °C |

Note

1. Non-repetitive current pulse derated above TA=25 °C

SMD TRANSIENT VOLTAGE SUPPRESSORS DO-218AB SERIES

ELECTRICAL CHARACTERISTICS - Ratings at 25°C

| Parameter | SYMBOLS | VALUE | | | UNITS |
|---|------------------|-------|-------------|------|-------|
| | | Min. | Typical | Max. | |
| Breakdown Voltage | V _{BR} | 17.8 | 18.8 | 19.7 | V |
| Test Current | I _T | | 5.0 | | mA |
| Reverse Stand-Off | V _{WM} | | 16.0 | | V |
| Reverse Leakage @V _{WM} | I _D | | | 10.0 | μA |
| Reverse Leakage @ V _{WM} , T _J = 175 °C | I _D | | | 150 | μA |
| Peak Pulse Current @ 10/1000 μs Wave-form | I _{PPM} | | | 254 | A |
| Clamping Voltage @ I _{PPM} | V _C | | | 26.0 | V |
| Temp. Coefficient of V _{BR} (Note 1) | α _T | | 0.081 | | %/ °C |

Note


1. To calculate V_{BR} vs Junction temperature, use the following formula: V_{BR} at T_J = V_{BR} at 25 °C x 1+ α_T x (T_J -25)
2. For all type Max. V_F = 1.8V at I_F = 100 A measured on 8.3ms single half Sine-wave or equivalent square wave, duty cycle = 4 pulses per minute Max.

SMD TRANSIENT VOLTAGE SUPPRESSORS DO-218AB SERIES
RELIABILITY

| Number | Experiment Items | Experiment Method And Conditions | Reference Documents |
|--------|------------------------------------|--|---------------------------------|
| 1 | Solder Resistance Test | Test 260°C± 5°C for 10 ± 2 sec. Immerse body into solder 1/16" ± 1/32" | MIL-STD-750D METHOD-2031.2 |
| 2 | Solderability Test | 230°C ±5°C for 5 sec. | MIL-STD-750D METHOD-2026.1 0 |
| 3 | Pull Test | 1 kg in axial lead direction for 10 sec. | MIL-STD-750D METHOD-2036.4 |
| 4 | Bend Test | 0.5Kg Weight Applied To Each Lead, Bending Arcs 90 °C ± 5 °C For 3 Times | MIL-STD-750D METHOD-2036.4 |
| 5 | High Temperature Reverse Bias Test | TA=100°C for 1000 Hours at VR=80% Rated VR | MIL-STD-750D METHOD-1038.4 |
| 6 | Forward Operation Life Test | TA=25°C Rated Average Rectified Current | MIL-STD-750D METHOD-1027.3 |
| 7 | Intermittent Operation Life Test | On state: 5 min with rated IRMS Power Off state: 5 min with Cool Forced Air. On and off for 1000 cycles. | MIL-STD-750D METHOD-1036.3 |
| 8 | Pressure Cooker Test | 15 PSIG, TA=121°C, 4 hours | MIL-S-19500 APPENOIXC |
| 9 | Temperature Cycling Test | -55°C~+125°C; 30 Minutes For Dwelled Time 5 minutes for transferred time. Total: 10 cycles. | MIL-STD-750D METHOD-1051.7 |
| 10 | Thermal Shock Test | 0°C for 5 minutes., 100°C for 5minutes, Total: 10 cycles | MIL-STD-750D METHOD-1056.7 |
| 11 | Forward Surge Test | 8.3ms Single Sale Sine-wave One Surge. | MIL-STD-750D METHOD-4066.4 |
| 12 | Humidity Test | TA=65°C, RH=98% for 1000 hours. | MIL-STD-750D METHOD-1021.3 |
| 13 | High Temperature Storage life Test | 150°C for 1000 Hours | MIL-STD-750D METHOD-1031.5 |

SMD TRANSIENT VOLTAGE SUPPRESSORS DO-218AB SERIES

SUGGESTED REFLOW PROFILE (For Reference Only)

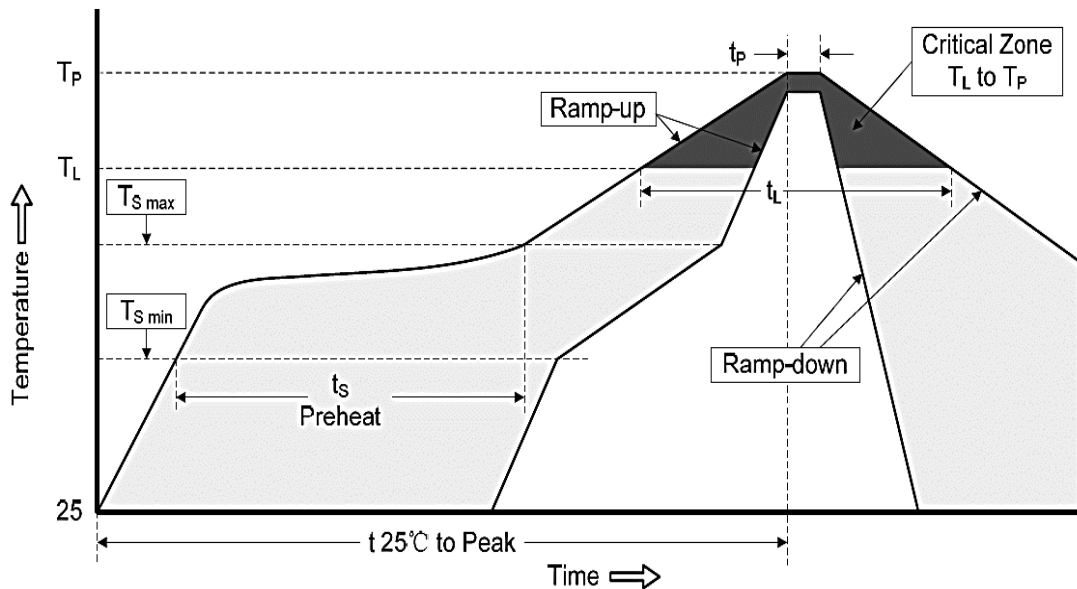

| | | |
|--|----------------------------------|-------------------|
| Profile Feature | | Pb-Free Assembly |
| Average Ramp-up Rate (Ts Max to Tp) | | 3°C/second Max |
| Preheat | Temperature Min (Ts Min.) | 150°C |
| | Temperature Max (Ts Max.) | 200°C |
| | Time (ts Min. to ts Max.) | 60 ~ 180 seconds |
| Time maintained above | Temperature (Tl) | 217°C |
| | Time (tl) | 60 ~ 150 seconds |
| Peak/Classification Temperature (Tp) | | 260 °C |
| Time within 5°C of actual Peak Temperature (tp) | | 20 ~ 40 seconds |
| Ramp-down rate | | 6 °C /Second Max. |
| Time 25 °C to Peak Temperature | | 6 minutes Max. |
| Suggest reflow times | | 3 Times Max. |

SMD TRANSIENT VOLTAGE SUPPRESSORS DO-218AB SERIES

RATINGS AND CHARACTERISTIC CURVES (For Reference Only)

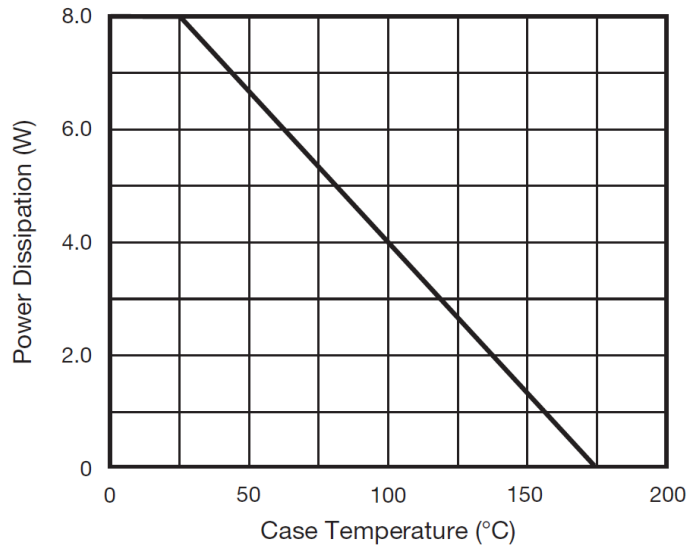


Fig. 1 - Power Derating Curve

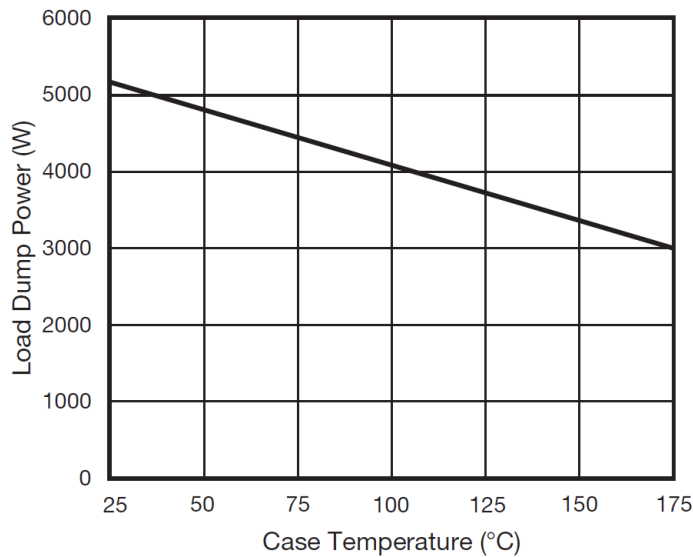


Fig. 2 - Load Dump Power Characteristics (10 ms Exponential Waveform)

SMD TRANSIENT VOLTAGE SUPPRESSORS DO-218AB SERIES

RATINGS AND CHARACTERISTIC CURVES (For Reference Only)

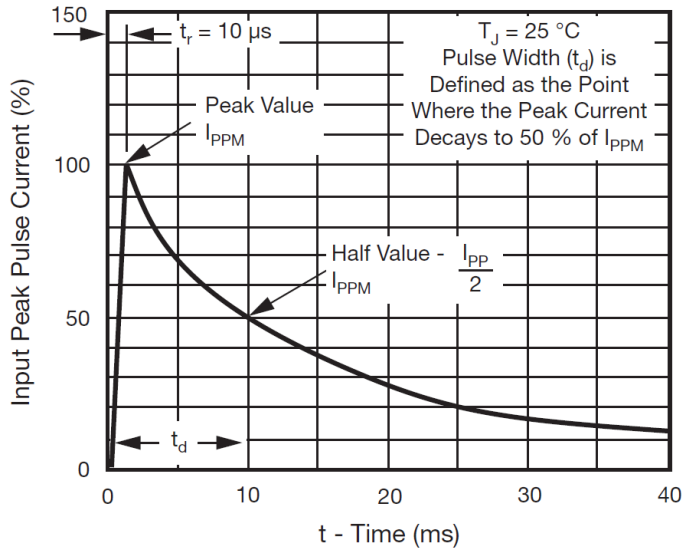


Fig. 3 - Pulse Waveform

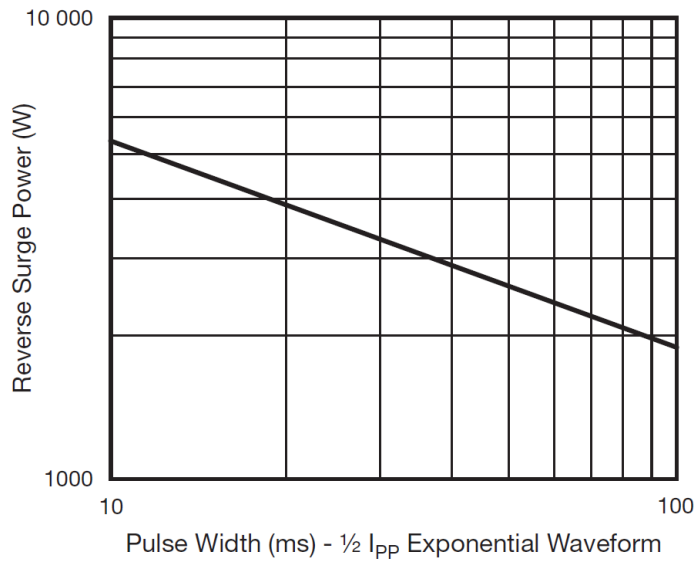


Fig. 4 - Reverse Power Capability

SMD TRANSIENT VOLTAGE SUPPRESSORS DO-218AB SERIES

RATINGS AND CHARACTERISTIC CURVES (For Reference Only)

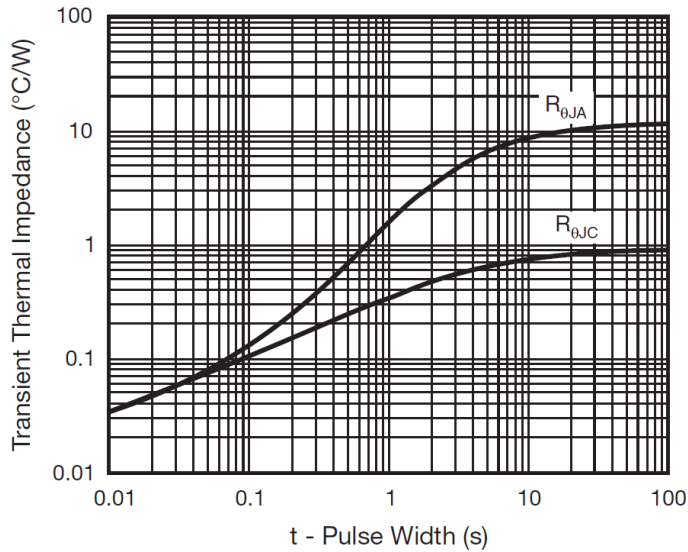


Fig. 5 - Typical Transient Thermal Impedance


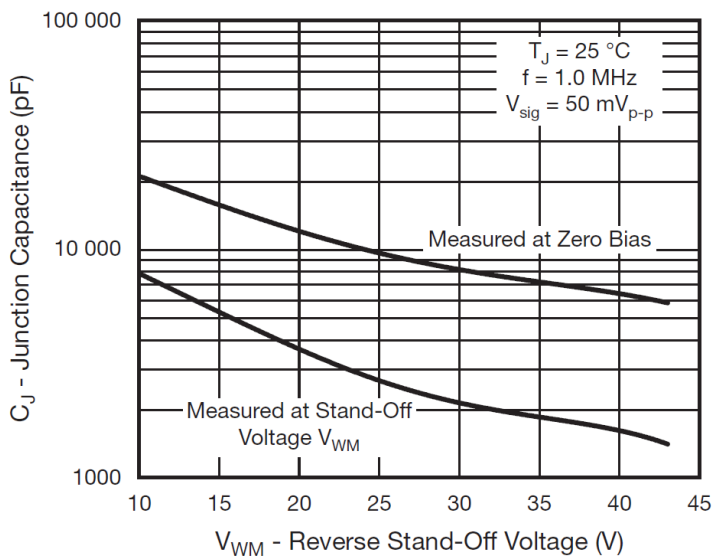


Fig. 6 - Typical Junction Capacitance

SMD TRANSIENT VOLTAGE SUPPRESSORS DO-218AB SERIES

TAPE/REEL (Unit: mm)

All Devices are packed in accordance with EIA standard RS-481-A and specifications. 750pcs/Reel

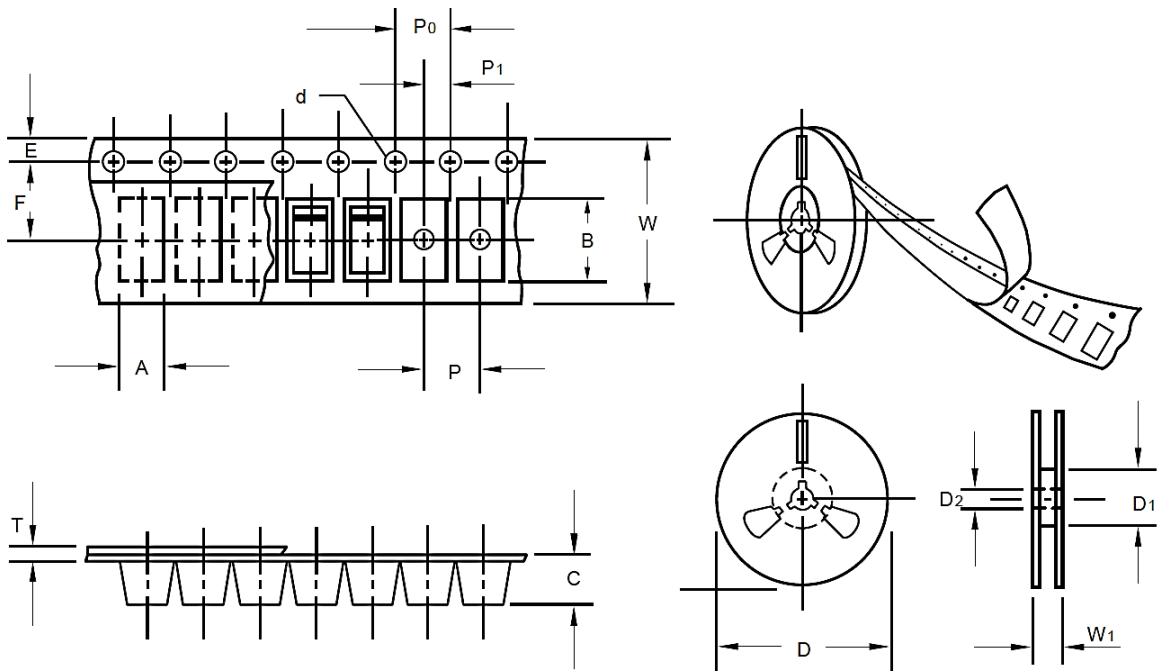

| Item | Symbol | Tolerance | DO-218AB |
|--------------------------|--------|-----------|------------|
| Carrier width | A | +/-0.30 | 10.80 |
| Carrier Length | B | +/-0.30 | 16.13 |
| Carrier Depth | C | +/-0.20 | 6.00 |
| Sprocket hole | d | +/-0.20 | 1.55 |
| 13"Reel outside diameter | D | +/-0.30 | 330.00 |
| 13"Reel inner diameter | D1 | - | 50.0 Min. |
| Feed hole diameter | D2 | - | 20.2 Min. |
| Sprocket hole position | E | +/-0.2 | 1.75 |
| Punch hole position | F | +/-0.20 | 11.50 |
| Punch hole pitch | P | +/-0.20 | 16.0 |
| Sprocket hole pitch | P0 | +/-0.20 | 4.00 |
| Embossment center | P1 | +/-0.20 | 2.00 |
| Overall tape thickness | T | - | - |
| Tape width | W | +/-0.20 | 24.00 |
| Reel width | W1 | - | 30.40 Max. |

SMD TRANSIENT VOLTAGE SUPPRESSORS DO-218AB SERIES

PACKAGE for reference

| Case Code | DO- 218AB |
|-----------|-----------|
| Reel Size | 13" |
| Reel Size | 330 mm |
| MPQ/Reel | 750 pcs |
| Qty. /Box | 1500 pcs |
| G.W/Box | 5.5 kgs |

DISCLAIMER

NextGen Component, Inc. reserves the right to make changes to the product(s) and or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information







Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View SM8S16A on WIN SOURCE](#)

 [MDD Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management