



**THE DATASHEET OF
ADP-2-10+**



Power Splitter/Combiner

ADP-2-10+

2 Way-0° 50Ω 5 to 1000 MHz



Generic photo used for illustration purposes only

CASE STYLE: CD636

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

| Reel Size | Devices/Reel |
|-----------|------------------|
| 7" | 20, 50, 100, 200 |
| 13" | 500, 1000 |

Maximum Ratings


| | |
|-----------------------------|----------------|
| Operating Temperature | -40°C to 85°C |
| Storage Temperature | -55°C to 100°C |
| Power Input (as a splitter) | 0.5W max. |
| Internal Dissipation | 0.125W max. |

Permanent damage may occur if any of these limits are exceeded.


Pin Connections

| | |
|----------|-----|
| SUM PORT | 1 |
| PORT 1 | 3 |
| PORT 2 | 4 |
| GROUND | 6 |
| NOT USED | 2,5 |

Outline Drawing

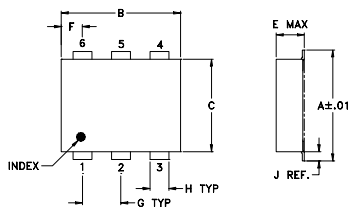

PCB Land Pattern




Suggested Layout, Tolerance to be within ±.002

Outline Dimensions (inch/mm)

| | | | | | | |
|------|------|------|------|------|-------|------|
| A | B | C | D | E | F | G |
| .272 | .310 | .220 | .100 | .162 | .055 | .100 |
| 6.91 | 7.87 | 5.59 | 2.54 | 4.11 | 1.40 | 2.54 |
| H | J | K | L | | wt | |
| .030 | .026 | .065 | .300 | | grams | |
| 0.76 | 0.66 | 1.65 | 7.62 | | 0.25 | |

Demo Board MCL P/N: TB-48+ Suggested PCB Layout (PL-035)

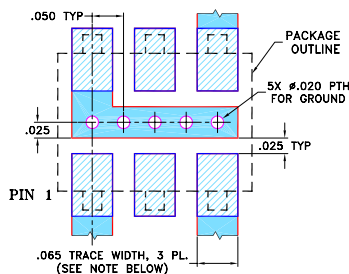

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

Features

- low insertion loss, 0.4 dB typ.
- excellent amplitude unbalance, 0.01 dB typ.
- very good phase unbalance, 0.3 deg. typ.
- aqueous washable
- protected under U.S. Patent 6,133,525

Applications

- VHF/UHF receivers/transmitters
- instrumentation

Electrical Specifications




| FREQ. RANGE (MHz) | ISOLATION (dB) | | | INSERTION LOSS (dB) ABOVE 3.0 dB | | | PHASE UNBALANCE (Degrees) | | | AMPLITUDE UNBALANCE (dB) | | | | | |
|-------------------|----------------|-----|------|----------------------------------|------|-----|---------------------------|------|------|--------------------------|------|------|------|------|------|
| | L | M | U | L | M | U | L | M | U | L | M | U | | | |
| $f_c - f_u$ | Typ. | Min | Typ. | Min | Typ. | Min | Typ. | Max. | Typ. | Max. | Typ. | Max. | Max. | Max. | Max. |
| 5-1000 | 25 | 15 | 23 | 15 | 20 | 15 | 0.3 | 0.9 | 0.4 | 0.9 | 0.6 | 1.2 | 2.0 | 2.0 | 3.0 |

L = 5-50 MHz M = 50-500 MHz U = 500-1000 MHz

Typical Performance Data

| Frequency (MHz) | Total Loss ¹ (dB) | | Amplitude Unbalance (dB) | Isolation (dB) | Phase Unbalance (deg.) | VSWR S | VSWR 1 | VSWR 2 |
|-----------------|------------------------------|------|--------------------------|----------------|------------------------|--------|--------|--------|
| | S-1 | S-2 | | | | | | |
| 5.00 | 3.22 | 3.23 | 0.01 | 22.55 | 0.06 | 1.04 | 1.24 | 1.24 |
| 10.00 | 3.23 | 3.23 | 0.00 | 25.33 | 0.03 | 1.03 | 1.19 | 1.19 |
| 25.00 | 3.23 | 3.23 | 0.00 | 26.82 | 0.02 | 1.03 | 1.16 | 1.16 |
| 50.00 | 3.26 | 3.26 | 0.00 | 26.58 | 0.06 | 1.03 | 1.16 | 1.16 |
| 80.00 | 3.28 | 3.28 | 0.00 | 26.00 | 0.14 | 1.04 | 1.16 | 1.16 |
| 150.00 | 3.32 | 3.33 | 0.01 | 24.51 | 0.21 | 1.07 | 1.16 | 1.16 |
| 250.00 | 3.36 | 3.36 | 0.01 | 22.61 | 0.39 | 1.11 | 1.16 | 1.15 |
| 350.00 | 3.41 | 3.41 | 0.00 | 21.19 | 0.57 | 1.14 | 1.16 | 1.14 |
| 450.00 | 3.49 | 3.48 | 0.00 | 20.24 | 0.66 | 1.16 | 1.15 | 1.12 |
| 550.00 | 3.56 | 3.54 | 0.02 | 19.64 | 0.76 | 1.18 | 1.14 | 1.10 |
| 650.00 | 3.60 | 3.58 | 0.02 | 19.39 | 0.75 | 1.18 | 1.12 | 1.07 |
| 750.00 | 3.66 | 3.65 | 0.01 | 19.60 | 0.73 | 1.17 | 1.10 | 1.05 |
| 850.00 | 3.70 | 3.68 | 0.02 | 20.39 | 0.92 | 1.16 | 1.09 | 1.06 |
| 950.00 | 3.79 | 3.76 | 0.03 | 21.81 | 0.69 | 1.16 | 1.10 | 1.11 |
| 1000.00 | 3.91 | 3.89 | 0.02 | 22.86 | 0.89 | 1.17 | 1.12 | 1.14 |

1. Total Loss = Insertion Loss + 3dB splitter loss.

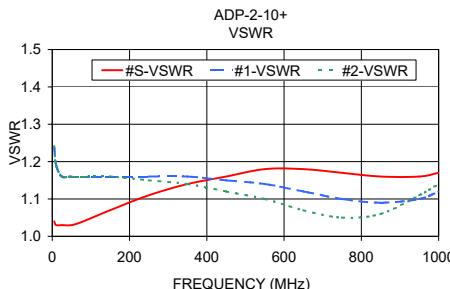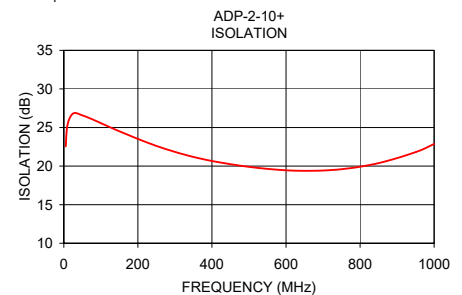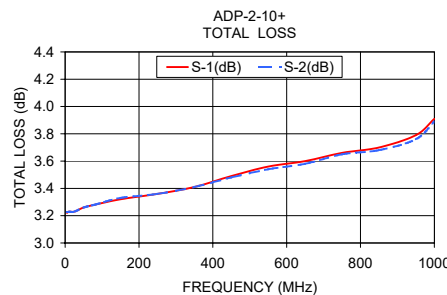

electrical schematic



Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View ADP-2-10+ on WIN SOURCE](#)

 [Mini-Circuits Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management