



**THE DATASHEET OF
AK40A-048L-050F03SM**



15 Watts

AK40A

Total Power: 15W
 Input Voltages: 24V, 48V
 No. of Outputs: Single



Special Features

- Surface Mount
- High Power Density 15W/Cu. in.
- Full power capability without external heatsink
- Input differential and common mode filtering
- Hot insertable with inrush current limit
- Ability to limit inrush current in an external capacitor
- Input undervoltage lockout with hysteresis
- Output overvoltage protection
- Remote shutdown

Environmental

Ambient air operating temperature range:
 -40°C to +75°C (no derating)

Cooling Method: Convection

MTBF: > 7.5 Mhrs

Storage and Handling per Jedec Std-033
 Moisture Sensitivity Level 2

Safety

UL 1950
 IEC 950
 CSA C22.2-9.50
 CB 52719-106

Electrical Specs

Input

Input Range	36 to 75 VDC for 48V 18 to 36 VDC for 24V
Maximum Inrush Current Limit:	1.0 A Max
Maximum External Capacitor to Limit:	4.0mF
Low Input Shutdown:	34.0V \pm 2.0V for 48V 17.0V \pm 1.0V for 24V
Auto Recovery:	37.0V \pm 2.0V for 48V 18.5V \pm 1.0V for 24V
Hysteresis:	3.0V \pm 1.0V for 48V 1.5V \pm 0.5V for 24V
Efficiency:	85%
Enable:	Open Circuit or up to 0.5V max.
Disable:	4V min, 75V max

Output

Voltage Tolerance:	\pm 3% for single output
Noise/Ripple:	75mVrms max.
Output Voltage Adjust Range:	\pm 10% for single output
Overvoltage Protection:	Self limiting Clamp, 140% max
Short Circuit Protection:	Continuous Auto Start
Switching Frequency:	200kHz nominal

AMERICAS

5810 Van Allen Way
 Carlsbad, CA 92008
 Telephone: 760-930-4600
 Facsimile: 760-930-0698

EUROPE

Astec House, Waterfront Business Park
 Merry Hill, Dudley
 West Midlands, DY5 1LX, UK
 Telephone: 44 (1384) 842-211
 Facsimile: 44 (1384) 843-355

ASIA

Units 2111-2116, Level 21
 Tower1, Metroplaza
 223, Hing Fong Road
 Fwai Fong, New Territories
 Hong Kong
 Telephone: 852-2437-9662
 Facsimile: 852-2402-4426



AK40A

Ordering Information

Input Voltage	Output Voltage	Maximum Power	Model Number
18V to 36V	1.5V @ 4A	6.0W	AK40A-024L-015F04SM
18V to 36V	1.8V @ 4A	7.2W	AK40A-024L-018F04SM
18V to 36V	2.1V @ 4A	8.2W	AK40A-024L-021F04SM
18V to 36V	2.5V @ 4A	12.0W	AK40A-024L-025F04SM
18V to 36V	3.3V @ 4A	13.2W	AK40A-024L-033F04SM
18V to 36V	5.0V @ 3A	15.0W	AK40A-024L-050F03SM
18V to 36V	12V @ 1.25A	15.0W	AK40A-024L-120F01SM
36V to 75V	1.5V @ 4A	6.0W	AK40A-048L-015F04SM
36V to 75V	1.8V @ 4A	7.2W	AK40A-048L-018F04SM
36V to 75V	2.1V @ 4A	8.2W	AK40A-048L-021F04SM
36V to 75V	2.5V @ 4A	12.0W	AK40A-048L-025F04SM
36V to 75V	3.3V @ 4A	13.2W	AK40A-048L-033F04SM
36V to 75V	5.0V @ 3A	15.0W	AK40A-048L-050F03SM
36V to 75V	12V @ 1.25A	15.0W	AK40A-048L-120F01SM


Pin Assignments

Single Output

- +Vout
- +Vout
- +Vout
- +Vout
- Vout
- Vout
- Vout
- Vout
- Reserved
- Adjust
- Reserved
- Reserved
- Reserved
- Reserved
- Reserved
- Reserved
- +Vin
- Shutdown
- Vin
- Reserved

Notes:

- All specifications are typical at nominal input and full load unless otherwise noted.
- Specification subject to change without notice.
- Mechanical drawings are for reference only.
- Minimum Load: 0.2A (min 15%).
- Max. Capacitive Load: 330 mF.
- Warranty: 1 yr.

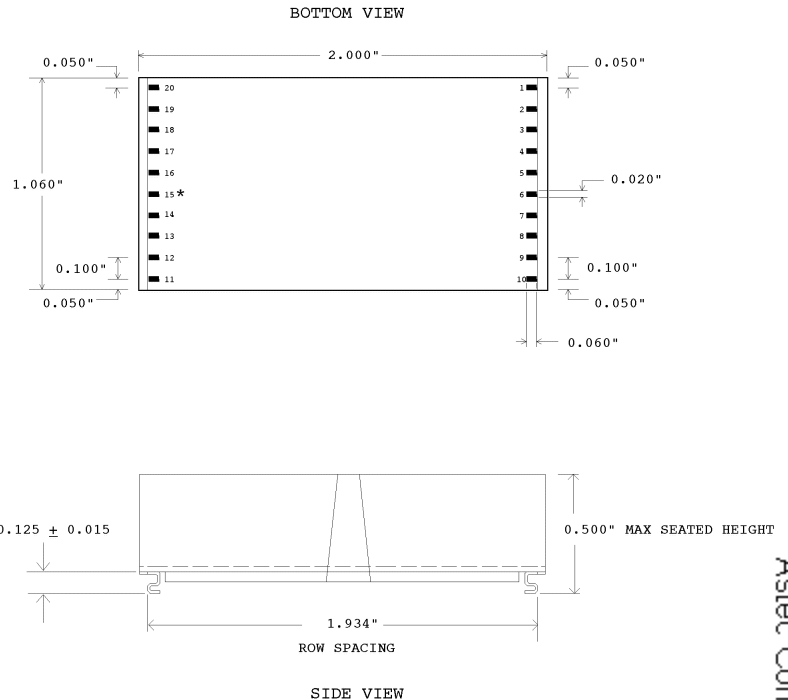

Dimensions: Single Output: 1"W x 2"L x 0.5"H
 Maximum Weight: Single Output: 20 grams

Astec Conventional Power

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View AK40A-048L-050F03SM on WIN SOURCE](#)
- ⊖ [Artesyn Embedded Technologies Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management