



THE DATASHEET OF CX2024NL



CX2024NL

- Balun Transformer, 1:1
- IMPEDANCE = 75 OHMS
- 50-1000MHZ
- Surface Mount

ELECTRICAL SP


INSERTION LOSS:

FREQUENCY	ATTENUATION
10 MHz	-1.0 dB MAX
50 MHz	-0.5 dB MAX
150 MHz	-0.5 dB MAX
300 MHz	-0.5 dB MAX
450 MHz	-0.5 dB MAX

RETURN LOSS:

FREQUENCY	ATTENUATION
10 MHz	-20.0 dB MIN
50 MHz	-20.0 dB MIN
150 MHz	-20.0 dB MIN
300 MHz	-20.0 dB MIN
450 MHz	-20.0 dB MIN

- NOTES: UNLESS OTHERWISE SPECIFIED
1. OPERATING TEMPERATURE: -40°C TO +85°C
 2. STORAGE TEMPERATURE: -50°C TO +125°C
 3. JEDEC MOISTURE: LEVEL 1.
 4. DIMENSIONS ARE IN INCHES WITH THE FOLLOWING TOLERANCE:
.XX= ±.01
.XXX= ±.005
 5. OPTIONAL TAPE & REEL PACKAGING CAN BE ORDERED BY ADDING A "T" SUFFIX TO THE PART NUMBER(EX: CX2024NLT)
 6. ROHS COMPLIANT



SCHEMATIC




© Copyright, 2014. Pulse Electronics Corp. All rights reserved. Drawing specifications subject to change without notice. (03/13/14)

PULSE CONFIDENTIAL
&
PROPRIETARY


PRODUCT SPECIFICATION:

XFMR, RF, 1:1, 50-1000MHZ

MECHANICAL SPECIFICATIONS:

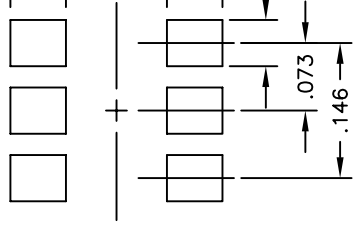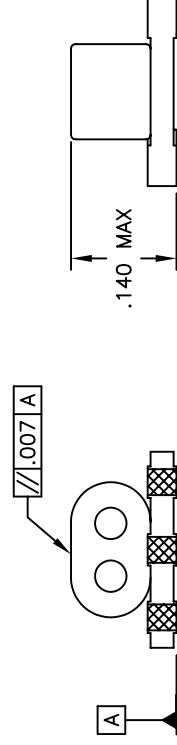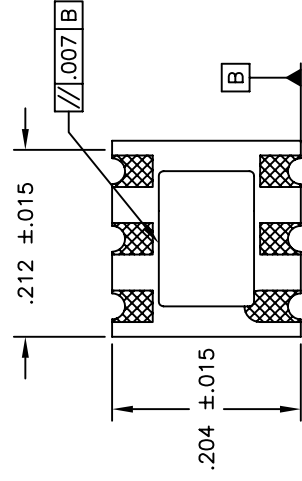

SUGGESTED LAND PATTIE



© Copyright, 2014. Pulse Electronics Corp. All rights reserved. Drawing specifications subject to change without notice. (03/13/14)

PULSE CONFIDENTIAL
&
PROPRIETARY


PRODUCT SPECIFICATION:

XFMR, RF, 1:1, 50-1000MHZ

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View CX2024NL on WIN SOURCE](#)

 [Pulse Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management