





THE DATASHEET OF SFP013-L

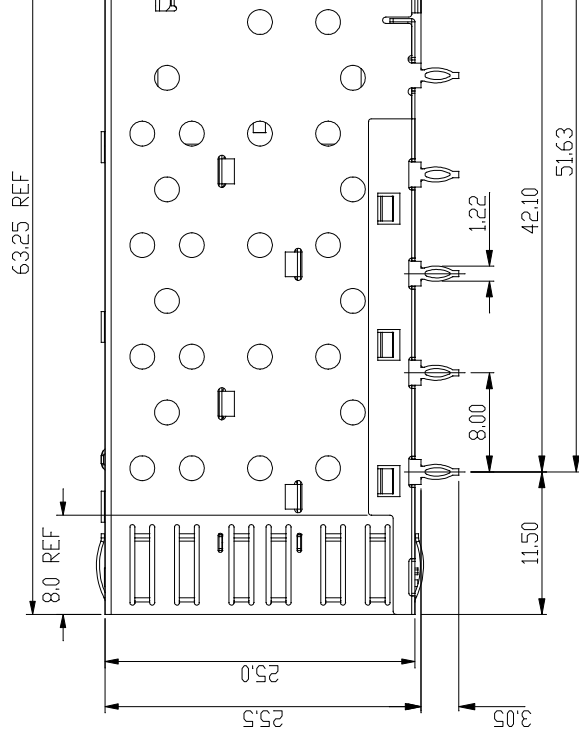

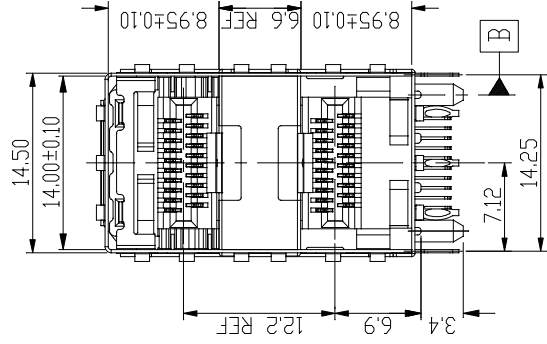

NOTES:

1. MATERIAL:
CONNECTOR HOUSING: GLASS FILLED HIGH TEMPERATURE PLASTIC, UL94 V-0, BLACK
TERMINALS: PHOS-BRONZE t=0.2mm
OVERMOLDED TERMINALS HOUSING: GLASS FILLED HIGH TEMPERATURE PLASTIC, UL94 V-0, BLACK.
CAGE ASSEMBLY: PHOS-BRONZE t=0.25mm.
2. FINISH:
TERMINAL:
1)50u" MIN NICKEL PLATING OVER ALL.
2)COMPLIANT TAIL: 50u" TIN OVER 50u" MIN NICKEL.
3)30u" MIN GOLD PLATING ON MATING AREA.
CAGE: 50u" MIN NICKEL PLATING OVER ALL.
3. PRESS FIT HOLES:
CONTACT:
1)HOLE DIAMETER AFTER PLATING: 0.55-0.65mm.
2)DRILLED HOLE: 0.675-0.725mm
CAGE:
1)HOLE DIAMETER AFTER PLATING: 1.00-1.10mm.
2)DRILLED HOLE: 1.125-1.175mm.
4. RATING:
1)VOLTAGE: 120V r.m.s
2)CURRENT RATING: 0.5amp. MAXIMUM PER INDIVIDUAL CONTACT.
3)OPERATING TEMPERATURE: -55° C TO 85° C
4)INSULATION RESISTANCE: 1000 mega-ohms Min.

Qty Per:	TRAY	CARTON
	16	96

8

7


6

5


4

3

RoHS Comp	
TOLERANCES EXCEPT AS NOTED MM .0 ± 0.25 .00 ± 0.20 .000 ± 0.10 ANGLES ± 0.5	MM (INCH) ± ± ±
DETACHED LISTS	
DFTD YIC001 DATE 8/26/10	TITLE SFP
THIRD ANGLE PROJECTION SCALE : 2:1	

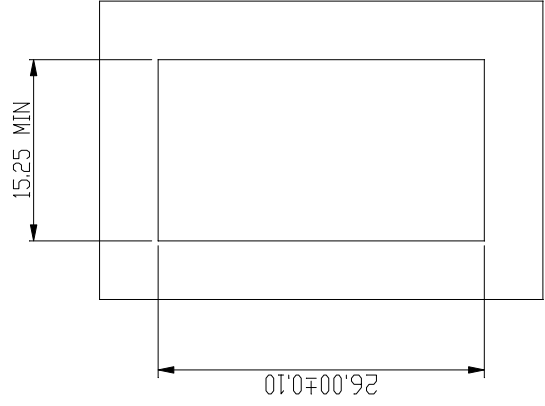

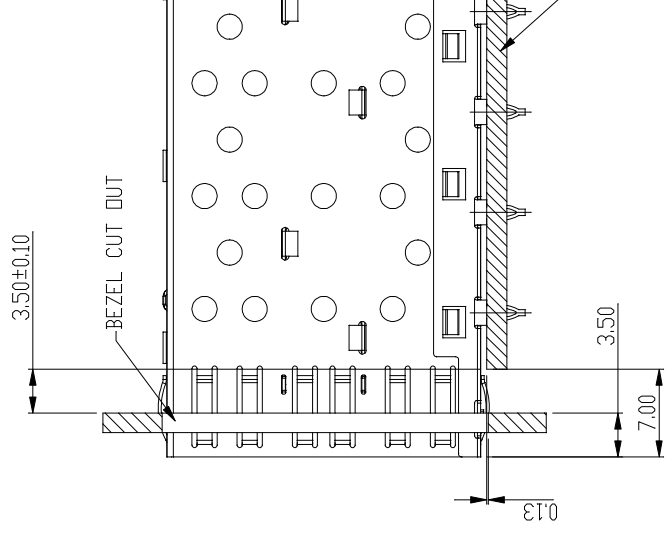

BEZEL CUT-OUT CENTER SPACING DETAIL
BEZEL THICKNESS: 0.8-2.6



		RoHS Comp	
TOLERANCES EXCEPT AS NOTED		TITLE	
MM	±	SFP	
.0 ± 0.25	±	DFTD Yican	
.00 ± 0.20	±	DATE 8/26/10'	
.00 ± 0.10	±	SCALE : 2:1	
ANGLES ± 0.5		THIRD ANGLE PROJECTION	
DETACHED LISTS		3	
4		5	
6		7	
8			

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View SFP013-L on WIN SOURCE](#)
-  [Pulse Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management