






**THE DATASHEET OF
A-MCSP-80005**

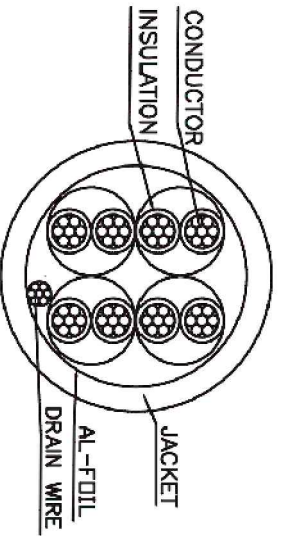

3	4	5	6	7
---	---	---	---	---

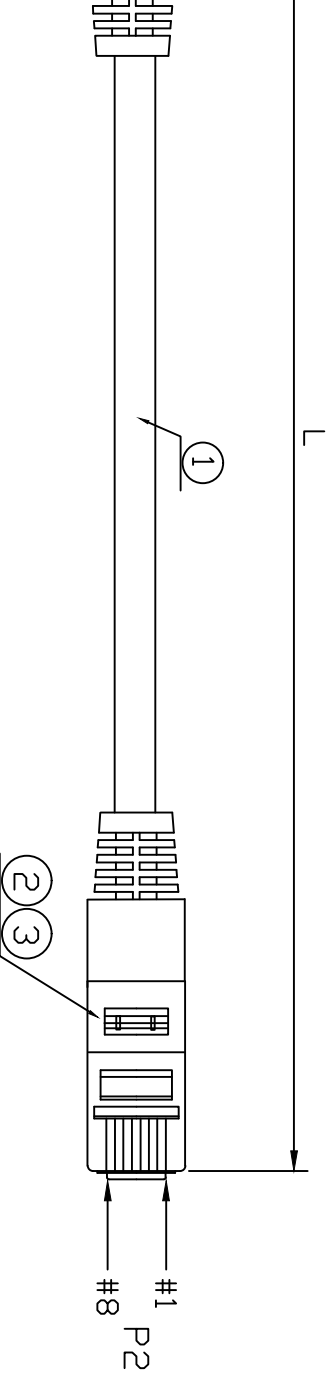

① TOLERANCE

Length (Meter)	Max-M	Max-M
0.5	0.03	0.025
1	0.04	0.035
2	0.06	0.06
3	0.09	0.09
5	0.15	0.15
7	0.21	0.21
10	0.3	0.3
15	0.45	0.45
20	0.6	0.6
30	0.9	0.9

Electrical
100% short,open,miswire test

Order lengths in meter: 0.5,1,2,3,5,7,10,15

A-MCSP-80XXXXX

Order lengths in meter: Order color: (R) Red, (Y) Yellow
(G) Green, (B) Blue

Order Code:

① A-MCSP-80XXXX : color Grey

NO	PART NO	DESCRIPTION	QTY	UNIT
3	mold	PVC,50P	9.0	G
2	plug	8P8C plating gold 3U" with metal shield	2	PCS
1	cable	FTP (26AWG*1P)*4+D+A+PVC, OD:5,2±0,2mm	2.0	M

FREE									
RANGE			Drawn	26.06.2015	Joanna				
±X			Approved	15.12.2015	Joanna				
±X									
±X									
TOL	①	Add P/N and change tolerance		15.12.2015	Joanna				
±X°	①	Drawn		26.06.2015	Joanna				
TOL									
TOL									

ASSMANN WSW-No.
A-MCSP-80XXXXX




Drawing-No.
ASS 7425 CA rev01

3	4	5	6	7
---	---	---	---	---

H	G	F	E	C	B	A
---	---	---	---	---	---	---

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View A-MCSP-80005](#) on WIN SOURCE
-  [Assmann WSW Components](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management