




**Dxx15L & Dxx20L & Dxx25L Series**

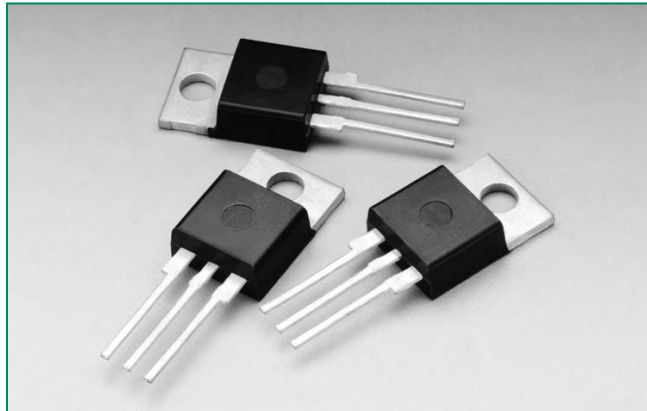

**Description**

Silicon rectifiers that are excellent for DC phase control applications with motor loads.

Isolated mounting tab allows for use in circuits with common anode or common cathode connections.

**Features & Benefits**

- RoHS Compliant
- Glass – passivated junctions
- Voltage capability up to 1000 V
- Surge capability up to 350 A

**Applications**


Typical applications are AC to DC solid-state switches for industrial power tools, exercise equipment, white goods, and commercial appliances.

Internally constructed isolated package is offered for ease of heat sinking with highest isolation voltage.

**Agency Approval**

| Agency | Agency File Number |
|--------|--------------------|
|        | L Package : E71639 |

**Schematic Symbol**

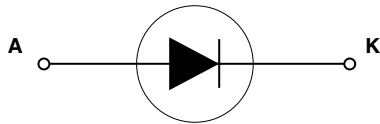

**Additional Information**



[Datashheet](#)



[Resources](#)



[Samples](#)

**Main Features**

| Symbol       | Value        | Unit |
|--------------|--------------|------|
| $I_{T(RMS)}$ | 15 / 20 / 25 | A    |
| $V_{RRM}$    | 400 to 1000  | V    |

**Absolute Maximum Ratings**

| Symbol       | Parameter                            | Test Conditions  | Value      |        |        | Unit                 |
|--------------|--------------------------------------|--|------------|--------|--------|----------------------|
|              |                                      |  | Dxx15L     | Dxx20L | Dxx25L |                      |
| $I_{F(RMS)}$ | RMS forward current                  | Dxx15L: $T_C = 90^\circ\text{C}$<br>Dxx20L/Dxx25L: $T_C = 80^\circ\text{C}$        | 15         | 20     | 25     | A                    |
| $I_{F(AV)}$  | Average forward current              |  | 9.5        | 12.7   | 15.9   | A                    |
| $I_{FSM}$    | Peak non-repetitive surge current    | single half cycle; $f = 50\text{Hz}$ ;<br>$T_J(\text{initial}) = 25^\circ\text{C}$ | 188        | 255    | 300    | A                    |
|              |                                      | single half cycle; $f = 60\text{Hz}$ ;<br>$T_J(\text{initial}) = 25^\circ\text{C}$ | 225        | 300    | 350    |                      |
| $I^2t$       | $I^2t$ Value for fusing              | $t_p = 8.3 \text{ ms}$   | 210        | 374    | 508    | $\text{A}^2\text{s}$ |
| $T_{stg}$    | Storage temperature range            |  | -40 to 150 |        |        | $^\circ\text{C}$     |
| $T_J$        | Operating junction temperature range |  | -40 to 125 |        |        | $^\circ\text{C}$     |

Note: xx = voltage

**Electrical Characteristics ( $T_J = 25^\circ\text{C}$ , unless otherwise specified)**

| Symbol   | Parameter             | Test Conditions                           |      | Value | Unit          |
|----------|-----------------------|---|------|-------|---------------|
| $t_{rr}$ | Reverse-recovery Time | $I_F = 0.9\text{A}$ , $I_R = 1.5\text{A}$ | TYP. | 4     | $\mu\text{s}$ |

**Static Characteristics**


| Symbol   | Test Conditions  |                           | Value | Unit      |      |               |
|----------|--|---------------------------|-------|-----------|------|---------------|
| $V_{FM}$ | 15A Device $I_T = 30\text{A}$ ; $t_p = 380\mu\text{s}$ |                           | MAX.  | 1.6       | V    |               |
|          | 20A Device $I_T = 40\text{A}$ ; $t_p = 380\mu\text{s}$ |                           |       |           |      |               |
|          | 25A Device $I_T = 50\text{A}$ ; $t_p = 380\mu\text{s}$ |                           |       |           |      |               |
| $I_{RM}$ | $V_{RRM}$  | $T_J = 25^\circ\text{C}$  | MAX.  | 400-600V  | 10   | $\mu\text{A}$ |
|          |  |                           |       | 800-1000V | 20   |               |
|          |  | $T_J = 100^\circ\text{C}$ |       | 400-800V  | 500  |               |
|          |  |                           |       | 1000V     | 3000 |               |
|          |  | $T_J = 125^\circ\text{C}$ |       | 400-800V  | 1000 |               |

**Thermal Resistances**


| Symbol            | Parameter             | Value  | Unit               |
|-------------------|-----------------------|--------|--------------------|
| $R_{\theta(J-C)}$ | Junction to case (AC) | Dxx15L | 2.60               |
|                   |                       | Dxx20L | 2.55               |
|                   |                       | Dxx25L | 2.50               |
|                   |                       |        | $^\circ\text{C/W}$ |

Note: xx = voltage


**Figure 1: On-State Current vs. On-State Voltage (Typical)**

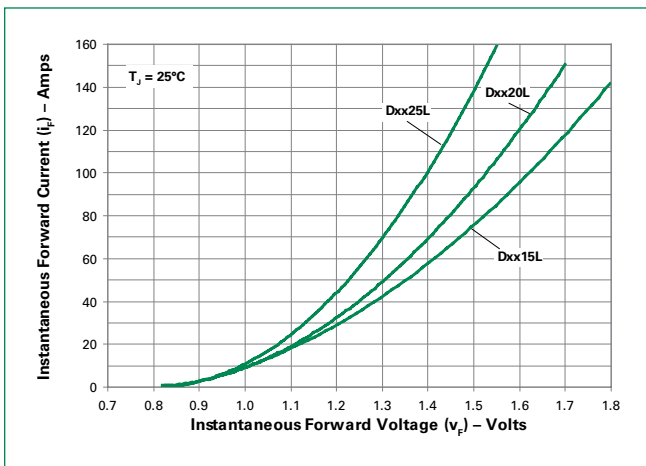

**Figure 2: Power Dissipation vs. Average Forward On-State Current (Typical)**

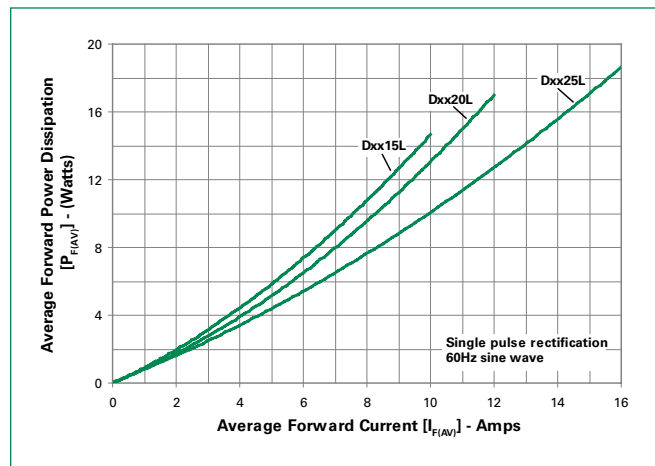


**Figure 3: Maximum Allowable Case Temperature vs. Average On-State Current**

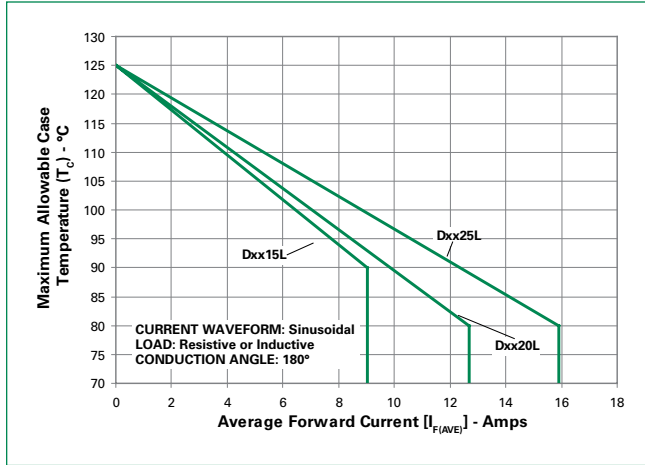


Note: xx = voltage

**Figure 4: Surge Peak On-State Current vs. Number of Cycles**

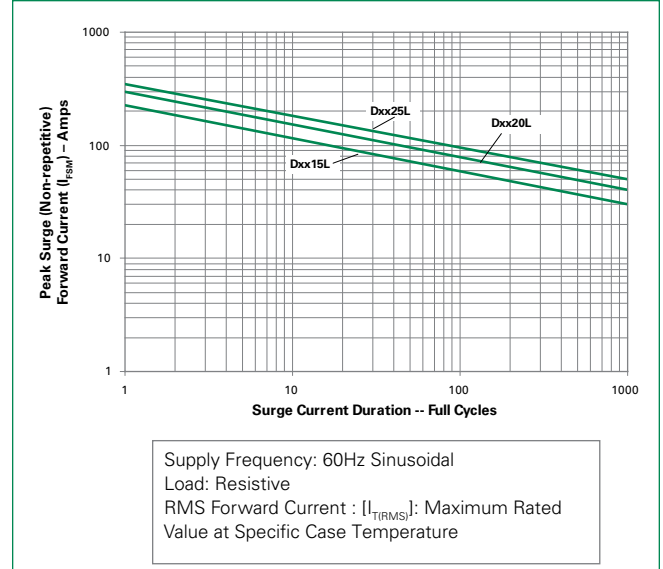

**Soldering Parameters**

|  |                                    |                         |
|--|------------------------------------|-------------------------|
| Reflow Condition                                       |                                    | Pb – Free assembly      |
| Pre Heat   | - Temperature Min ( $T_{s(min)}$ ) | 150°C                   |
|  | - Temperature Max ( $T_{s(max)}$ ) | 200°C                   |
|  | - Time (min to max) ( $t_s$ )      | 60 – 180 secs           |
| Average ramp up rate (Liquidus Temp) ( $T_L$ ) to peak |                                    | 5°C/second max          |
| $T_{s(max)}$ to $T_L$ - Ramp-up Rate                   |                                    | 5°C/second max          |
| Reflow   | - Temperature ( $T_L$ ) (Liquidus) | 217°C                   |
|  | - Temperature ( $t_L$ )            | 60 – 150 seconds        |
| Peak Temperature ( $T_p$ )                             |                                    | 260 <sup>+0/-5</sup> °C |
| Time within 5°C of actual peak Temperature ( $t_p$ )   |                                    | 20 – 40 seconds         |
| Ramp-down Rate   |                                    | 5°C/second max          |
| Time 25°C to peak Temperature ( $T_p$ )                |                                    | 8 minutes Max.          |
| Do not exceed  |                                    | 280°C                   |

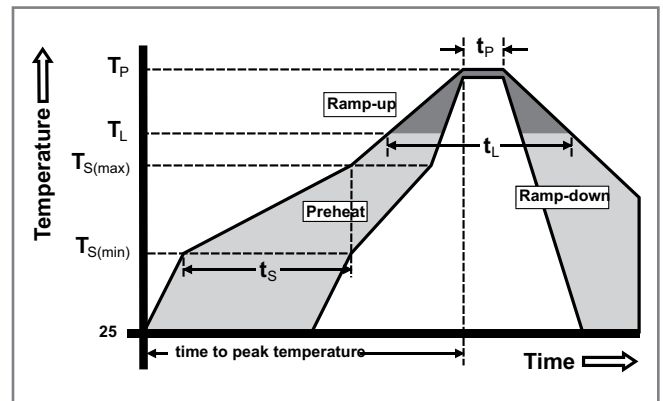

### Physical Specifications

|                        |   |
|------------------------|---|
| <b>Terminal Finish</b> | 100% Matte Tin Plated   |
| <b>Body Material</b>   | UL recognized epoxy meeting flammability classification 94V-0 |
| <b>Lead Material</b>   | Copper Alloy  |


### Design Considerations

Careful selection of the correct device for the application's operating parameters and environment will go a long way toward extending the operating life of the rectifier. Good design practice should limit the maximum continuous current through the main terminals to 75% of the device rating. Other ways to ensure long life for a power discrete semiconductor are proper heat sinking and selection of voltage ratings for worst case conditions. Overheating, overvoltage (including dv/dt), and surge currents are the main killers of semiconductors. Correct mounting, soldering, and forming of the leads also help protect against component damage.

### Environmental Specifications

| Test                                     | Specifications and Conditions  |
|--|--|
| <b>High Temperature Voltage Blocking</b> | MIL-STD-750: Method 1040, Condition A<br>Rated $V_{RRM}$ , 125°C, 1008 hours |
| <b>Temperature Cycling</b>               | MIL-STD-750: Method 1051<br>-40°C to 150°C, 15-minute dwell,<br>100 cycles   |
| <b>Biased Temperature &amp; Humidity</b> | EIA/JEDEC: JESD22-A101<br>320VDC, 85°C, 85%RH, 1008 hours                    |
| <b>High Temp Storage</b>                 | MIL-STD-750: Method 1031<br>150°C, 1008 hours                                |
| <b>Low-Temp Storage</b>                  | 1008 hours; -40°C  |
| <b>Resistance to Solder Heat</b>         | MIL-STD-750: Method 2031<br>260°C, 10 seconds                                |
| <b>Solderability</b>                     | ANSI/J-STD-002, Category 3, Test A   |
| <b>Lead Bend</b>                         | MIL-STD-750: Method 2036, Condition E  |

### Dimensions — TO-220AB (L-Package) — Isolated Mounting Tab

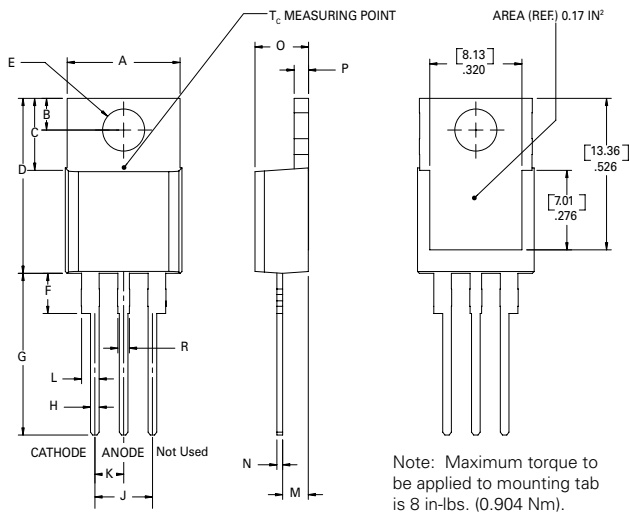

| Dimension | Inches |       | Millimeters |       |
|-----------|--------|-------|-------------|-------|
|           | Min    | Max   | Min         | Max   |
| A         | 0.380  | 0.420 | 9.65        | 10.67 |
| B         | 0.105  | 0.115 | 2.67        | 2.92  |
| C         | 0.230  | 0.250 | 5.84        | 6.35  |
| D         | 0.590  | 0.620 | 14.99       | 15.75 |
| E         | 0.142  | 0.147 | 3.61        | 3.73  |
| F         | 0.110  | 0.130 | 2.79        | 3.30  |
| G         | 0.540  | 0.575 | 13.72       | 14.61 |
| H         | 0.025  | 0.035 | 0.64        | 0.89  |
| J         | 0.195  | 0.205 | 4.95        | 5.21  |
| K         | 0.095  | 0.105 | 2.41        | 2.67  |
| L         | 0.060  | 0.075 | 1.52        | 1.91  |
| M         | 0.085  | 0.095 | 2.16        | 2.41  |
| N         | 0.018  | 0.024 | 0.46        | 0.61  |
| O         | 0.178  | 0.188 | 4.52        | 4.78  |
| P         | 0.045  | 0.060 | 1.14        | 1.52  |
| R         | 0.038  | 0.048 | 0.97        | 1.22  |

**Product Selector**

| Part Number | Voltage |      |      |       | Type      | Package |
|-------------|---------|------|------|-------|-----------|---------|
|             | 400V    | 600V | 800V | 1000V |           |         |
| Dxx15L      | X       | X    | X    | X     | Rectifier | TO-220L |
| Dxx20L      | X       | X    | X    | X     | Rectifier | TO-220L |
| Dxx25L      | X       | X    | X    | X     | Rectifier | TO-220L |


Note: xx = Voltage

**Packing Options**

| Part Number | Marking | Weight | Packing Mode | Base Quantity     |
|-------------|---------|--------|--------------|-------------------|
| Dxx15LTP    | Dxx15L  | 2.2 g  | Tube         | 500 (50 per tube) |
| Dxx20LTP    | Dxx20L  | 2.2 g  | Tube         | 500 (50 per tube) |
| Dxx25LTP    | Dxx25L  | 2.2 g  | Tube         | 500 (50 per tube) |


Note: xx = Voltage

**Part Numbering System**

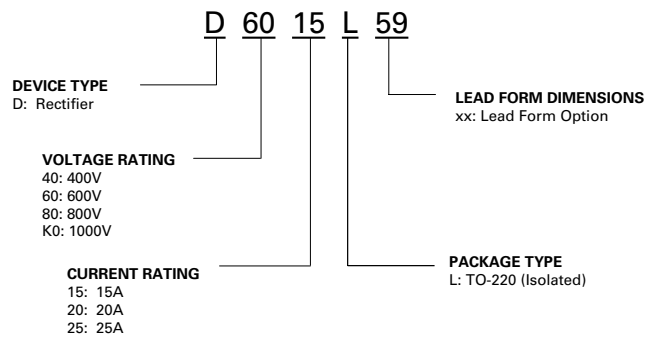


**Part Marking System**

TO-220AB - (L Package)

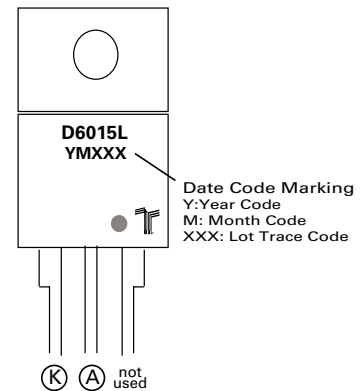

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View D4020L on WIN SOURCE](#)

 [Littelfuse Inc. Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management