




**THE DATASHEET OF
PE-65554NL**



Through Hole Common Mode Chokes

Suited for LAN and Telecom WAN Applications



- Ⓢ Pulse Pour-Filled THD package
- Ⓢ Reduces radiated EMI emissions
- Ⓢ Filters common mode noise for EMI reduction
- Ⓢ Common mode attenuation from 100 KHz to 1 GHz
- Ⓢ Extended Operating Temperature -40 to +85°C
- Ⓢ Tube packed - Wave solder temperature <260°C


Electrical Specifications @ 25°C

Part Number	No. of Lines	Primary Inductance OCL (μH MIN)	Common Mode Attenuation (dB TYP)									DCR (Ω MAX)	Primary Application
			100 KHz	1 MHz	10 MHz	30 MHz	50 MHz	100 MHz	300 MHz	500 MHz	1 GHz		
B2005NL	2	9000	47	47	41	30	22	33	21	15	15	1.0	DSL
PE-67531NL	2	140	14	34	45	49	50	47	38	32	25	0.60	LAN
PE-65554NL	4	24	—	21	32	38	39	34	24	13	—	0.30	LAN
PE-65950NL	4	4700±30%	40	51	37	28	23	20	—	—	—	1.00	WAN

MECHANICALS

SCHEMATICS

B2005NL

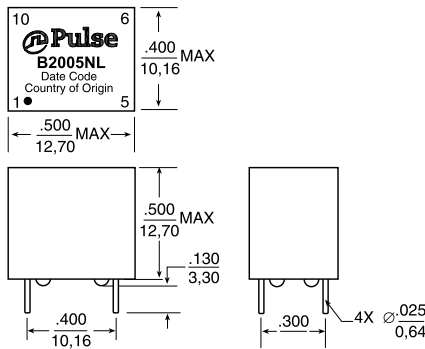


Dimensions: $\frac{\text{Inches}}{\text{mm}}$
 Unless otherwise specified, all tolerances are $\pm \frac{.005}{0,13}$

Weight3.4 grams
 Tube40/tube



PE-67531NL

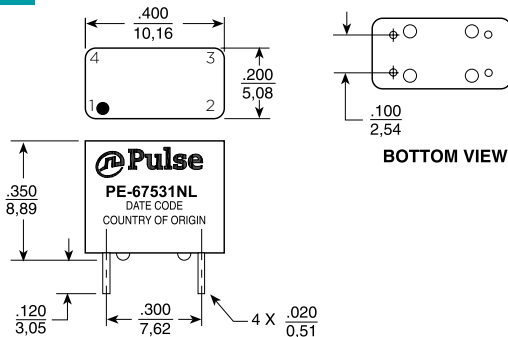

Dimensions: $\frac{\text{Inches}}{\text{mm}}$
 Unless otherwise specified, all tolerances are $\pm \frac{.010}{0,25}$

Weight0.82 grams
 Tube50/tube



Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View PE-65554NL on WIN SOURCE](#)

 [Pulse Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management