

1:1 Transmission Line Balun 50 - 1200 MHz



MABA-009210-CT1760

Rev. V4

Features

- Surface Mount
- 1:1 Impedance
- Excellent temperature stability
- RoHS* Compliant


Applications

- CATV / Broadband

Description

The MABA-009210-CT1760 is a 1:1 RF transmission line Transformer in a low cost surface mount package. Suitable for use in 50 Ω and 75 Ω systems.

Functional Schematic



Ordering Information

Part Number	Package
MABA-009210-CT1760	900 piece reel
MABA-009210-CT17TB	Sample Board

Pin Configuration

Pin Number	Function
1	Primary Dot (input)
2	Secondary (o/p coupled)
3	Secondary Dot (o/p through)
4	Primary (ground)

Electrical Specifications: Freq. = 50 - 1200 MHz, T_A = +25°C, Z₀ = 75 Ω

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Insertion Loss 1 (Through) Pin 3 to pin 1	50 MHz 870 MHz 1002 MHz 1200 MHz	dB	—	0.13 0.53 0.63 0.83	0.33 0.93 1.18 1.93
Insertion Loss 2 (Coupled) Pin 2 to pin 1	50 MHz 870 MHz 1002 MHz 1200 MHz	dB	—	0.43 0.33 0.43 0.63	0.62 0.63 0.78 1.33
Amplitude Balance	50 MHz 870 MHz 1002 MHz 1200 MHz	dB	—	0.3 -0.1 -0.2 -0.2	-0.6 +0.7 +0.7 +0.8
Phase Balance	50 - 1002 MHz 1002 - 1200 MHz	°	—	1.2 3.2	± 4.0 ± 8.0
Input Return Loss	50 - 500 MHz 500 - 1002 MHz 1002 - 1200 MHz	dB	18.0 17.5 11.0	23.0 19.0 18.0	—

1:1 Transmission Line Balun 50 - 1200 MHz




MABA-009210-CT1760

Rev. V4


Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Power	500 mW
DC Current	500 mA
Operating/Storage Temperature	-40°C to +85°C

Recommended Footprint

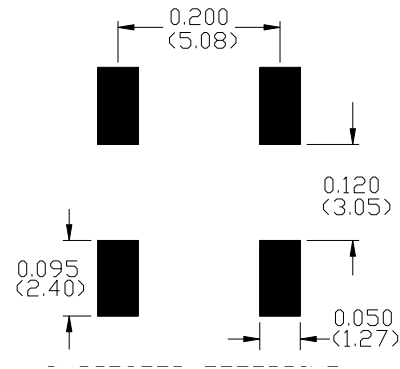

Outline Drawing

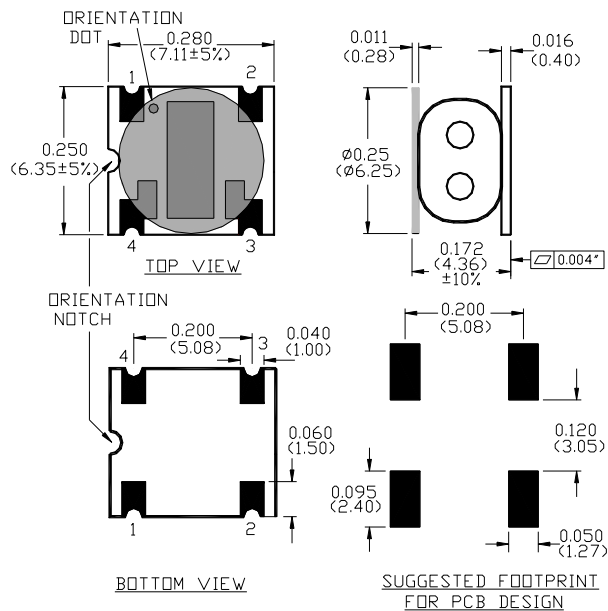

Tape & Reel Information

Parameter	Units	Value
Qty per reel	-	900
Reel Size	mm	330
Tape Width	mm	16.00
Pitch	mm	12.00
Orientation	-	F24
Reference Application Note ANI-019 for orientation		

1. Dimensions in inches (mm).
2. Tolerance: .xx ±0.02, .xxx 0.01 unless otherwise noted.
3. Model number and lot code are printed on the reel.
4. Plating finish: ENIG on both sides, 0.05 to 0.1 µm gold over 3 to 6 µm nickel

1:1 Transmission Line Balun 50 - 1200 MHz




MABA-009210-CT1760


Rev. V4

Typical Performance Curves: Electrical Specifications: $Z_0 = 75 \Omega$, $T_A = 25^\circ\text{C}$, $P_{in} = 0 \text{ dBm}$


Insertion Loss 1: (through Pin 3-1)

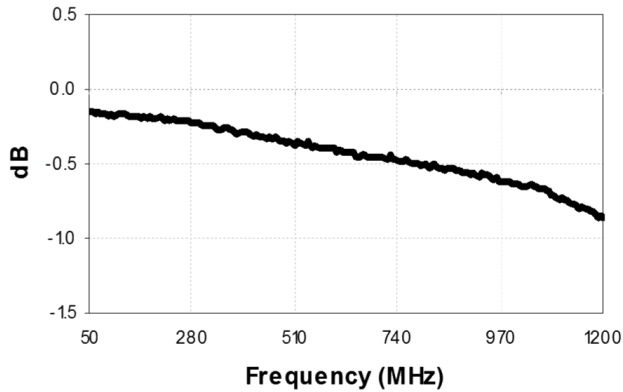


Insertion Loss 2: (coupled Pin 2-1)

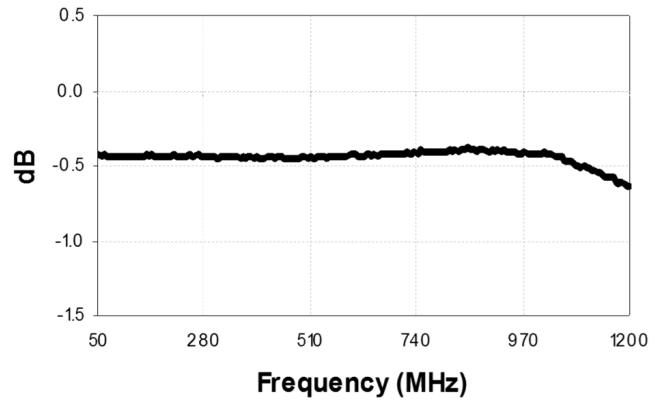


Amplitude Balance

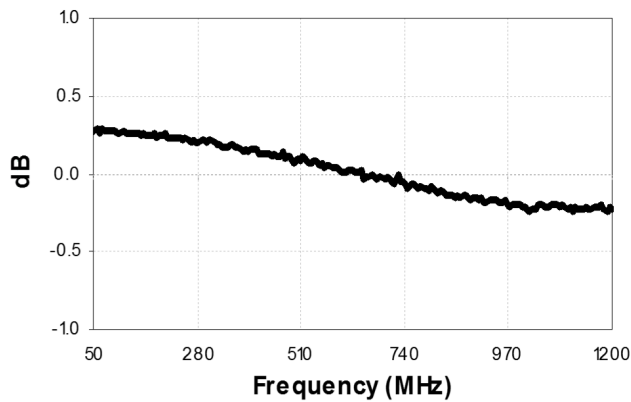

Phase Balance

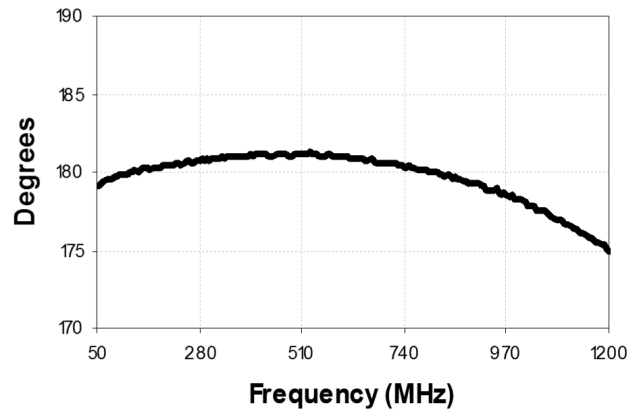

Return Loss: Input (Pin 1)

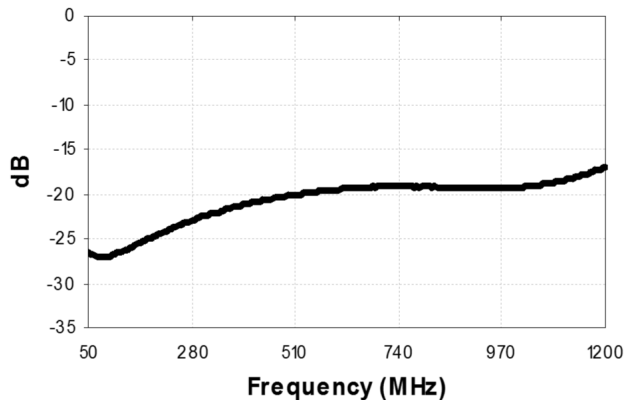

Full temperature plots available on request

1:1 Transmission Line Balun

50 - 1200 MHz



MABA-009210-CT1760

Rev. V4

MACOM Technology Solutions Inc. ("MACOM"). All rights reserved.

These materials are provided in connection with MACOM's products as a service to its customers and may be used for informational purposes only. Except as provided in its Terms and Conditions of Sale or any separate agreement, MACOM assumes no liability or responsibility whatsoever, including for (i) errors or omissions in these materials; (ii) failure to update these materials; or (iii) conflicts or incompatibilities arising from future changes to specifications and product descriptions, which MACOM may make at any time, without notice. These materials grant no license, express or implied, to any intellectual property rights.

THESE MATERIALS ARE PROVIDED "AS IS" WITH NO WARRANTY OR LIABILITY, EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHT, ACCURACY OR COMPLETENESS, OR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View MABA-009210-CT1760 on WIN SOURCE](#)
- ⊖ [M/A-Com Technology Solutions Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management