THE DATASHEET OF

W06M

www.win-source.net 0086-755-83957316

Single Phase Silicon Bridge Rectifier

V_{RRM} = 600 V - 1000 V

I_O = 1.5 A

Features

- Ideal for printed circuit board
- Low forward voltage drop
- Low leakage current
- Types from 600 V up to 1000 V VRRM
- Not ESD Sensitive

WOM Package



Mechanical Data

Case: Molded plastic body

Terminals: Plated leads, solderable per MIL-STD-202 Method 208 guaranteed

Polarity: Color band on body denotes cathode end

Mounting position: Any

Weight: 1.07 grams

Maximum ratings at Tc = 25 °C, unless otherwise specified

Parameter	Symbol	Conditions	W06M	W08M	W10M	Unit
Repetitive peak reverse voltage	V_{RRM}		600	800	1000	V
RMS reverse voltage	V_{RMS}		420	560	700	V
DC blocking voltage	V_{DC}		600	800	1000	V
Operating temperature	T_j		-65 to 125	-65 to 125	-65 to 125	°C
Storage temperature	T_{stg}		-65 to 150	-65 to 150	-65 to 150	°C

Electrical characteristics at Tc = 25 °C, unless otherwise specified

Single phase, half sine wave, 60 Hz, resistive or inductive load

For capacitive load derate current by 20%

Parameter	Symbol	Conditions	W06M	W08M	W10M	Unit
Maximum average forward rectified current	I_O	T_a = 50 °C	1.5	1.5	1.5	A
Peak forward surge current	I_{FSM}	t_p = 8.3 ms, half sine	50	50	50	A
Maximum instantaneous forward voltage drop per bridge element	V_F	I_F = 1.0 A	1.0	1.0	1.0	V
Maximum DC reverse current at rated DC blocking voltage	I_R	T_a = 25 °C T_a = 100 °C	10 500	10 500	10 500	µA

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

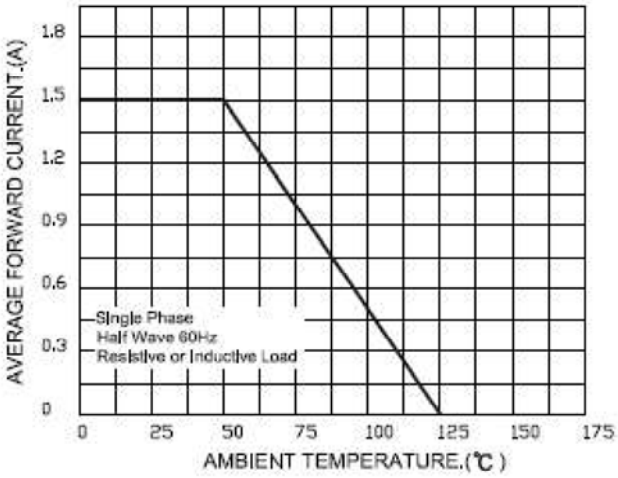

FIG.2-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

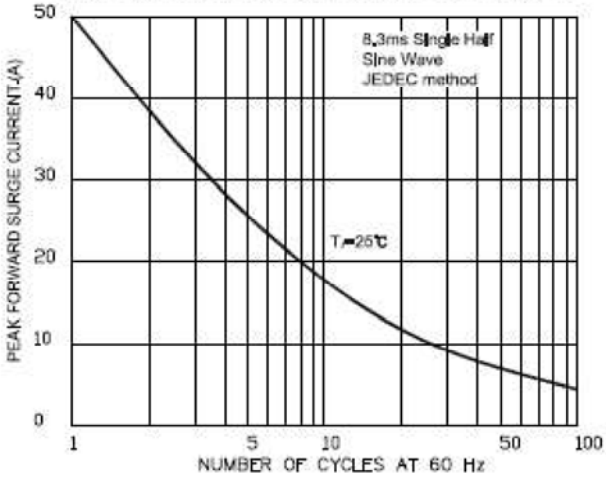

FIG.3-TYPICAL FORWARD CHARACTERISTICS

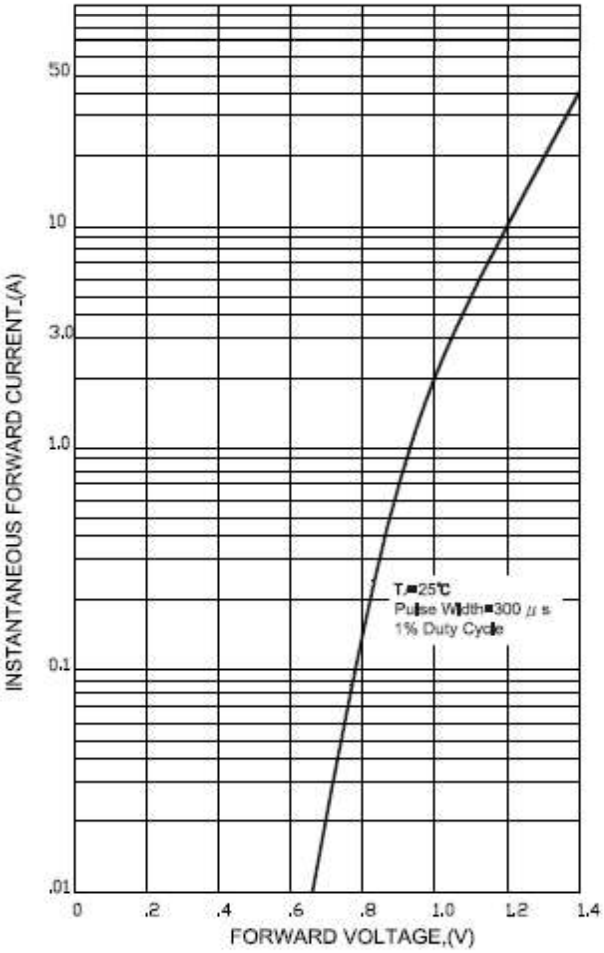

FIG.4-TYPICAL REVERSE CHARACTERISTICS

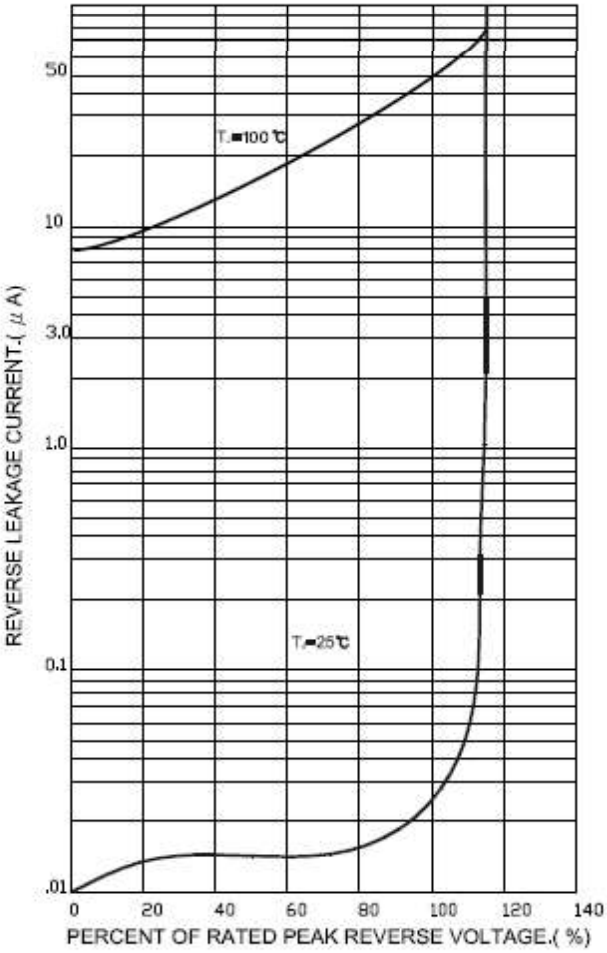

Package dimensions and terminal configuration

Product is marked with part number and terminal configuration.

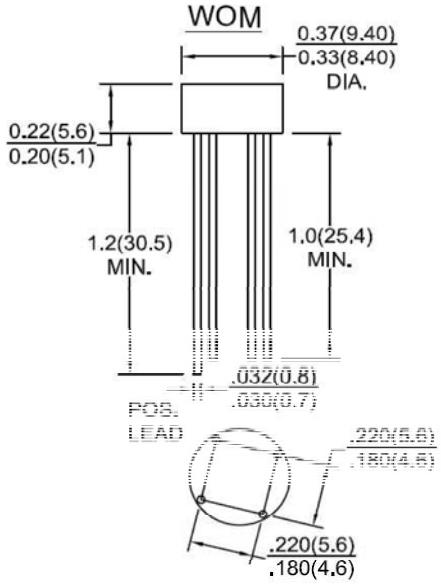

Dimensions in inches and (millimeters)



Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- View W06M on WIN SOURCE
- GeneSiC Semiconductor Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- Global Sourcing Solution
- Obsolete Management
- Cost Control Management
- Shortage Management
- Alternative Solution
- Excess Inventory Management