


- **Designed for SDARS IF Receiver**
- **Low Insertion Loss**
- **5.0 X 7.0 mm Surface-Mount Case**
- **Differential or Single Ended Input and Output**
- **Complies with Directive 2002/95/EC (RoHS)**
- **Moisture Sensitivity Level: 1**
- **AEC-Q200 Qualified**

SF2037B

**76.500 MHz
SAW Filter**



SMP-03

Absolute Maximum Ratings

| Rating | Value | Units |
|---|----------------|-------|
| Maximum Incident Power in Passband | +10 | dBm |
| Max. DC voltage between any 2 terminals | 30 | VDC |
| Storage Temperature Range | -40 to +85 | °C |
| Max Soldering Profile | 265°C for 10 s | |

Electrical Characteristics

| Characteristic | Sym | Notes | Min | Typ | Max | Units | |
|---|----------------------|--------------------|-----------------------------------|--------|------|-------------------|-----|
| Nominal Center Frequency | f_C | | | 76.500 | | MHz | |
| Passband | Insertion Loss | IL | | 10.0 | 12.0 | dB | |
| | | 1dB Passband | BW_1 | 3.8 | 4.1 | MHz | |
| | | 15dB Bandwidth | BW_{15} | | 6.7 | 6.8 | MHz |
| | | 30dB Bandwidth | BW_{30} | | 7.7 | 7.8 | MHz |
| Amplitude Ripple over $f_c \pm 1.9$ MHz | | | | 0.5 | 1.10 | dB _{p-p} | |
| Group Delay Variation over $f_c \pm 1.9$ MHz | | GDV | | 65 | 150 | ns _{p-p} | |
| Rejection | 50 to 70.44 MHz | | 40 | 43 | | dB | |
| | | 70.44 to 72.04 MHz | 38 | 43 | | | |
| | | 81.26 to 82.56 MHz | 38 | 49 | | | |
| | | 82.56 to 86.50 MHz | 40 | 48 | | | |
| | | 86.5 to 91.50 MHz | 45 | 48 | | | |
| | 91.50 to 100.000 MHz | | 45 | 58 | | | |
| Operating Temperature Range | T_A | | -40 | | +85 | °C | |
| Frequency Temperature Coefficient | FTC | | | -18 | | ppm/°C | |
| Differential Input | | | 175 ohms | | | | |
| Differential Output | | | 1000 ohms | | | | |
| Case Style | | | SMP-03 7 x 5 mm Nominal Footprint | | | | |
| Lid Symbolization (YY=year, WW=week, S=shift, ## = Sequence Code) | | | RFM, SF2037B, YYWWS## | | | | |

Electrical Connections

| Connection | Terminals |
|----------------------|------------|
| Port 1 Hot | 10 |
| Port 1 Ground Return | 1 |
| Port 2 Hot | 5 |
| Port 2 Ground Return | 6 |
| Case Ground | All Others |




CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.

NOTES:

1. The design, manufacturing process, and specifications of this device are subject to change.
2. US or International patents may apply.
3. RoHS compliant from the first date of manufacture.

Matching Circuit and Matching Component Values Used in G3 Sirius Radios

(Refer to Sirius Radio G3 Chipset Application Note, Doc. #RX000104-B, Sec. 4.2.4)

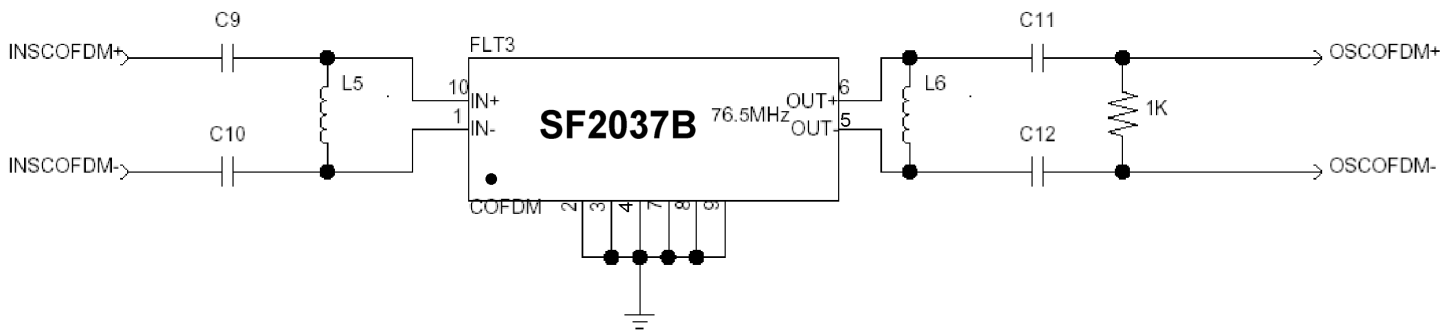


COFDM Narrowband SAW Matching Circuit

COFDM Narrowband SAW Matching Values


| Reference Designator | Value |
|----------------------|--------|
| C9 | 10 pF |
| C10 | 10 pF |
| L5 | 270 nH |
| L6 | 390 nH |
| C11 | 100 pF |
| C12 | 100 pF |

Matching Circuit and Matching Component Values Used on Filter Demo Board


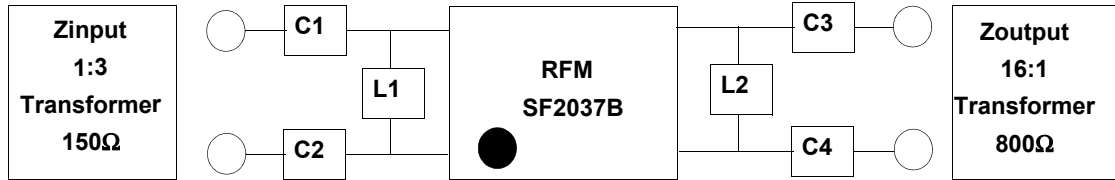


SF2037B
76.500 MHz

C1 = 9pF
C2 = 9pF
L1 = 270nH
L2 = 330nH
C3 = 18pF
C4 = 18pF

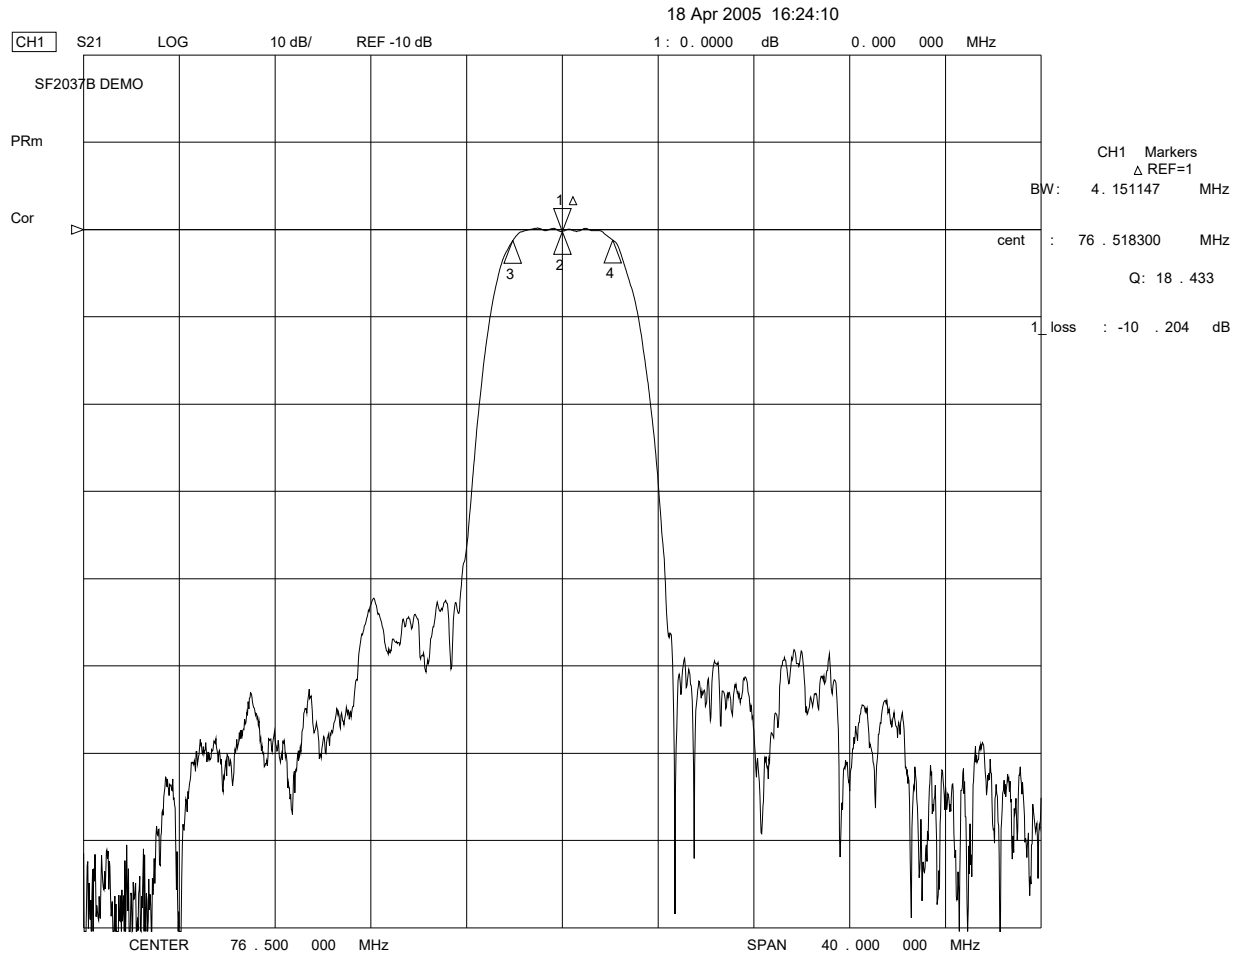

18 Apr 2005 16:18:31

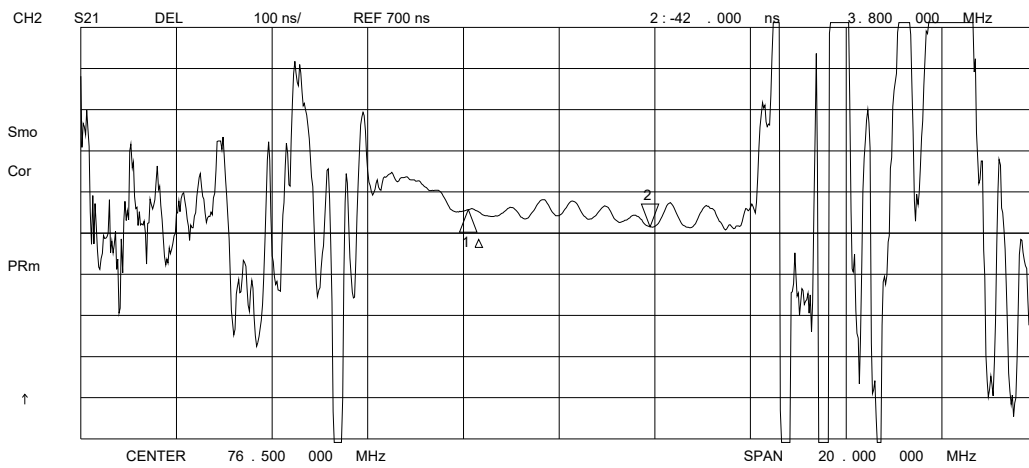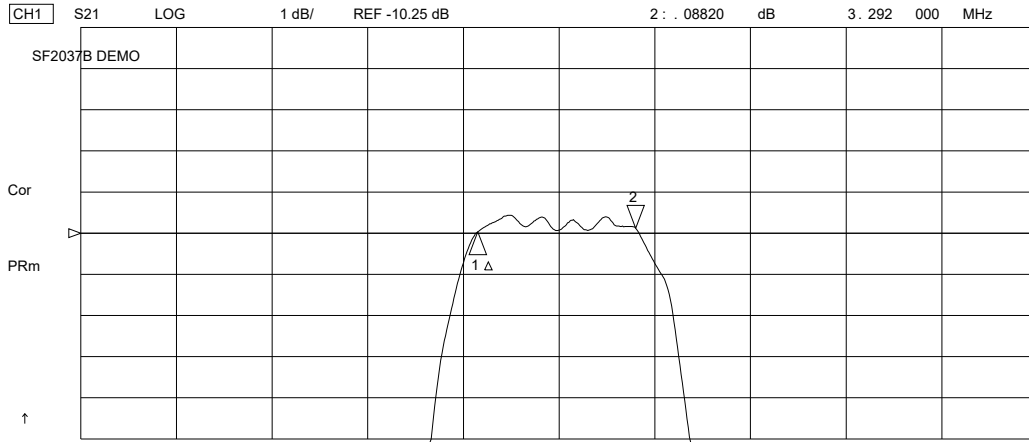

18 Apr 2005 16:28:43


CH1 S11 1 UFS

1: 59.928 Ω -9.8086 Ω 212.11 pF 76.500 000 MHz

SF2037B DEMO

Cor

PRm

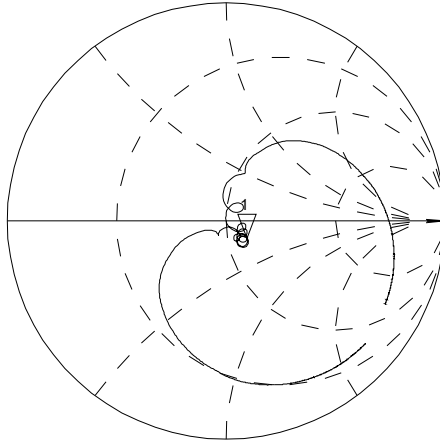


CH2 S22 1 UFS

1: 43.949 Ω 3.1992 Ω 6.6558 nH 76.500 000 MHz

Cor

PRm

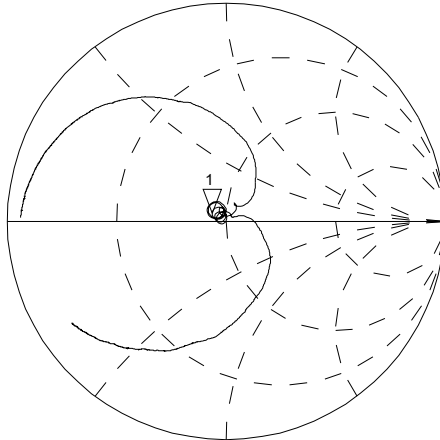


CENTER 76.500 000 MHz


SPAN 40.000 000 MHz

SMP-03 Case

10-Terminal Ceramic Surface-Mount Case 7 x 5 mm Nominal Footprint




Recommended PCB Footprint

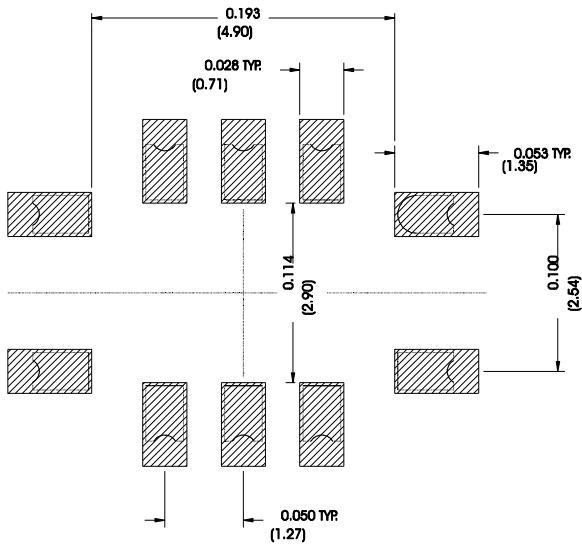

| Dimension | mm | | | Inches | | |
|-----------|------|------|------|--------|-------|-------|
| | Min | Nom | Max | Min | Nom | Max |
| A | 6.80 | 7.00 | 7.20 | 0.268 | 0.276 | 0.283 |
| B | 4.80 | 5.00 | 5.20 | 0.189 | 0.197 | 0.205 |
| C | | 1.65 | 2.00 | | 0.065 | 0.079 |
| D | .47 | 0.60 | .73 | 0.019 | 0.024 | 0.029 |
| E | 2.41 | 2.54 | 2.67 | 0.095 | 0.100 | 0.105 |
| H | 0.87 | 1.0 | 1.13 | 0.034 | 0.039 | 0.044 |
| J | 4.87 | 5.00 | 5.13 | 0.192 | 0.197 | 0.202 |
| K | 2.87 | 3.00 | 3.13 | 0.113 | 0.118 | 0.123 |
| P | 1.14 | 1.27 | 1.40 | 0.045 | 0.050 | 0.055 |


| Materials | |
|------------------------|--|
| Solder Pad Termination | Au plating 30 - 60 ulnches (76.2-152 uM) over 80-200 ulnches (203-508 uM) Ni. |
| Lid | Fe-Ni-Co Alloy Electroless Nickel Plate (8-11% Phosphorus) 100-200 ulnches Thick |
| Body | Al ₂ O ₃ Ceramic |

| Electrical Connections | | |
|------------------------|------------------|------------------|
| Connection | | Terminals |
| Port 1 | Input or Return | 10 |
| | Return or Input | 1 |
| Port 2 | Output or Return | 5 |
| | Return or Output | 6 |
| Ground | | All others |
| Single Ended Operation | | Return is ground |
| Differential Operation | | Return is hot |

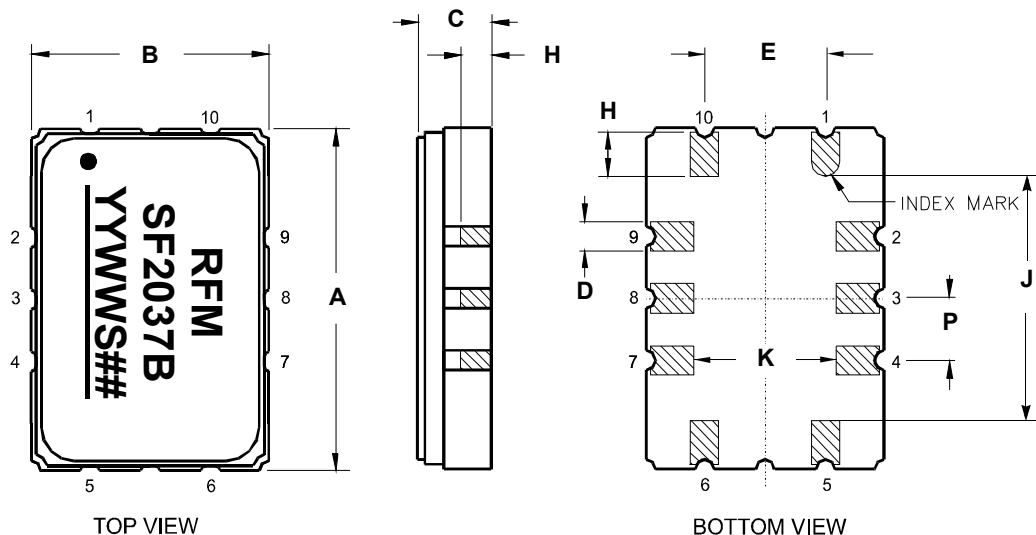


Tape and Reel Specifications

Tape and Reel Standard per ANSI/EIA-481


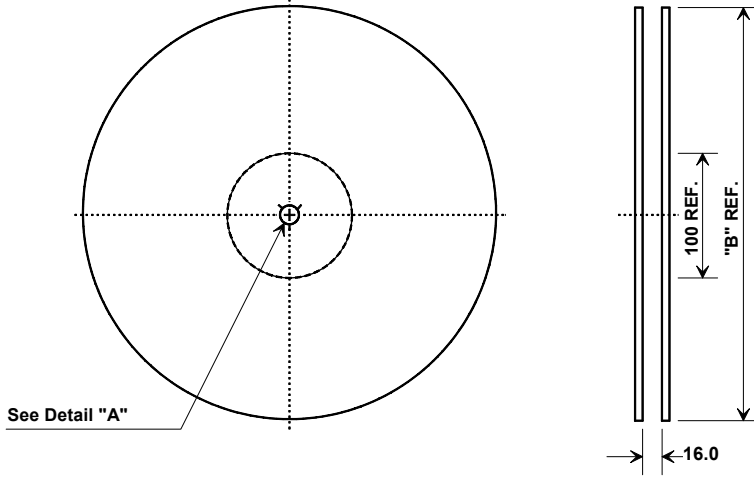


| "B " | | Quantity Per Reel |
|--------------|-------------|-------------------|
| Nominal Size | | |
| Inches | millimeters | |
| 7 | 178 | 500 |
| 13 | 330 | 2000 |




COMPONENT ORIENTATION and DIMENSIONS

| Carrier Tape Dimensions | |
|-------------------------|---------|
| Ao | 5.5 mm |
| Bo | 7.5 mm |
| Ko | 2.0 mm |
| Pitch | 8.0 mm |
| W | 16.0 mm |

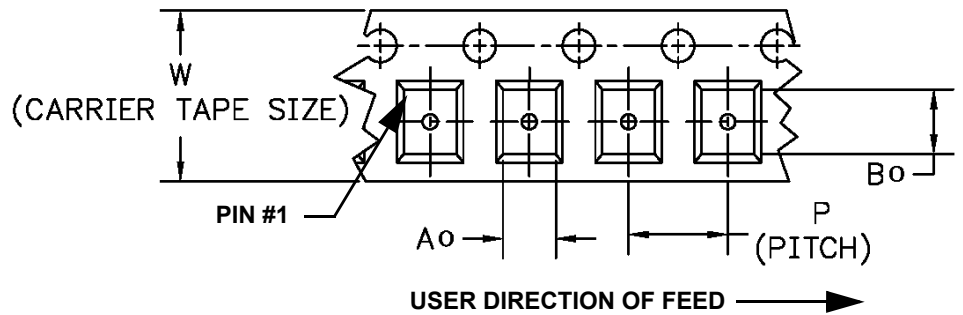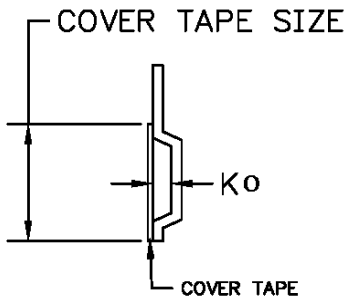



Recommended Reflow Profile

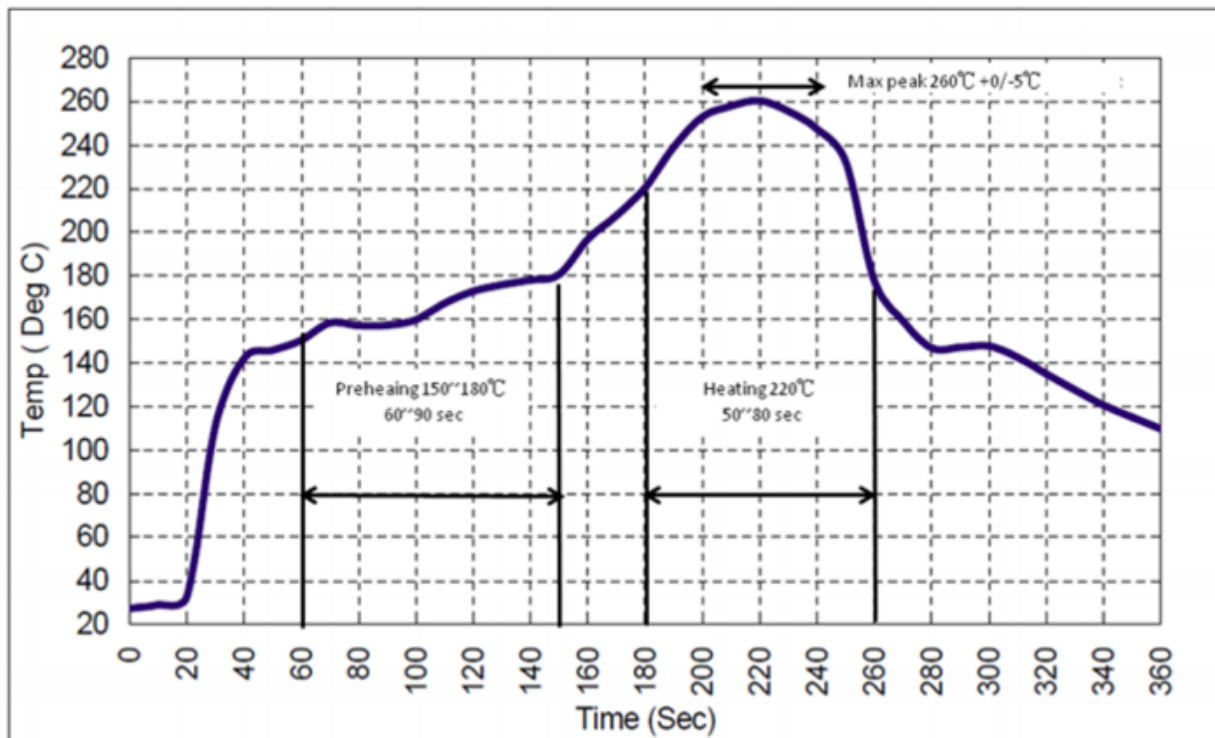1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 260°C+0/-5°C peak (10 seconds).
4. Time: 5 times maximum.



Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View SF2037B on WIN SOURCE](#)
-  [RF Monolithics, Inc Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management