



**Series PVD33**

Microelectronic Power IC  
 BOSFET® Photovoltaic Relay  
 Single-Pole, 220mA, 0-300V DC

**General Description**

The Photovoltaic DC Relay (PVD) is a single-pole, normally open solid state replacement for electro-mechanical relays used for general purpose switching of analog signals. It utilizes as an output switch a unique bidirectional (AC or DC) MOSFET power IC termed a BOSFET. The BOSFET is controlled by a photovoltaic generator of novel construction, which is energized by radiation from a dielectrically isolated light emitting diode (LED).

The PVD overcomes the limitations of both conventional and reed electromechanical relays by offering the solid state advantages of long life, high operating speed, low pick-up power, bounce-free operation, low thermal voltages and miniaturization. These advantages allow product improvement and design innovations in many applications such as process control, multiplexing, telecommunications, automatic test equipment and data acquisition.

The PVD can switch analog signals from thermocouple level to 300 volts peak DC. Signal frequencies into the RF range are easily controlled and switching rates up to 6kHz are achievable. The extremely small thermally generated offset voltages allow increased measurement accuracies.


Unique silicon technology developed by International Rectifier forms the heart of the PVD. The monolithic BOSFET contains a bidirectional N-channel power MOSFET output structure. In addition, this power IC chip has input circuitry for fast turn-off and gate protection functions. This section of the BOSFET chip utilizes both bipolar and MOS technology to form NPN transistors, P-channel MOSFETs, resistors, diodes and capacitors.

The photovoltaic generator similarly utilizes a unique International Rectifier alloyed multijunction structure. The excellent current conversion efficiency of this technique results in the very fast response of the PVD microelectronic power IC relay.

This advanced semiconductor technology has created a radically new control device. Designers can now develop switching systems to new standards of electrical performance and mechanical compactness.

**Features**

- BOSFET Power IC ■
- 10<sup>10</sup> Operations ■
- 100µsec Operating Time ■
- 3 milliwatts Pick-Up Power ■
- 1000V/µsec dv/dt ■
- Bounce-Free ■
- 8-pin DIP Package ■
- 40°C to 85°C ■
- UL recognized ■

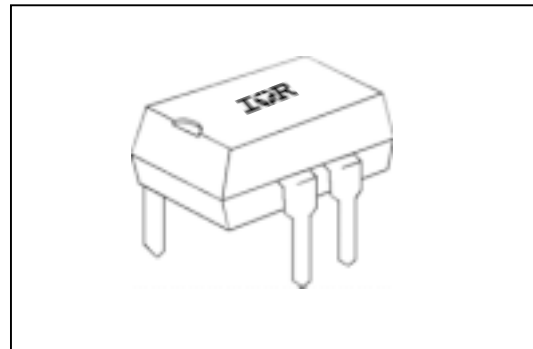

**Part Identification**

Part Number	Operating Voltage (DC)	Sensitivity	Off-State Resistance
PVD2352	200V	5 mA	10 <sup>8</sup> Ohms
PVD3354	300V		10 <sup>10</sup> Ohms

*(BOSFET is a trademark of International Rectifier)*

**Replaced by PVD33N****Electrical Specifications** ( $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$  unless otherwise specified)

<b>INPUT CHARACTERISTICS</b>	<b>PVD2352</b>	<b>PVD3354</b>	<b>Units</b>
Minimum Control Current (see figures 1 and 2) For 160mA Continuous Load Current For 200mA Continuous Load Current For 90mA Continuous Load Current	2.0 5.0 5.0		DC mA@25°C mA@40°C mA@85°C
Maximum Control Current for Off-State Resistance at 25°C	10		μA(DC)
Control Current Range (Caution: current limit input LED. See figure 6)	2.0 to 25		mA(DC)
Maximum Reverse Voltage	7.0		V(DC)

<b>OUTPUT CHARACTERISTICS</b>	<b>PVD2352</b>	<b>PVD3354</b>	<b>Units</b>
Operating Voltage Range	200	300	V <sub>(peak)</sub>
Maximum Load Current 40°C (see figures 1 and 2)	220		mA(DC)
Response Time @25°C (see figures 7 and 8) Max. T <sub>(on)</sub> @ 12mA Control, 50 mA Load, 100 VDC Max. T <sub>(off)</sub> @ 12mA Control, 50 mA Load, 100 VDC	100 50		μs
Max. On-state Resistance 25°C (Pulsed) (fig. 4) 50 mA Load, 5mA Control	6		Ω
Min. Off-state Resistance 25°C (see figure 5)	10 <sup>8</sup> @ 160VDC	10 <sup>10</sup> @ 240VDC	Ω
Max. Thermal Offset Voltage @ 5.0mA Control	0.2		μvolts
Min. Off-State dv/dt	1000		V/μs
Output Capacitance (see figure 9)	20		pF @ 50VDC

<b>GENERAL CHARACTERISTICS (PVD2352 and PVD3354)</b>		<b>Units</b>	
Dielectric Strength: Input-Output		2500	V <sub>RMS</sub>
Insulation Resistance: Input-Output @ 90V <sub>DC</sub>		10 <sup>12</sup> @ 25°C - 50% RH	Ω
Maximum Capacitance: Input-Output		1.0	pF
Max. Pin Soldering Temperature (1.6mm below seating plane, 10 seconds max.)		+260	°C
Ambient Temperature Range: Operating		-40 to +85	
Storage		-40 to +100	

Replaced by PVD33N

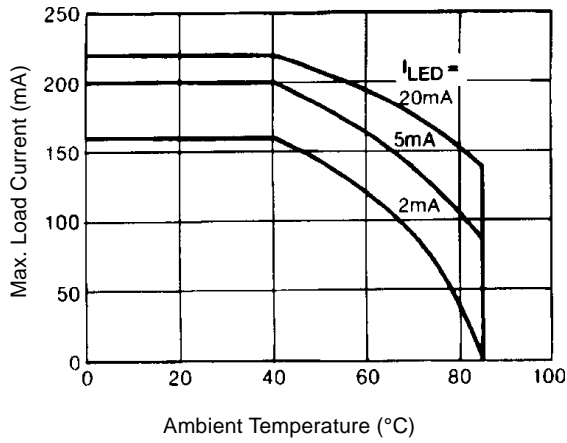


Figure 1. Current Derating Curves

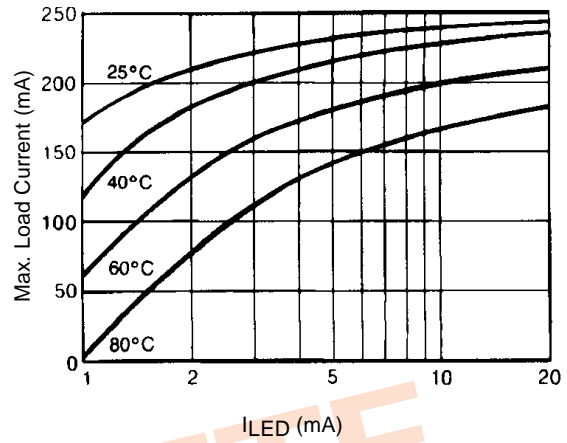


Figure 2. Typical Control Current Requirements

OBSOLETE

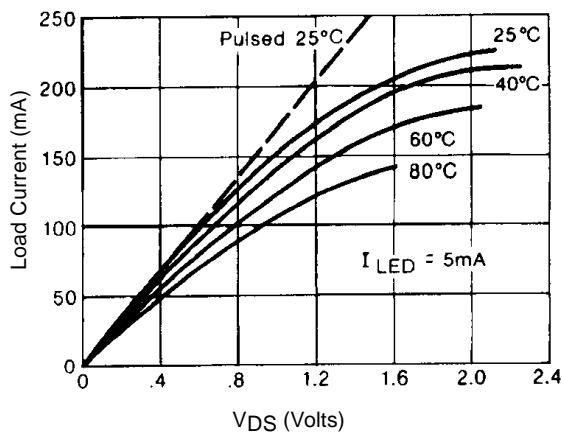


Figure 3. Typical On Characteristics

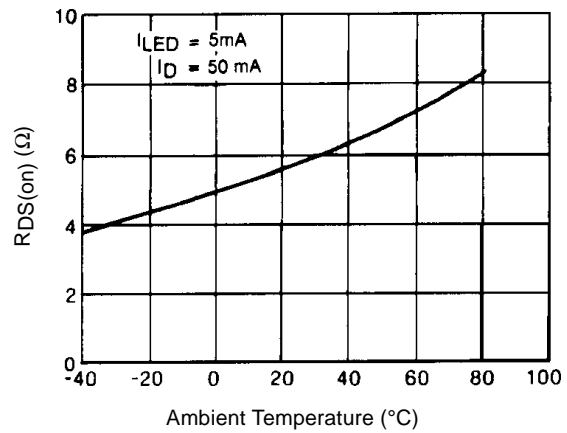


Figure 4. Typical On-Resistance

Replaced by PVD33N

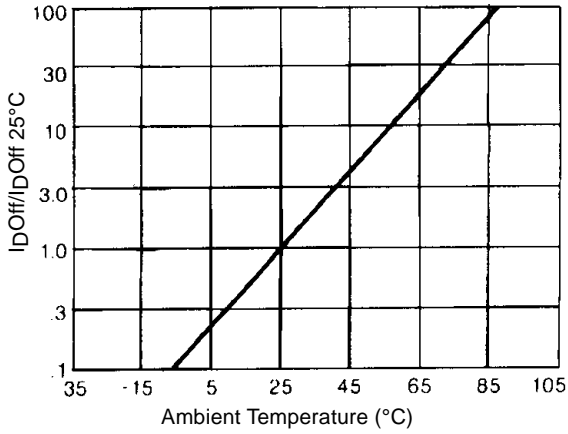


Figure 5. Normalized Off-State Leakage

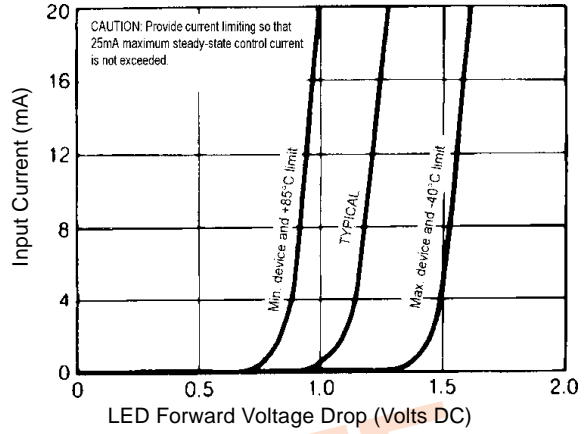


Figure 6. Input Characteristics  
 (Current Controlled)

OBSOLETE

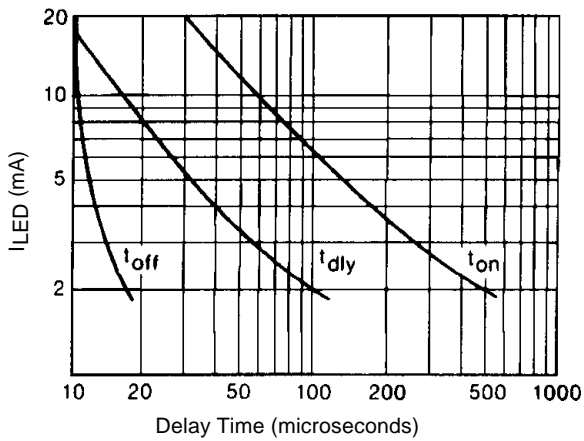


Figure 7. Typical Delay Times

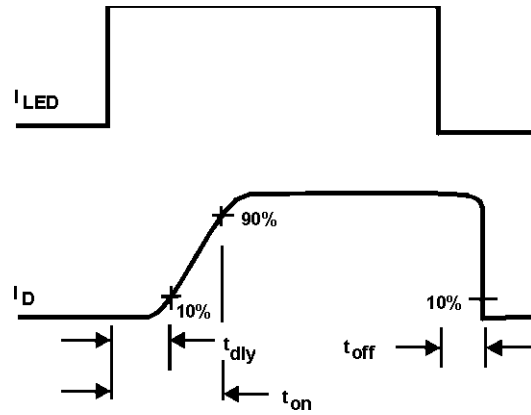


Figure 8. Delay Time Definitions

**Replaced by PVD33N**


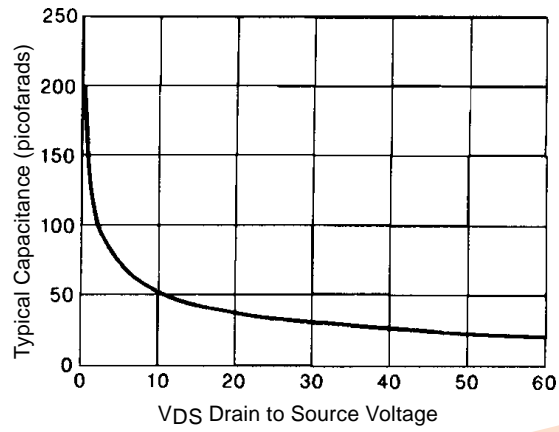



Figure 9. Typical Output Capacitance

OBSOLETE

### Wiring Diagram



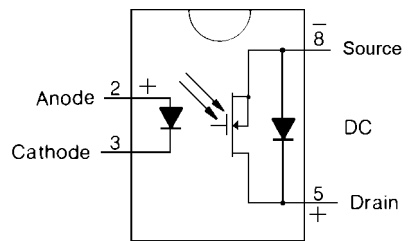

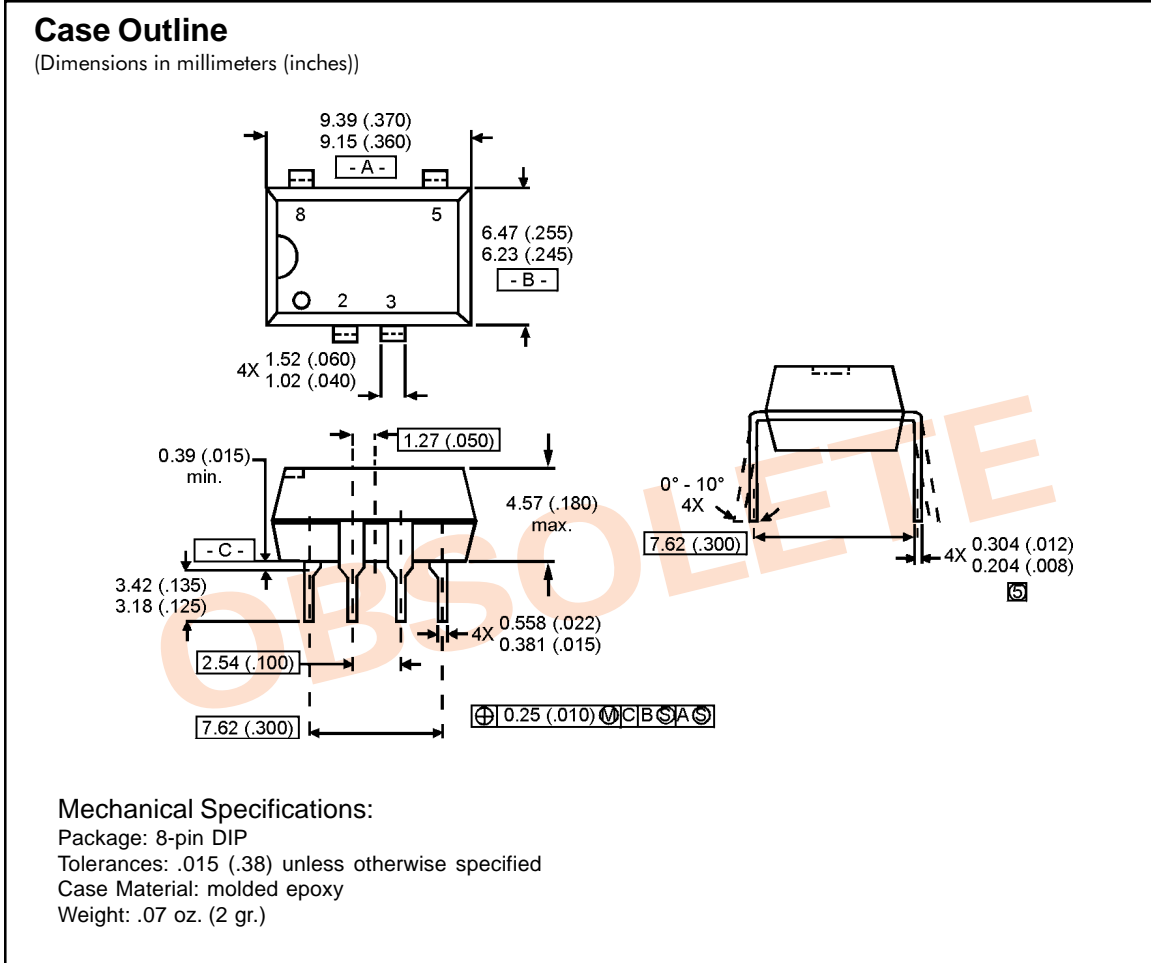**Replaced by PVD33N**



## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View PVD2352 on WIN SOURCE](#)
-  [Infineon Technologies](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management